



Light Output Voice Output

The number of LEDs is customized by customers


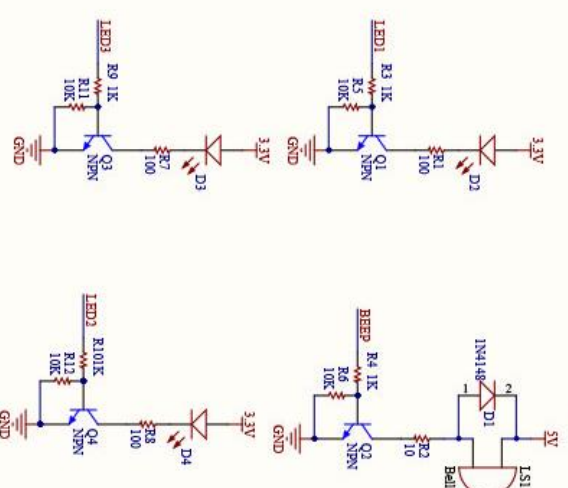


Button



Lens package 1

FPC Flat cable camera
0.5mm space 24pin FPC socket


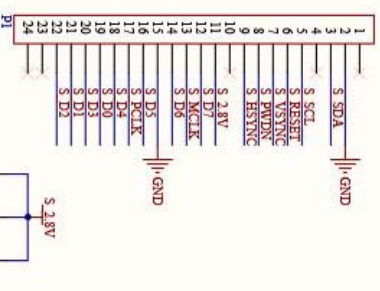


Lens package1

Chose one of two lens

S_2.8V is the lens power supply, which is directly output by the 802 module, the customer only needs to place the filter capacitor.

GM802 V1.3

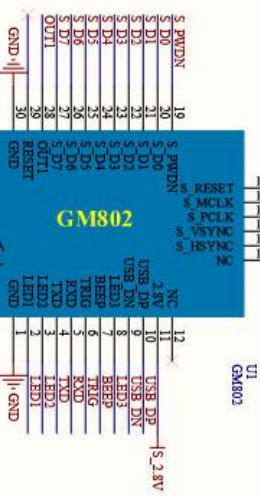

The pin output sequence is customized by customers

USB



UART



Double row hard seat socket

GM802 Simple Reference Circuit
Hangzhou Grow Technology Co., Ltd