


六足机器人程序准备篇

1. 安装 Arduino IDE

安装 arduino1.x

2. 安装 Arduino PS2X_lib 库


打开 arduino 程序示例文件夹，将 PS2X_lib 复制到 Documents\Arduino\libraries。

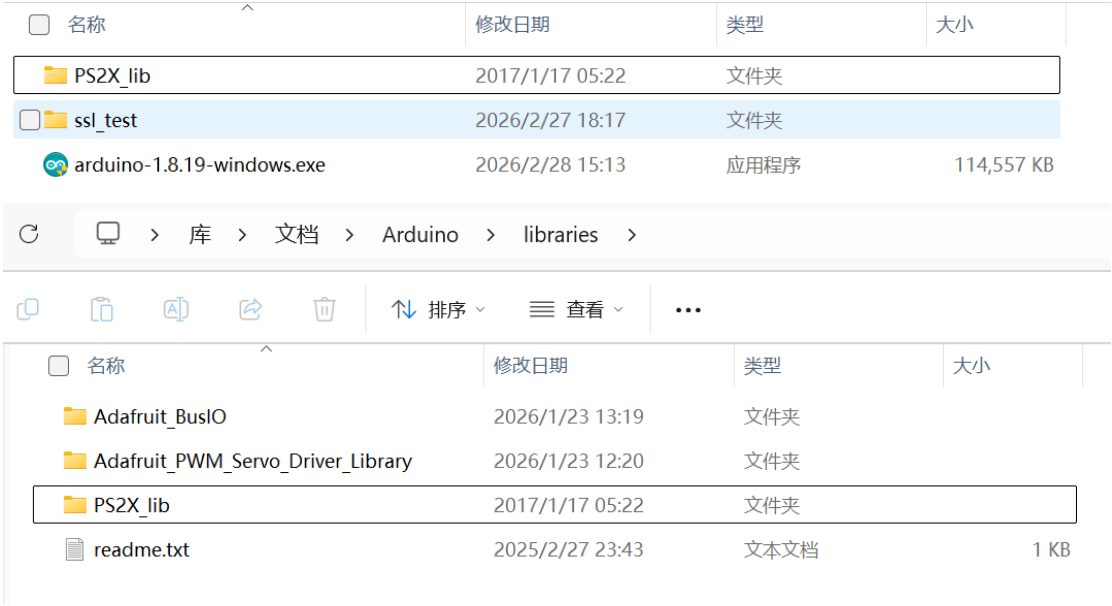


3. 打开程序

打开 ssl_test 文件夹，使用 arduino1.x 打开 ssl_test.ino。

4. 烧录程序

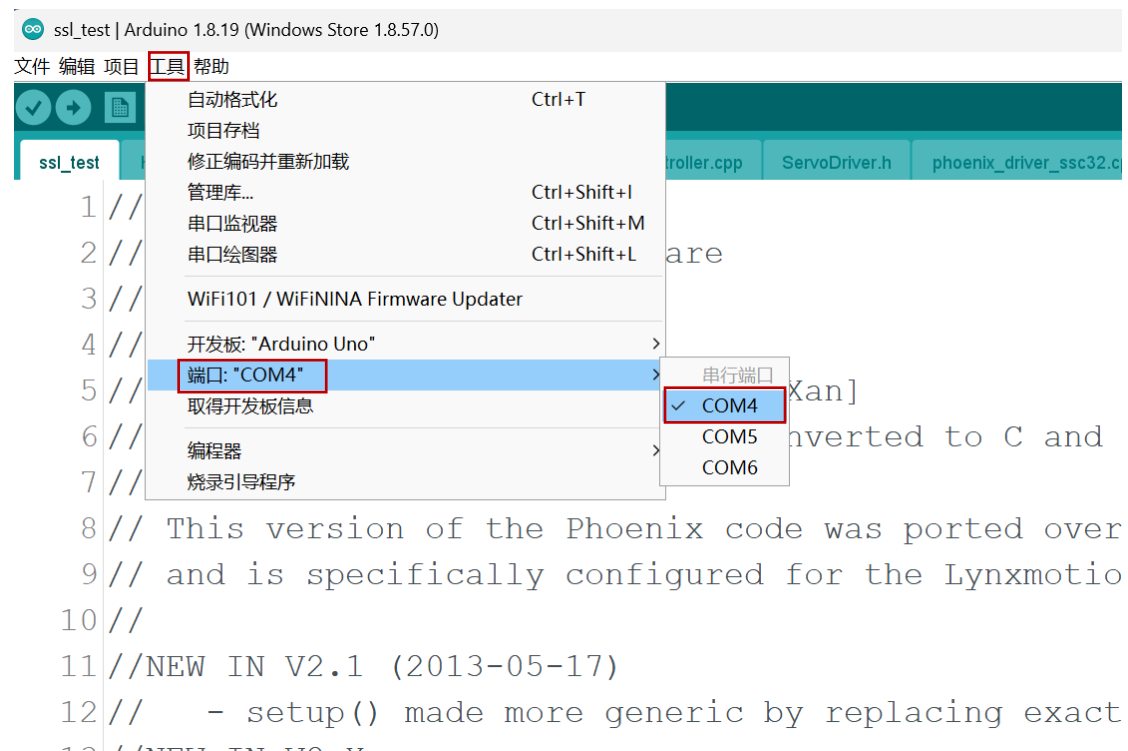

找不到单片机端口按板子的 RST 按钮

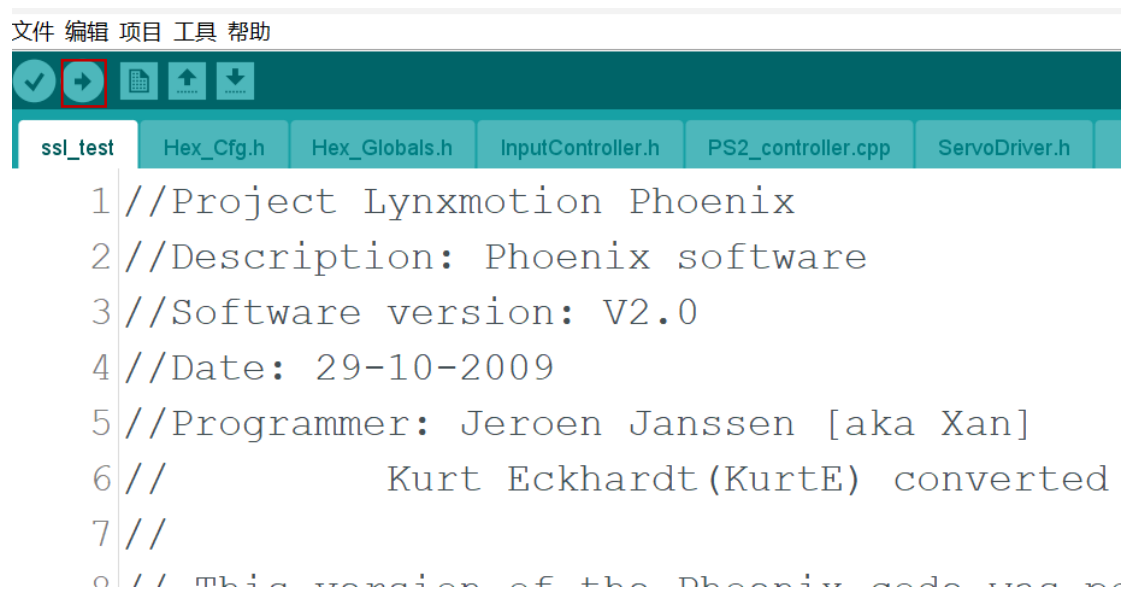

上传

The screenshot shows the Arduino IDE interface. The top menu bar includes '文件' (File), '编辑' (Edit), '项目' (Project), '工具' (Tools), and '帮助' (Help). The toolbar contains icons for opening files, saving, compiling, uploading, and erasing. The file explorer on the left shows the project structure with files like 'ssl_test', 'Hex_Cfg.h', 'Hex_Globals.h', 'InputController.h', 'PS2_controller.cpp', 'ServoDriver.h', and 'phoenix_driver_ssc32.cpp'. The main editor displays the code for 'ssl_test', which includes project metadata and comments. The bottom console window shows the upload progress and status messages from the avrdude utility.

```
1//Project Lynxmotion Phoenix
2//Description: Phoenix software
3//Software version: V2.0
4//Date: 29-10-2009
5//Programmer: Jeroen Janssen [aka Xan]
6//      Kurt Eckhardt(KurtE) converted to C and Arduino
7//
8// This version of the Phoenix code was ported over to the Arduino Environment
9// and is specifically configured for the Lynxmotion BotBoarduino
10//
11//NEW IN V2.1 (2013-05-17)
```

上传成功。

```
avrdude: 23516 bytes of flash written
avrdude: verifying flash memory against C:\Users\LEGION\AppData\Local\Temp\arduino_build_733545/ssl_test.
avrdude: load data flash data from input file C:\Users\LEGION\AppData\Local\Temp\arduino_build_733545/ssl
avrdude: input file C:\Users\LEGION\AppData\Local\Temp\arduino_build_733545/ssl.ino.hex contains 235
avrdude: reading on-chip flash data:

Reading | ##### | 100% 2.92s

avrdude: verifying ...
avrdude: 23516 bytes of flash verified

avrdude done. Thank you.
```

上传成功