

型号 Model: E2835UX26

日期 Date: 2019-7-29

部门 Department: RD

版本 Edition: A/0

承认 Acceptance
☒ 批量生产 Batch production

☐ 初步试样 Initial sample

☐ 客户专用设计 Customer Special Design

设计编号 Design Number:

MLS	批准 Approval	审核 Audit	制作 production
客 户 会 签 Customer signature			
客 户 意 见 Customer comment			

地址: 广东省中山市小榄镇龙山工业区木林森大道 1 号


Address: Xiaolan town Longshan industrial zone Mulinsen road no. 1, Zhongshan City, Guangdong Province

总机 (switchboard): 0760-8982 8888

E-mail: mls@zsmls.com

<http://www.zsmls.com>

简述（Description）：平面发光二极管（SMD LED）

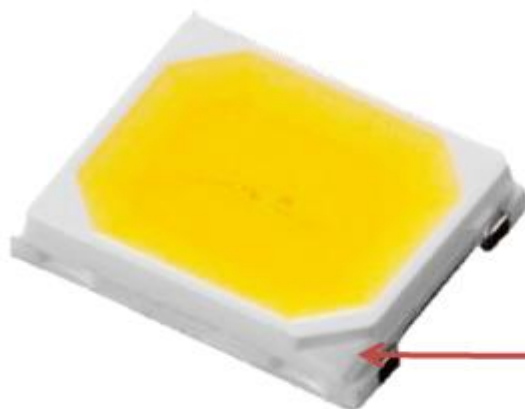

产品选择（Product Selection Guide）

产品分类 Types	色温 CCT(K)	流明 Lumen(lm)			显指 CRI	测试电流 Current(mA)
		最小值 Min.	典型值 Typ.	最大值 Max.		
E2835UW26	6500	20	25	28	80	60
E2835UZ26	5000	20	25	28	80	60
E2835UN26	4000	20	25	28	80	60
E2835US26	3000	20	24	28	80	60

命名规则（Product Nomenclature）

E 2835 UX 26


E：发光二极管 Emitting Diode

2835：封装体型号 Package Model

X:色温 CCT

26：机种 Type

封装尺寸 (Package Dimensions)

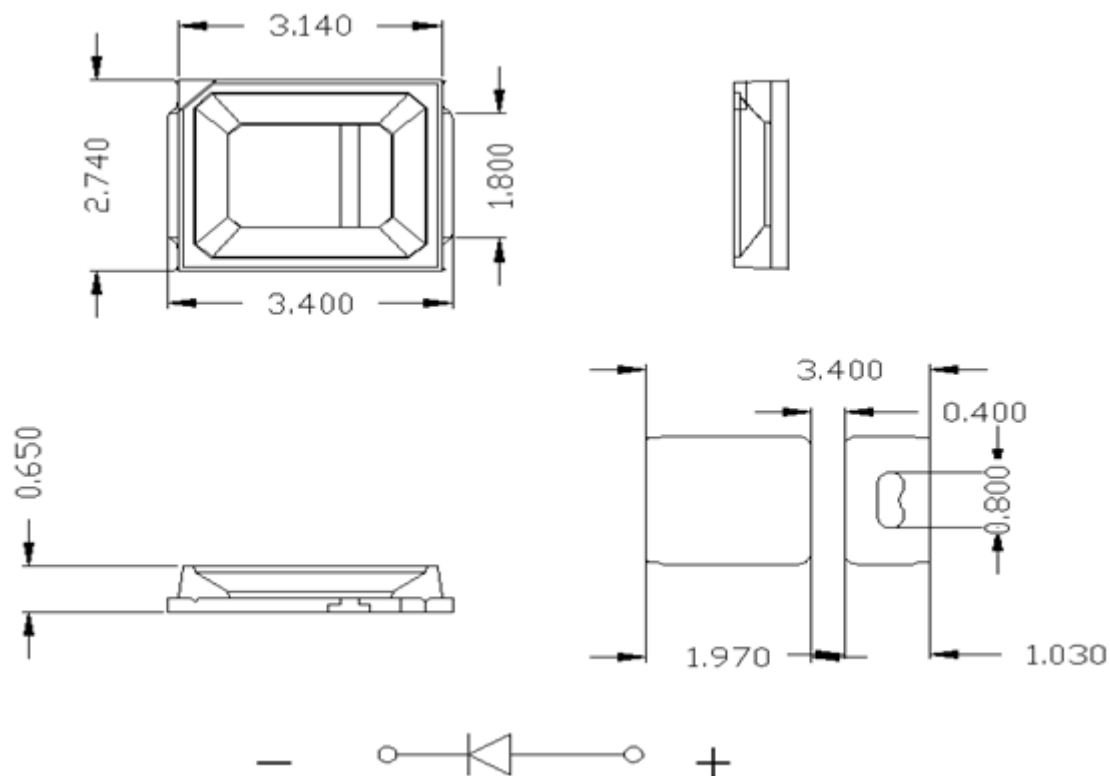

备注(Remarks):

1. 所有尺寸单位为毫米
All dimensions are in millimeters
2. 未注明公差为 ± 0.1 毫米 (除非另有说明)
Tolerance of ± 0.1 mm (unless otherwise noted)
3. 规格若有变更恕不另行通知
Specifications subject to change without prior notice

最大参数值(Absolute Maximum Rating Value Temperature at 25℃)

参数 (Parameters)	极限参数 (Maximum Rating)	单位 (Units)
功耗(Power)	230	mW
峰值正向电流 (Peak Current)	72	mA
反向电压 (Reverse Voltage)	7	V
正向脉冲电流 $\leq 10\text{ms}$, 工作周期=1/10 (Pulse Forward Current($\text{typ} \leq 10\text{ms}$, Duty cycle=1/10))	180	mA







光电特性参数(Optical Parameters Temperature at 25℃)

参数 Parameter	符号 Symbols	最小值 Min	标准值 Typical	最大值 Max	单位 Units	测试条件 Testing Conditions
发光角度(Viewing Angle)	2 θ 1/2	--	120	--	Deg	IF=60mA
正向电压(Forward voltage)	VF	2.9	-	3.4	V	IF=60mA
显色指数 (Color Rendering Index)	CRI	80	--	--	Ra	IF=60mA
ESD 测试(ESD Testing)	E	90%	--	--	--	VR =2000V
结温 Junction temperature	Tj	--	--	115	℃	IF=60mA
热阻 Thermal Resistance @25℃	Rth	--	40	--	℃/W	IF=60mA

备注 (Remarks):

- 此发光亮度为根据人眼对发光亮度的感应曲线之模拟发光强度符合 CIE (国际光委会组织)。
Light-emitting brightness is according to human eye simulation of the induction curve of luminous intensity in line with the CIE (International Light Committee Organization)。
- 1/2 的角度是从光学中心线处的发光强度为 1/2 光学中心线值。
1/2 angle is from optical centerline at the luminous intensity is 1/2 the optical centerline value。
- 发光亮度保证误差正负 4%。
Lumen tolerance is guaranteed within plus or minus 4%。
- CRI x,y 测量误差 ± 0.003 。
Measurement tolerance, x, y ± 0.003 requirement.
- 测试结果为焊接直径为 20mm, 厚度为 2mm 的 PCB 测试结果, 所测数据为 MLS 的测试设备。
The tested package is taped on diameter 20mm thickness 2mm PCB. The optical measurement data by MLS equipment test.

典型的电性及视角曲线 (Typical Electrical and Perspective Curve)

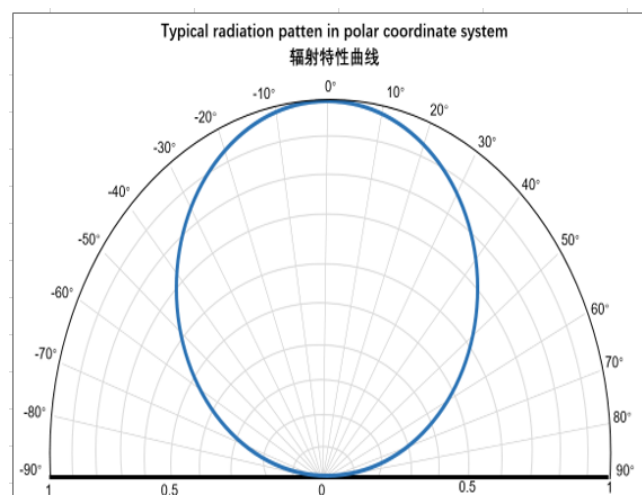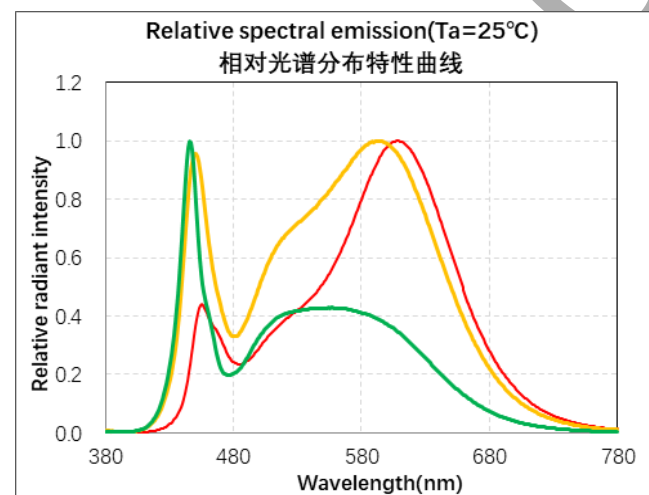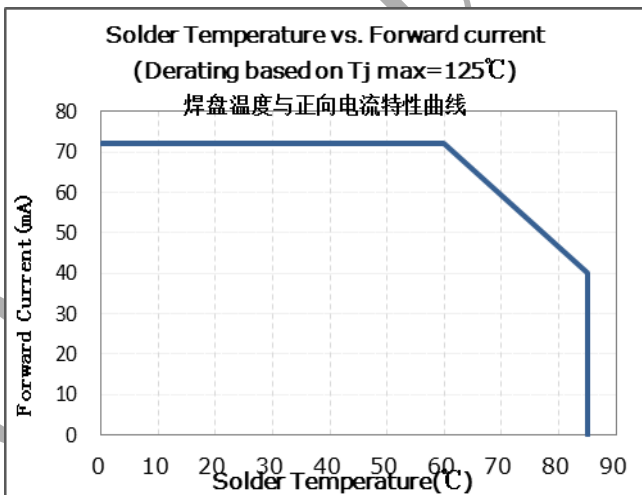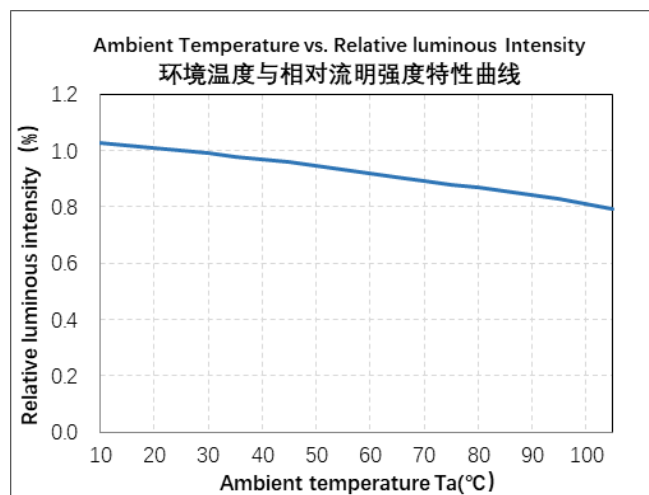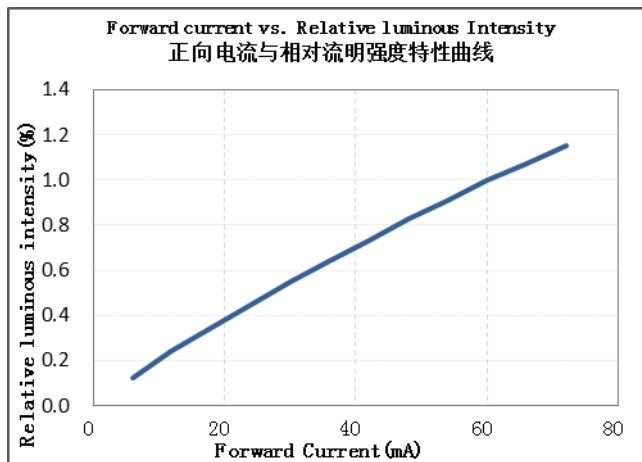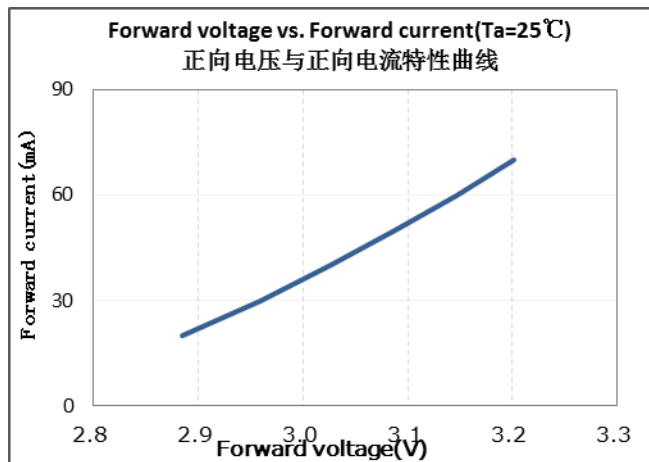

亮度 BIN 等级 (Lumen bin grade @ 60mA)


参数 Parameter	符号 Symbols	等级 grade	实际参数 Actual parameter	单位 Units
光通量 (Luminous Flux)	Φ	C24	22-24	Lm
		C26	24-26	Lm
		C28	26-28	LM

电压 BIN 等级 (Vf bin grade @ 60mA)

参数 Parameter	符号 Symbols	等级 grade	单位 Units
电压	VF	2.9-3.0	V
		3.0-3.1	V
		3.1-3.2	V
		3.2-3.3	V
		3.3-3.4	V


打靶图（CIE Chromaticity Diagram）

E2835UW26

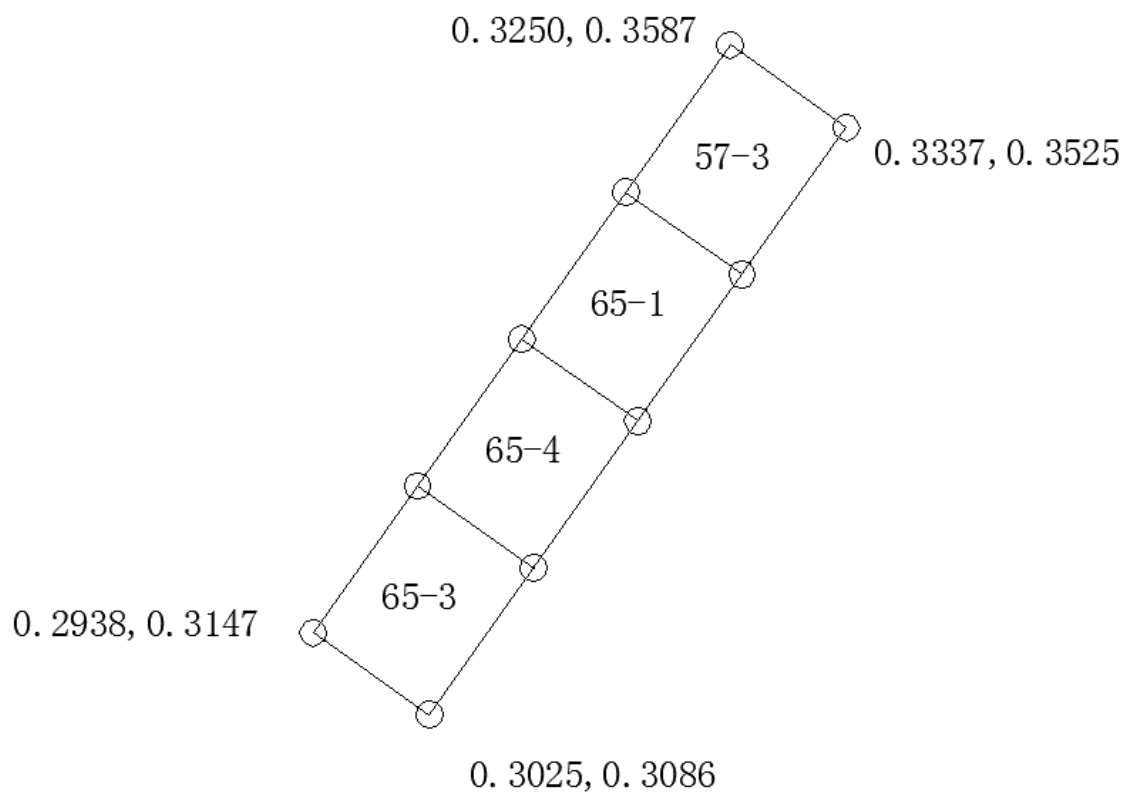


区域	57-3	65-1	65-4	65-3
标签值（K）	5500-6000	6000-6500	6500-7000	7000-7500
实际值（K）	5452-6172	5763-6619	6208-7172	6724-7870

E2835UZ26

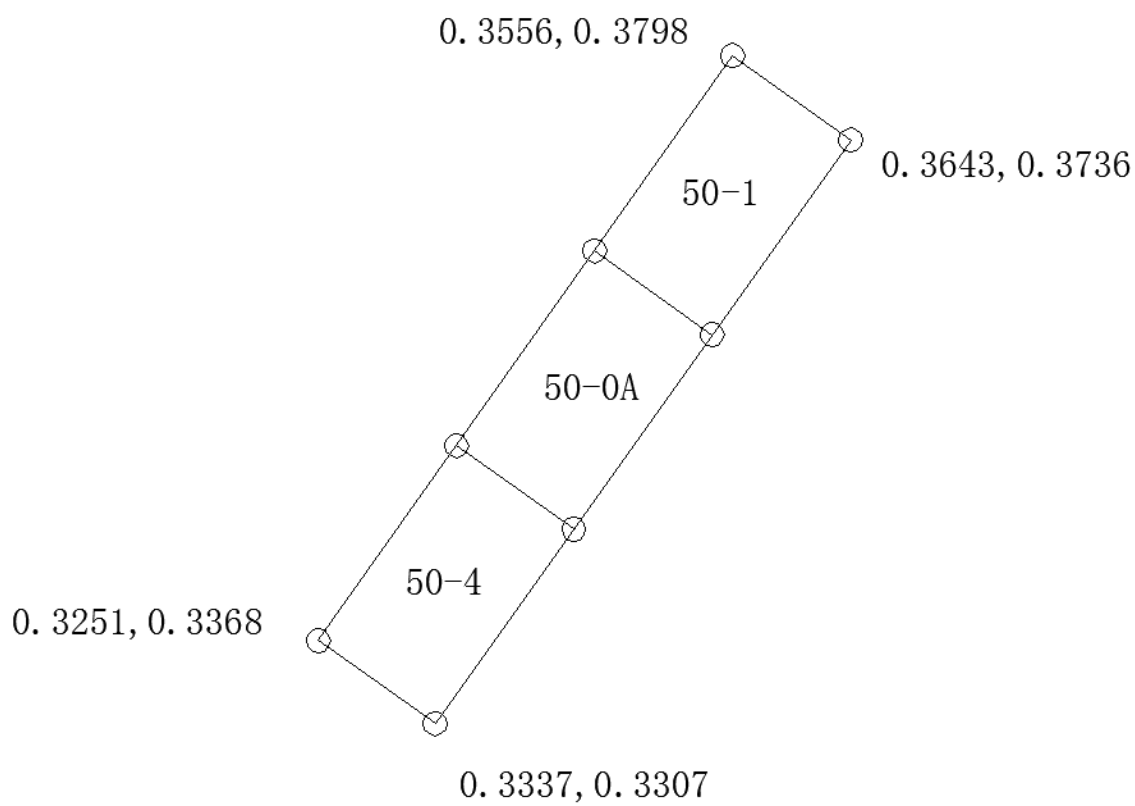


区域	50-1	50-0A	50-4
标签值（K）	4700-5100	4800-5200	4900-5300
实际值（K）	4447-5030	4703-5386	5027-5839

E2835UN26

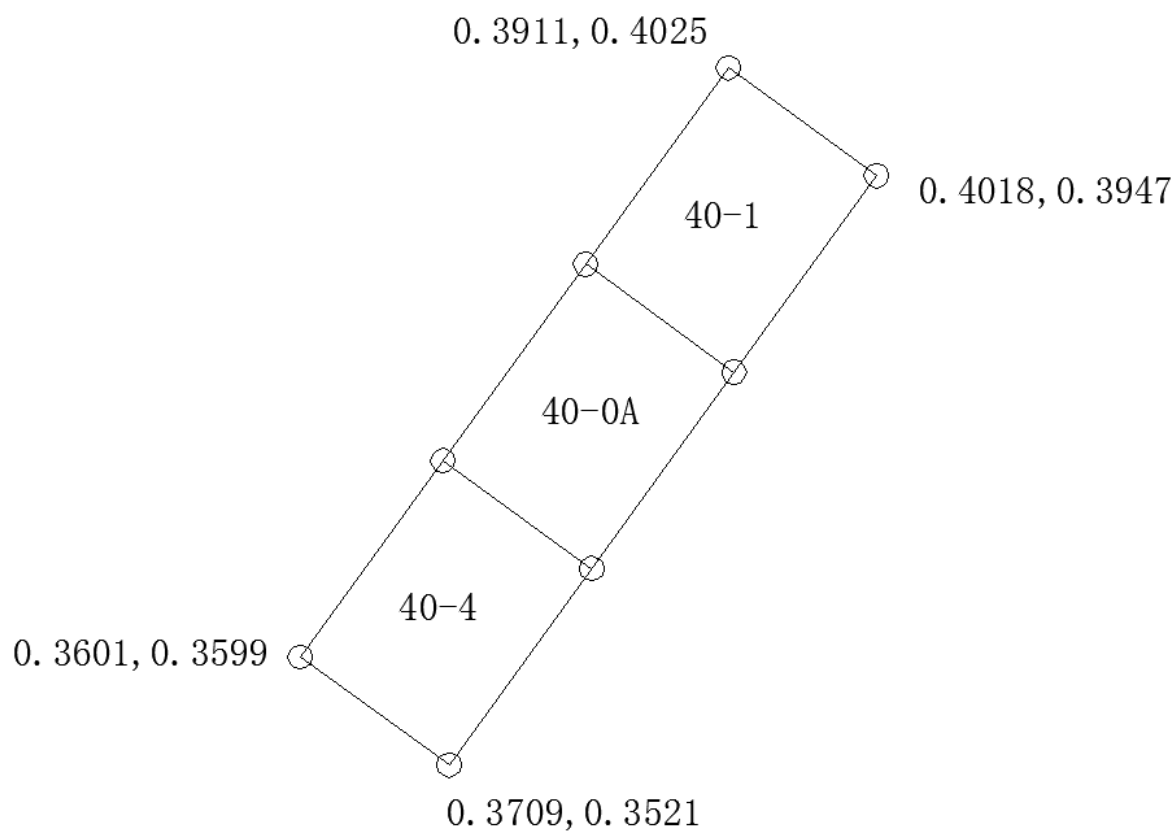

区域	40-1	40-0A	40-4
标签值 (K)	3700-4100	3800-4200	3900-4300
实际值 (K)	3610-4072	3740-4267	3898-4502

E2835US26

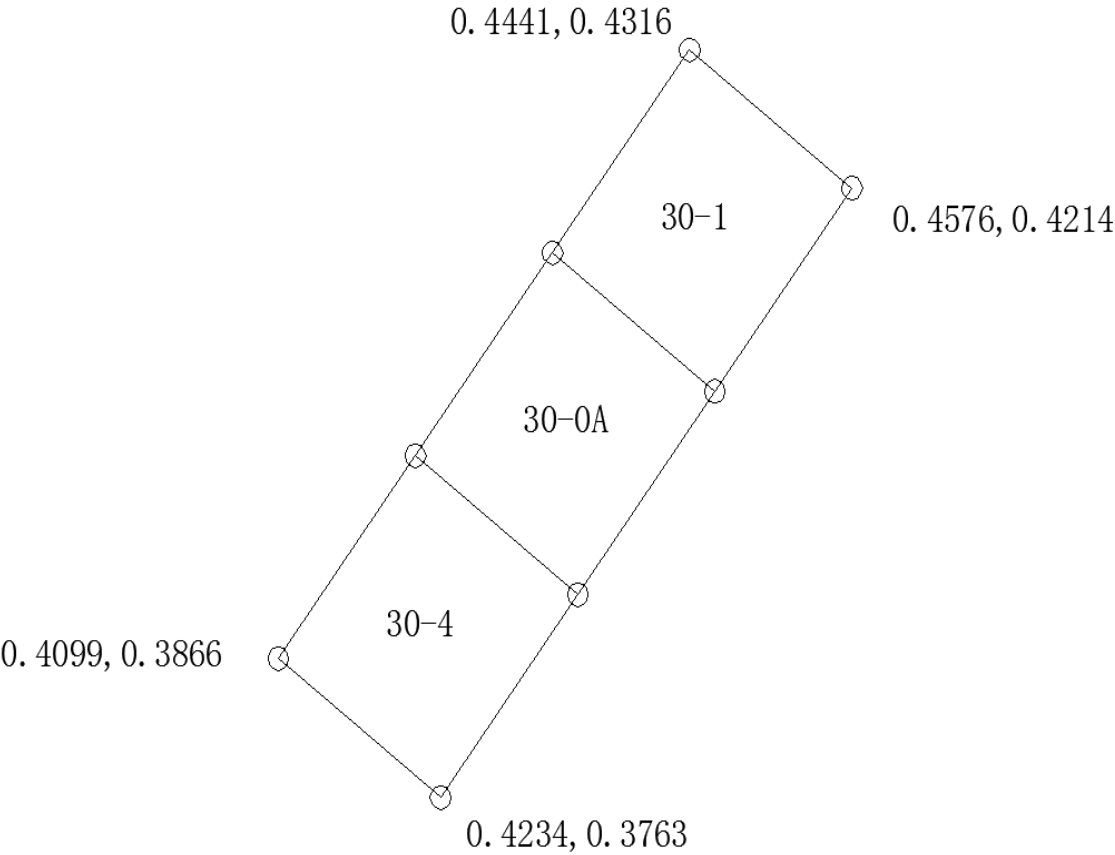

区域	30-1	30-0A	30-4
标签值（K）	2800-3100	2900-3200	3000-3300
实际值（K）	2813-3174	2869-3314	2929-3366

MLS

可靠性测试项目及测试条件(Reliability Test Items and Test Conditions)

编号 Number	测试项目 Test Item	实验条件 Test Conditions	样本大小 Sample size	允收/判退 Acceptance/Rejection
01	冷热冲击 Hot/cold Temperature Shock	-40℃ ±5℃ (15 mins) ~125℃ ±5℃ (15 mins) 两温度转换时间 (Transfer time) <10 s 周期(Cycles): 200 个周期 (200 Cycles)	20PCS	0/1
02	高温寿命 High Temperature Operating Life	温度(Temperature): 85℃ 电流 (IF): 72mA 周期(Cycles): 1000H	20PCS	Failure: 0/1 $\Delta \text{Lumen} \geq 80\%$ $\Delta u'v' : < 0.008$
03	高温高湿 Temperature Humidity Operating Life	温度(Temperature): 85℃ 湿度 (Humidity): 85% 电流 (IF): 72mA 周期(Cycles): 1000H	20PCS	Failure: 0/1 $\Delta \text{Lumen} \geq 80\%$ $\Delta u'v' : < 0.008$
04	组合测试 Composite test	1.85℃/85%RH 存储 8 小时 → 焊接在 MPCB 板上过 3 次回流焊(最高温度 260℃) → 冷热冲击 100 个循环 Cycles (-40℃/15min ~ 中间转换 (Transfer time) 10s ~ 125℃/15min)	20PCS	0/1

标签 Label

Model:产品型号

Lot NO:生产批号

IV: 发光强度等级

VF: 正向电压等级

X/Y (HUE): 发光颜色等级或者波长等级

Date Code: 生产日期/部门编号/机台编号/班次


Quantity: 数量

Remarks: 备注


Ra: 显值标准值

Model:	*****	
Lot No:	*****	Ra>**
IV:	*****	
VF:	*****	
X/Y(HUE):	*****	
Date Code:	****/**/**	
Quantity:	*****	
Remarks:		


QC Pass (50) RoHS




编带规格 Taping Specifications (单位 Unit: mm)

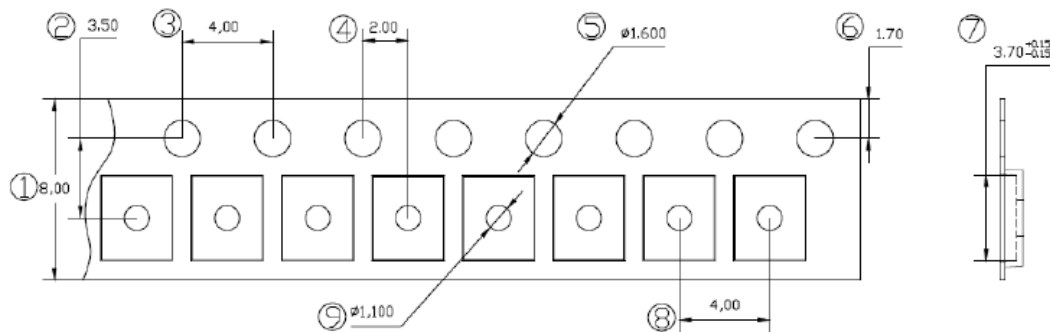

卷轴尺寸 Reel Size (单位 Unit: mm)

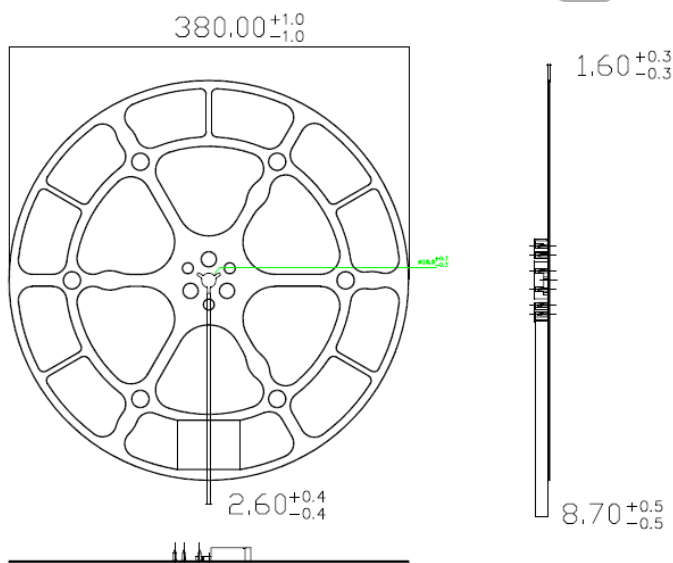

防潮包装 (Humidity Proof packaging)

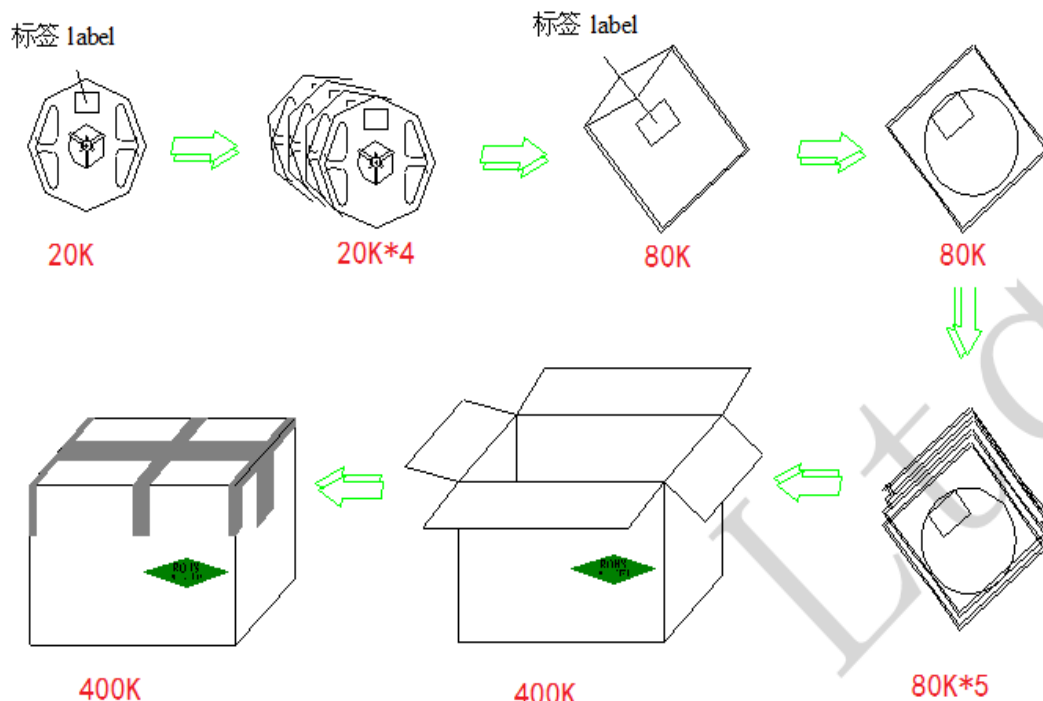

注意事项 (Note)


封装发光二极管的材料是硅性质，因此发光二极管的表面柔软而有弹性。虽然有机硅的特点能降低热应力，但是更容易受到机械外力的破坏，在表面上施加压力将会影响发光二极管的可靠性。在这样的情况下，装配使用有机硅封装的发光二极管产品时必须遵守相应的处理措施，避免任何的压力施加给发光二极管的任何部分，所以在使用时请采用气动吸咀。否则会导致发光二极管损坏和可靠性降低影响其寿命。

Packaged LED material is silicone nature, therefore, LED has is a soft and flexible surface. Although characteristics of silicone is to reduce thermal stress, but it is more susceptible to mechanical damage to the external forces applied on the surface. Pressure affects the reliability of light emitting diodes. In such circumstances, the assembly of organic silicon encapsulated LED products must comply with the appropriate measures to deal with. Avoid any pressure applied to any part of the LED and use pneumatic nozzle. Otherwise it may lead to reduction in reliability, and impact of its life to the LED.

温度控制 (The temperature control)

产品灯脚温度需控制在-20℃-115℃之间。Product light foot temperature between -20℃-115 °C which shall be controlled.

回流焊说明 (Reflow soldering instructions)

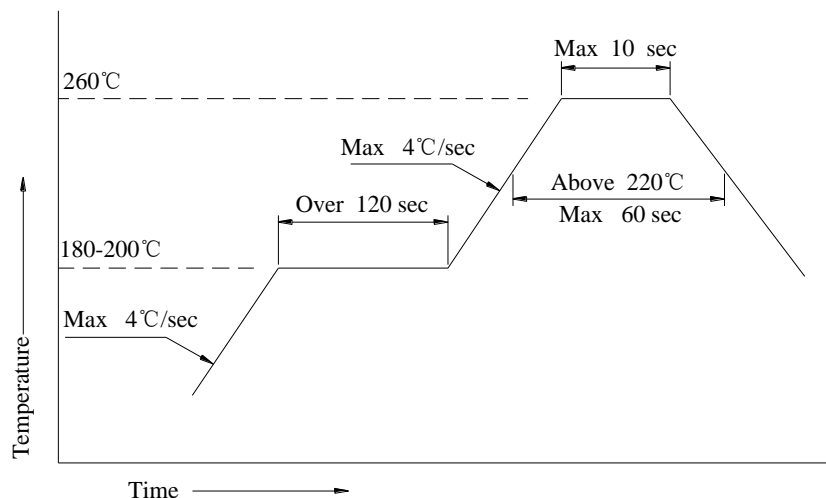

- 1、回流焊建议使用免清洗助焊剂，并依照回流焊曲线进行焊接，焊接次数不可超过 2 次。

Reflow soldering is recommended to the use of clean free flux, and in accordance to the reflow curve.
Maximum number of soldering is limited .

- 2、焊接时，不要在加热过程中对其施加压力。

When soldering, do not exert pressure during heating process.

烙铁焊接 (Soldering)

- 1、当手动焊接时，建议采用 20W 的防静电烙铁，焊头的温度必须控制在 360°C 以下/3 秒，焊接次数为 1 次。

When manual soldering iron is used, it is recommended to use 20W anti-electro static soldering iron, soldering temperature must be kept below 360 °C / 3 seconds, 1Time soldering only.


- 2、不可在同一单元板上焊接不同 BIN 的材料，否则会导致 LED 色差。

Do not mix different BIN materials on the same board, otherwise it will cause LED color Variation.

修复 (Repair)

当修复发光二极管时，应事先确认发光二极管是否会被破坏，修复过程中应避免接触胶体表面，双焊头烙铁应使用如下图的方式作业。

When repairing light-emitting diodes, it is advised to confirm the light emitting diode will be damaged, the repair process should avoid contact with the colloid surface, use of soldering iron should be according to following diagram.

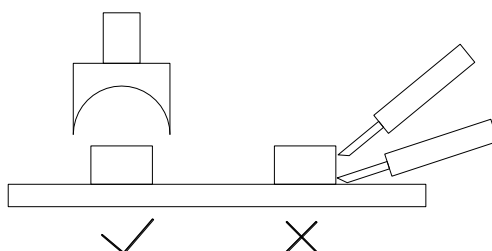

清洗 (Clean)

在焊接后推荐使用纯酒精清洗，清洗擦拭或浸渍不要超过 1 分钟。使用其它类似溶剂清洗前，请确保溶剂不会对发光二极管封装造成损伤。

Recommend the use of pure alcohol to clean, wash and wipe or dipping no more than 1 minutes after soldering. When different solvents are used for cleaning, make sure that solvents do not damage the light emitting diode packaging.

灌封 (Potting)

1、使用硅酮胶（玻璃胶）灌封时推荐采用中性、醇型类灌封胶。

The use of silicone rubber (plastic glass) for potting, it is recommended the use of alcoholic encapsulating Material.

2、灌封胶若使用脱肟型中性灌封胶，请确保灌封胶固化过程中的通风良好，在未完成固化过程中不可进行密封组装发光二极管元件。这样会造成镀银层氧化及发光颜色变淡。

When deoximation neutral potting material is used, make sure that the potting curing process in well-ventilated. Do not perform sealing assembly of Light Emitting Diodes before potting is completely cured and setting process is completed. This will result in the silver layer oxidation and luminous color fades, light degradation and even dead LED.

3、禁止使用醋酸型（酸性）硅酮胶进行灌封。

Prohibit the use of acetic acid type (acidic) silicone rubber potting materials.

4、使用正常灌封胶时建议进行少量灌封试验，常温点亮测试 168H 确认无异常后再批量作业。


It is recommended that small quantity samples are made for potting test, Room temperature light test of 168H confirming no abnormality before mass products.

5、更改任何一种灌封材料时，请先作试样确认是否对我公司产品造成侵蚀反应。将灌封材料取 5-10g 和发

光二极管 10-20pcs 于 100ml 的器皿内密封放置 168H 后确认产品是否有异常。


When there is change in potting material, please make samples to confirm whether there is erosion reaction. Take 5-10 grams of potting material and 10-20 pcs in a 100ml sealed containers for 168H confirm whether there is abnormality.

驱动方式 (Driving method)

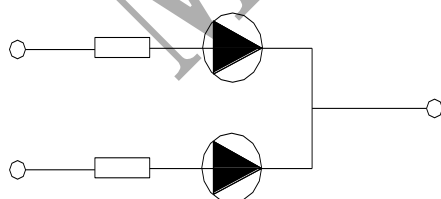

(A)

(A) 被推荐的电路 Recommended circuits

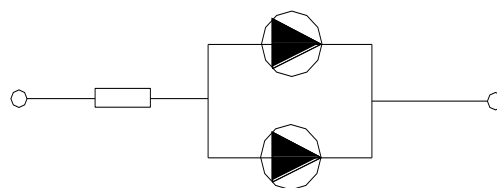

(B)

(B) 每个灯珠可能出现亮度不一致，是由 I-V 的曲线而导致的

Each LED may appear inconsistent brightness, it is a result of the IV curve.

静电(Static electricity)

对于整个工序（生产、测试、包装等）所有与 LED 直接接触的员工都要做好防止和消除静电措施，主要有

All employees have direct contact with LED for all processes (production, testing, packaging, etc.) must perform all preventive and eliminating static electricity measures.

1、 车间铺设防静电地板并做好接地，工作台采用防静电工作台，带电产品接触低阻值的金属表面时，由

于急放电引发产品故障的可能性是很高的，故要求工作台及与产品相接触之处使用表面电阻为 10^6 - $10^9\Omega$ 的桌垫。

Workshop floors to use of the anti-static flooring and grounding, anti-static work bench, when charged material is in contact with low resistance metal surface, due to acute discharge, possibility of product failure is very high, so the requirements of the bench and any contact with the products should have surface resistance of 10^6 - $10^9\Omega$ table mats.

2、 生产机台如：锡炉、回流焊、SMT 设备、电烙铁，以及检测设备均需接地良好，接地交流阻抗小于

1.0 Ω 。在容易产生静电的环境与设备上，还必须安装离子风扇、作业过程中，操作员穿防静电服、带防静电手环、手套等，取放时尽可能接触产品的绝缘部分。

Production machines such as: tin furnace, reflow soldering, SMT equipment, electric soldering iron, and testing equipment need to be grounded, grounded AC impedance less than 1.0 ohm. Prone to static electricity environment and equipment must be installed ion fan. During working process, operators to wear anti-static clothing, wrist strap, gloves, and etc., When handling, hold the insulated part of the product as much as possible.

3、 盛装 LED 使用防静电元件盒，包装则采用防静电材料。

For packaging of LED, anti-static component boxes, packaging materials should be use.

4、 请保持环境湿度在 60%RH 以下，以免空气过于干燥产生静电。

Keep ambient humidity below 60% RH to avoid air being too dry to generate static electricity.


5、 静电接地需与电源零线、防雷地线分开，接地措施应完全防止静电产生，必须用粗的铜线引入泥土内，在铜线末端系上大铁块，埋入地表 1 米以下，各接地线均需与主线连接在一起。

Grounding should be connected to the neutral input line. It should be separated from the lightning grounding. Grounding should be done with anti-static. Heavy gauge copper cable should be connected to a large piece of metal and buried at least 1 meter deep into the ground. All ground cables must be connected together with the main cable.

使用操作示意图 (Operating diagram)



1、使用镊子或合适的工具，沿侧表面夹取元件。

Use forceps or other appropriate tools grip along the side surface of component.




2、不要接触有机硅的表面，它可能会破坏发光二极管的内部电路。

Do not touch the silicone surface. It may damage the internal circuitry of the LED.



3、不要将焊接好的发光二极管堆叠放置，会导致发光二极管划伤及胶体受损造成死灯。

Do not stack soldered LED, it may cause scratching of LED and silicone damage leading to dead LED.



4、不可接触和使用天那水、三氯乙稀、丙酮、硫化物、钠离子及酸、碱、盐等物质，这样会造成镀银层氧化

化及荧光粉硫化。致使发光二极管发光颜色变淡、亮度变暗等现象发生。

Do not make contact with thinner, Trichloroethylene, acetone, sulfide, sodium ion and acid, alkali, Salt and other substances. These materials will cause oxidation of silver plating and vulcanization of phosphor leading to color fading and reduction of brightness conditions.



储存 (Storage)

1、建议未拆封前储存条件：小于 30℃/60%RH 下，保存期限为一年。

Recommended storage conditions before opening packaging: <30 °C / <60% RH, retention period of one year.

