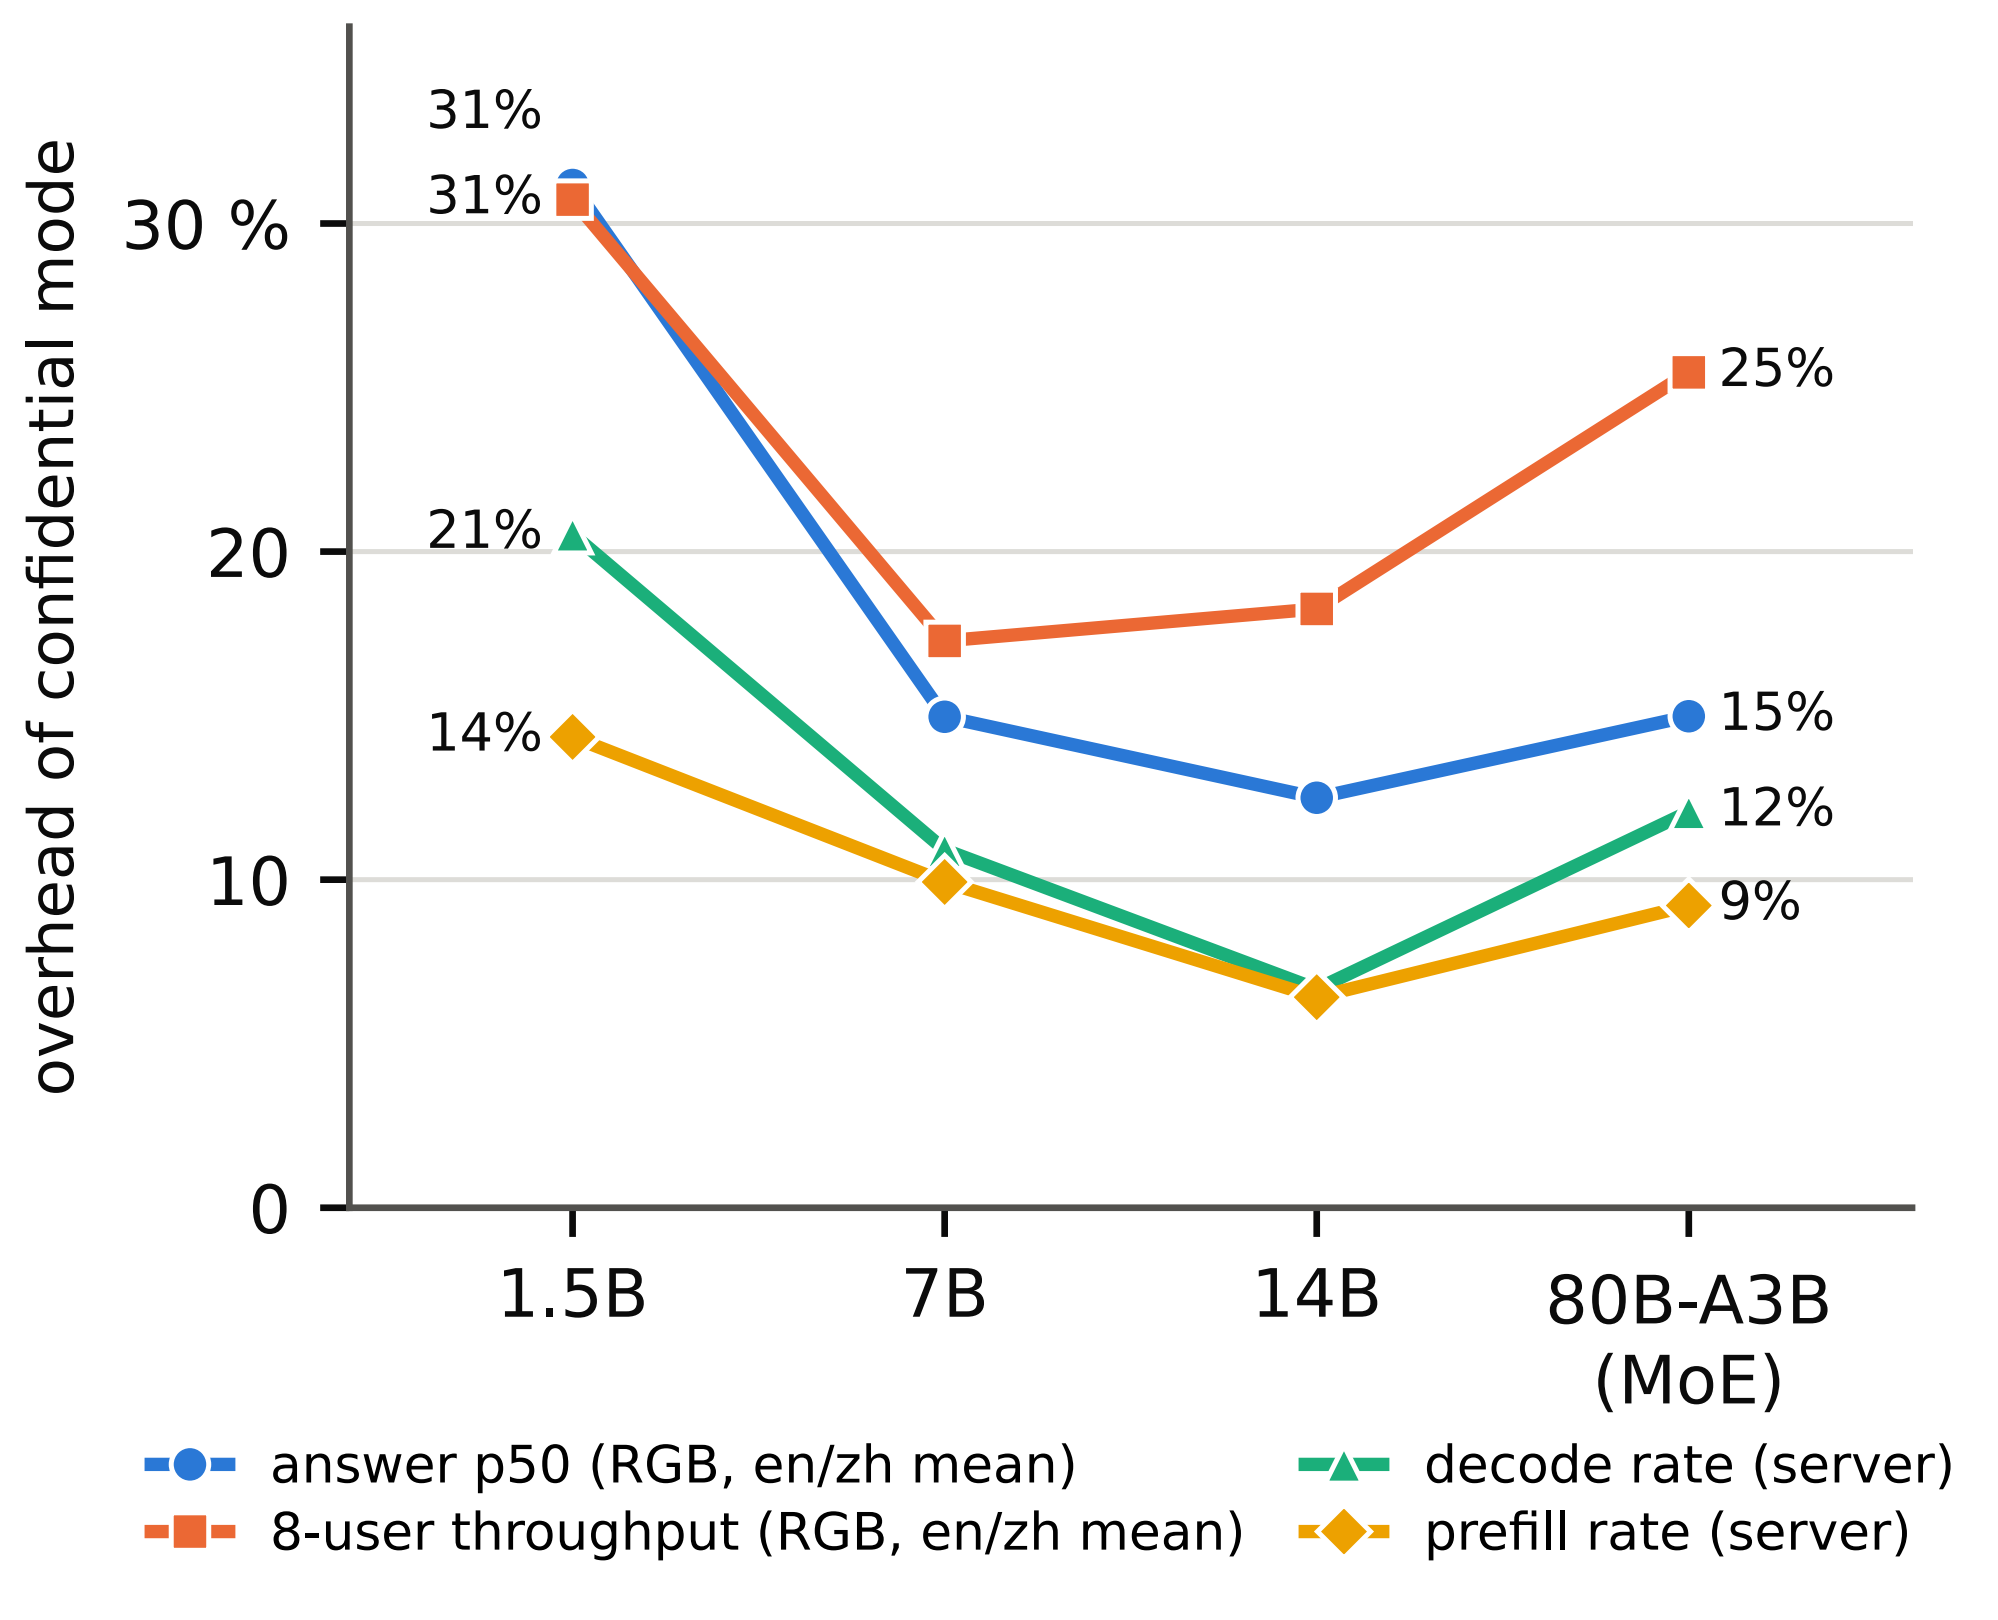
overhead of confidential mode
30 %
20
10
0
31%
31%
21%
14%
25%
15%
12%
9%
1.5B
7B
14B
80B-A3B
(MoE)
answer p50 (RGB, en/zh mean)
8-user throughput (RGB, en/zh mean)
decode rate (server)
prefill rate (server)