

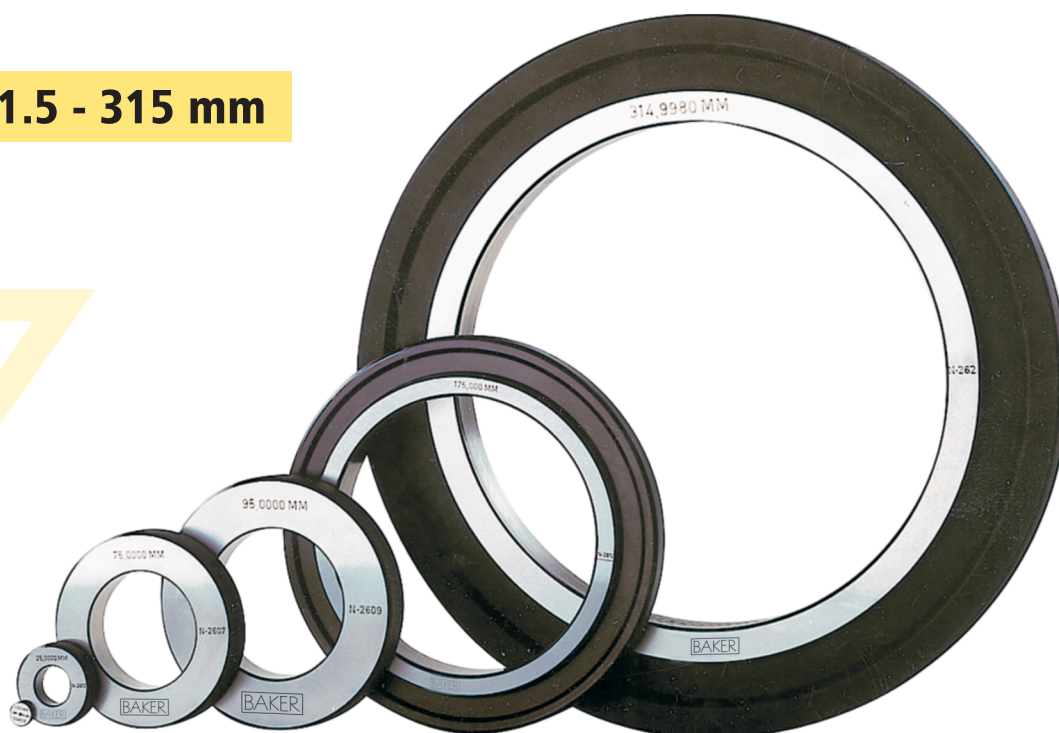


# Master Setting Ring

**RANGE: 1.5 - 315 mm**

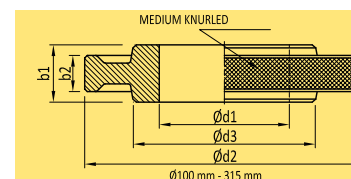

**40mm**



| Nominal Diameter Range (mm) | Size Tolerance (mm) | Roundness & Parallelism |
|-----------------------------|---------------------|-------------------------|
| 1-3                         | $\pm 0.0015$        | 0.0003                  |
| 3-6                         | $\pm 0.002$         | 0.0004                  |
| 6-10                        | $\pm 0.002$         | 0.0004                  |
| 10-18                       | $\pm 0.0025$        | 0.0005                  |
| 18-30                       | $\pm 0.003$         | 0.0006                  |
| 30-50                       | $\pm 0.0035$        | 0.0007                  |
| 50-80                       | $\pm 0.004$         | 0.0008                  |
| 80-120                      | $\pm 0.005$         | 0.001                   |
| 120-180                     | $\pm 0.006$         | 0.0012                  |
| 180-250                     | $\pm 0.007$         | 0.0014                  |
| 250-315                     | $\pm 0.008$         | 0.0016                  |

| $\phi d1$ |             | $\phi d2$ | $b1$ |
|-----------|-------------|-----------|------|
| ABOVE     | UPTO & INC. |           |      |
| 1.5       | 2.5         | 22        | 4    |
| 2.5       | 5.0         | 22        | 5    |
| 5.0       | 10.0        | 32        | 8    |
| 10.0      | 15.0        | 38        | 10   |
| 15.0      | 20.0        | 45        | 12   |
| 20.0      | 25.0        | 53        | 14   |
| 25.0      | 32.0        | 63        | 16   |
| 32.0      | 40.0        | 71        | 18   |
| 40.0      | 50.0        | 82        | 20   |
| 50.0      | 60.0        | 100       | 20   |
| 60.0      | 70.0        | 112       | 24   |
| 70.0      | 80.0        | 125       | 24   |
| 80.0      | 90.0        | 140       | 24   |
| 90.0      | 100.0       | 160       | 24   |

| $\phi d1$ |             | $\phi d2$ | $\phi d3$ | THICKNESS |      |
|-----------|-------------|-----------|-----------|-----------|------|
| ABOVE     | UPTO & INC. |           |           | $b1$      | $b2$ |
| 100.0     | 110.0       | 170       | 132       | 28        | 14   |
| 110.0     | 120.0       | 180       | 140       | 28        | 16   |
| 120.0     | 130.0       | 190       | 150       | 28        | 16   |
| 130.0     | 140.0       | 200       | 160       | 28        | 18   |
| 140.0     | 150.0       | 212       | 170       | 28        | 18   |
| 150.0     | 160.0       | 224       | 180       | 28        | 20   |
| 160.0     | 170.0       | 236       | 190       | 28        | 20   |
| 170.0     | 180.0       | 250       | 200       | 32        | 20   |
| 180.0     | 190.0       | 265       | 212       | 32        | 22   |
| 190.0     | 200.0       | 280       | 224       | 32        | 22   |
| 200.0     | 212.0       | 300       | 236       | 32        | 22   |
| 212.0     | 224.0       | 315       | 250       | 32        | 25   |
| 224.0     | 236.0       | 335       | 265       | 36        | 25   |
| 236.0     | 250.0       | 355       | 280       | 36        | 28   |
| 250.0     | 265.0       | 375       | 300       | 36        | 28   |
| 265.0     | 280.0       | 400       | 315       | 36        | 28   |
| 280.0     | 300.0       | 425       | 335       | 36        | 32   |
| 300.0     | 315.0       | 450       | 355       | 36        | 32   |

## FEATURES

- Used for setting of measuring instruments like horizontal comparators, length measuring machines for ID checking, dial bore gauges etc.
- Made from oil hardening non shrinking gauge steel, hardened and tempered to 60-62 HRC
- Sub-zero treated at  $-80^{\circ}\text{C}$  for long term dimensional stability
- Actual dimensions duly etched
- Calibrated at  $20^{\circ}\text{C}$  under Standards room condition against national/international traceable standards
- Certificate of calibration is provided along with each master traceable to national/international standards, certificate under NABL (as per ISO 17025) as per request
- Manufactured as per DIN2250-1: 2008 Type C
- Master Setting Rings also supplied in standard set consisting of sizes:
  - Set 1:  $\phi 4.0$ ,  $\phi 5.0$ ,  $\phi 6.0$  &  $\phi 8.0$  mm
  - Set 2:  $\phi 10.0$ ,  $\phi 12.0$ ,  $\phi 16.0$ ,  $\phi 20.0$  &  $\phi 25.0$  mm
- Set also supplied as per customer's requirement