





棘輪型扭力扳手

QLK

- 精度為 ±3% 以内。

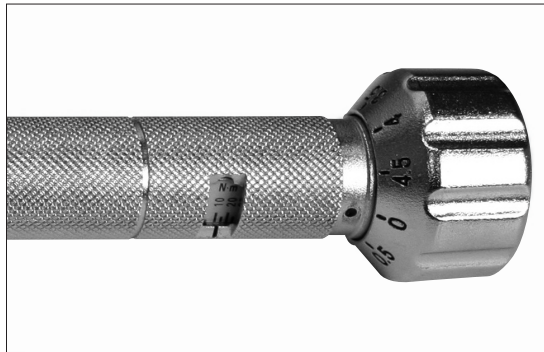

セットトルク値: 50 + 2 = 52 N·m
(主目盛 + 副目盛)

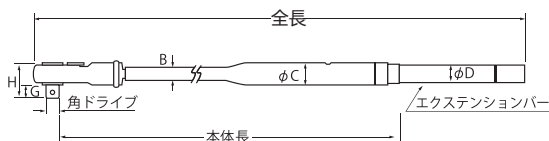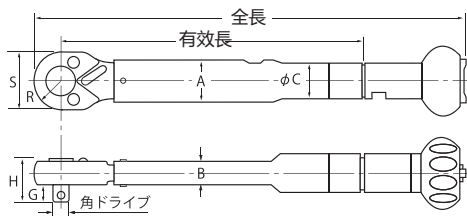

30~4200 QLK

5600 QLK

7000~21000 QLK

型 號	調整範圍	最小讀值	型 號	調整範圍	最小讀值	型 號	調整範圍	最小讀值	四角頭	全長	尺 寸(mm)								牌 價		
											頭 部			主 體							
公 制	kgf.cm / kgf.m		牛 頓	N.m		英 制	lbf.in			mm	H	G	R	A	B	C	D				
30QLK	10-30kgf.cm	0.5kgf.cm	CN300QLK	100-300cN.m	5cN.m				6.35 (1/4")	186	18.8	7.5	12								
60QLK	20-60 "	1 "	N6QLK	2-6 N.m	0.1 N.m									18.2	9.6	15					
120QLK	40-120 "	2 "	N12QLK	4-12 "	0.2 "	PI120QLK	40-120	2													
230QLK	70-230 "	2 "				PI230QLK	70-230	2	9.53 (3/8")	232	25	11	15.5								
250QLK	50-250 "	2 "	N25QLK	5-25 "	0.2 "					232											
450QLK	100-450 "	5 "				PI450QLK	100-450	5		253.5			16	25	11.4	20					
500QLK	100-500 "	5 "	N50QLK	10-50 "	0.5 "					253.5											
900QLK	200-900 "	10 "	N90QLK	20-90 "	1 N.m				12.7 (1/2")	352	31	14	19.7	27.5	12.4	21.7					
1000QLK	200-1000 "	10 "	N100QLK	20-100 "	1 "	PI1000QLK	200-1000	10		392											
1400QLK	400-1400 "	10 "	N140QLK	40-140 "	1 "																
1800QLK	400-1800 "	20 "	N180QLK	40-180 "	2 "					478	33			23	34						
2000QLK	400-2000 "	20 "	N200QLK	40-200 "	2 "	PI2000QLK	400-2000	20	19.05 (3/4")		42	20			15.4	27.2					
2800QLK	4-28kgf. m	0.2kgf.m	N280QLK	40-280 "	2 "					678										23.5	35
3600QLK	8-36 "	0.2 "	N360QLK	80-360 "	2 "					678											
4200QLK	6-42 "	0.2 "	N420QLK	60-420 "	2 "					950			42.7	27	38	16	30				
5600QLK	8-56 "	0.3 "	N560QLK	80-560 "	3 "				25.4 (1")	1195	49.5	34	43.5	18	34						
7000QLK	10-70 "	0.5 "	N700QLK	100-700 "	5 "					1314				46	19.2	35.4	27.2				
8500QLK	10-85 "	0.5 "	N850QLK	100-850 "	5 "				25.4 (1")	1388	58	27	38	54	23	42.7	31.8				
10000QLK	10-100 "	0.5 "	N1000QLK-8	100-1000 "	5 "					1538											
14000QLK	20-140 "	1 "								1844	61		44	66	26	51			40		
15000QLK	20-150 "	1 "	N1500QLK	200-1500 "	10 "					2064											
21000QLK	70-210 "	1 "	N2100QLK	700-2100 "	10 "												34				