


Calipers

An industry standard measuring tool

Neck Caliper SERIES 573, 536 — ABSOLUTE Digimatic and vernier types

MeasurLink® ENABLED
Data Management Software by Mitutoyo

- Can measure wall thickness inside bores and recesses.
- Digimatic models are an IP67 Absolute type. Slider action is smooth, firm and comfortable.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. (Refer to page A-3.)

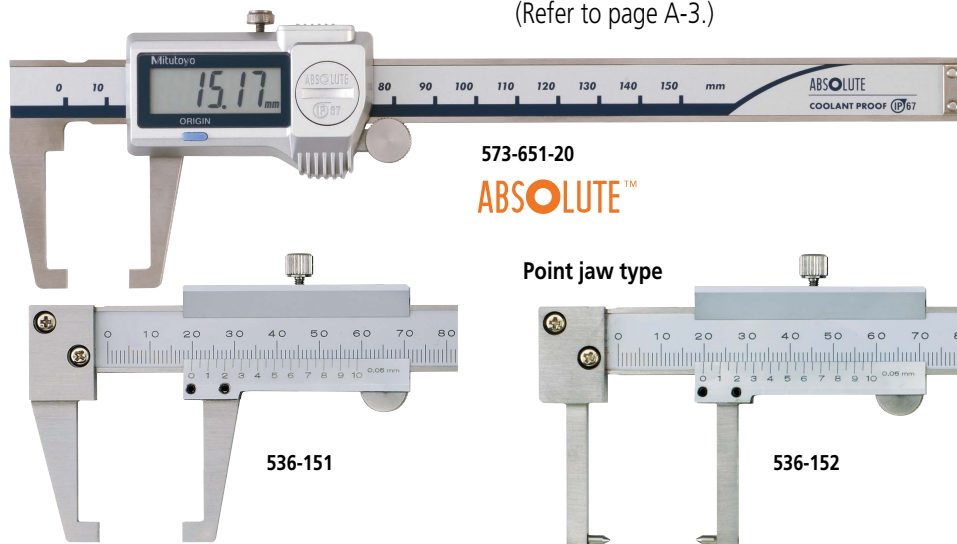

SPECIFICATIONS

Metric Digimatic model			
Order No.	Range (mm)	Maximum permissible error (mm)*3	
		EMPE	SMPE
573-651-20	0 - 150	±0.03	
573-652-20*1	0 - 150	±0.03	
573-653-20*2	0 - 150	±0.03	
573-654-20*1+2	0 - 150	±0.03	


Metric Analog model			
Order No.	Range (mm)	Maximum permissible error (mm)*3	
		EMPE	SMPE
536-151	0 - 150	±0.05	
536-152*1	0 - 150	±0.05	

*1 Point jaw type

*2 Without thumb roller

*3 Partial Surface Contact Error, EMPE and Shift Error, SMPE are terms (notations) used in ISO 13385-1:2019.

DIMENSIONS

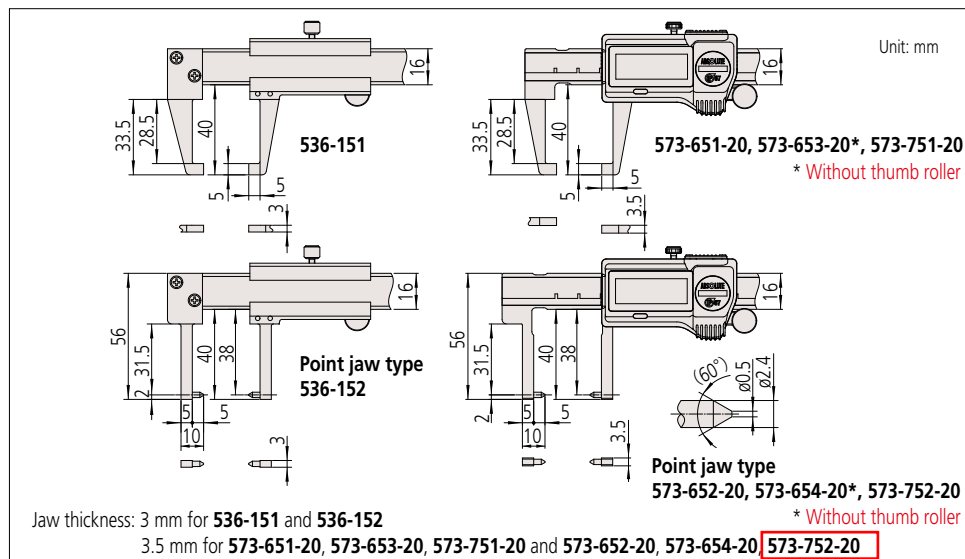

MeasurLink® ENABLED
Data Management Software by Mitutoyo


Products equipped with the measurement data output function can be connected to the measurement data network system MeasurLink® (refer to page A-25 for details).

IP67



Dust- and Water- Protected

www.tuv.com
ID 0000045042



Technical Data

- Resolution*1: 0.01 mm or 0.0005 in/0.01 mm
- Graduation*2: 0.05 mm
- Display*1: LCD
- Scale type*1: ABSOLUTE electromagnetic induction linear encoder
- Max. response speed*1: Unlimited
- Battery: SR44 (1 pc.), **938882**, for initial operational checks (standard accessory)
- Battery life*1: Approx. 5 years under normal use
- Dust/Water protection level*1: IP67 (IEC 60529)*3
- *1 Digimatic models
- *2 Analog models
- *3 Rustproofing shall be applied after use if caliper was in contact with coolant.

Optional Accessories for Digimatic Models

For details, refer to page A-21.

- Connecting cables for **IT/DP/MUX**
 - 05CZA624**: SPC cable with data button (1 m)
 - 05CZA625**: SPC cable with data button (2 m)
- USB Input Tool Direct
- **06AFM380A**: SPC cable for **USB-ITN-A** (2 m)
- Connecting cables for **U-WAVE-T**
 - 02AZD790A**: SPC cable with data button (160 mm)
 - 02AZE140A**: SPC cable for foot switch

Wireless Data Output **U-WAVE**

- **U-WAVE-TC**: **264-620** (IP67 type)
264-621 (Buzzer type)
- **U-WAVE-TCB Transmitter** (Mitutoyo Bluetooth® U-WAVE)
 - 264-624** (IP67 type)
 - 264-625** (Buzzer type)
 Refer to page A-10 for details.
- Connecting unit for **U-WAVE-TC/TCB**
 - 02AZF310** (IP67 type)
 Note: IP67 model is water/dust-proofed suitable for the factory floor.
Buzzer type is not water/dust-proofed.
Refer to pages A-10 and A-12 for details.