


## DH 棘輪頭 扭力轉接頭

齒數：43 T ~ 60 T

可左右切換棘輪效果以及快脫功能設計

| ITEM NO.   | inch | mm    | Teeth | W mm | H mm | L mm | L1 mm | L2 mm | g   |
|------------|------|-------|-------|------|------|------|-------|-------|-----|
| DH0912-14  | 1/4" | 9x12  | 43    | 24.0 | 29.0 | 43.5 | 14.0  | 11.5  | 68  |
| DH0912-385 | 3/8" | 9x12  | 45    | 24.0 | 33.0 | 43.5 | 14.0  | 11.5  | 72  |
| DH0912-38  | 3/8" | 9x12  | 45    | 36.0 | 36.5 | 55.5 | 20.5  | 11.5  | 146 |
| DH0912-125 | 1/2" | 9x12  | 45    | 36.0 | 40.0 | 55.5 | 20.5  | 11.5  | 158 |
| DH1418-38  | 3/8" | 14x18 | 45    | 36.0 | 36.5 | 62.0 | 20.5  | 15.0  | 184 |
| DH1418-125 | 1/2" | 14x18 | 45    | 36.0 | 40.0 | 62.0 | 20.5  | 15.0  | 192 |
| DH1418-12  | 1/2" | 14x18 | 45    | 43.5 | 46.0 | 71.0 | 30.5  | 15.0  | 294 |
| DH1418-34  | 3/4" | 14x18 | 60    | 69.0 | 68.5 | 99.5 | 45.5  | 15.0  | 396 |

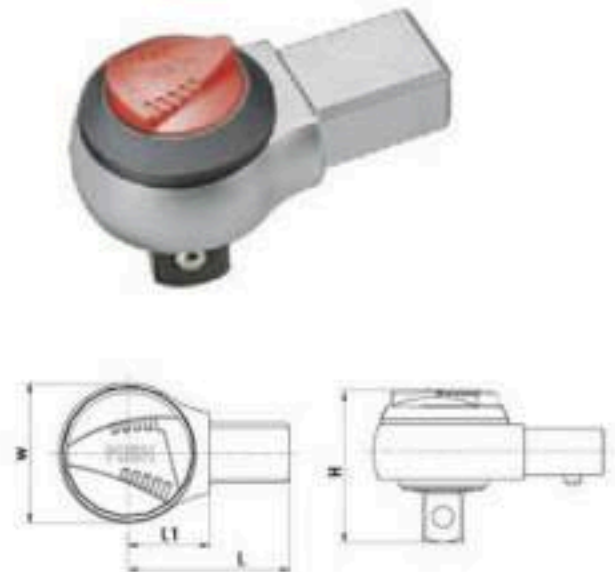

## OH 棘輪頭 扭力轉接頭

齒數：72 T

可左右切換棘輪效果以及快脫功能設計

| ITEM NO.   | inch | mm    | Teeth | W mm | H mm | L mm | L1 mm | L2 mm | g   |
|------------|------|-------|-------|------|------|------|-------|-------|-----|
| OH0912-14  | 1/4" | 9x12  | 72    | 27.0 | 27.5 | 47.5 | 17.0  | 11.5  | 78  |
| OH0912-385 | 3/8" | 9x12  | 72    | 27.0 | 31.0 | 47.5 | 17.0  | 11.5  | 84  |
| OH0912-38  | 3/8" | 9x12  | 72    | 35.5 | 36.0 | 55.0 | 20.0  | 11.5  | 158 |
| OH0912-125 | 1/2" | 9x12  | 72    | 35.5 | 40.5 | 55.0 | 20.0  | 11.5  | 170 |
| OH1418-38  | 3/8" | 14x18 | 72    | 35.5 | 36.0 | 62.5 | 20.2  | 15.0  | 196 |
| OH1418-125 | 1/2" | 14x18 | 72    | 35.5 | 40.5 | 62.5 | 20.0  | 15.0  | 208 |
| OH1418-12  | 1/2" | 14x18 | 72    | 43.0 | 44.5 | 71.0 | 24.7  | 15.0  | 306 |
| OH1418-34  | 3/4" | 14x18 | 60    | 54.0 | 59.4 | 83.5 | 32.0  | 15.0  | 408 |



| ITEM NO.  | inch | mm      | Teeth | W mm | H mm | L mm | L1 mm | g    |
|-----------|------|---------|-------|------|------|------|-------|------|
| OH2028-34 | 3/4" | 20x28.5 | 60    | 68.0 | 68.0 | 137  | 43.7  | 1400 |
| OH2028-88 | 1"   | 20x28.5 | 60    | 68.0 | 74.0 | 137  | 43.7  | 1500 |

棘輪頭 轉接頭 方頭尺寸可從 1/4"~1" 等各式皆可與 WUMA 可換頭 扭力扳手 搭配使用

