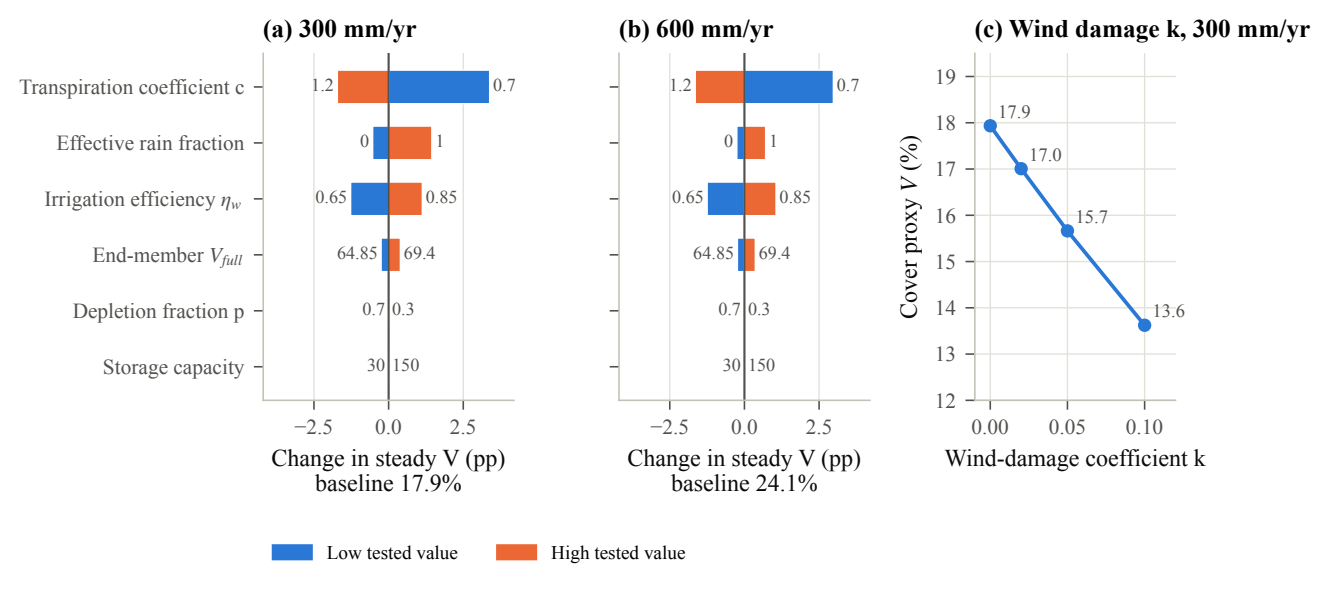
(a) 300 mm/yr
(b) 600 mm/yr
(c) Wind damage k, 300 mm/yr
Transpiration coefficient c
Effective rain fraction
Irrigation efficiency η_w
End-member V_{full}
Depletion fraction p
Storage capacity
1.2
0.7
0
1
0.65
0.85
64.85
69.4
0.7
0.3
30
150
−2.5
0.0
2.5
Change in steady V (pp)
baseline 17.9%
Change in steady V (pp)
baseline 24.1%
Cover proxy V (%)
19
18
17
16
15
14
13
12
17.9
17.0
15.7
13.6
0.00
0.05
0.10
Wind-damage coefficient k
Low tested value
High tested value