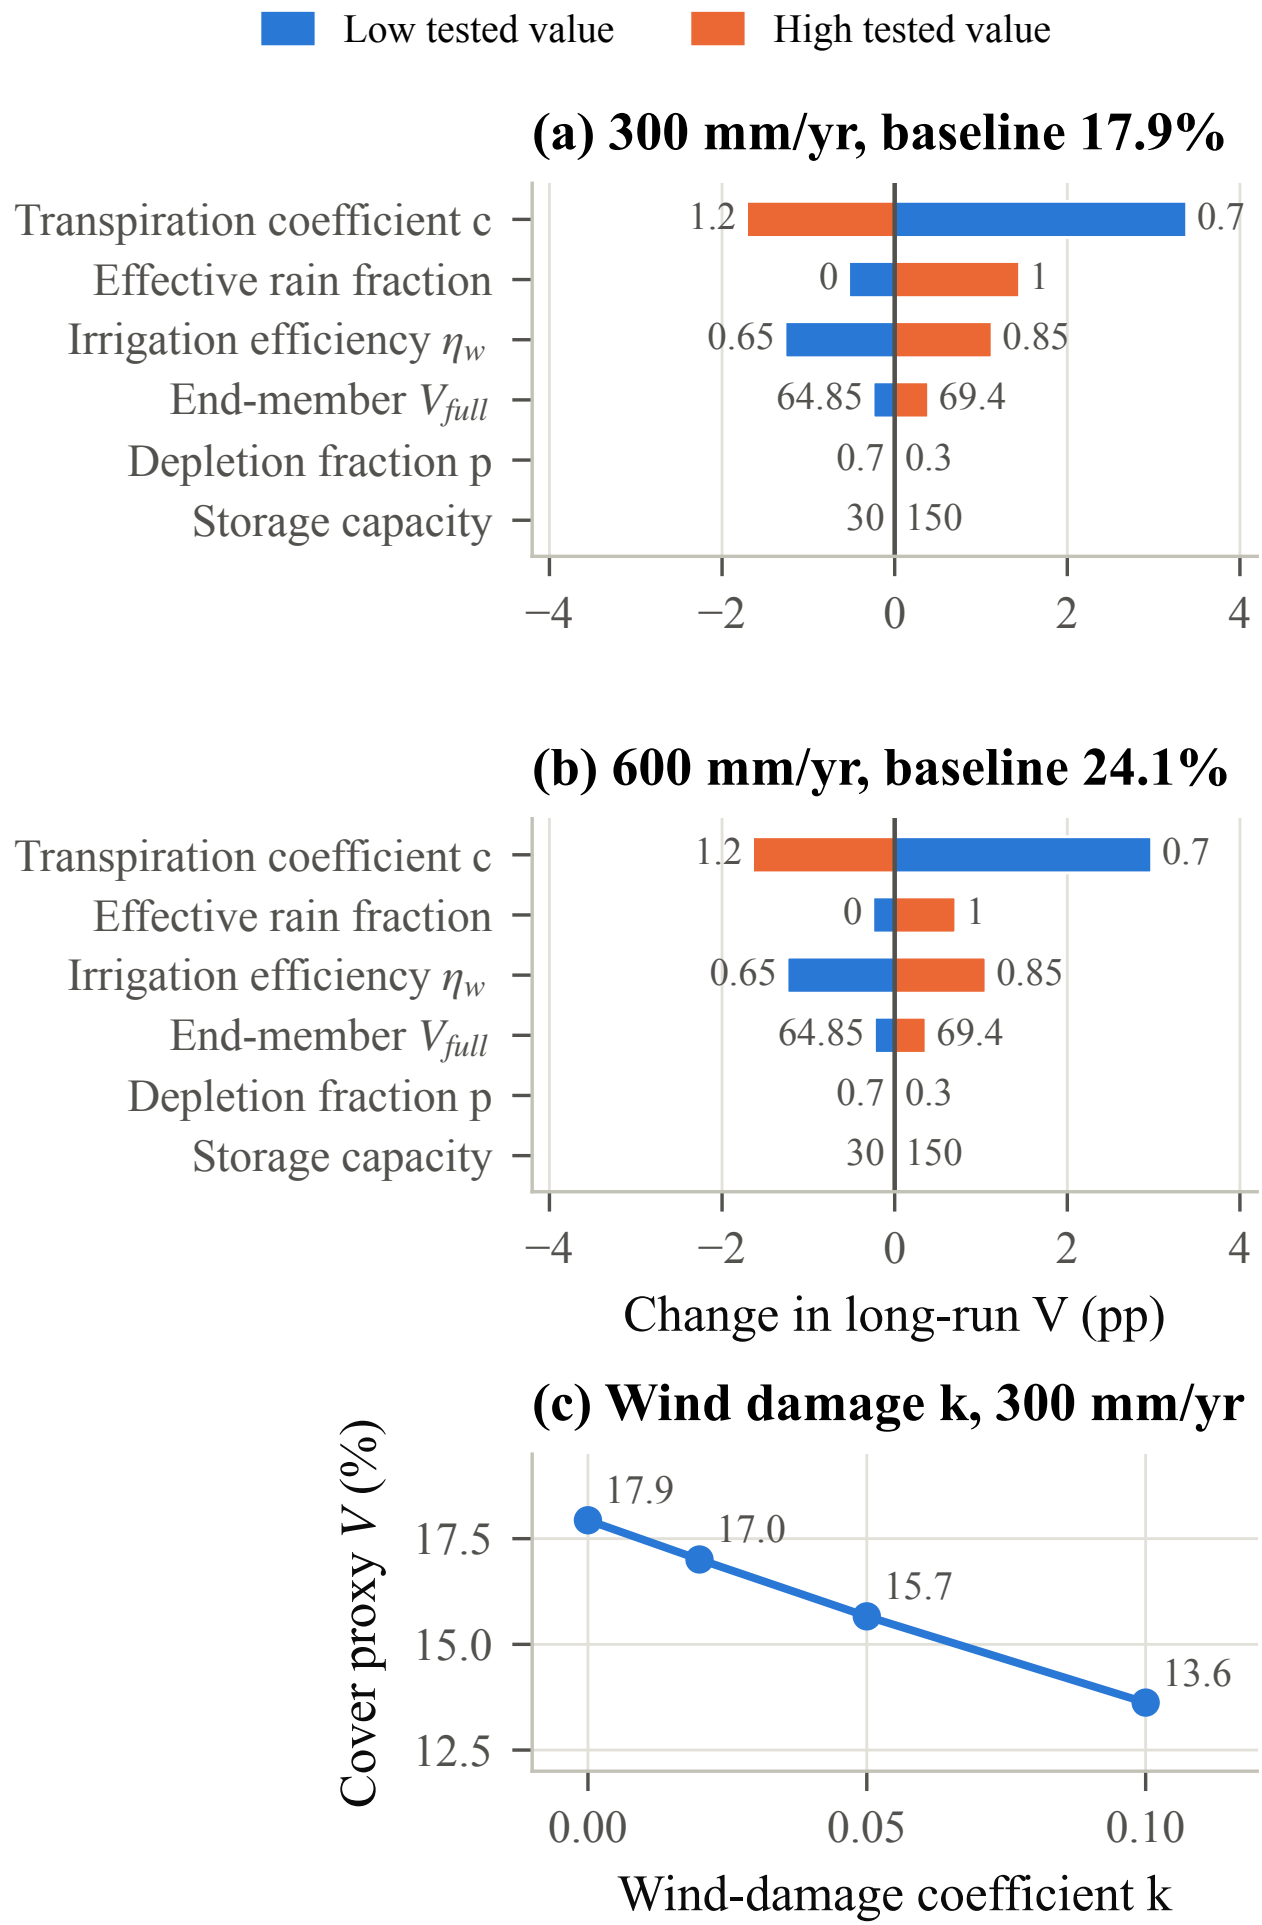

Low tested value
High tested value
(a) 300 mm/yr, baseline 17.9%
Transpiration coefficient c
Effective rain fraction
Irrigation efficiency η_w
End-member V_{full}
Depletion fraction p
Storage capacity
1.2
0.7
0
1
0.65
0.85
64.85
69.4
0.7
0.3
30
150
−4
−2
0
2
4
(b) 600 mm/yr, baseline 24.1%
Transpiration coefficient c
Effective rain fraction
Irrigation efficiency η_w
End-member V_{full}
Depletion fraction p
Storage capacity
1.2
0.7
0
1
0.65
0.85
64.85
69.4
0.7
0.3
30
150
−4
−2
0
2
4
Change in long-run V (pp)
(c) Wind damage k, 300 mm/yr
Cover proxy V (%)
17.5
15.0
12.5
17.9
17.0
15.7
13.6
0.00
0.05
0.10
Wind-damage coefficient k