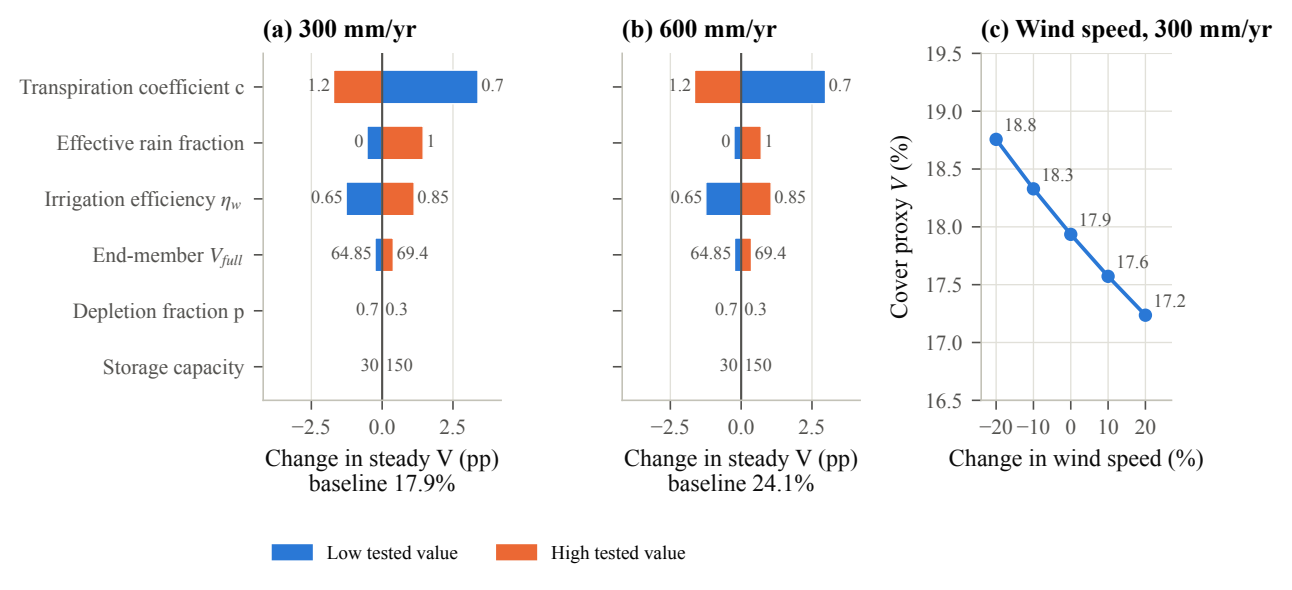
(a) 300 mm/yr
(b) 600 mm/yr
(c) Wind speed, 300 mm/yr
Transpiration coefficient c
Effective rain fraction
Irrigation efficiency $\eta_w$
End-member $V_{full}$
Depletion fraction p
Storage capacity
1.2
0.7
0
1
0.65
0.85
64.85
69.4
0.7
0.3
30
150
−2.5
0.0
2.5
Change in steady V (pp)
baseline 17.9%
Change in steady V (pp)
baseline 24.1%
Cover proxy $V$ (%)
19.5
19.0
18.5
18.0
17.5
17.0
16.5
18.8
18.3
17.9
17.6
17.2
−20
−10
0
10
20
Change in wind speed (%)
Low tested value
High tested value