


CSC 361

Computer Networks

WLAN and Physical Layer (Chapter 7)

Wenjun Yang

Summer 2026

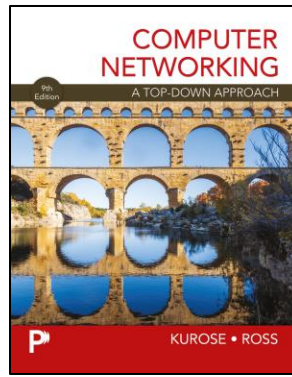

Wireless and Mobile Networks: Overview

Chapter goals:

- understand principles of wireless networks:
 - **physical layer**: radio, influence on higher layers
 - **access network**: link-layer challenges/solutions in any wireless networks
 - **core network**: the “network” layer in a wireless network
 - **user/device mobility**: among access networks
 - **application-specific wireless networks**: Bluetooth, satellite, IoT
- wireless networks in practice:
 - WiFi
 - 5G (with a bit of 4G)
 - Bluetooth, satellite, IoT

For a more extensive treatment of wireless and mobile networks visit:

https://gaia.cs.umass.edu/wireless_and_mobile_networks


Chapter 7 Outline (1 of 10)

- introduction
- radio: the physical layer
- the wireless **access** network
 - principles, WiFi, 5G
- the wireless core network
 - principles, 5G
- mobility
- Bluetooth, satellite, IoT wireless networks



Wireless and Mobile Networks: Context

- more mobile-broadband-connected (cellular) devices than fixed-broadband-connected devices (5-1 in 2019)!
 - wireless connectivity even great when WiFi users considered (80% of broadband homes use WiFi)
 - 60% of Internet traffic from major web sites destined to mobile device

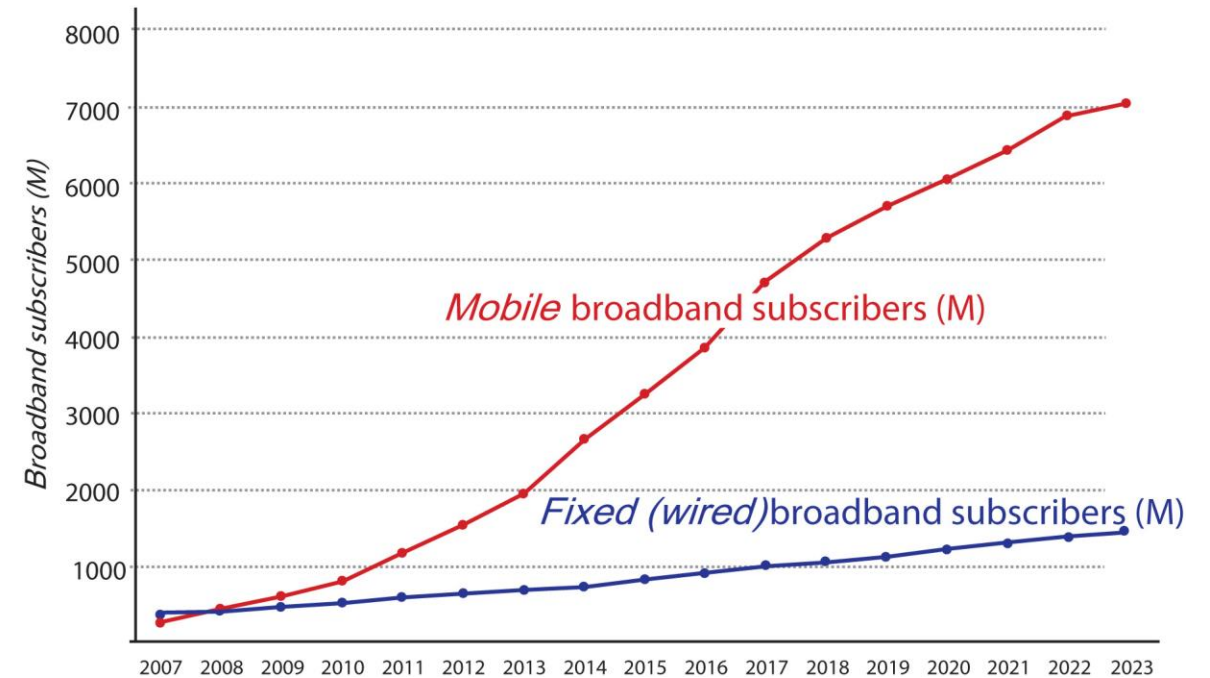


Data source: www.statista.com (1/25)

Wireless Applications their Needs


Six application areas :

- Wide-area Mobile Wireless Internet Access
- Local-area Mobile Wireless Internet Access
- Fixed Wireless Internet Access
- Satellite Networks for Internet Access and Sensing
- Cable replacement
- Internet of Things (IoT)



Application needs:

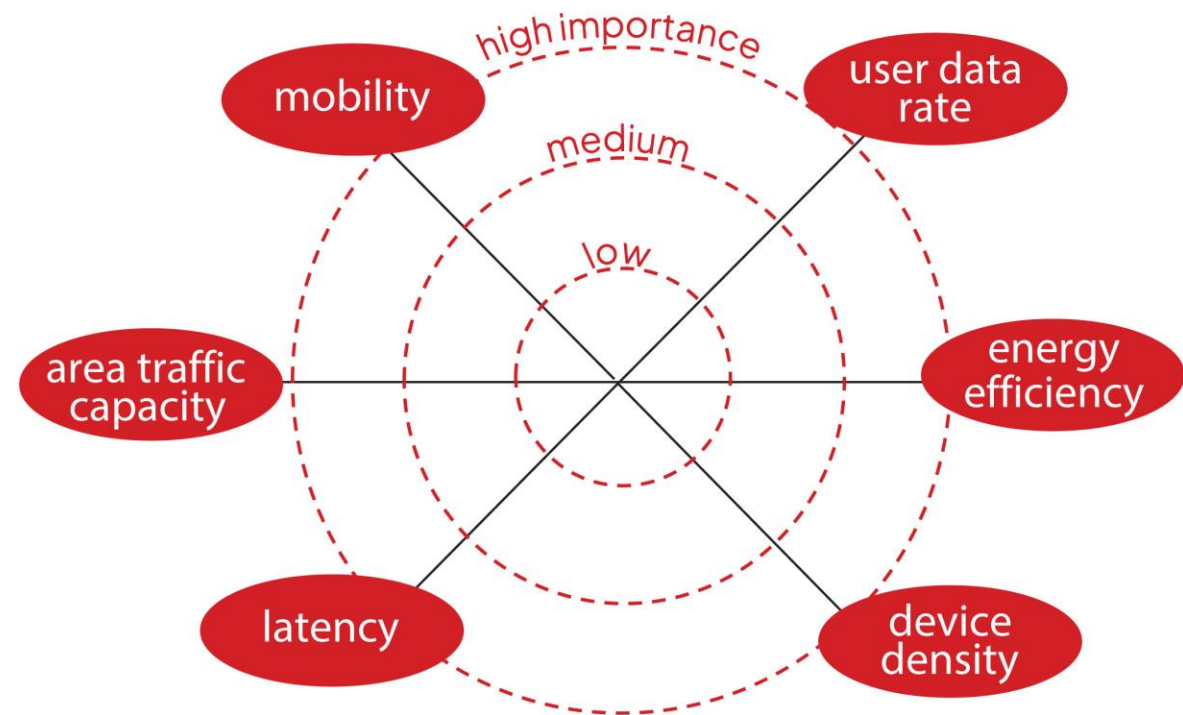


Elements of a Wireless Network (1 of 5)

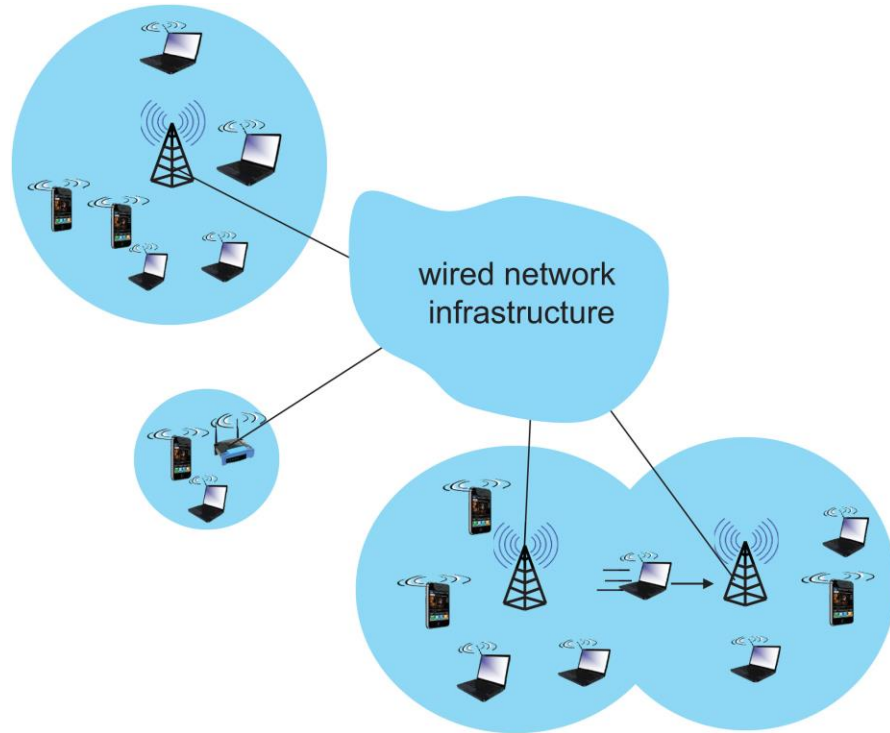


Elements of a Wireless Network (2 of 5)

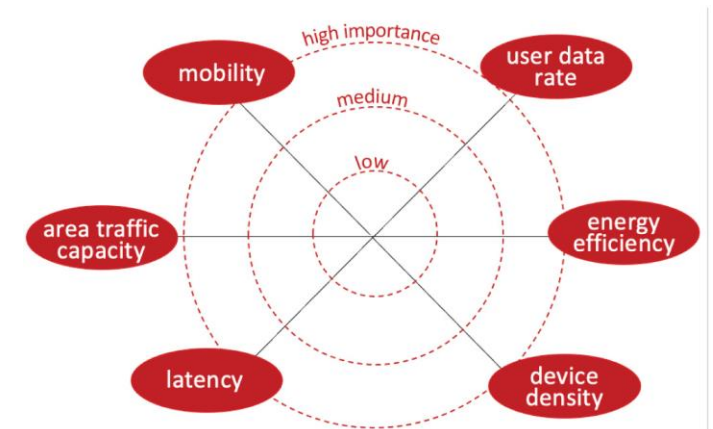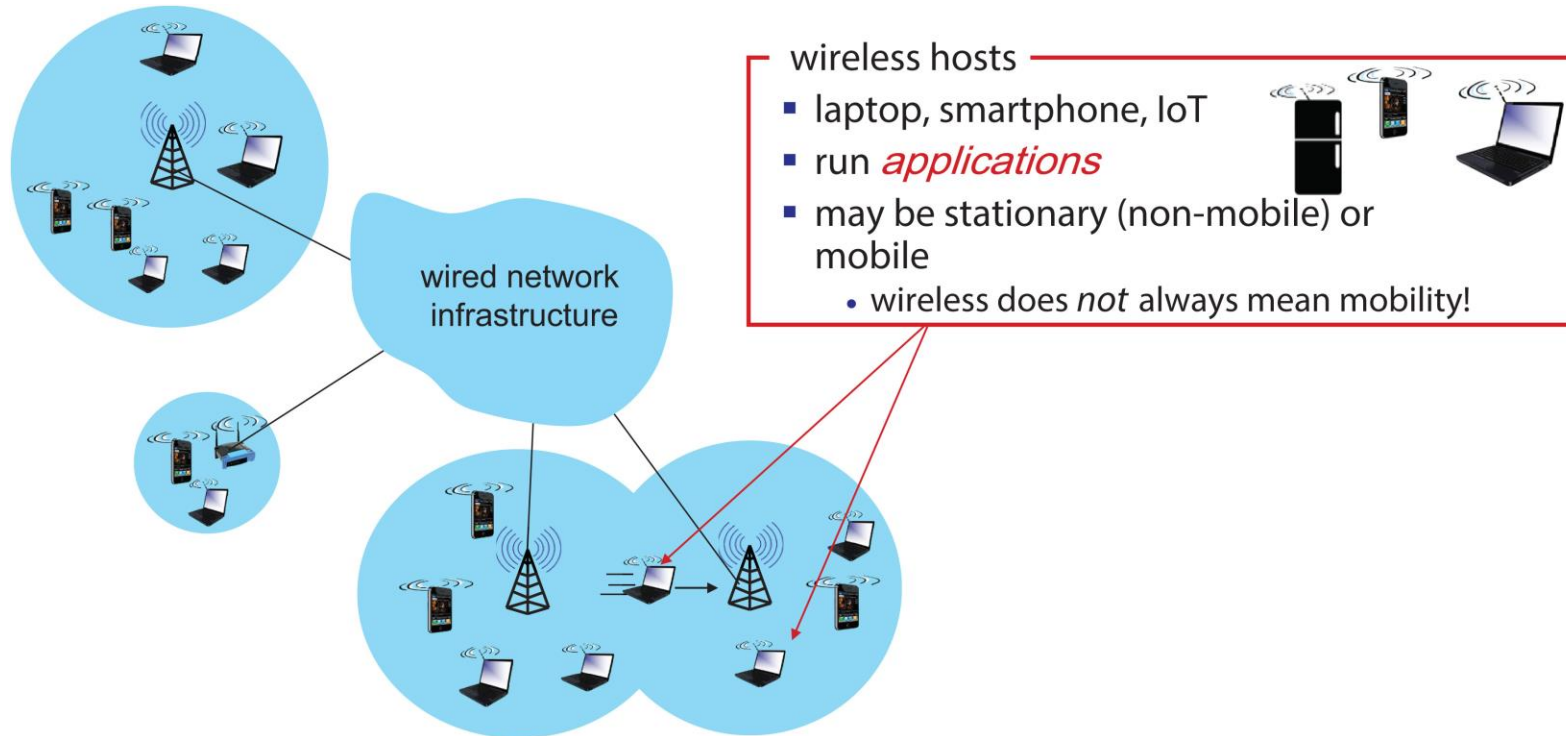

Elements of a Wireless Network (3 of 5)

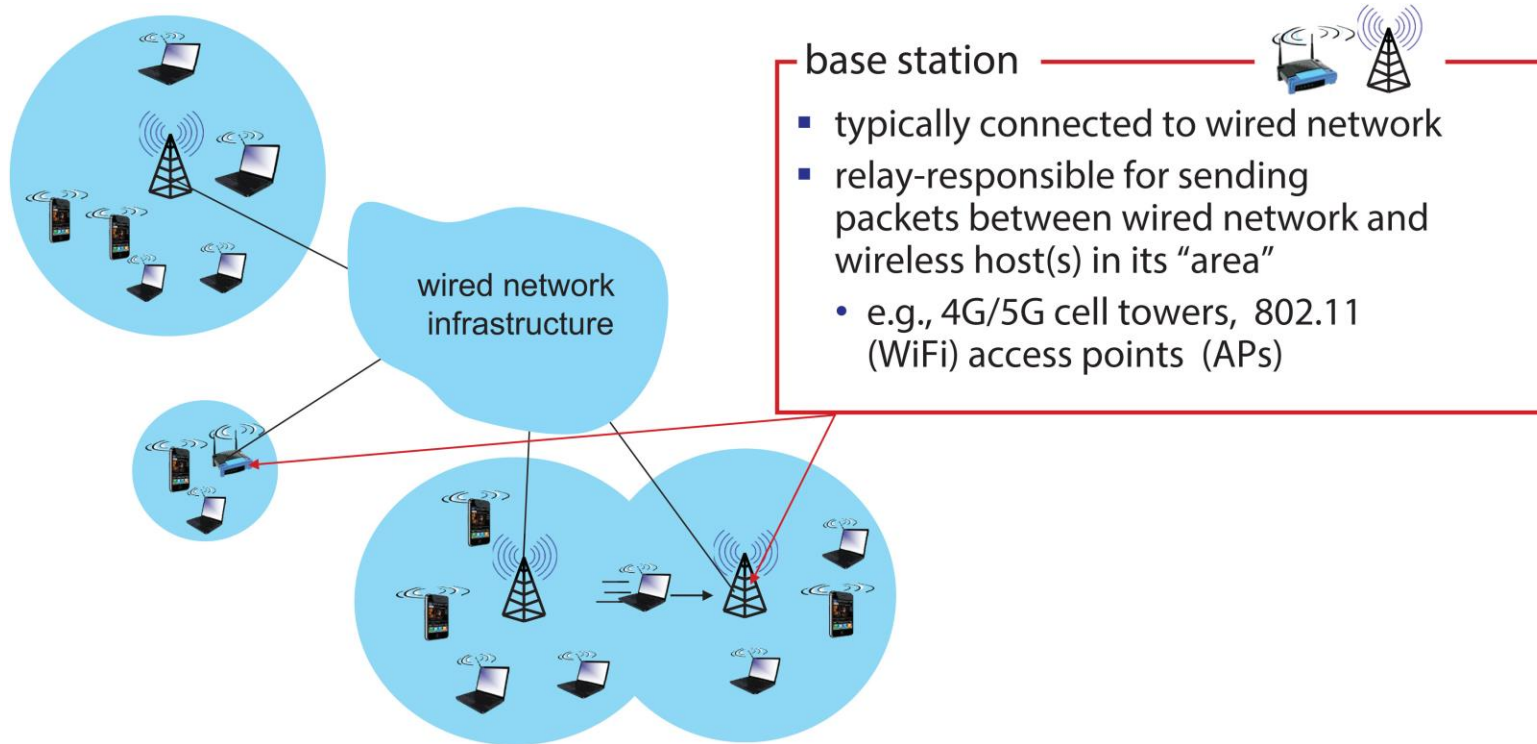


Elements of a Wireless Network (4 of 5)

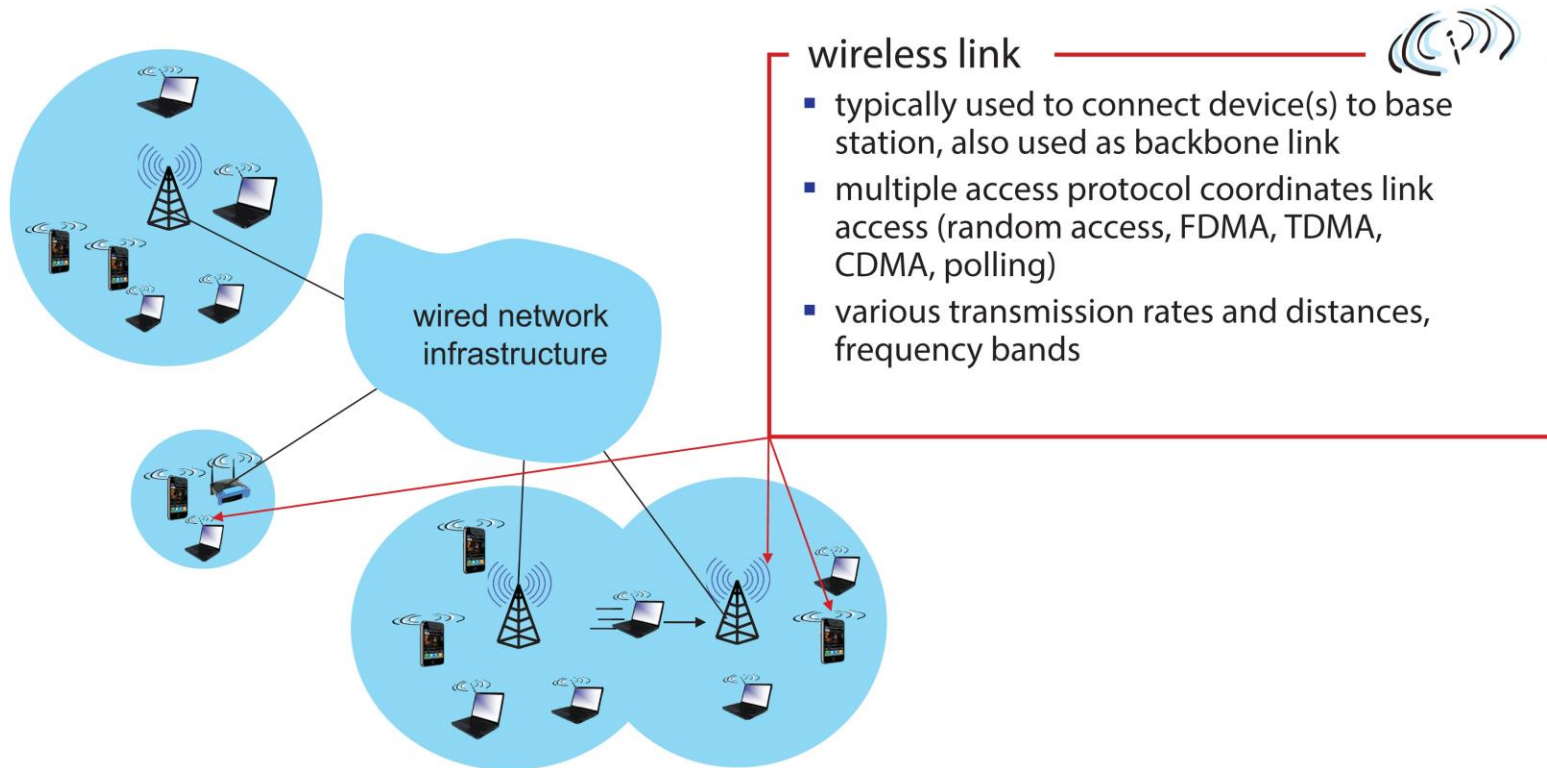


Ad hoc networks: not all wireless networks are connected into a larger network

Elements of a Wireless Network (5 of 5)

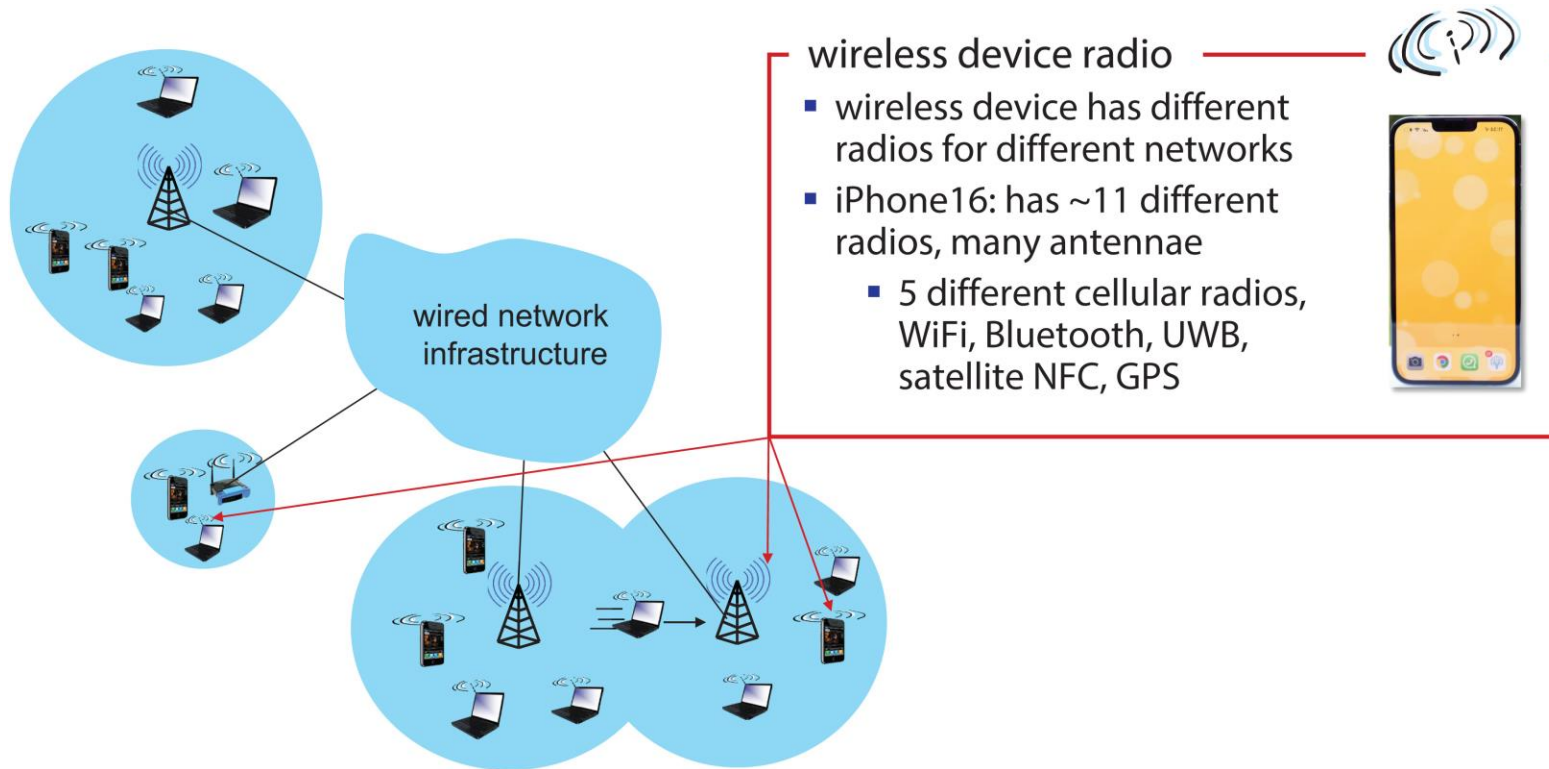


Ad hoc networks: not all wireless networks are connected into a larger network

Characteristics of Selected Wireless Links

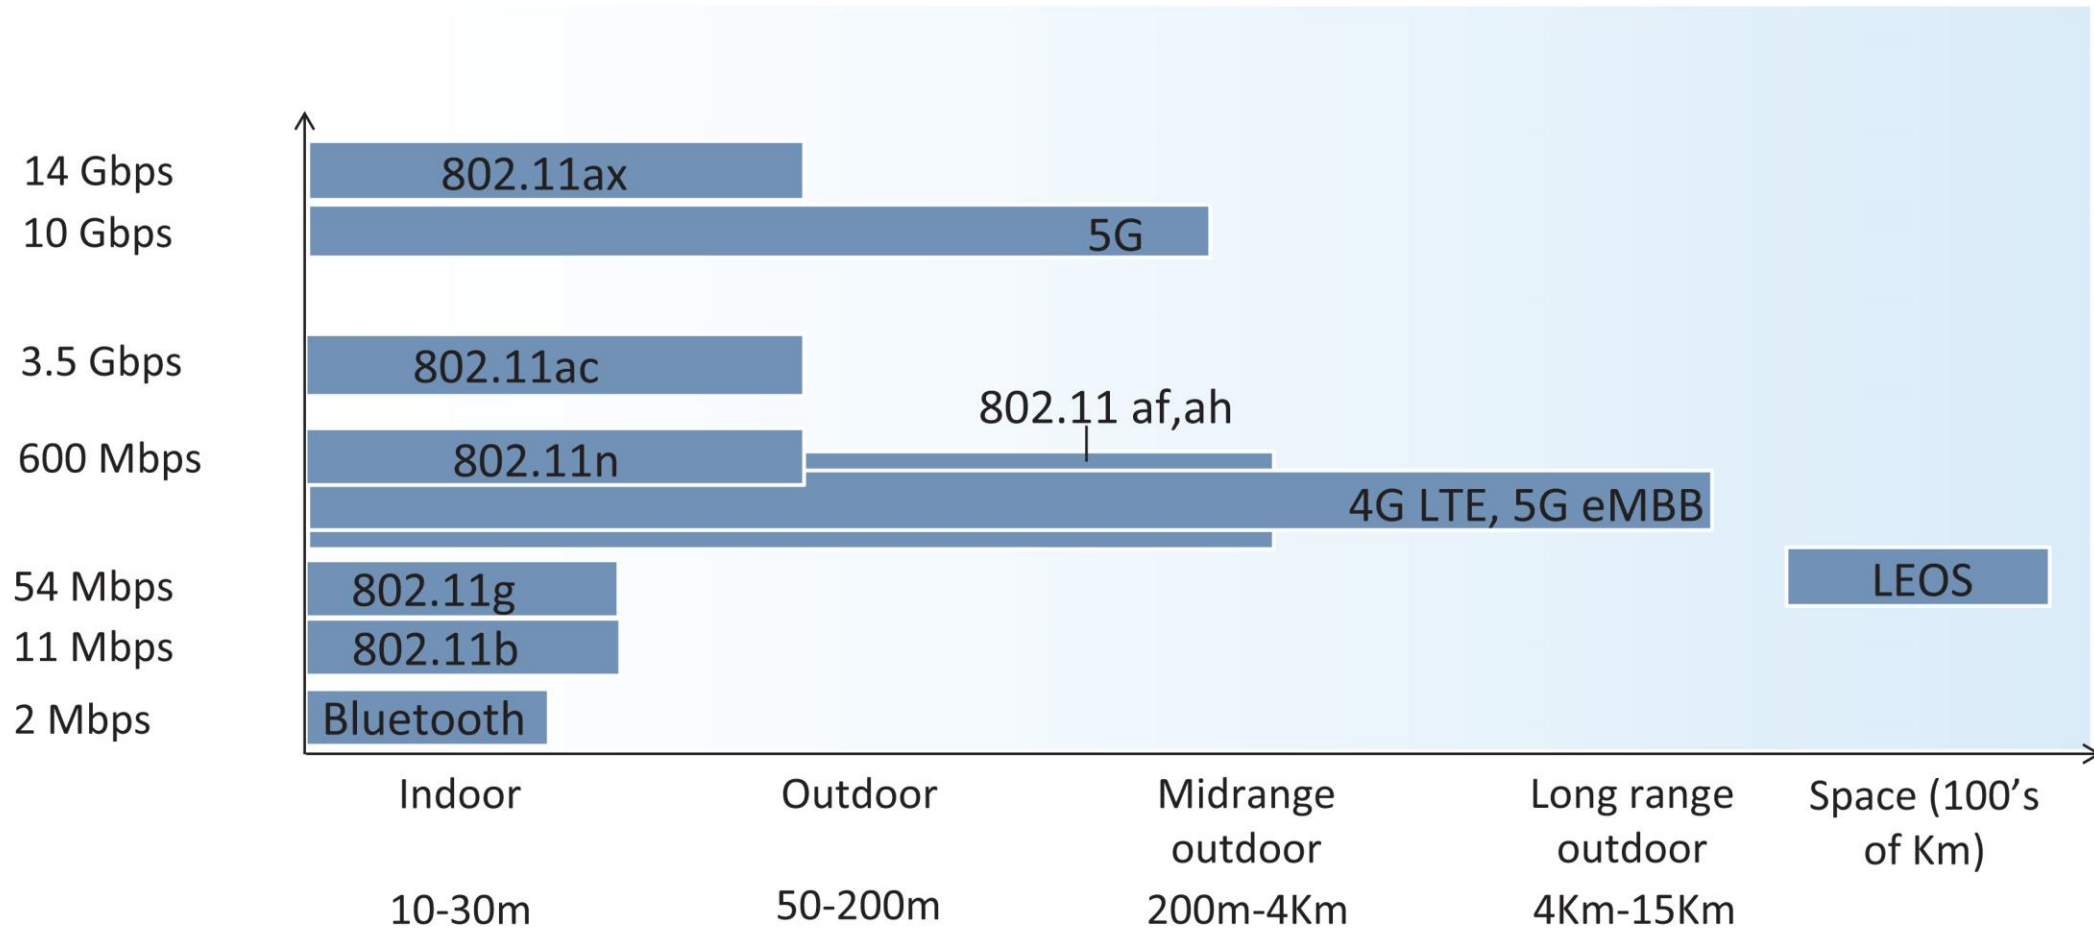


Wireless Networks: Edge and Core Networks

WiFi:

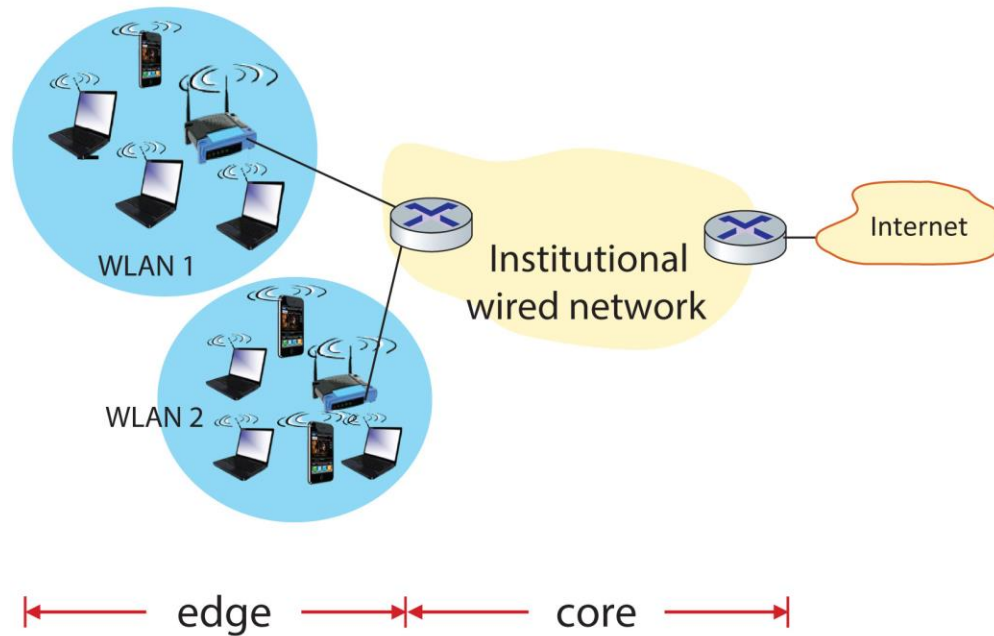

5G:

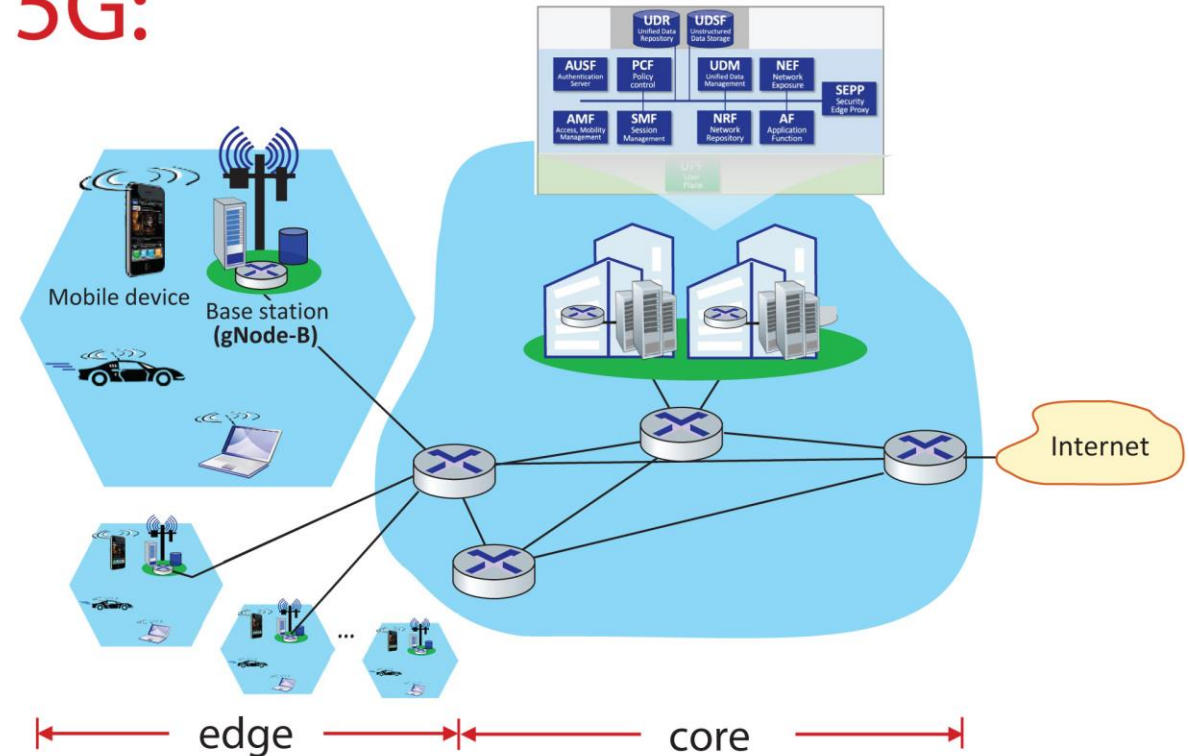


Chapter 7 Outline (2 of 10)

- introduction
- radio: the physical layer
 - radio principles
 - radio channels
 - radio spectrum
 - coding and modulation
- the wireless **access** network
- the wireless core network
- mobility
- Bluetooth, satellite, IoT wireless networks



Electromagnetics: Enabling Communication

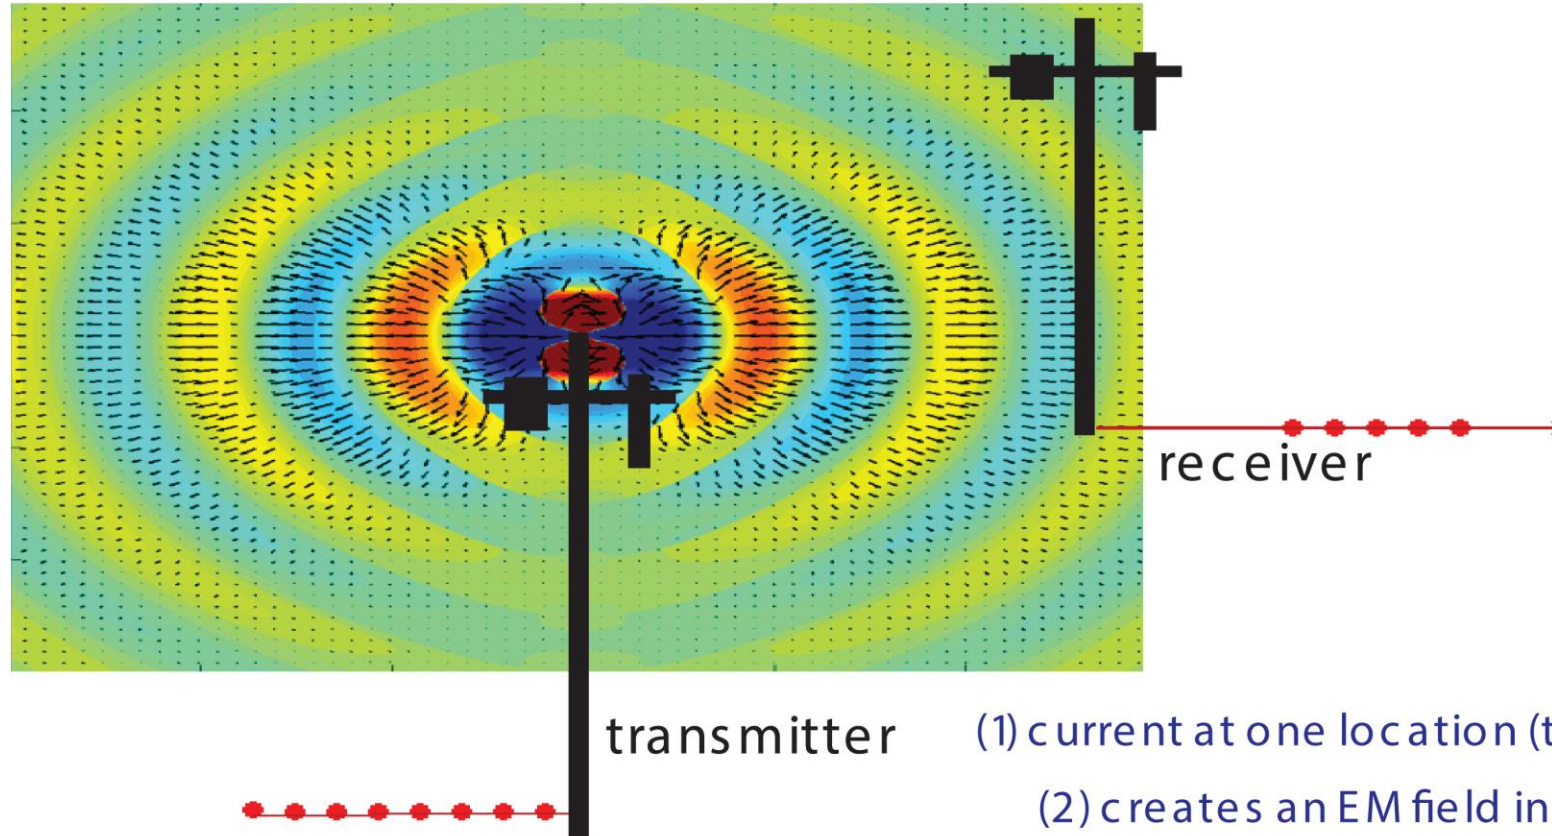

transmitter


receiver

(1) current at one location (transmitter)

(2) creates an EM field in space

(3) induces a current at remote location
(receiver)....


Radio Basics: Electromagnetic Waves

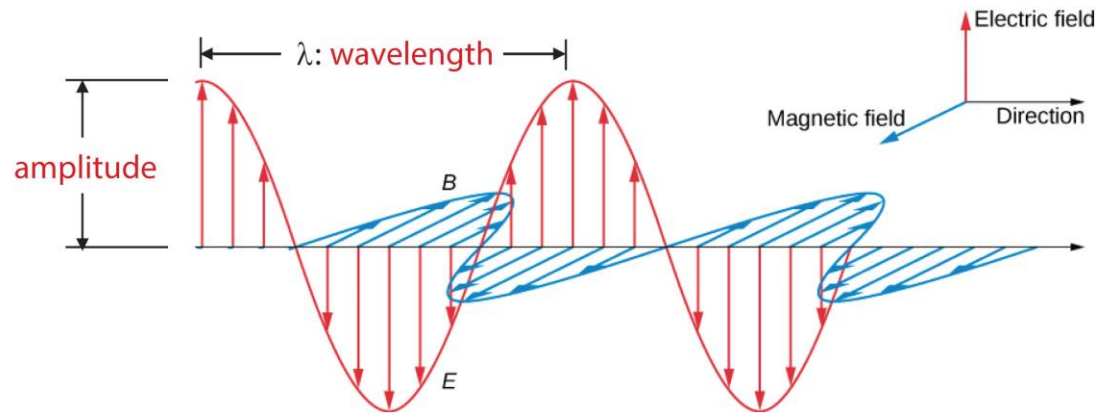

Electromagnetic wave has:

- **wavelength** (λ)
- **frequency**: speed of light / wavelength = c/λ
- **directionality** (of propagation)
- time-varying **amplitude**

slide concept: S. Rangan (NYU)


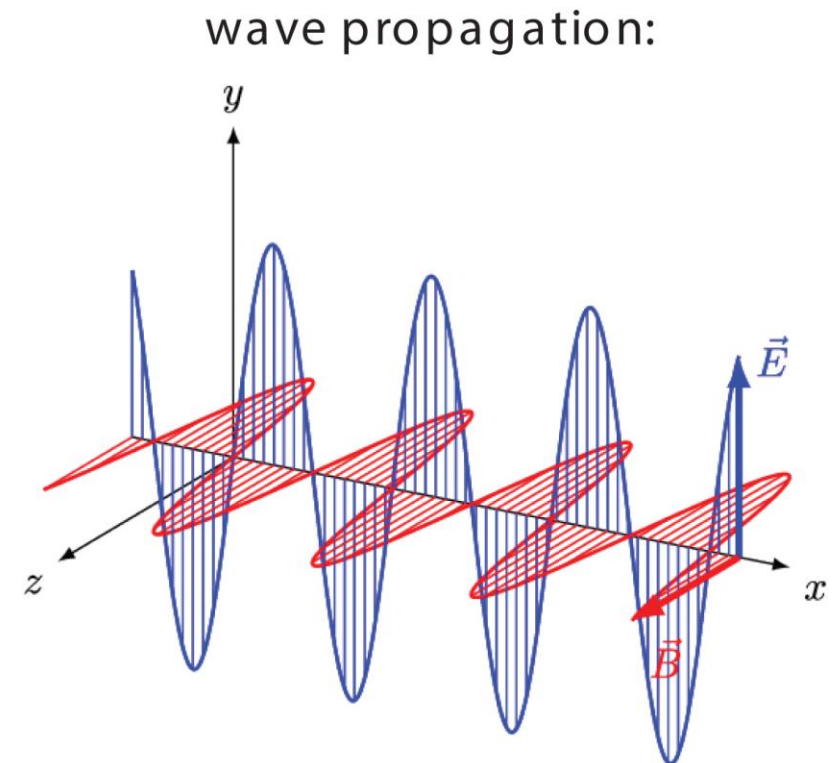


Radio Basics: Phase

The **phase** of a periodic signal, represents the fraction of the period covered up until time t

- often measured in angular units (0 to 360)

we can code information into signal by changing signal's phase (keeping frequency the same!)

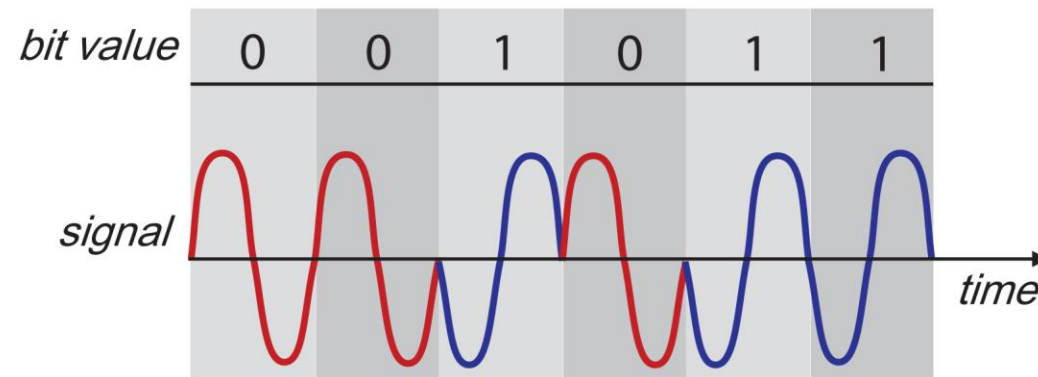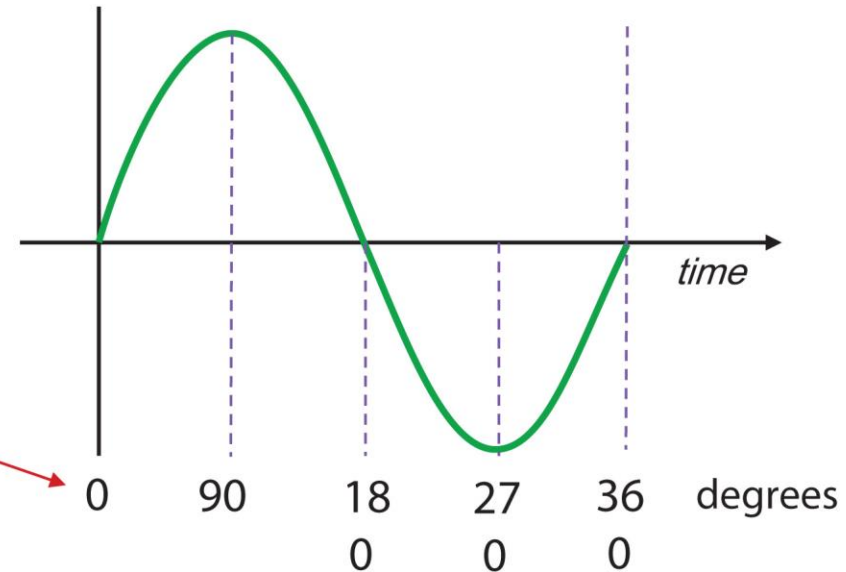

Radio Signal Characteristics (1 of 2)

Power: antenna receive/transmit energy per unit time

- **linear:** measured in watts (or milliwatts)
- **logarithmic:** measured in decibels (db)

$$P_{dBm} = 10 \cdot \log_{10} \left(\frac{P_{mW}}{1mW} \right)$$


- **example:**

$P_{mW} = 250 \text{ mW}$ (typical max mobile transmit power)

$$\begin{aligned} P_{dBm} &= 10 \cdot \log_{10} \left(\frac{250 \text{ mW}}{1mW} \right) \\ &= 24 \text{ dBm} \end{aligned}$$

Power spectral density:

- power present in signal as a function of frequency

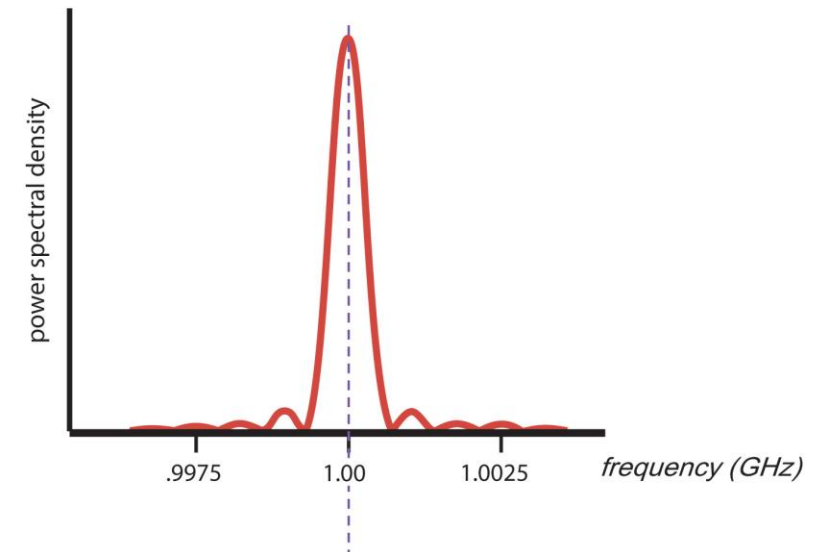

carrier (center) frequency

Radio Signal Characteristics (2 of 2)


Bandwidth: width (measured in Hz) of range of frequencies use by radio signal

- radio frequency usage characterized by power spectral density (psd of zero means no signal power at that frequency)
- bandwidth = “band” + “width” (width of frequency band used)

two meanings/usage of “bandwidth”




Radio signal “bandwidth” different from link “bandwidth” (maximum transmission rate) term used by network engineers!

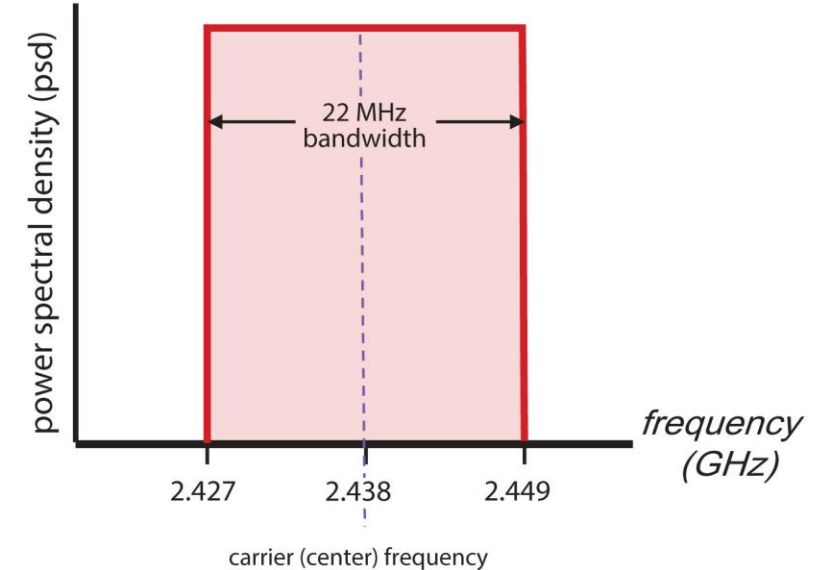

Radio signal with 22 MHz bandwidth, evenly spread between 2.427, 2.429 GHz. This 22 MHz bandwidth channel corresponds to channel 6 in WiFi network)

Signals and Noise

- **interference:** other transmitters/EM radiators in same frequency band
 - hundreds of consumer devices operate in unlicensed 2.4 GHz band (aka: Industrial, Scientific, and Medical band): WiFi, Bluetooth, Zigbee, satellite TV, microwave ovens, garage-door openers, baby monitors, cordless phones, wireless mics/speakers, radio-controlled drones and toys, amateur radio, ...
- **thermal and electronic noise** in receiver:
 - natural thermal variations, imperfections in electronics

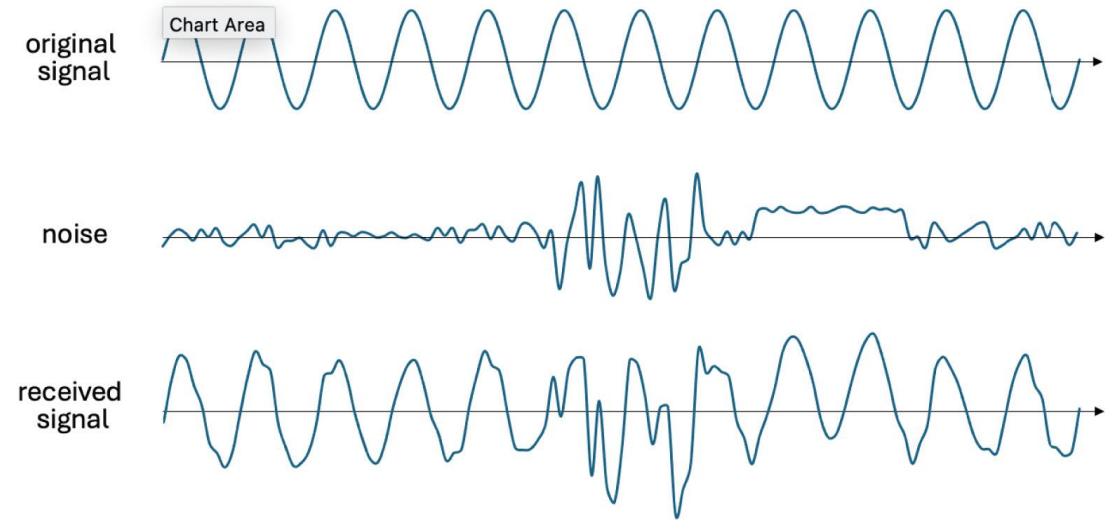

Original signal, noise, and noisy received signal


Signal to Noise Ratio (SNR)

SNR: ratio of signal power to noise power (often measured in dB)

- fundamental measure of channel “quality”

$$\text{SNR (dB)} = 10 \cdot \log_{10} \left(\frac{\text{received signal power}}{\text{noise power}} \right)$$

- SNR of 0 implies equal signal and noise
- high (or low) SNR: easy (or hard) to extract signal from signal+noise
- Typical ranges for current radios:
 - lower limit for cellular: -10 to -6 dB
 - lower limit for WiFi: 20dB

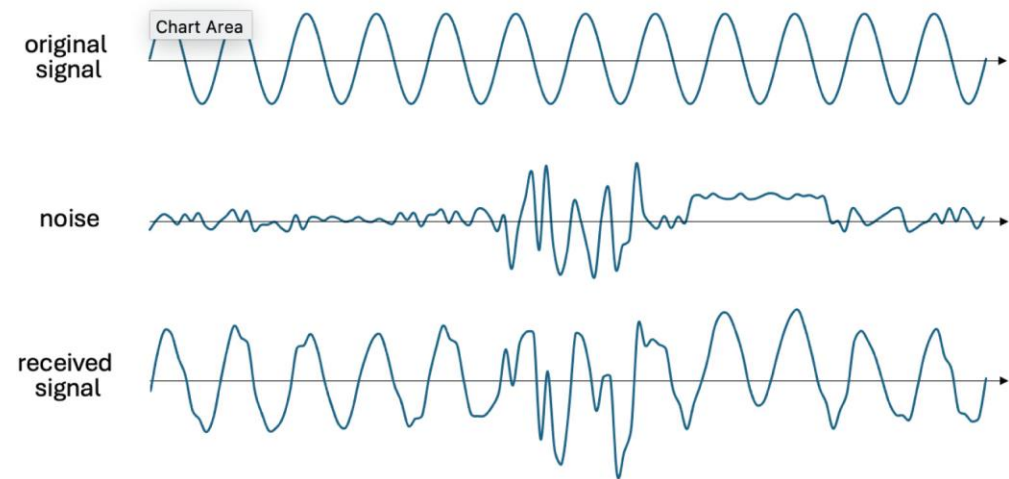

Original signal, noise, and
noisy received signal

Channel Capacity

Shannon capacity (of a communication channel): maximum rate at which data can be transmitted, given bandwidth, SNR constraints

$$C = B \cdot \log_2 \left(1 + \frac{\text{received signal power}}{\text{noise power}} \right)$$

where:

- C is capacity (bits/sec)
- B is bandwidth (in Hz)
- power measured linearly (e.g., in mW)

Observations:

- C scales linearly with B (for constant SNR)
- high SNR: C scales logarithmically: little value in increasing SNR beyond a certain point
- Shannon: classic 1948 paper

Antennas

Antennas both transmit and receive radio waves

single antenna: old school

multiple antenna: common now in wireless networks



MIMO: Multiple input
multiple output antenna

- Gigabit LTE with 4×4 MIMO
- Wi-Fi 6 (802.11ax) with 2×2 MIMO

Wireless Radio Spectrum:

- **radio spectrum:** national asset, owned by the nation
- national government determine how spectrum is used “locally”
- different spectrum use types:

licensed:

- dedicated use, typically by one “owner” (e.g., cellular carrier such as AT&T, Verizon)
- often allocated by spectrum auction


shared:

- spectrum dynamically shared among users
- “incumbent” may get preferential access, others “back off”

unlicensed:

- open (free) for anyone to use, conforming to rules (e.g., power transmission levels)
- 2.4G Hz and 5 Ghz WiFi
- 3.5GHz “Private 5G” (aka CBRS)


WiFi Spectrum Bands

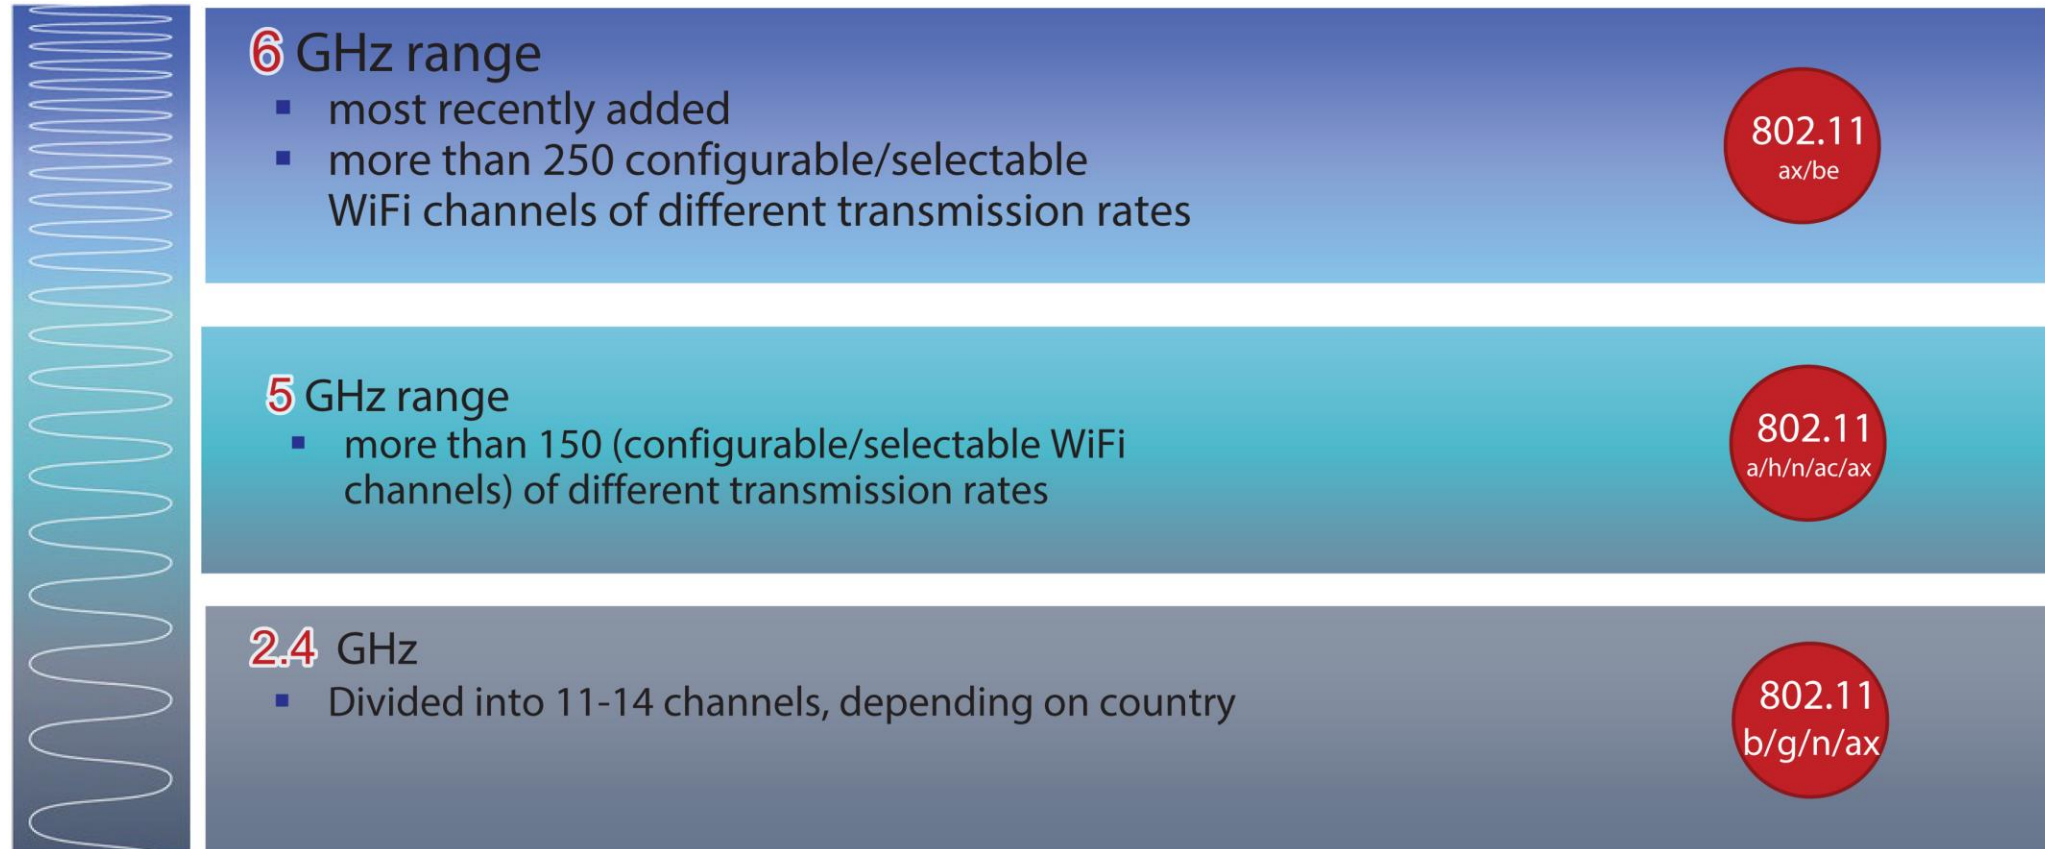

- other 802.11 WiFi spectrum bands, but not in widespread use


5G Spectrum: Three Spectrum Bands*

* No single, well-accepted ranges for “low”, “mid” and “high”

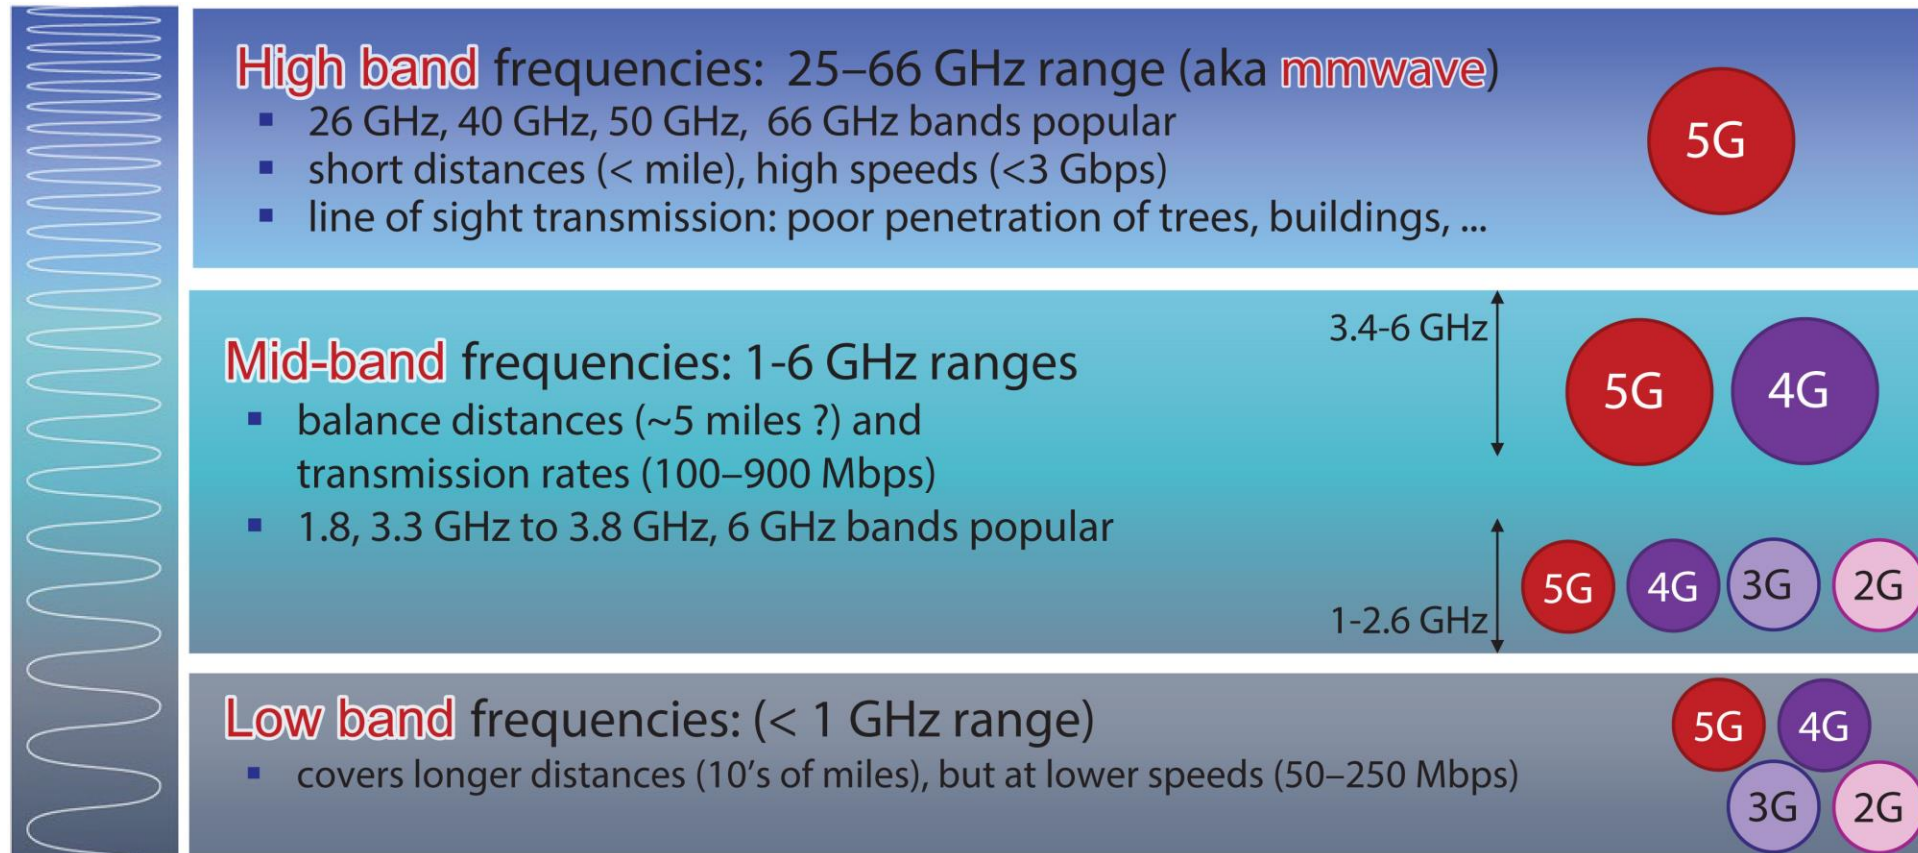


Chapter 7 Outline (3 of 10)

- introduction
- radio: the physical layer
 - radio principles
 - radio channels
 - antennas: MIMO
 - radio spectrum
 - coding and modulation
- the wireless *access* network
- the wireless core network
- mobility
- Bluetooth, satellite, IoT wireless networks

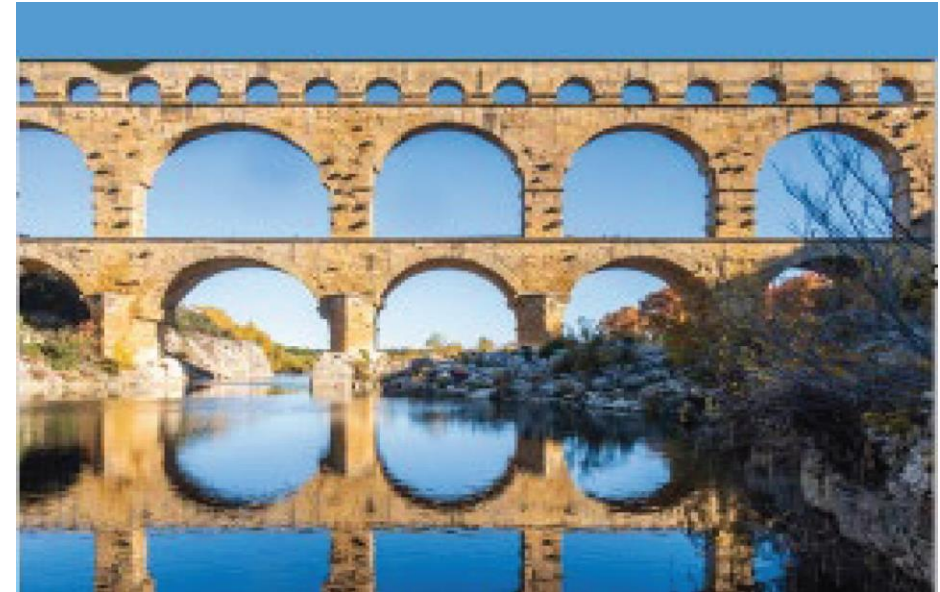


Physical Layer: Coding and Modulation

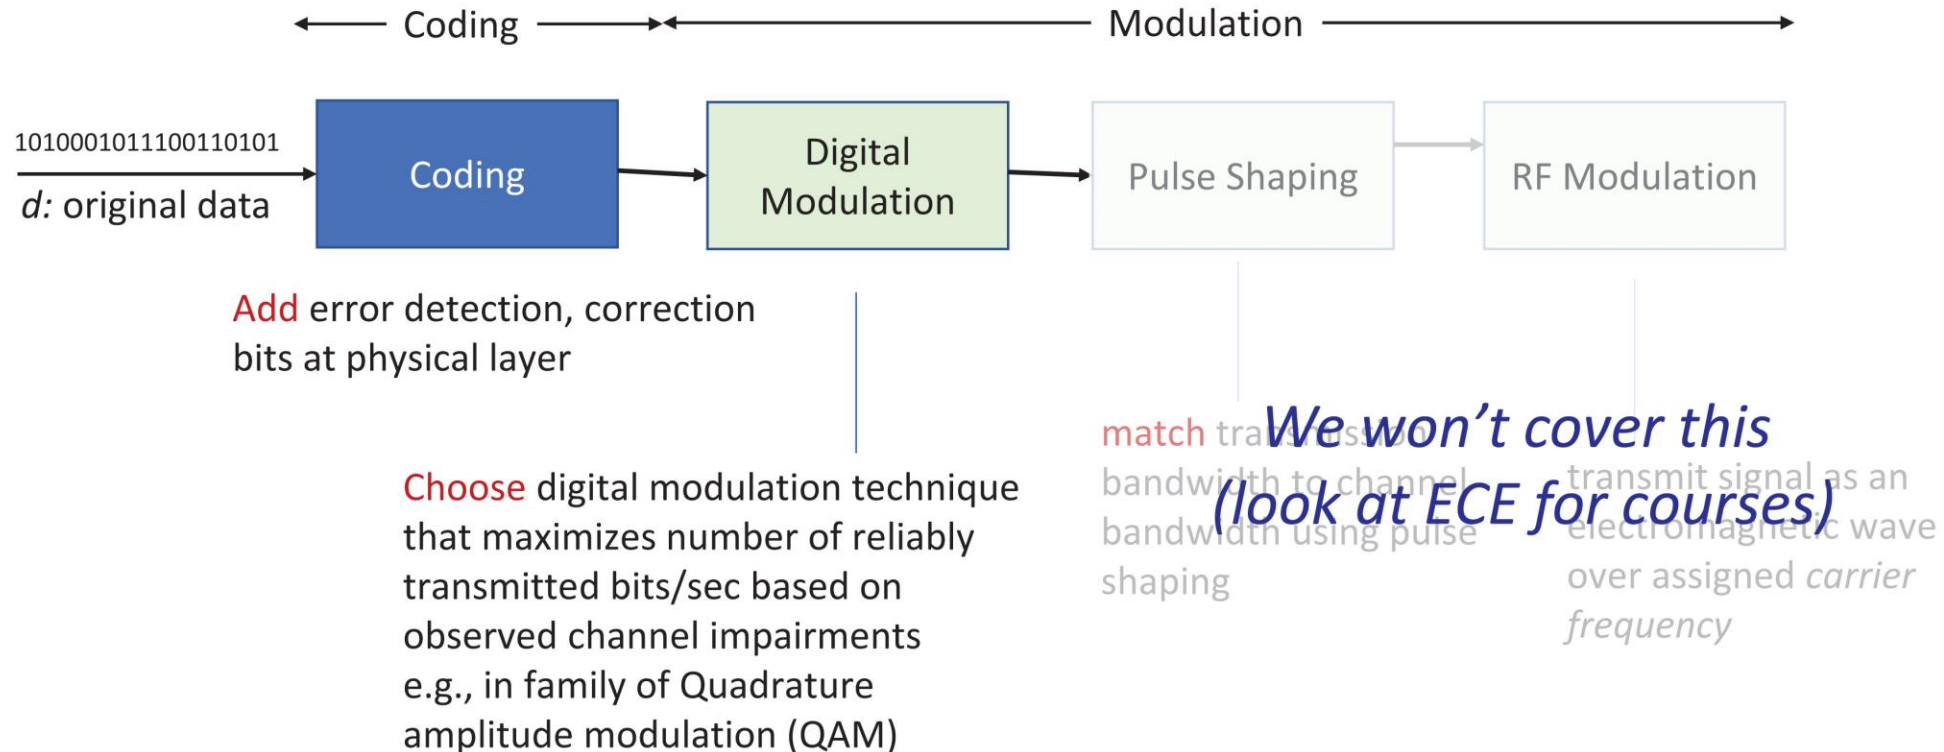


Carrier: waveform at a given frequency, f_c (carrier frequency), modified (modulated) with an information-bearing signal

Modulation

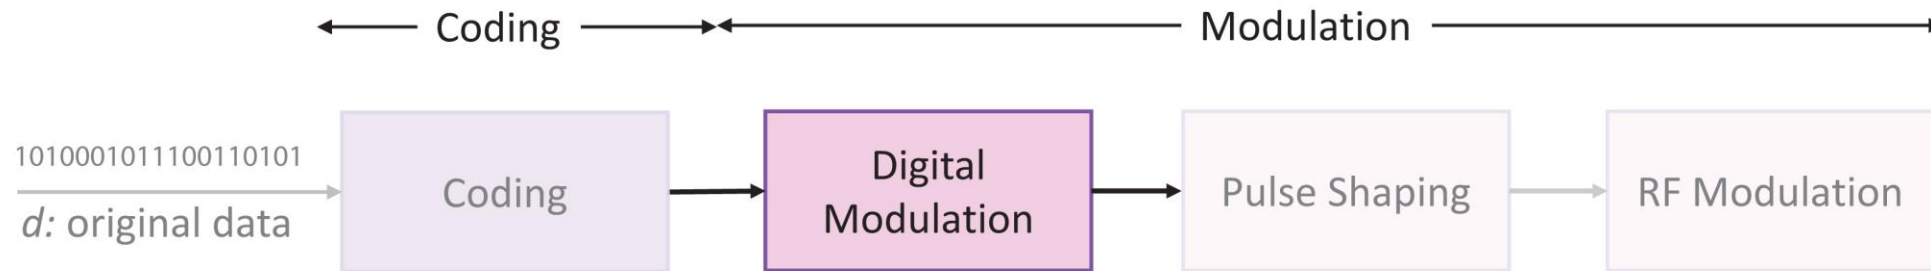

digital modulation

encoding bits (1's, 0's) into analog RF carrier signal by changing (“modulating”) a characteristic of the RF carrier signal: **amplitude**, **frequency**, or **phase**.

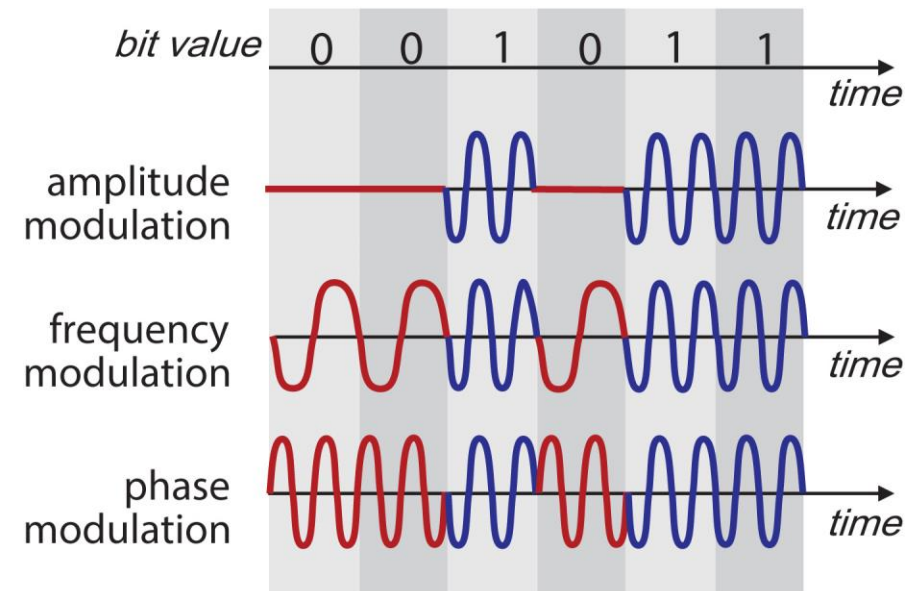

Modulation Schemes: ASK, PSK

Amplitude shift keying (ASK):
signal's *amplitude* encodes bits

0: —


1: 

Binary Phase shift keying (BPSK):
signal's *phase* encode bits

0: 

1: 


PSK: 0 and 1 signals *out of phase*
by 180° , but at same carrier
frequency

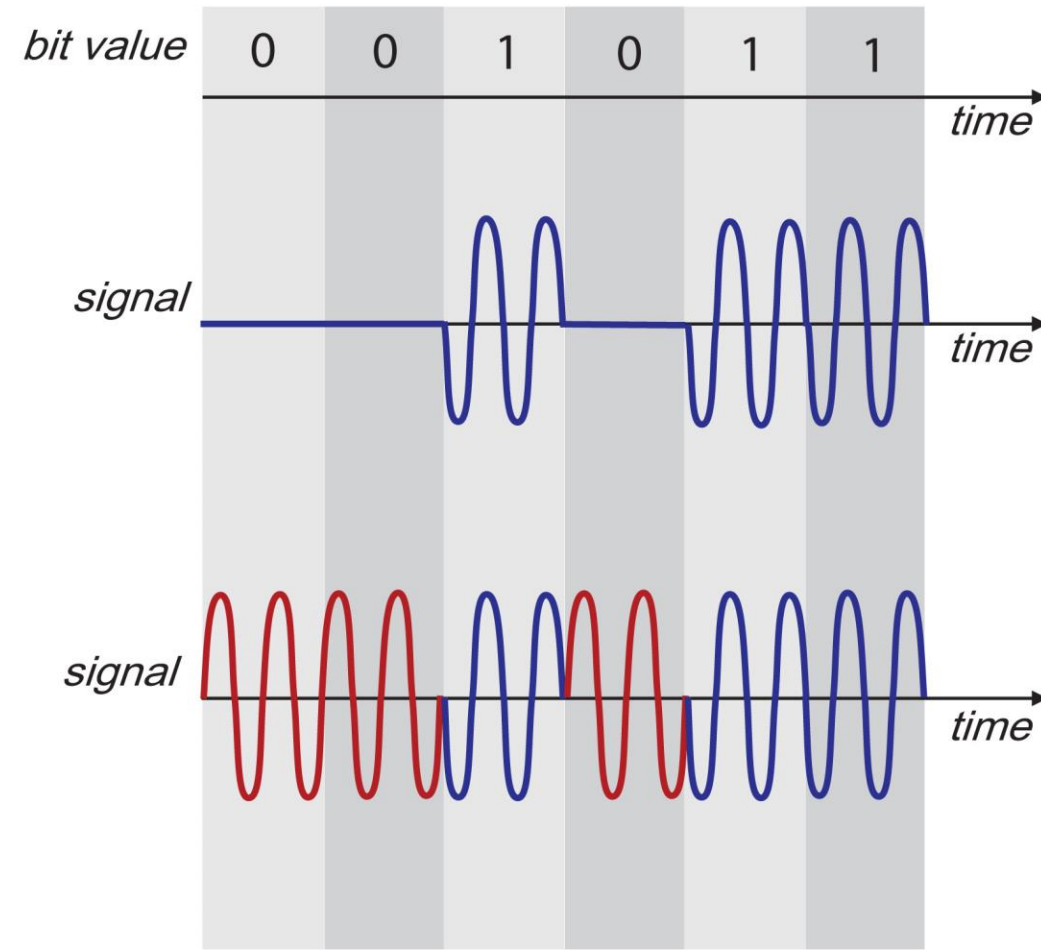

Modulation Schemes: QPSK

Why stop at just two phases?


- two bits grouped to become one “symbol” (2 bits -> 4 symbols)
- **QPSK: Quadrature Phase Shift Keying:** 4 symbols encoded using 4 phases

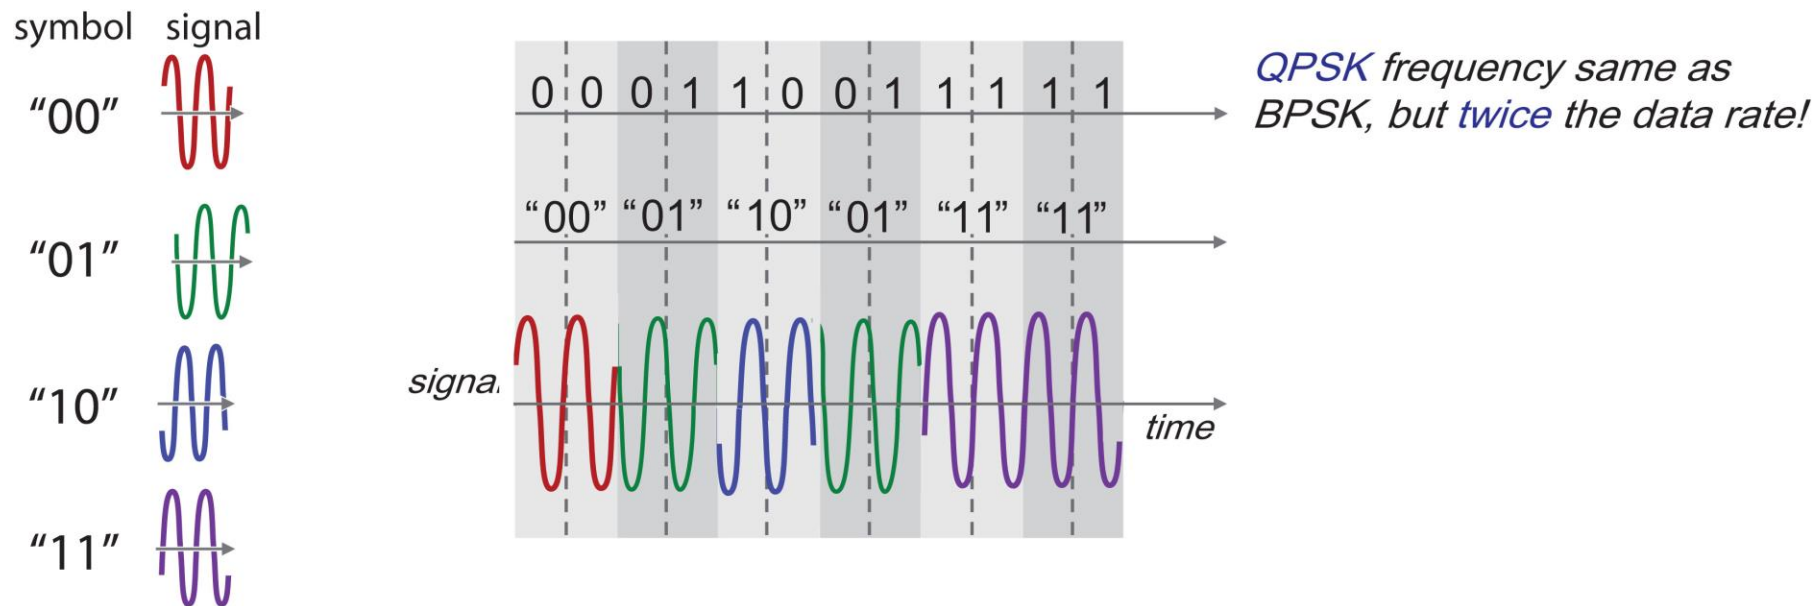

Fun interactive QPSK tool: <https://www.geogebra.org/m/enkymjtq>

Constellation Diagrams

graphical characterization of modulation: amplitude, phase of symbols

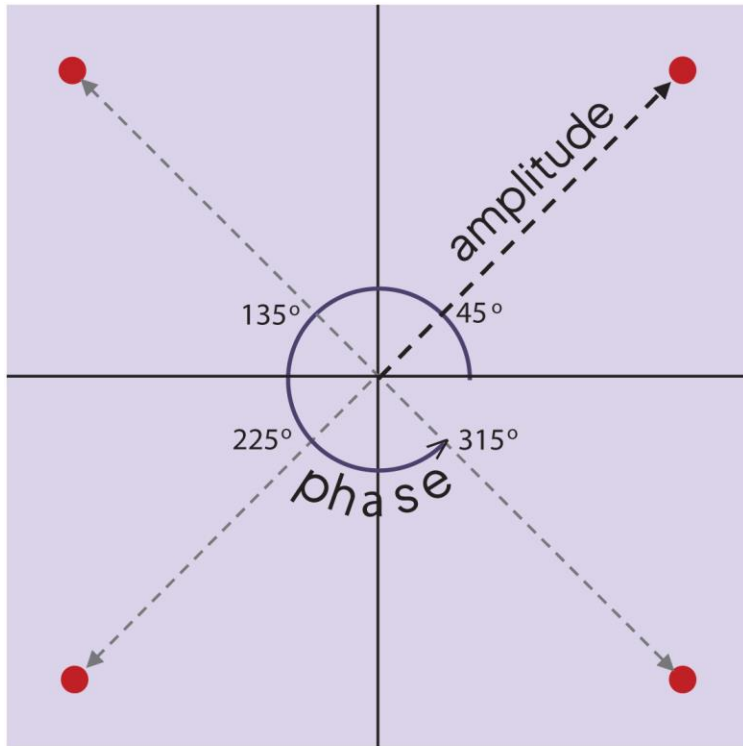


QPSK constellation diagram

- point in constellation diagram depicts symbol's phase (degrees counterclockwise from east) and amplitude (distance from origin)
- QPSK constellation diagram: four symbols represented by four signal waveforms:
 - four different **phases**
 - identical **amplitude**


QAM: Quadrature Amplitude Modulation

- generalizing QPSK
- m -QAM : using m different amplitude/phase values to encode $\log_2(m)$ bits


4-QAM b_0b_1



16-QAM

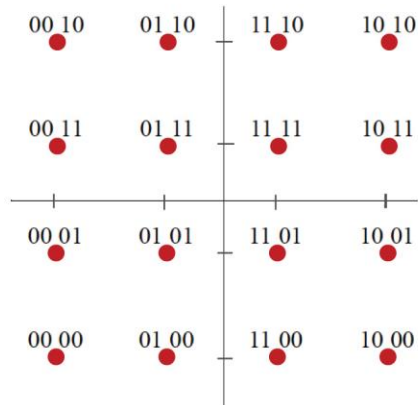

64-QAM

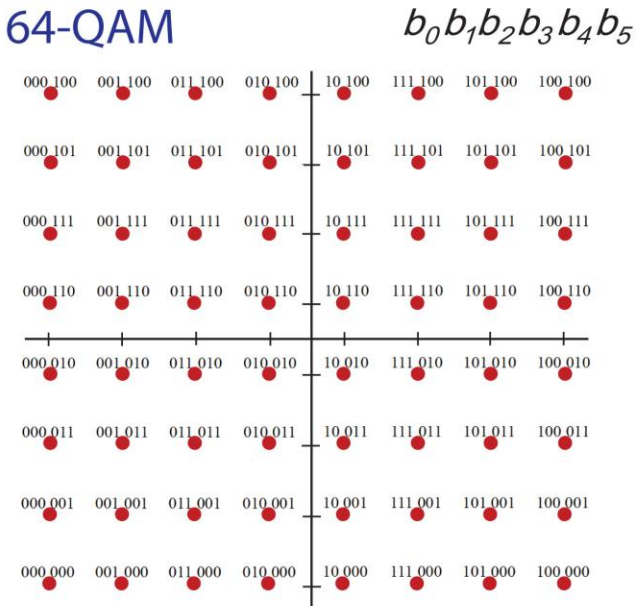

bit encodings for 4-QAM, 16-QAM, 64-QAM (for WiFi)