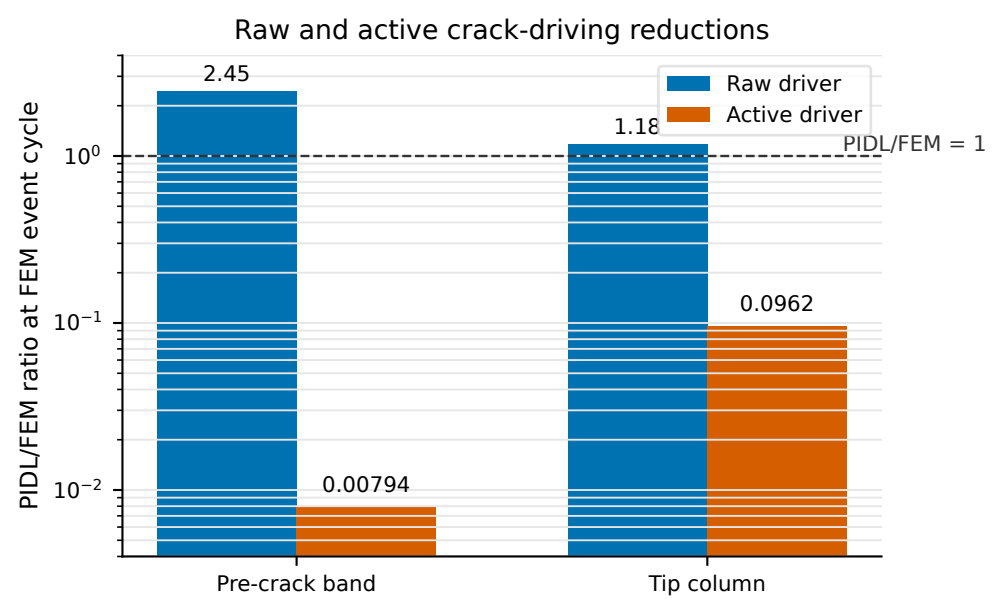
Raw and active crack-driving reductions
Raw driver
Active driver
PIDL/FEM = 1
2.45
1.18
0.0962
0.00794
PIDL/FEM ratio at FEM event cycle
10^{0}
10^{-1}
10^{-2}
Pre-crack band
Tip column