ITEM 序号	QTY 数量	PART NO. 零件号	Drawing NO. 图纸号	PART NAME 零件名称	MATERIAL 材料	WEIGHT 重量	REMARKS 备注
1	1	Y0704499	D0052271	后管缩管总成 REAR TUBE ASSY	NA	796 (2)	
2	1	Y0585329	D0047070	后管缩管 REAR TUBE	HC500/780DP - ① 32 x 2.0±0.1	705	
3	1	Y0704370	D0052253	后管加片 REAR TUBE REINFORCEMENT BRACKET	HC500/780DP - 2.0±0.1	93	

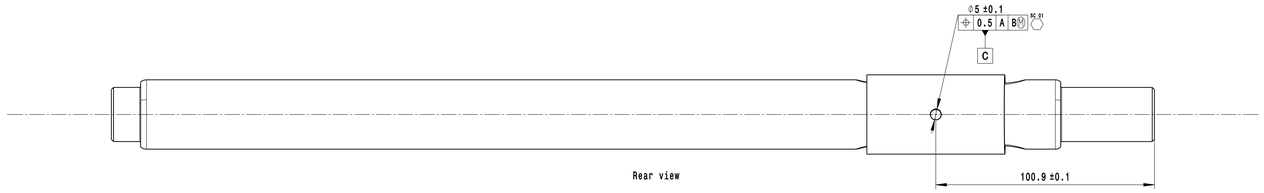

Rear view

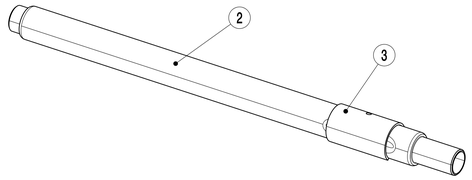

Isometric view
PN:Y0704499

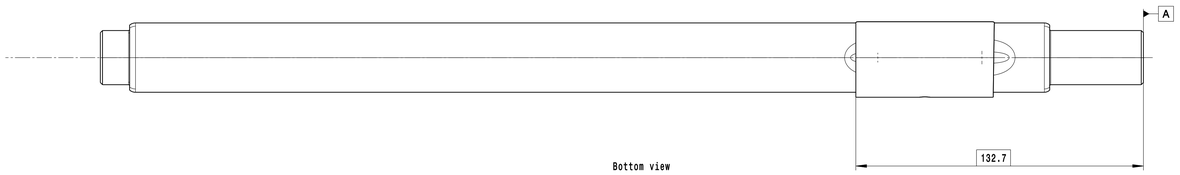

Bottom view



Auxiliary view A

Front view

技术要求:
1.限用材料必须符合最新版本的
GB/T30512-2014和VW91101 2015-3;
THE MATERIAL RESTRICTIONS IN ACCORDANCE TO GB/T30512-2014 AND VW91101 2015-3
INCLUDING THE LATEST VERSION OF ANNEXLL HAVE TO BE MET.
2.零件不能有过量防锈油,具体情况必须与Yanfeng确认;
PARTS HAVE TO BE FREE OF EXCESSIVE OIL, CONDITION MUST BE AGREED WITH Yanfeng;
3.焊接标准按照VW 01106-1,共4条焊缝;
WELDING MUST BE ACCORDANCE WITH VW 01106-1, TOTAL WELDING SEAM IS 4;
4.模具与检具设计必须在制造前得到Yanfeng批准;
TOOL DESIGN AND GAUGE DESIGN MUST BE APPROVED BY Yanfeng PRIOR TO TOOL AND GAUGE BUILD;
(2) 5.弧焊焊缝起弧3mm,收弧2mm
THE ARC OF THE WELD IS 3MM AND THE ARC IS 2MM

焊接件未注公差(GD&T公差表) Welding Parts General Tolerance	
产品要素的未注公差描述 General Tolerance Of Features	未注公差值 General Tolerance Value
所有尺寸要素(FOS)的未注位置公差 All FOS(Feature Of Size: Circular Holes/Cylinders/Slots/Spheres),Position Tolerance	Φ0.4Ⓜ A B C 4Ⓜ A B C
所有不规则封闭要素的尺寸和位置公差 All Irregular-Closed Features:Size Tolerance&Position Tolerance	0.2 4Ⓜ A B C
所有外表面的轮廓度 All General Surfaces:Profile Tolerance	3 A B C
所有切边的面轮廓度 All Trim Edges:Profile Tolerance	3 A B C

2 TO 3	P135	103	s2.1 // 18	3	(2)
2 TO 3	P135	102	s2.1 // 18	3	
2 TO 3	P135	101	s2.1 // 18	3	
2 TO 3	P135	100	s2.1 // 18	3	
Welded to Item	Weld process	Weld Number	Dimension	Weld Class	

C12		SC 01		
M15	CC 05			
M8	CC 04			
K15	CC 03			
K8	CC 02			
P11	CC 01			
Field / 域	(CC/Category 分类) Symbol (CC/关键)	(SC) Symbol / (SC/重要)	(IC) Symbol / (IC/特)	Description / 描述
	▽CC 5	○SC 1	□IC 0	NUMBER OF CHARACTERISTICS / 特性数量

DESCRIPTION OF CRITICAL (CC), SIGNIFICANT(SC), AND INITIAL(IC) CHARACTERISTIC / 关键特性(CC)、重要特性(SC)和初始特性特性(IC)的描述

- CC: DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN. / 需监控控制计划的关键特性
- SC: DESIGNATES SIGNIFICANT CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN. / 需监控控制计划的重要特性
- IC: DESIGNATES INITIAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN. / 需监控控制计划的初始特性

A20,R6 Q11	Update weight;Added weld information table Add a fifth item to the technical requirements		00053704
Type / 类 2	Field / 域 ---	Revision Text / 修改内容 uzhuL100	CN Number / 计件 2024-02-02
Revision Index / 版本	CN Number / 计件	Created By / 制 adongm	Approved By / 核 Date of Issue / 日期
	First release of drawings		00039483
Type / 类 1	Field / 域	Revision Text / 修改内容	CN Number / 计件
Revision Index / 版本	00034549 CN Number / 计件	uzhas602 Created By / 制 adongm	Approved By / 核 2022-11-30 Date of Issue / 日期
Projection Method / 投影法 1st Angle ISO 128-30	Tolerance / 公差 ---	Reference Part Number / 参考件号 ---	Revision/版本 ---
CATIA V5 PLM	YF-PM-ST-01-60	Scale/比例 1:1 Unit / 单位 mm	Reference Drawing Number / 参考图号 --- Revision/版本 ---
CAD System Database	Document Standard Yanfeng Drawing Template Level:	03	
Responsible / 责任 uzhuL100	Created By / 制 uzhas602 Approved By / 核 adongm	Date of Issue / 日期 2022-11-30	Responsible Department / 责任部门 --- --- --- ---

Title, Supplementary Title / 标题 后管缩管总成 REAR TUBE ASSY

Yanfeng

Language 语种	Drawing Type / 图纸类型	Part Number / 零件号	Revision/版本
en/zh	ASSEMBLY	Y0704499	2
Sheet/张 1/1	Effectivity Class / 有效性 PROTOTYPE	Drawing Number / 图纸号 D0052271	Revision/版本 2

© 2022 Yanfeng International Automotive Technology Co. Ltd. All rights reserved. / 版权