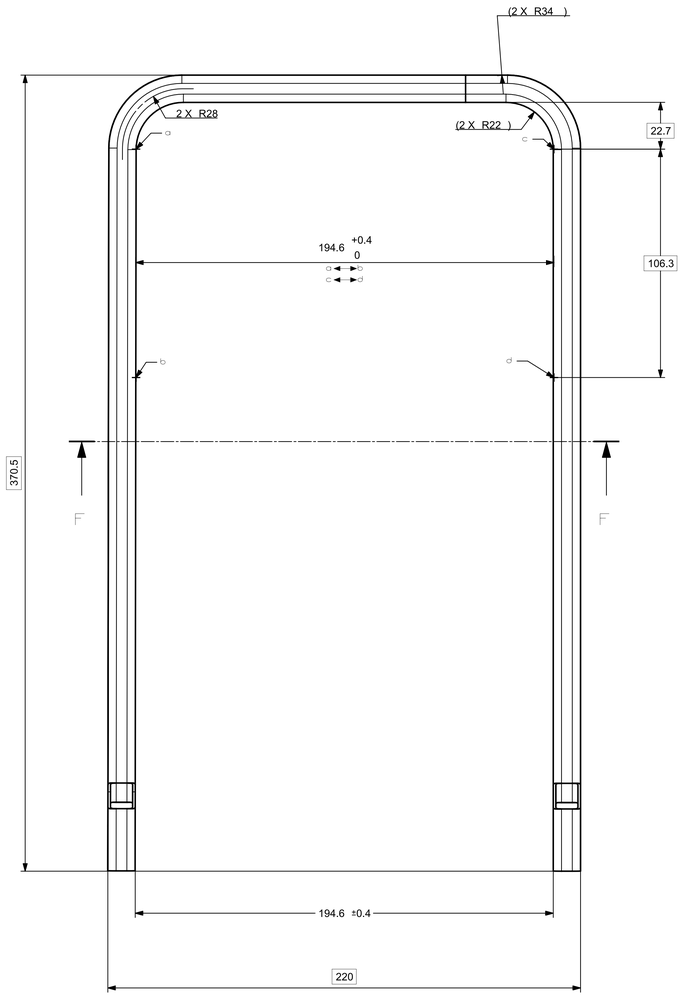

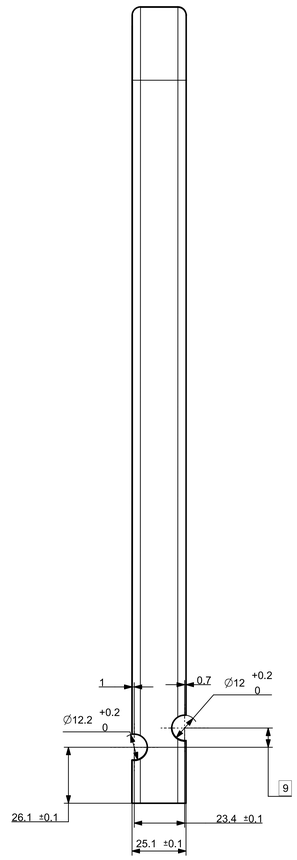

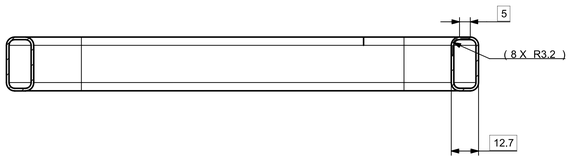

SECTION F - F

线性 Linear	>1000- ≤2000	±1.2
	>400- ≤1000	±0.8
	>120- ≤400	±0.5
	>30- ≤120	±0.3
	>6- ≤30	±0.2
	≤6	±0.1
角度 Angular		±1°

未公差
General tolerances for nominal dimensions without specified tolerance.

© 2023 Yanfeng International Automotive Technology Co., Ltd. All rights reserved. / 版权所有 仅内部使用

一般技术要求：
GENERAL NOTE:

包括公差在内的零件要求以图纸为准，未注尺寸参考CAD数据。
图示为左件，无特殊说明，右件与左件对称。

DRAWING IS MASTER FOR ALL PART REQUIREMENTS INCLUDING TOLERANCES.REFER TO CAD DATA FOR DIMENSIONS NOT SHOWN.
LH SHOWN,RH OPPOSITE UNLESS OTHERWISESPECIFIED.

GD&T 标准	ASME Y14.5M-1994	
CC-1	符合最新版本的全球汽车材料规范（GADSL）的零部件要求。 THE MATERIAL REQUIREMENTS IN ACCORDANCE TO LATEST RELEASE OF GADSL "GLOBAL AUTOMOTIVE DECLARABLE SUBSTANCE LIST"	
	受限制和需报告的化学品按照GMW3059的要求，并满足GB/T30512的要求。 RESTRICTED AND REPORTABLE CHEMICALS PER GMW3059,AND MEET GB/T30512 REQUIREMENTS.	
特殊特性 SPECIAL CHARACTERISTIC		数量 QTY
CC	关键特性，必须按规定监控特性不间断监控。 DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN.	1
SC	重要特性，必须按规定监控特性不间断监控。 DESIGNATES SIGNIFICANT CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN.	
IC	首件检查/客户件追溯特性。 DESIGNATES CHARACTERISTIC TO BE CHECKED AT INITIAL / SUBSEQUENT CUSTOMER PART SUBMISSION.(ONE TIME CAPABILITY).	

技术要求：
1．不允许有影响性能的毛刺，尖角等存在
2．未注尺寸见3D数模
3．材料：GMW3032M-ST-S-340LA-UNCOATED-U
GRADE 100B MINIMUM YIELD STRENGTH=160 MPA
4．关键特性 ▽ 共1处，重要特性 ⬡ 共0处

NOTES:
1.THERE IS NO BURR SHARP EDGE WHICH WILL INFWENCE THE PART'S PERFORMANCE
2.DIMENSION UNLESS SPECIFIED ACCORDING TO 3D MODEL
3.MATERIAL:GMW3032M-ST-S-340LA-UNCOATED-U
GRADE 100B MINIMUM YIELD STRENGTH=160 MPA
4.CRITICAL CHARACTERISTIC ▽ 1 TOTAL; SIGNIFICANT CHARACTERISTIC ⬡ 0 TOTAL;

Field /区域	CC/Category/Symbol (CC/) 符	(SC) Symbol /符	(IC) Symbol / 符	Description / 描
	▽CC 1	⬡SC 0	□IC 0	Number of Characteristics /特殊特性数
	DESCRIPTION OF CRITICAL (CC), SIGNIFICANT(SC), AND INITIAL(IC) CHARACTERSTIC / 关键性 (CC)，重要性 (SC) 和起始特性 (IC) 的描述			
CC	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN. / 指明关键监控的特性			
SC	DESIGNATES SIGNIFICANT CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN. / 指明关键监控的重要特性			
IC	DESIGNATES INITIAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN. / 指明关键监控的起始特性			

- - -	- - -	RELEASED FOR PROTOTYPE			- - -
Tags	Field	Revision Text			CR Number
- - -	- - -	陈文天	- - -		2023-6-1
Revision Index	CR Number	Created By	Approved By		Date of Issue
Projection Method/投影 1st Angle ISO 128-30		Tolerance /公差 SEE NOTE		Reference Information / 参考信息 - - - - - -	
NX	PLM	YF-PM-ST-01-60	Scale / 比例 1:1	Unit / 单位 mm	
CAD System	Database	Document Standard	Yanfeng Drawing Template Level1 D4		
Responsible / 责任 陈定天/陈学翔	Created By / 绘制 陈定天	Approved By / 审核 - - -	Date of Issue / 日期 2023-11-09	Program / 程序 NDLB 30012585 SGM	

Title, Supplementary Title / 标题-副标题
座椅
FRAME-R/SEAT A/RST

Yanfeng

Language / 语种	Drawing Type / 图纸类型	Part Number / 零件号	Revision 版本
zh/zh	COMPONENT	Y091422B	1
Sheet / 张 1/1	Effective Class / 有效等级 PROTOTYPE	Drawing Number 图号 D0079663	Revision 版本 1

A0