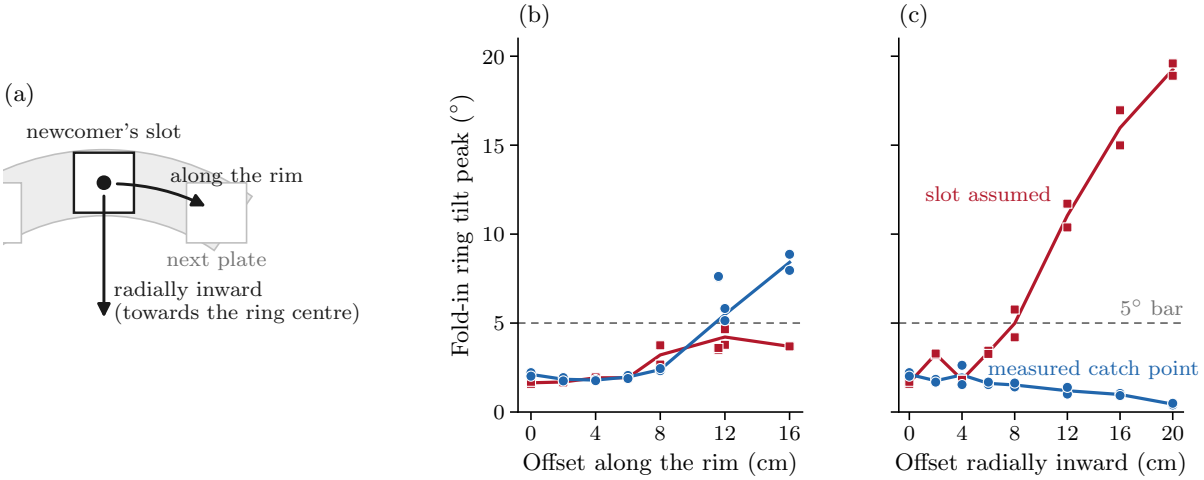

(a)
newcomer's slot
along the rim
next plate
radially inward
(towards the ring centre)
(b)
Fold-in ring tilt peak (°)
0
5
10
15
20
0
4
8
12
16
Offset along the rim (cm)
(c)
slot assumed
5° bar
measured catch point
0
4
8
12
16
20
Offset radially inward (cm)