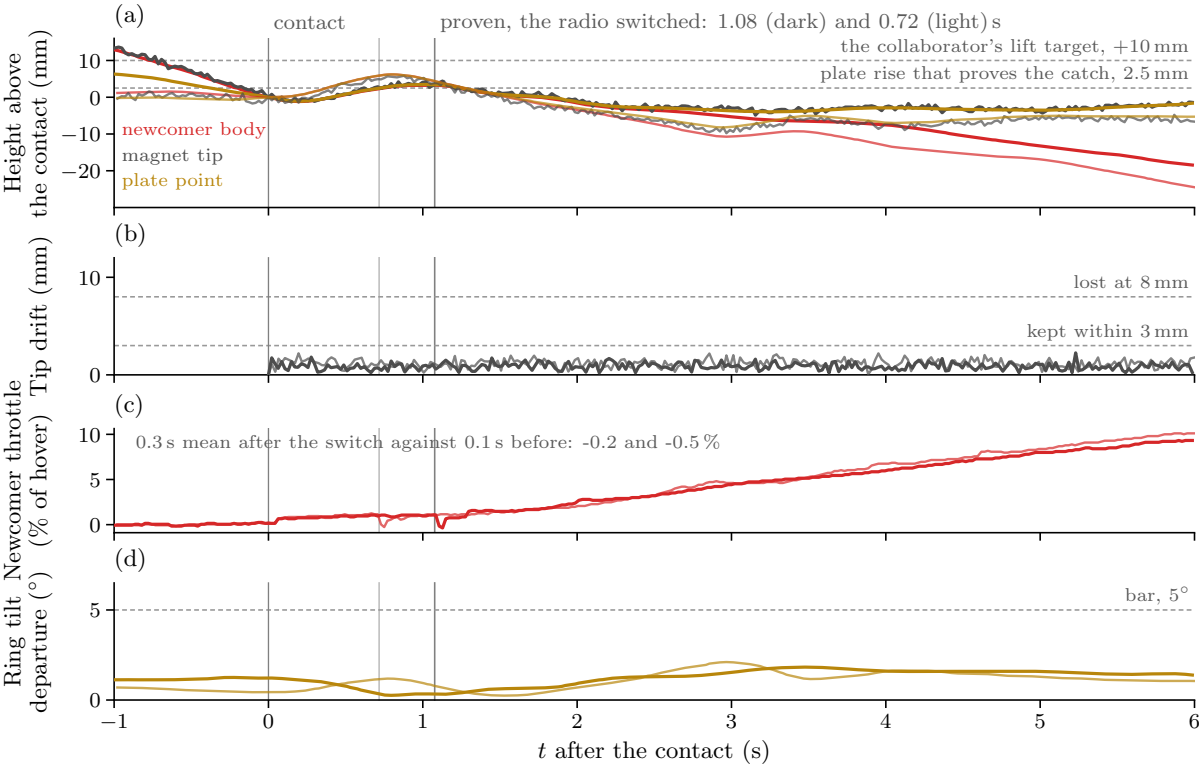

(a)
contact
proven, the radio switched: 1.08 (dark) and 0.72 (light) s
the collaborator's lift target, +10 mm
plate rise that proves the catch, 2.5 mm
newcomer body
magnet tip
plate point
Height above the contact (mm)
10
0
−10
−20
(b)
lost at 8 mm
kept within 3 mm
Tip drift (mm)
10
0
(c)
0.3 s mean after the switch against 0.1 s before: -0.2 and -0.5 %
Newcomer throttle (% of hover)
10
5
0
(d)
bar, 5°
Ring tilt departure (°)
5
0
−1
0
1
2
3
4
5
6
t after the contact (s)