LANMOR SERVICES INC.

Project:

Frame Width

Door Closer

Model

Surface
Concealed Header
Concealed Floor

Delayed Egress

Model

Auto Operator

Model

Door Width

15

Door Coordinator?

Model

Hinge Size

HINGE TYPE
BB
NRP
SWAGED
IMTERMEADTIATE
CONT.

PA
Cush
Spring
Hold open

Auto Flush Bolt

Flush Bolt

Model

Prep

161
61L
RPD
Null
86
VRPD

0.125

0.125

0.125

0.125

Door Height

Prep

ASA
CYL
RPD
VPD
(CVR)

Panic hardware

Model
Length?

Lock

Model / Manufacture

Continuous Hinge =

Mullion (removable) | Length ?

Astragal # |

KickPlate | Mop Plate | Amor Plate

Dimensions?

Fire Bolt

Threshold Length

Threshold

Model #

ADA Full Saddle

Sweep /Door Bottom /Shoe

Model #

Fire Bolt / Btm Flush Bolt

Model #

Finish

605 = US3
BRIGHT BRASS

606 = US4
SATIN BRASS

611 = US9
BRIGHT BRONZE

612 = US10
SATIN BRONZE

613 = US10B
OIL RUBBED BRONZE

625=US26
BRIGHT CHROME

626 =US26D
SATIN CHROME

628 =US28
SATIN ALUM

630 =US32D
SATIN STAINLESS

US1D
DULL BLACK

626AM
ANTIMICROBIAL SATIN CHROME

630AM
ANTIMICROBIAL SATIN STAINLESS

Cutouts

Vision
Narrow
Half
Full

Louver
Fire pin
Louver

1/8
5/32
3/16
1/4
1/2

Fire glass
Safety glass
Wired
IGU

Clear
Bronze
Grey
Green
Blue
Frosted

Tempered
Annealed

Handing

LH

RH

LHR

RHR

Wood Doors

White Oak
Cherry
White Maple
Walnut
Red Oak
White Birch
Natural Birch
Mahogany

20 MIN
45MIN
60 MIN
90 MIN

Particleboard
EHD LEAD
Mineral Core

Rotary Cut
Plain sliced
Quarter Cut
Rift cut *
Comb Cut

Book
Slip
Random
Running
Balanced
Center

SCL
Hollow
STC

Metal Doors & Frame

20GA
18GA
16GA
14GA
12GA
FRP
LEAD

Door
20 MIN
45MIN
60 MIN
90 MIN

A60
G90

Honeycomb
Steel Stiffen
Polystrene
Polyurethane
Lead

DOUBLE EGRESS
KD FRAME
KD DRYWALL
CASED OPEN
H STOP
LEAD

Frame
20 MIN
45MIN
60 MIN
90 MIN

Glass Doors

Herculite
3in
6in

Glass
1/4"
1/4" Lam 1/4"
1/2"
3/4"
1"
IGU

BLUMCRAFT
PULL
LADDER
STRAIGHT
CURVED

LENGTH

CENTER TO CENTER

" & "

Frame Profile

ANCHOR

P& D
WOOD STRAP
METAL STRAP
BUTTERFLY
WIRE

Soffit

Throat Depth

Jamb Depth

Rabbit

Face

EQUALRABBIT
UNEQUAL RABBIT
SINGLE RABBIT

Door Edge

Beveled

Straight

Thickness


Visible Seam?
Yes
No

Single Door

QTY	MARK NUMBER	SWING	THICK.	FRAME OPENING SIZE WIDTH(IN)	FRAME OPENING SIZE HEIGHT(IN)	LABEL MINUTES
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None

Material * A40 | Core Type Honeycomb | Gauge 16G *

All fields marked with an asterisk are prepopulated to DCI standards.

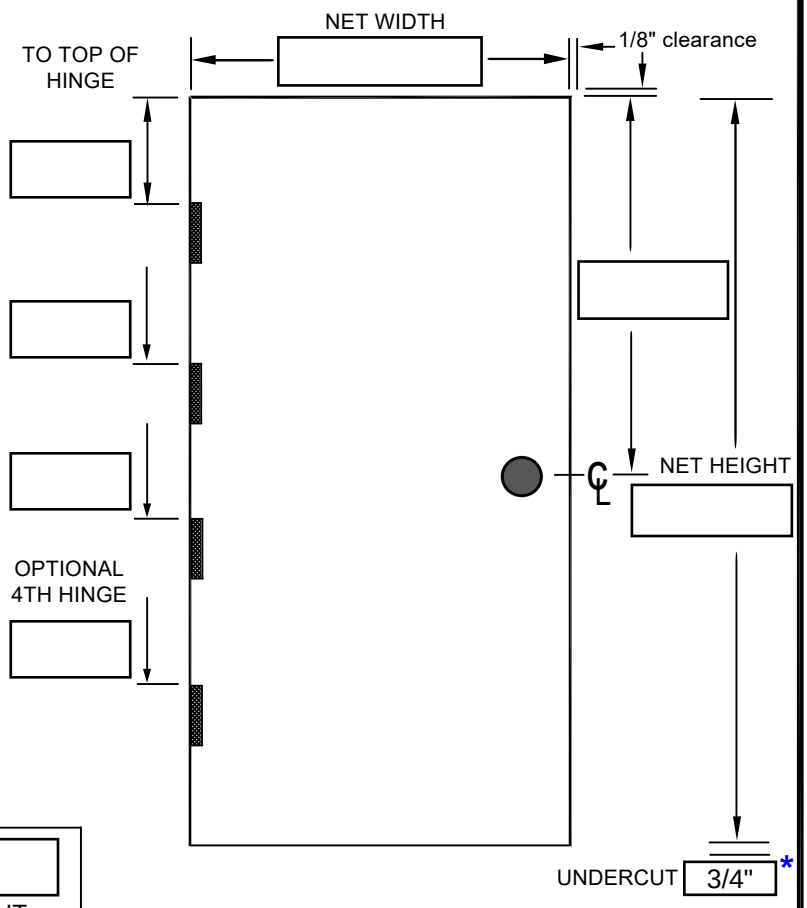

Cutout Options

Cut Out Only ☐ SIZE WIDTH HEIGHT

LOCATION:

CENTERED ☐ TOP OF DOOR TO TOP OF CUTOUT LOCK EDGE TO CUTOUT

Integral Lite ☐ VISIBLE GLASS SIZE WIDTH HEIGHT

GLASS THICKNESS: GLASS STOP: PUSH SIDE ○ PULL SIDE ○

LOCATION:

CENTERED ☐ TOP OF DOOR TO TOP OF VISIBLE GLASS LOCK EDGE TO VISIBLE GLASS

Louver

INTEGRAL ☐ SIZE WIDTH HEIGHT

CUT OUT ONLY ☐

LOCATION:

CENTERED ☐ BOTTOM OF DOOR TO BOTTOM OF LOUVER LOCK EDGE TO LOUVER

DCI integral louvers ***cannot*** be used in fire rated doors.

For more information on the use of cutouts in fire rated doors please reference the DCI Technical Manual.

DOOR EDGE Seamless *

TOP CHANNEL	BOTTOM CHANNEL
RECESSED ◉	RECESSED ◉
FLUSH ○	FLUSH ○
FLUSH AND SEALED ○	FLUSH AND SEALED ○

LOCK EDGE: BEVELED ◉ SQUARE ○

HINGE EDGE: BEVELED ◉ SQUARE ○

HINGE LOCATIONS New DCI * BACKSET 1/4" *

HINGE TYPE 4.5" * STD WEIGHT ○

HINGE DETAILS: HEAVY WEIGHT ○

LOCK/EXIT DEVICE:

NOTE: All doors include door closer reinforcement.

OTHER DETAILS:

HOLLOW METAL ON DEMAND

www.dcihollowmetal.com

COMPANY NAME : PO NUMBER :


JOB NAME : PAGE OF

Single Door

QTY	MARK NUMBER	SWING	THICK.	FRAME OPENING SIZE WIDTH(IN)	FRAME OPENING SIZE HEIGHT(IN)	LABEL MINUTES
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None

Material * A40 | Core Type Polystyrene | Gauge * 16G

All fields marked with an asterisk are prepopulated to DCI standards.

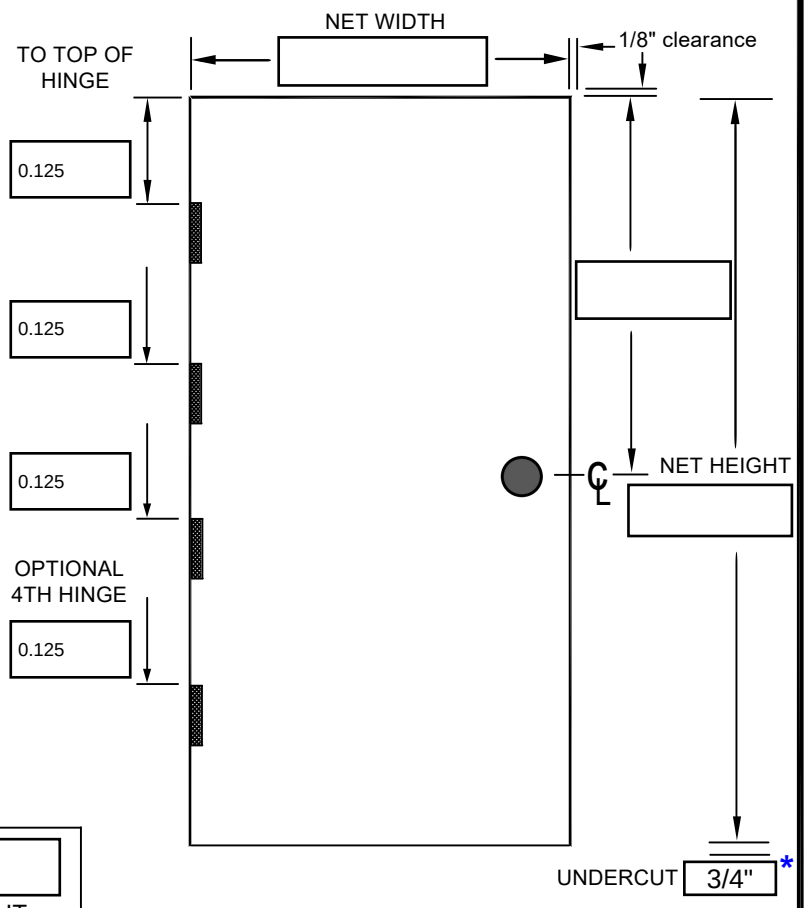

Cutout Options

Cut Out Only ☐ SIZE WIDTH HEIGHT

LOCATION:

CENTERED ☐ TOP OF DOOR TO TOP OF CUTOUT LOCK EDGE TO CUTOUT

Integral Lite ☐ VISIBLE GLASS SIZE WIDTH HEIGHT

GLASS THICKNESS: GLASS STOP: PUSH SIDE ○ PULL SIDE ○

LOCATION:

CENTERED ☐ TOP OF DOOR TO TOP OF VISIBLE GLASS LOCK EDGE TO VISIBLE GLASS

Louver

INTEGRAL ☐ SIZE WIDTH HEIGHT

CUT OUT ONLY ☐

LOCATION:

CENTERED ☐ BOTTOM OF DOOR TO BOTTOM OF LOUVER LOCK EDGE TO LOUVER

DCI integral louvers ***cannot*** be used in fire rated doors.

For more information on the use of cutouts in fire rated doors please reference the DCI Technical Manual.

DOOR EDGE * Seamless

TOP CHANNEL	BOTTOM CHANNEL
RECESSED ◉	RECESSED ◉
FLUSH ○	FLUSH ○
FLUSH AND SEALED ○	FLUSH AND SEALED ○

LOCK EDGE: BEVELED ◉ SQUARE ○

HINGE EDGE: BEVELED ◉ SQUARE ○

HINGE LOCATIONS * New DCI | BACKSET * 1/4"

HINGE TYPE * 4.5" | STD WEIGHT ○ | HEAVY WEIGHT ○

HINGE DETAILS:

LOCK/EXIT DEVICE:

NOTE: All doors include door closer reinforcement.

OTHER DETAILS:

HOLLOW METAL ON DEMAND

www.dcihollowmetal.com

COMPANY NAME : | PO NUMBER :


JOB NAME : | PAGE | OF

Single Door

QTY	MARK NUMBER	SWING	THICK.	FRAME OPENING SIZE WIDTH (IN)	FRAME OPENING SIZE HEIGHT (IN)	LABEL MINUTES
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None
			1 3/4"			None

Material * A40 | Core Type * Steel Stiffened | Gauge * 16G

All fields marked with an asterisk are prepopulated to DCI standards.

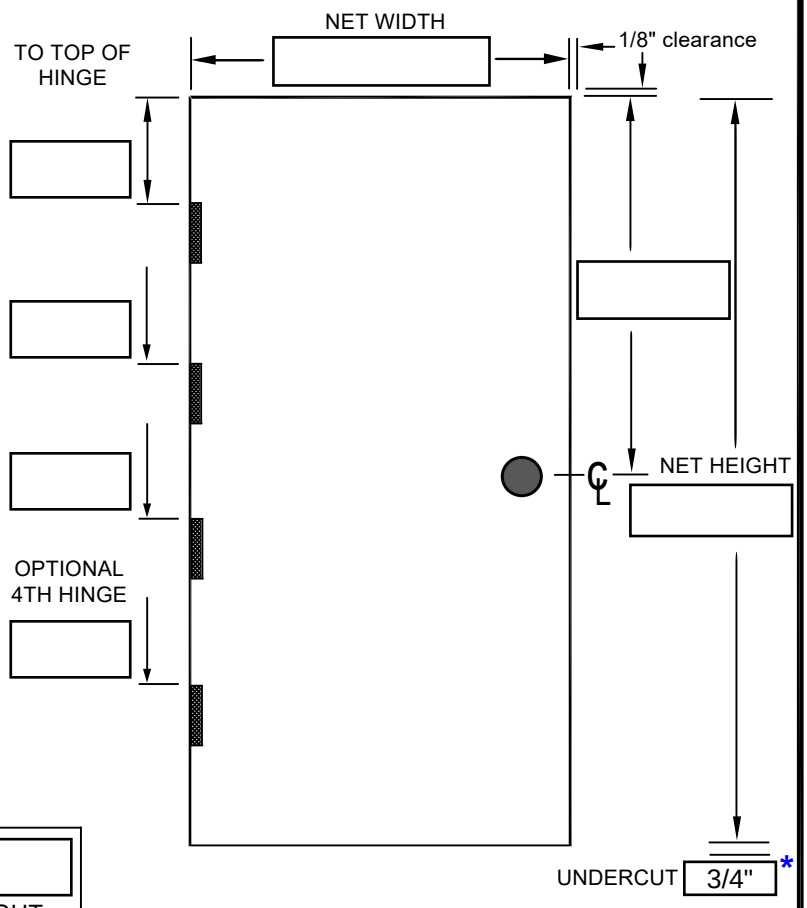

Cutout Options

Cut Out Only ☐ SIZE WIDTH HEIGHT

LOCATION:

CENTERED ☐ TOP OF DOOR TO TOP OF CUTOUT LOCK EDGE TO CUTOUT

Integral Lite ☐ VISIBLE GLASS SIZE WIDTH HEIGHT

GLASS THICKNESS: GLASS STOP: PUSH SIDE ○ PULL SIDE ○

LOCATION:

CENTERED ☐ TOP OF DOOR TO TOP OF VISIBLE GLASS LOCK EDGE TO VISIBLE GLASS

Louver

INTEGRAL ☐ SIZE WIDTH HEIGHT

CUT OUT ONLY ☐

LOCATION:

CENTERED ☐ BOTTOM OF DOOR TO BOTTOM OF LOUVER LOCK EDGE TO LOUVER

DCI integral louvers ***cannot*** be used in fire rated doors.

For more information on the use of cutouts in fire rated doors please reference the DCI Technical Manual.

DOOR EDGE * Seamless

TOP CHANNEL	BOTTOM CHANNEL
RECESSED ○	RECESSED ○
FLUSH ○	FLUSH ○
FLUSH AND SEALED ○	FLUSH AND SEALED ○

LOCK EDGE: BEVELED ○ SQUARE ○

HINGE EDGE: BEVELED ○ SQUARE ○

HINGE LOCATIONS * New DCI | BACKSET * 1/4"

HINGE TYPE * 4.5" | STD WEIGHT ○ | HEAVY WEIGHT ○

HINGE DETAILS:

LOCK/EXIT DEVICE:

NOTE: All doors include door closer reinforcement.

OTHER DETAILS:

HOLLOW METAL ON DEMAND

www.dcihollowmetal.com

COMPANY NAME : | PO NUMBER :

JOB NAME : | PAGE | OF