OPENING

SINGLE ☐ PAIR ☐

DOUBLE ACTING ☐ DOUBLE EGRESS ☐

PROJECT

CUSTOMER | QUOTE # | DATE

FRAME OPENING SIZE *(WIDTH X HEIGHT)* | **PREFIT DOOR SIZE** *(WIDTH X HEIGHT)* | BLOCKING

DOOR FACE *ACROVYN COLOR #* | **DOOR EDGE** *ACROVYN COLOR #*

FIRE RATING

☐ 20
☐ 45
☐ 60
☐ 90

"S" Label ☐ Y ☐ N

Temp. Rise ____

LITE

VISIBLE GLASS (W x H) ____

OR

CUTOUT ONLY (W x H) ____

DISTANCE FROM TOP RAIL (in) ____

DISTANCE FROM LOCK STILE (in) ____ **-OR-** ☐ CHECK IF CENTERED


LIGHT KIT TYPE (IF TO BE PROVIDED BY CS)

METAL: *BEIGE (PC)* ☐ | **WOOD:** *FLUSH BEAD* ☐


METAL: *ACROVYN WRAPPED* ☐ | **WOOD:** *LIPPED BEAD* ☐

METAL: *PAINTED TO MATCH* ☐

* SEE ATTACHED SHEET FOR ADDITIONAL LIGHT KIT INFORMATION.

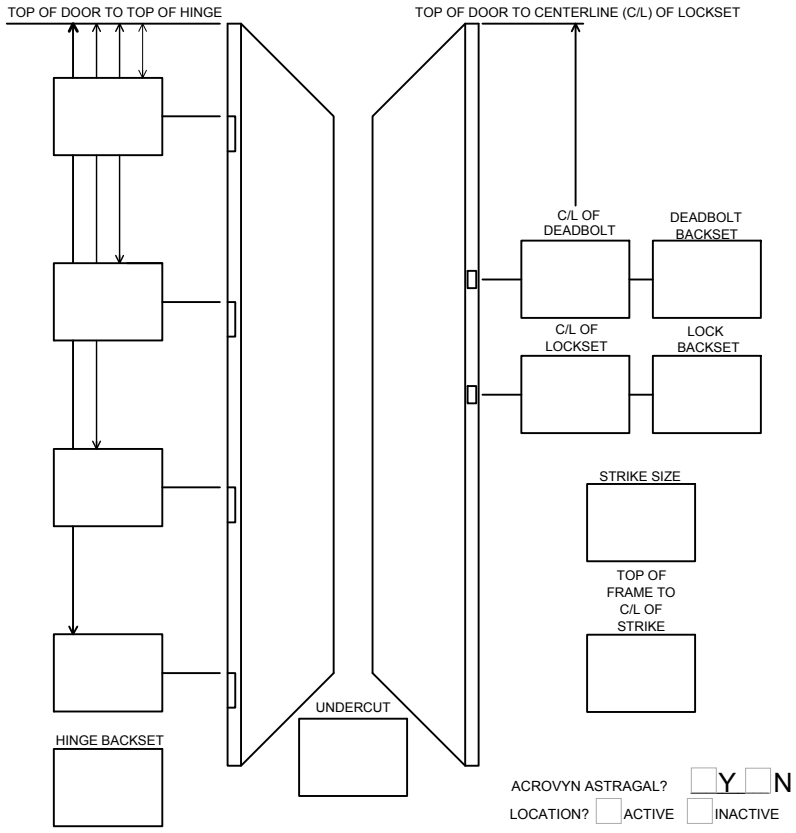

DOOR NO.	SWING
TOTAL DOORS THIS PAGE:	

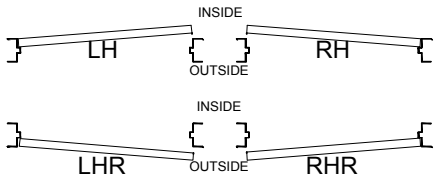

GLASS OPTIONS

(CHECK REQUIRED OPTION)

☐ ¼" TEMPERED (NR)
☐ ¼" FIREGLASS 20 (20)
☐ ¼" SUPERLITE I (20)
☐ ¼" SUPERLITE I-W Select a rating
☐ 3/16"FIRELITE NT Select a rating
☐ 5/16"FIRELITE PLUS Select a rating
☐ ⅞" KERALITE ULTRA (LOW TEMP RISE)
Optional - Select a rating

OTHER ____

SUPPLIED BY OTHERS? ☐ Y ☐ N

INSTALLED BY CS? ☐ Y ☐ N

OPTIONAL PROTECTION PLATES

STAINLESS STL. ☐

SIZE (HEIGHT) ____

PUSH SIDE ____ PULL SIDE ____

DOOR FRAME PROTECTION? Y/N ☐ Y ☐ N

PAGE ____ OF ____

HINGE

*(*REQUIRED FOR FABRICATION)*

MANUFACTURER* ____

MFG. MODEL NO.* ____

SIZE (HEIGHT x **THICKNESS**)* ____

TEMPLATE NO.* ____

EDGE TYPE:

HINGE:
☐ BEVELED
☐ SQUARE
☐ RADIUS

LATCH:
☐ BEVELED
☐ SQUARE
☐ RADIUS

LOCKSET

*(*REQUIRED FOR FABRICATION)*

MANUFACTURER* ____

MFG. MODEL NO.* ____

CYLINDRICAL* | MORTISE*

TEMPLATE NO.* ____

FLUSHBOLT (MFG., MODEL, & TEMPLATE NO.) | BOTTOM?

CONCEALED CLOSER / STOP (DEGREE OF OPENING, MFG., MODEL & TEMPLATE NO.)

EXIT DEVICE (MFG., MODEL & TEMPLATE NO.)

DEAD BOLT (MFG., MODEL & TEMPLATE NO.)

DOOR BOTTOM (MFG., MODEL & TEMPLATE NO.)

MISC. HARDWARE (TYPE, MFG., MODEL, & TEMPLATE NO.)

REV. 7/31/2018