
Project Name: Customer: Date: 10/16/2025 12:23 PM

LANMOR SERVICES Around the Clock Automation
A Division of The Cook & Boardman Group, LLC.

Door Size :	Door Type :	Handing:
Door Color/Stain/Laminate :	Door Core :	Door Manufacture :

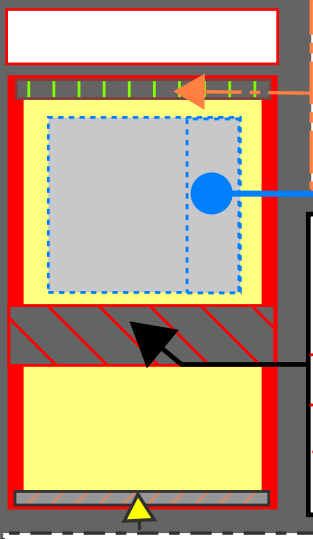

Top prep:

Location:

Mortised hardware:	Door Holder:
Door closer:	Flush Bolt:
A/0:	Door coordinator:
	Mag lock:

Hardware Prep:

☐ raceway bore

Finish:

Power transfer:

Power location:

Electrified hardware: Location:

Locking hardware:	Hinge type:	
Model:	Hinge loc 1:	Hinge loc 3:
Prep type:	Hinge loc 2:	Hinge loc 4:

Cut out type:

Visible glass size

X

Glazing size

1 X 1

Cut out size

Vision frame size

Location IN:
Location Down:
Location up:

Vision frame Profile

Glass thickness

Glass Type

Bottom Prep:


Sweep:	Kickplate:
Mortised hardware:	Bottom bolt:
Model:	Guide:

Door Fire Rating

Fire bolt:

Gasketing:

Fire Glass Req: ☐ Fire Hardware: ☐

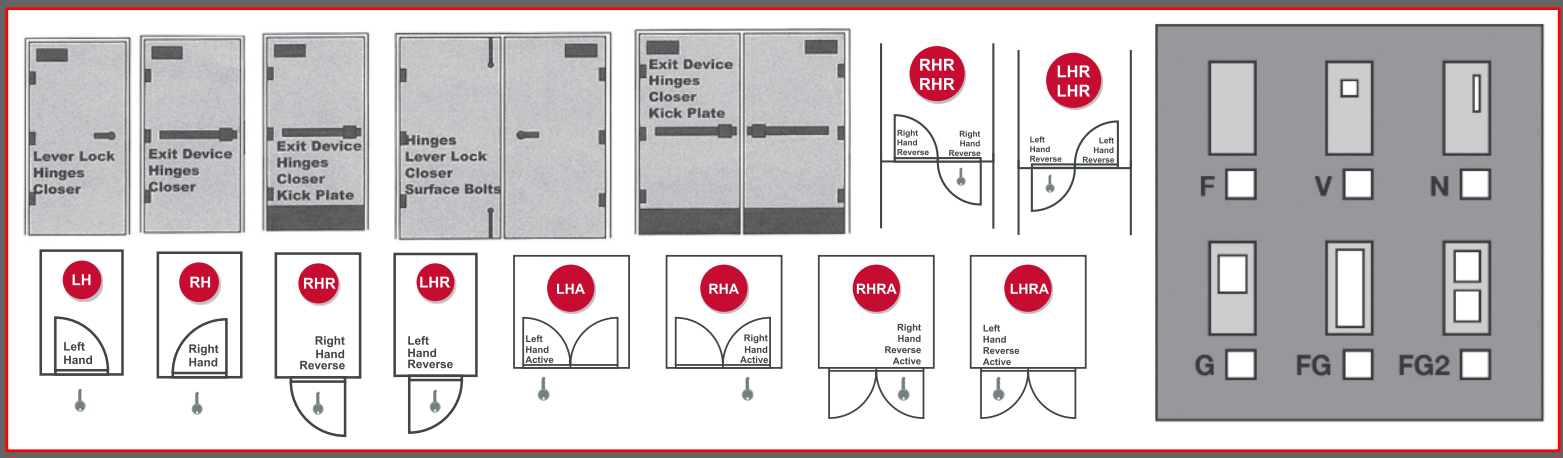

FRAME TYPE

- ☐ Single
- ☐ Pair
- ☐ Cased Opening
- ☐ Borrowed Lite
- ☐ Sidelite
- ☐ Transom Frame
- ☐ Transom & sidelite

Transom size

X

Glass Type


Glass thickness


Frame Fire Rating

Labeling Req

Gasketing:

Intumescent material: ☐ Fire Hardware Req: ☐

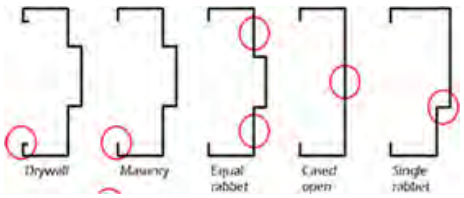

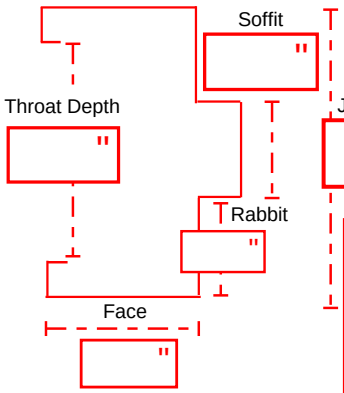

Wall conditions:

Wall rating:

Framing:

Drywall thickness:

Drywall Masonry

Frame Prep:

Power Transfer:

Power location:

☐ Electrified frame

Gauge:
Coating:
Material:

Rough opening:	X	Hinge Size:	
Frame size:	X	Hinge type:	
Frame material:		Hinge loc 1:	Hinge loc 3:
Prep type:		Hinge loc 2:	Hinge loc 4:
Electrified hardware:		Strike:	Location:
Locking hardware:		Door closer:	
Anchor:		Reinforcements:	

LANMOR SERVICES INC.

PROJECT NAME:	DOOR LOCATION:
PROJECT LOCATION:	

APPOINMENT DATE: 10/16/2025 12:23 PM
CUSTOMER ACCOUNT:
ADDRESS:
CONTACT NAME:
CONTACT EMAIL:
CONTACT PHONE#:

SCOPE OF WORK:

FRAME: WIDTH X HEIGHT
ROUGH OPENING: WIDTH X HEIGHT
FIRE RATNG:
Positive Pressure
Negative Pressure
Gauge
Soffit
Jamb Anchor
Throat Depth
Jamb Depth
Rabbit
Coating
Face

ACTIVE DOOR : X
INACTIVE DOOR : X
Cutout Size
Gauge
Glazing
FIRE RATNG:
Species
Door Edge
Visible Glass
DOOR THICKNESS
Top Inward
Stain/Color
Visible Seam?
Top Down
Core
ADD RACEWAY

AUTOMATIC DOOR OPERATOR/CORDINATOR

FIRE RATNG:
F: D:

HINGE SIZE
NOMINAL SIZE:
ELECTRIFIED HARDWARE

DOOR CLOSER MODEL
TYPE OF DOOR CLOSER
ACTIVE
DOOR PREP ACTIVE
DOOR HARDWARE
HANDING
FINISH
KICKPLATE/MOP PLATE/AMOR PLATE SIZE X

AUTO FLUSH BOLT MODEL
INACTIVE
DOOR PREP INACTIVE
STRIKE PREP/TYPE
STRIKE LOCATION - Center
DOOR HARDWARE
HANDING
FIRE BOLT MODEL
SWEEPS / SHOES/ BOTTOMS MODEL

ASTRAGAL/MULLION/EDGE GUARD
THRESHOLD MODEL & SIZE

LANMOR SERVICES INC DOOR MACHINE SHEET

OPENING

SINGLE | PAIR | DOUBLE ACTING | DOUBLE EGRESS

PROJECT

CUSTOMER | TYPE OF DOOR | DATE 10/16/2025 12:

LANMOR SERVICES INC.

FIRE RATING

20 | 45 | 60 | 90

"S" Label Y N

Temp. Rise

FRAME OPENING SIZE *(WIDTH X HEIGHT)*

PREFIT DOOR SIZE *(WIDTH X HEIGHT)*

BLOCKING

DOOR FACE *ACROVYN COLOR #*

DOOR EDGE *ACROVYN COLOR #*

DOOR NO.	SWING
Applied door vinyl wrap?	
add door closer reinforcement?	
add hinge reinforcement?	
Add raceway?	
Mortised hardware?	

LITE

VISIBLE GLASS (W x H)

OR

CUTOUT ONLY (W x H)

DISTANCE FROM TOP RAIL (in)

DISTANCE FROM LOCK STILE (in) **-OR-** CHECK IF CENTERED


LIGHT KIT TYPE (IF TO BE PROVIDED BY CS)

METAL: *BEIGE (PC)* | **WOOD:** *FLUSH BEAD*

METAL: *ACROVYN WRAPPED* | **WOOD:** *LIPPED BEAD*

METAL: *PAINTED TO MATCH*

* SEE ATTACHED SHEET FOR ADDITIONAL LIGHT KIT INFORMATION.

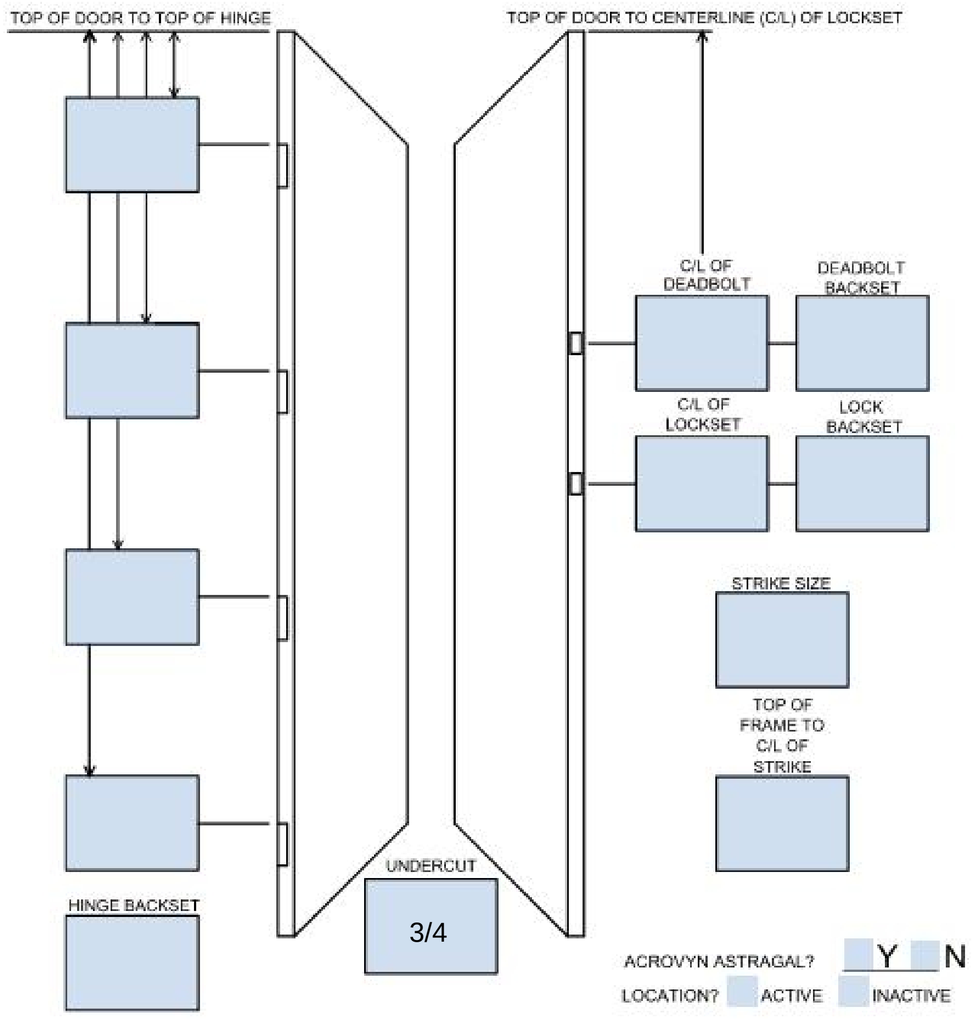

ACROVYN ASTRAGAL? Y N

LOCATION? ACTIVE INACTIVE


Stain/Color/Paint/Coating:

Gauge/Species/Veneer/ Cut:

Matching:

Core:

None | 10" Center Block | Additional Top Block | (1) 5x18 Lock Block | Additional Bottom Block | (2) 5x18 Exit Device/Lock Blocks

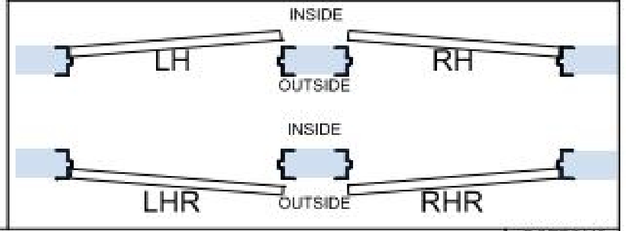

GLASS OPTIONS

(CHECK REQUIRED OPTION)

- ☐ ¼" TEMPERED (NR)
- ☐ ¼" FIREGLASS 20 (20)
- ☐ ¼" SUPERLITE I (20)
- ☐ ¼" SUPERLITE I-W
- ☐ 3/16"FIRELITE NT
- ☐ 5/16"FIRELITE PLUS
- ☐ ⅞" KERALITE ULTRA (LOW TEMP RISE)

Optional -

OTHER

SUPPLIED BY OTHERS? Y N

INSTALLED BY FACTORY? Y N

Hinge prep:

FLUSHBOLT

☐ Top Only ☐ Top & Btm.

Mfg.

Mfg. No.

Template No.

Top Length | Btm. Length

HOLDER/CLOSER

Mfg.

Mfg. No. | Degree of Opening

Template. No.

STC Rating:

Lead Thickness:

HINGE

*(*REQUIRED FOR FABRICATION)*

MANUFACTURER*

MFG. MODEL NO.*

SIZE (HEIGHT x **THICKNESS**)*

TEMPLATE NO.*

EDGE TYPE:

HINGE:

☐ BEVELED ☐ SQUARE ☐ RADIUS

LATCH:

☐ BEVELED ☐ SQUARE ☐ RADIUS

LOCKSET

*(*REQUIRED FOR FABRICATION)*

MANUFACTURER*

MFG. MODEL NO.*

CYLINDRICAL* | MORTISE*

TEMPLATE NO.*

FLUSHBOLT (MFG., MODEL, & TEMPLATE NO.) | BOTTOM?

CONCEALED CLOSER / STOP (DEGREE OF OPENING, MFG., MODEL & TEMPLATE NO.)

EXIT DEVICE (MFG., MODEL & TEMPLATE NO.)


DEAD BOLT (MFG., MODEL & TEMPLATE NO.)

DOOR BOTTOM (MFG., MODEL & TEMPLATE NO.)

MISC. HARDWARE (TYPE, MFG., MODEL, & TEMPLATE NO.)


SALESMAN:

SALESMAN EMAIL:

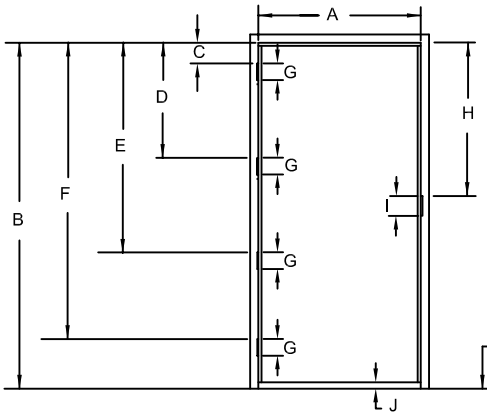


LANMOR SERVICES INC.

SINGLE OPENING

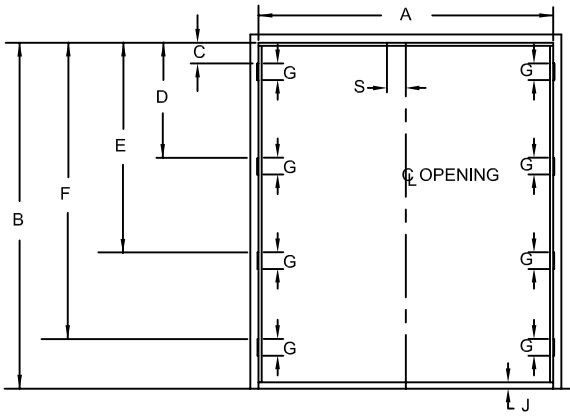


LANMOR SERVICES INC.


PAIR OPENING

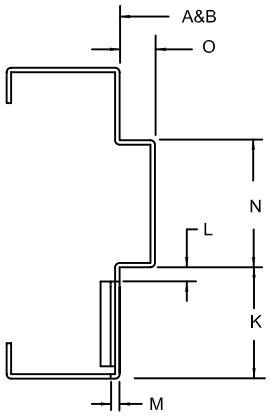

FRAME PROFILE

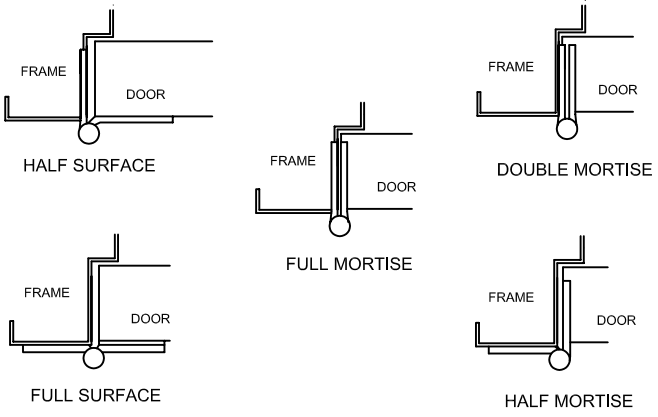

HINGE MOUNTING
CIRCLE THE APPROPRIATE HINGE CONFIGURATION

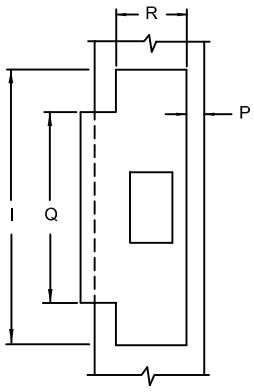

STRIKE DETAIL


	DESCRIPTION OF DIMENSION	ACTIVE DOOR	INACTIVE DOOR	NOTES
A	JAMB OPENING WIDTH (RABBET TO RABBET)			
B	JAMB OPENING HEIGHT (HEAD RABBET TO FINISH FLOOR)			
C	HEAD RABBET TO TOP OF TOP HINGE			
D	HEAD RABBET TO TOP OF SECOND HINGE			
E	HEAD RABBET TO TOP OF THIRD HINGE			
F	HEAD RABBET TO TOP OF FOURTH HINGE			
G	HEIGHT OF HINGE CUTOUT			
H	HEAD RABBET TO TOP OF STRIKE			
I	HEIGHT OF STRIKE CUTOUT (NOT THE STRIKE LIP)			
J	THRESHOLD HEIGHT			
K	RABBET DEPTH			
L	HINGE BACKSET			
M	HINGE DEPTH			
N	STOP WIDTH			
O	STOP HEIGHT			
P	STRIKE BACKSET			
Q	LENGTH OF STRIKE LIP			
R	STRIKE WIDTH			
S	℄ OPENING TO ℄ OF FLUSHBOLT CUTOUT			

ANCHOR

- ☐ Compression Anchor
- ☐ Existing Opening
- ☐ Metal Stud
- ☐ Masonry “T”
- ☐ Wood Stud
- ☐ No Anchors

CONSTRUCTION

- ☐ Knock Down
- ☐ Welded

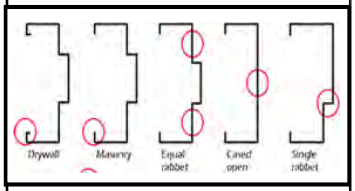


FIRE LABEL

- ☐ 3 Hour
- ☐ 90 Minute
- ☐ 45 Minute


3 Pc. Knockdown Frames ☐ **Gauge**

Throat Size

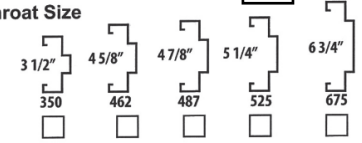

Welded Frames ☐ **Gauge**

Throat Size



LANMOR SERVICES INC.



PROJECT NAME:

SALES ORDER NO:

SALESMAN:

LANMOR SERVICES INC.

PROJECT NAME:

PROJECT LOCATION:

DOOR LOCATION:

APPOINMENT DATE: 10/16/2025 12:23 PM

CUSTOMER ACCOUNT:


ADDRESS:

CONTACT NAME:

CONTACT EMAIL:

CONTACT PHONE#:


SCOPE OF WORK:

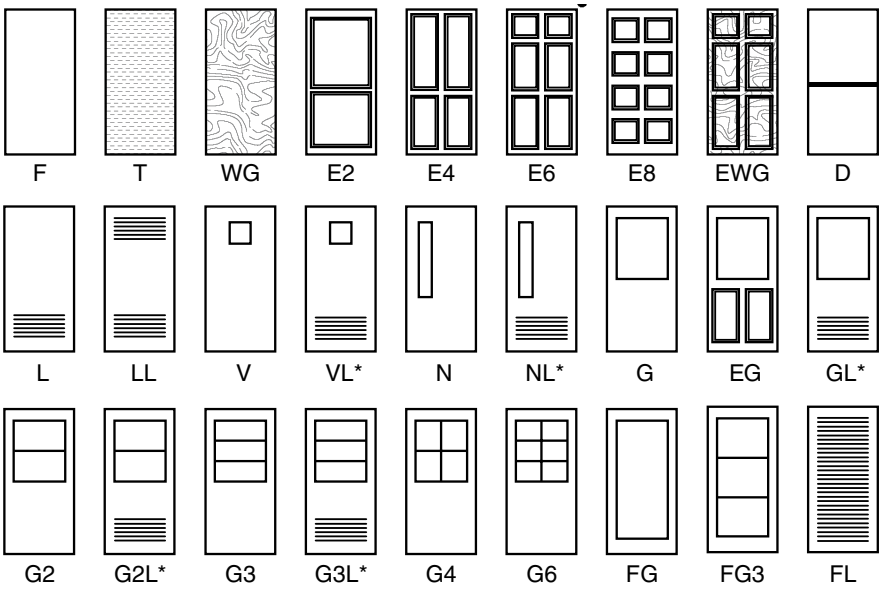



HARDWARE ADD


- ☐ Weatherstrip
- ☐ Threshold
- ☐ Passage Set
- ☐ Privacy Set
- ☐ Lockset
- ☐ Deadbolt
- ☐ Vertical Rod - Exit Device
- ☐ Flush Bolt
- ☐ Kick Plate
- ☐ Push Plate
- ☐ Door Pull
- ☐ Door Stop
- ☐ Check Chain
- ☐ Door Viewer
- ☐ Removable Mullion

HARDWARE ADD

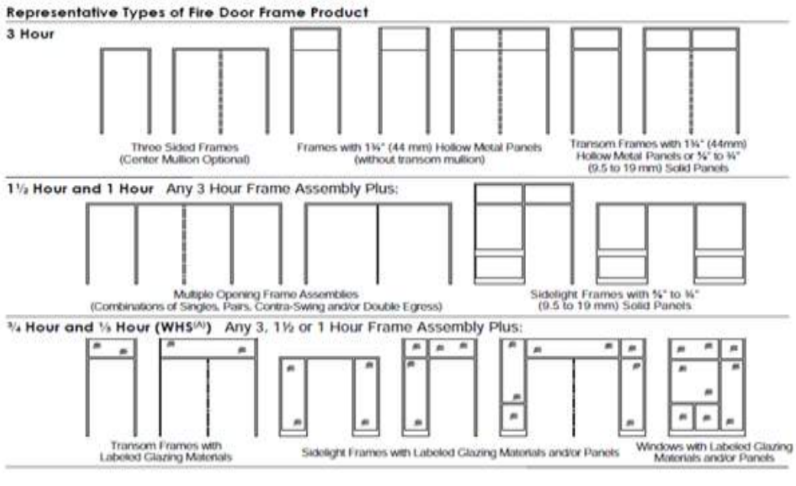





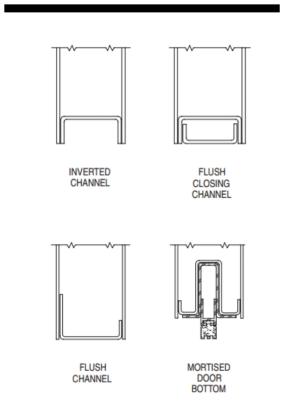

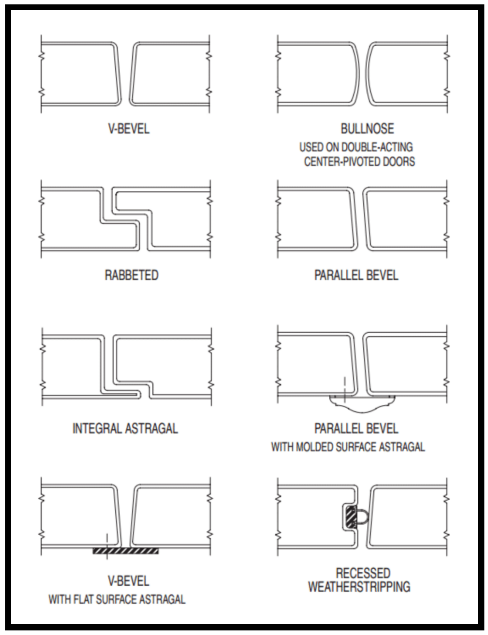





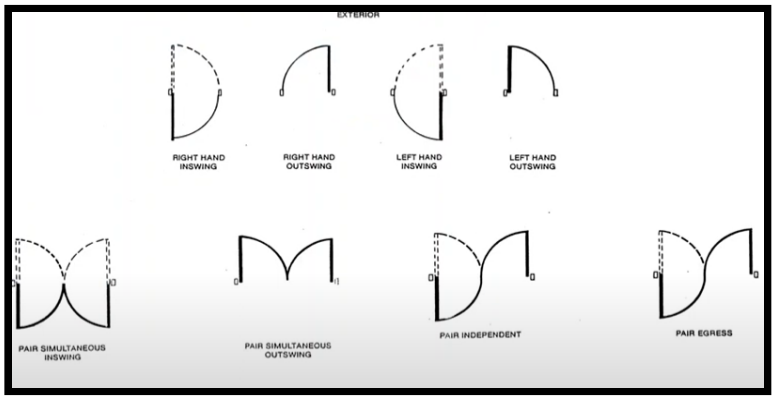

SALESMAN:

SALESMAN EMAIL:

LANMOR SERVICES INC.

PROJECT NAME

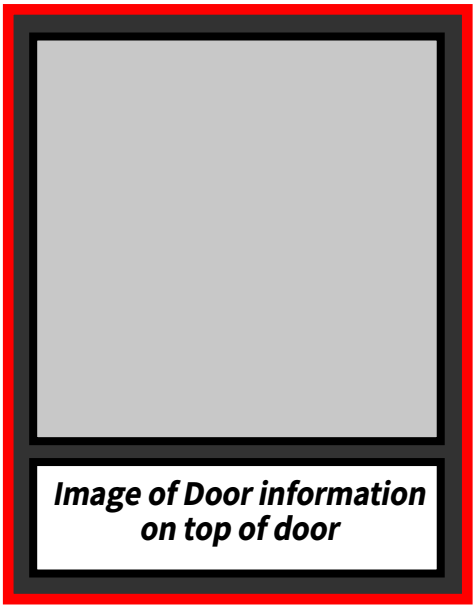


Image of Door information on top of door

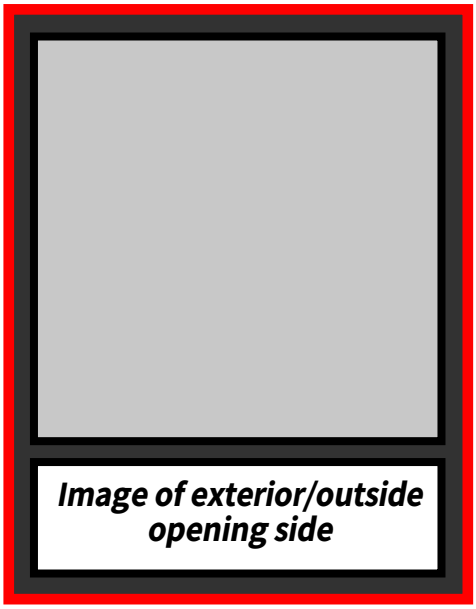


Image of exterior/outside opening side

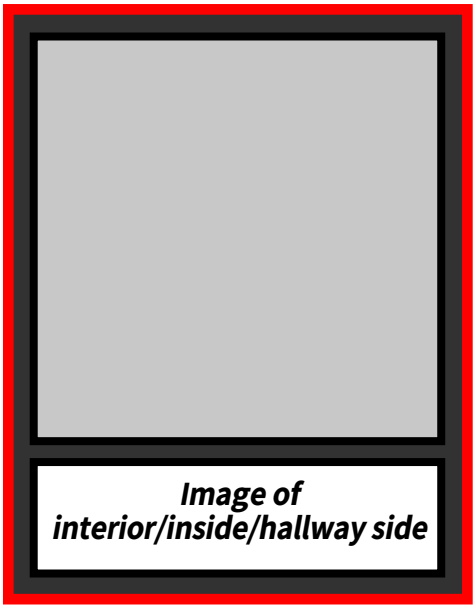


Image of interior/inside/hallway side

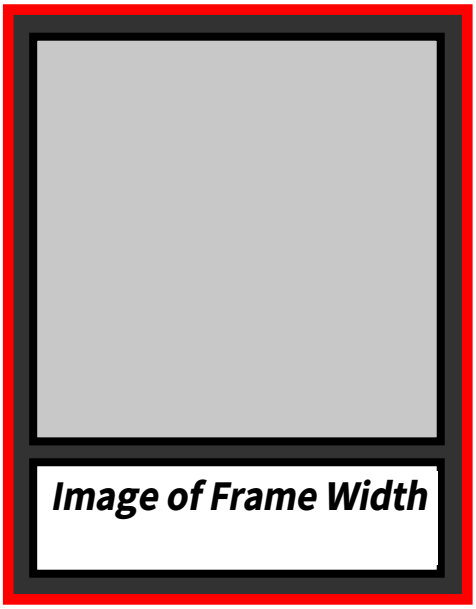


Image of Frame Width

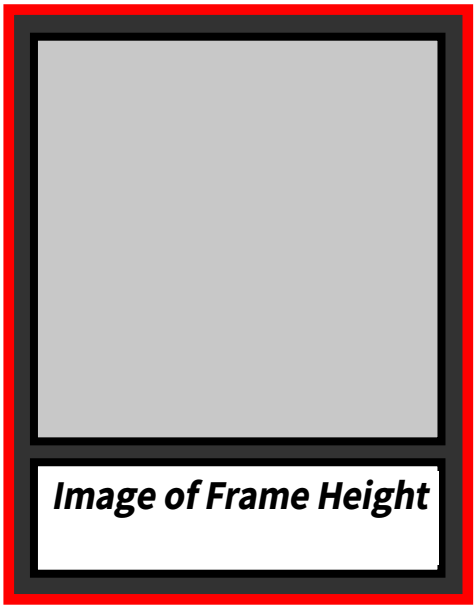


Image of Frame Height

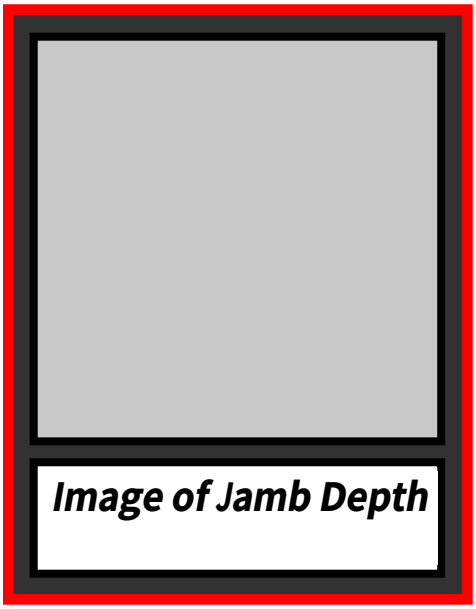


Image of Jamb Depth

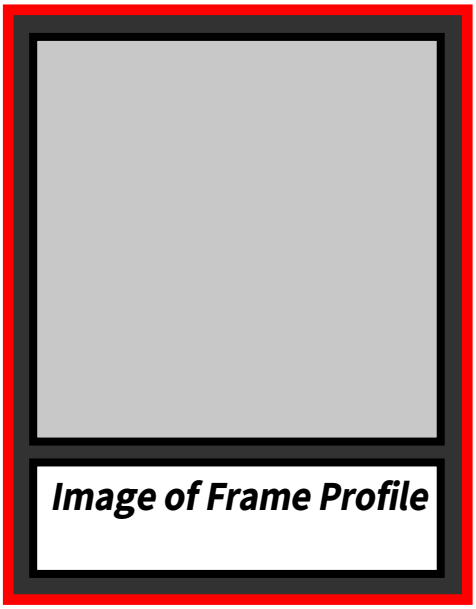


Image of Frame Profile

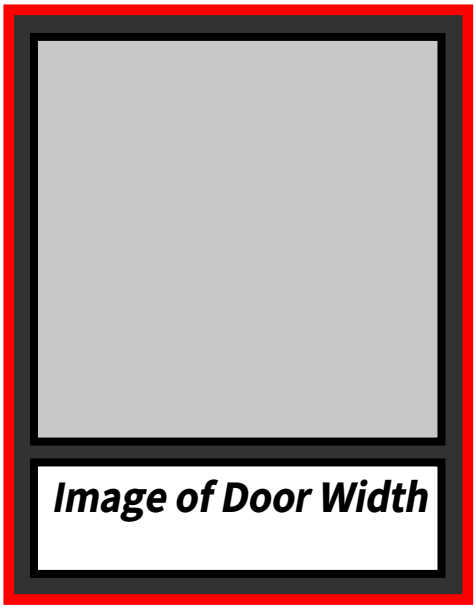


Image of Door Width

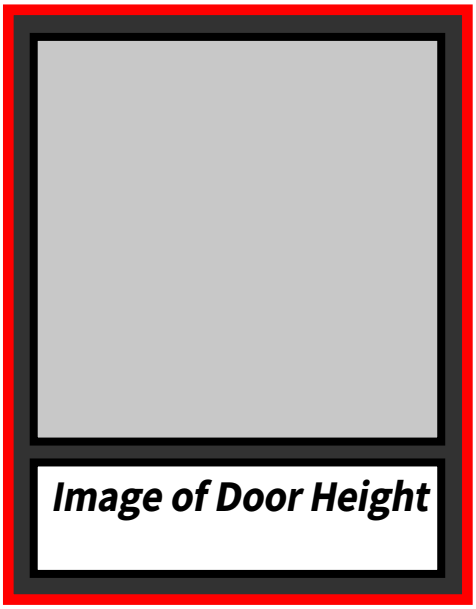


Image of Door Height

SALESMAN:

SALESMAN EMAIL:

LANMOR SERVICES INC. - 2058 W. ROSE GARDEN LANE PHOENIX AZ 85027 (623)869-6864

LANMOR SERVICES INC.

PROJECT NAME



Image of Door Thickness

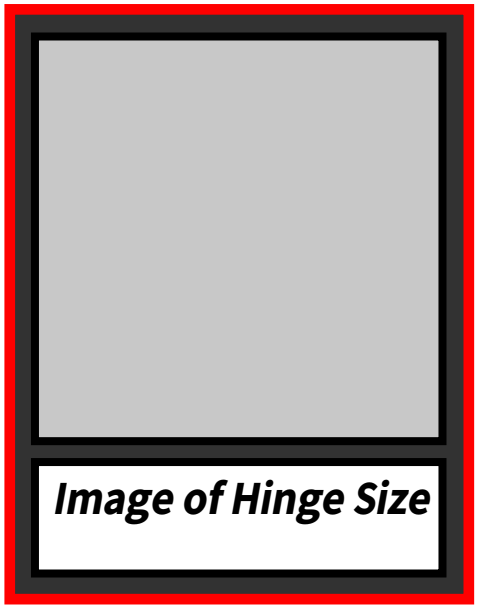


Image of Hinge Size

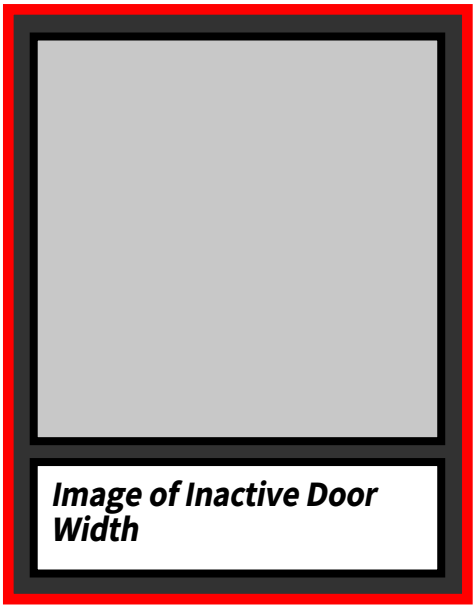


Image of Inactive Door Width

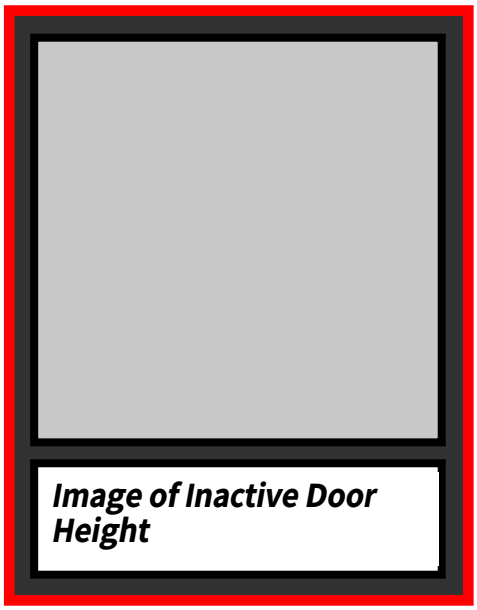


Image of Inactive Door Height

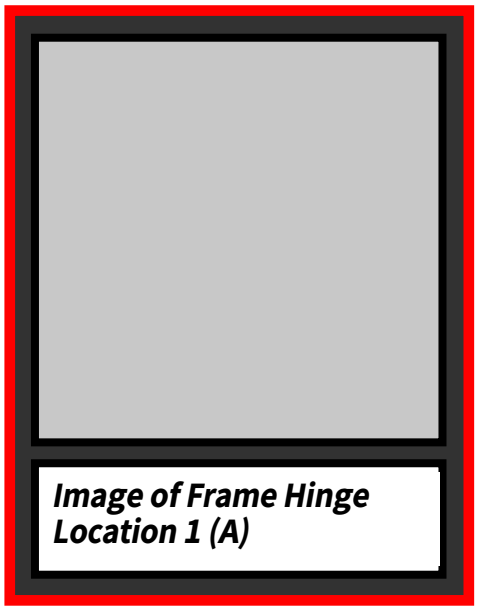


Image of Frame Hinge Location 1 (A)

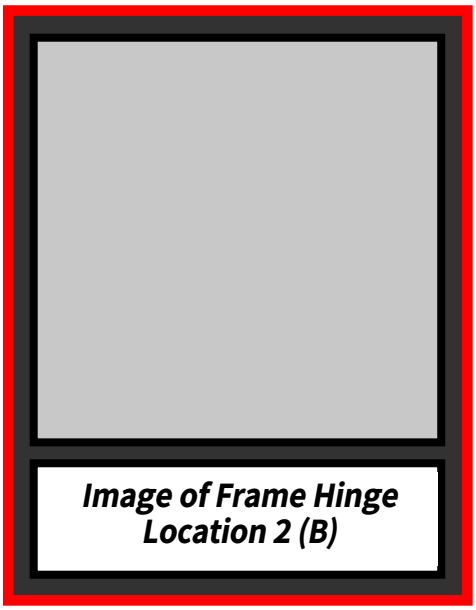


Image of Frame Hinge Location 2 (B)

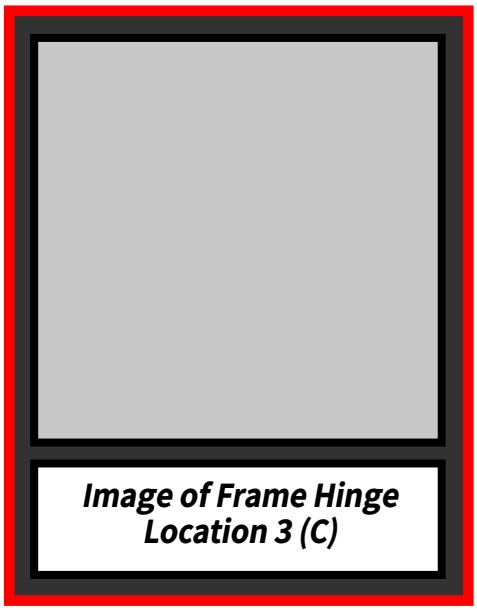


Image of Frame Hinge Location 3 (C)

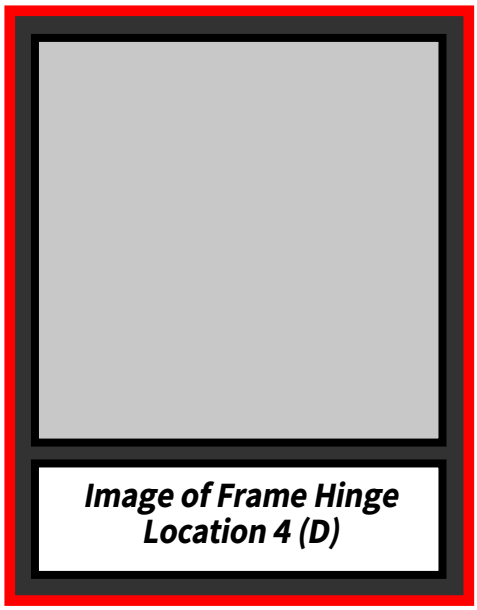


Image of Frame Hinge Location 4 (D)

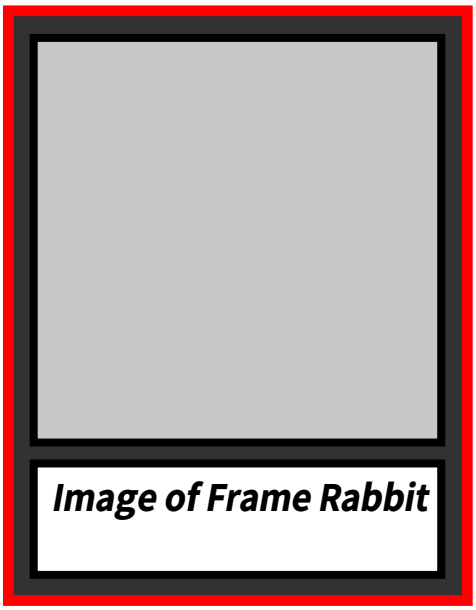


Image of Frame Rabbit

SALESMAN:

SALESMAN EMAIL:

LANMOR SERVICES INC. - 2058 W. ROSE GARDEN LANE PHOENIX AZ 85027 (623)869-6864

LANMOR SERVICES INC.

PROJECT NAME

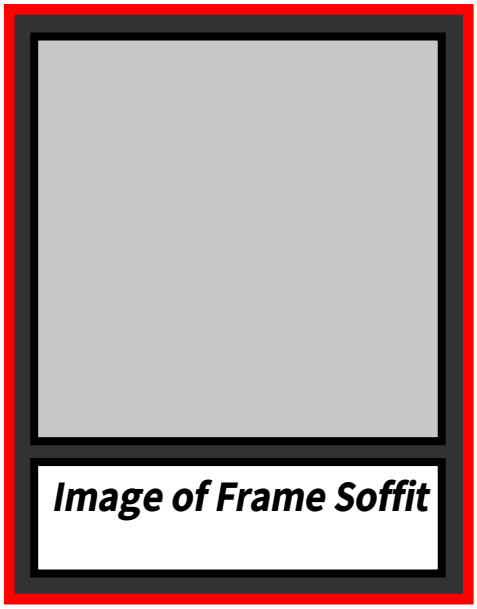


Image of Frame Soffit

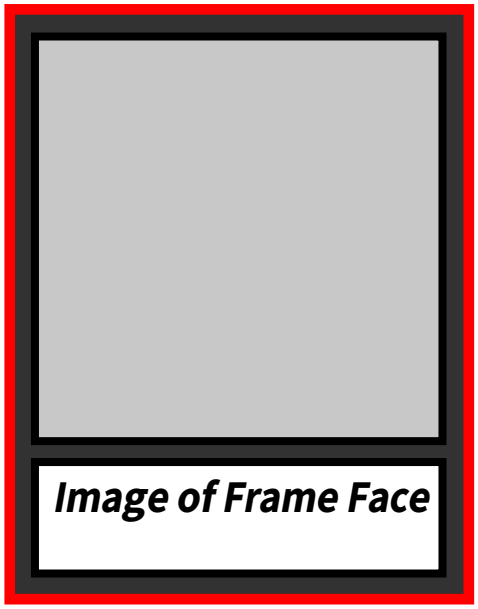


Image of Frame Face

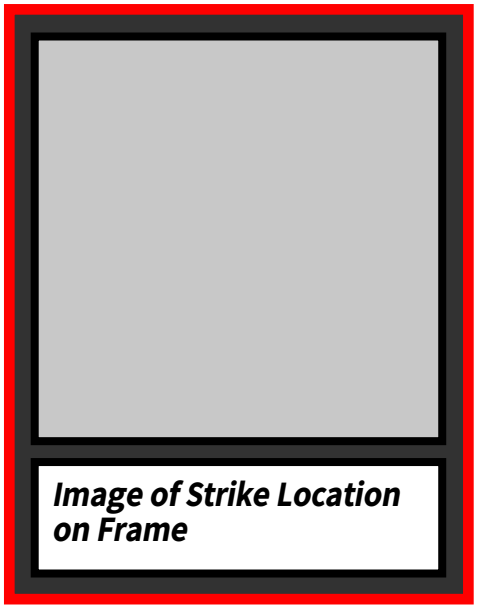


Image of Strike Location on Frame

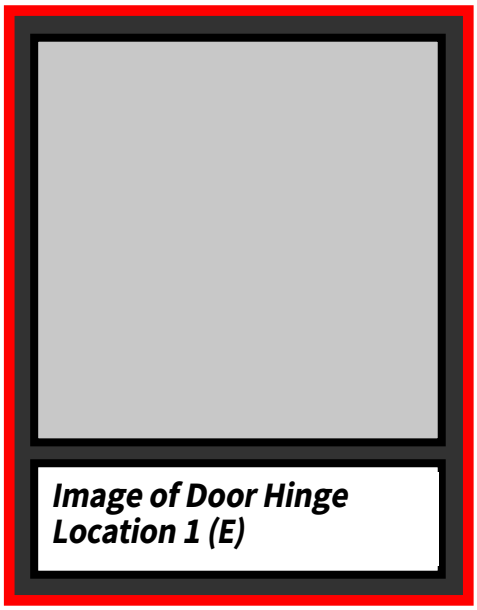


Image of Door Hinge Location 1 (E)

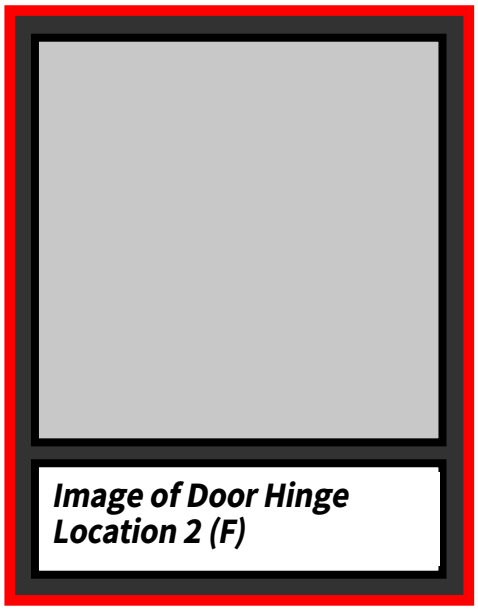


Image of Door Hinge Location 2 (F)

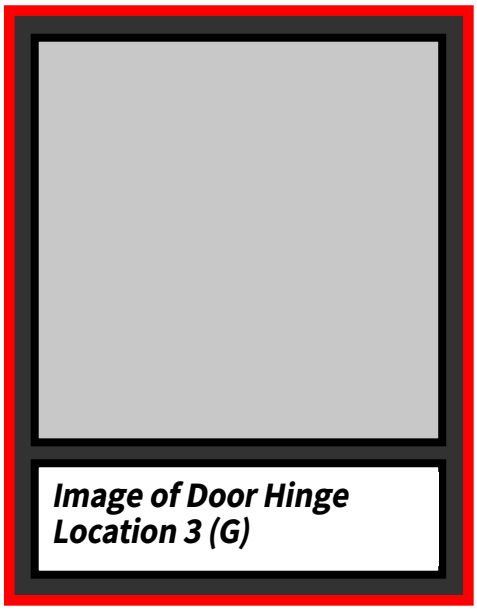


Image of Door Hinge Location 3 (G)

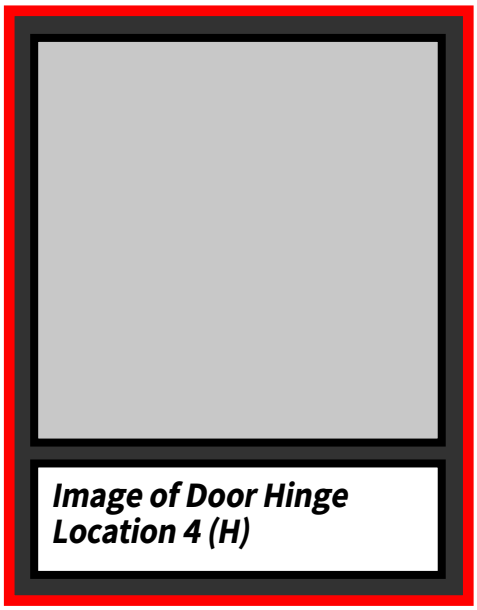


Image of Door Hinge Location 4 (H)

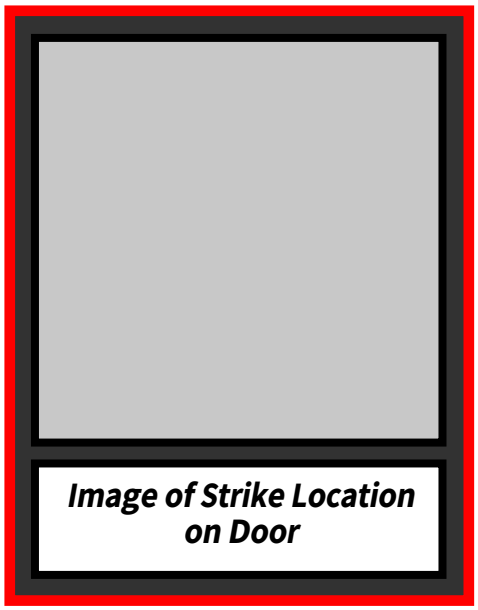


Image of Strike Location on Door

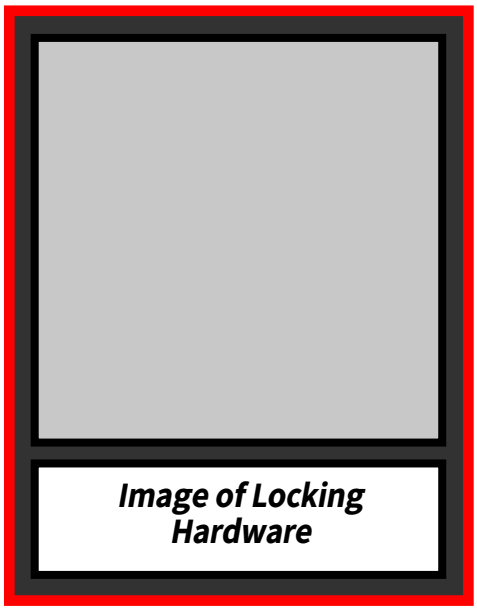


Image of Locking Hardware

SALESMAN:

SALESMAN EMAIL:

LANMOR SERVICES INC. - 2058 W. ROSE GARDEN LANE PHOENIX AZ 85027 (623)869-6864

LANMOR SERVICES INC.

PROJECT INFO

SCOPE OF WORK

DOOR & FRAME SCHEDULE

true

true

HARDWARE SCHEDULE

INSTALLATION NOTES

SALESMAN:

SALESMAN EMAIL: