

## Immobilizer Programming Procedure (M-H)

Mazda CX-30 (2019-2020)

Mazda3 (2019-2020)

**Please make sure the battery is fully charged before proceeding**


### DIRECTIONS



#### Note:

- The immobilizer system-related parts programming can be performed using the M-MDS. For details, follow the instructions displayed on the M-MDS.
- When programming the immobilizer system-related parts, the incode must be searched.
- The following items are displayed on the M-MDS. Select the item according to the service content.
- A maximum of six remote transmitters can be programmed to one vehicle.
- Before beginning the procedure, verify that the customer has provided all of the remote transmitters for the vehicle.

- 1.Shift the selector lever to the P position. (ATX)
- 2.Shift the shift lever to the neutral position. (MTX)
- 3.Operate the parking brake.
- 4.Connect the M-MDS.
- 5.After the vehicle is identified, select the following items from the initial screen of the M-MDS.  
(1)"Toolbox"  
(2)"Work Support"  
(3)"SECURITY AND LOCKS"  
(4)"IMMOBILIZER"
- 6.Select "Replacing Immobilizer Related Module"
- 7.Perform immobilizer system-related part programming according to the directions on the M-MDS.
- 8.Touch the push button start with the remote transmitter to verify that the engine starts.

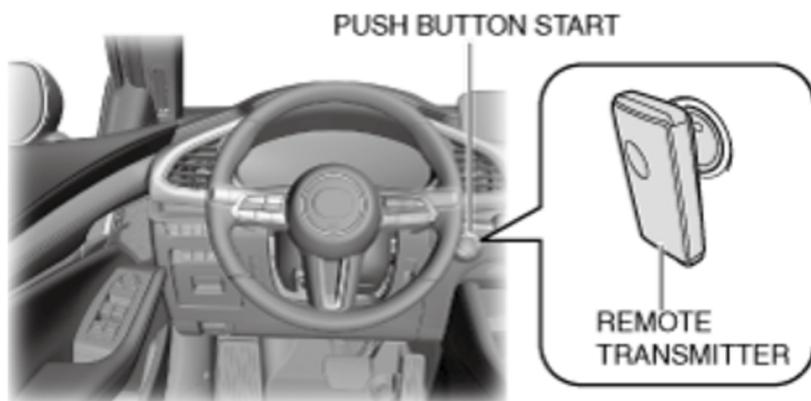

- 9.Verify that the engine starts while the remote transmitter is not in contact with the push button start.

### Contact Us

If you have any further questions, please contact us:

[admin@fs1inc.com](mailto:admin@fs1inc.com)

516.766.2223

[www.fs1inc.com](http://www.fs1inc.com)