

F72683.1525

Fasson®
DT300N/S2049/BG40WH N

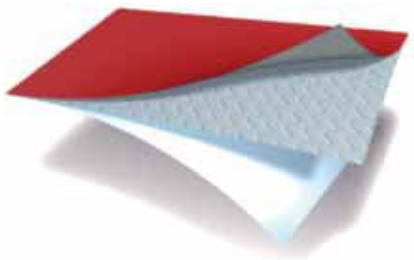



Facestock
A white BOPP film with a barrier-coated thermosensitive layer.

Basis Weight	60 g/m2	ISO 536
Caliper	75 µm	ISO 534

Adhesive
A general-purpose permanent, rubber-based adhesive suitable for rough surfaces such as recycled board. S2049 contains 30% Bio Based components that are derived from renewable sources.

Liner
BG40 is a high-density glassine paper featuring high internal strength, toughness and tear resistance as well as high transparency.

Basis Weight	57 g/m2	ISO 536
Caliper	50 µm	ISO 534

Laminate

Total Caliper	136 µm ±10%	Calculated

Typical Performance Data

Initial Tack	15 N/25mm	or tear	FTM 9 glass
Peel Adhes. 90°	7 N/25mm	or tear	FTM 2 st.st.
Min. appl. temp.	0°C		
Service temp.	- 40°C to 50°C subject to facestock limitations		

Note: Typical Performance Data only serves as reference to product performance under specified testing conditions and does not represent a product specification. Customers are recommended to test under actual conditions of use to determine its suitability.

Adhesive performance
S2049 features excellent performance on a wide variety of substrates, including apolar, textured HDPE, recycled corrugated cardboard, slightly rough, curved and difficult substrates. It is suitable for use in chilled or room temperature environments and provides moisture resistance after applying on a dry surface. *Exposure to chemicals and sunlight could degrade the adhesive. Not suitable for storage near ozone sources such as electrical devices.*

Applications and Use
Suitable for barcode labelling where excellent resistance to moisture, oils and fats is required in the retail and industrial sectors e.g. pre-packed food, meat and fish, laboratory items and pharmaceutical applications. Additional durability including smudge and moisture resistance is required e.g. Freeze/thaw applications.

NOTE: The combination of a filmic facetock and hotmelt adhesive has a propensity for curl. Ensure label is applied with pressure and has full contact with the substrate to reduce curl. Diecut labels may also exhibit curl when still on the liner. Product should be tested before end-use.

Avoid prolonged temperature of 50°C or more for long periods. Exposure to direct sunlight or strong fluorescent light may invalidate the image or discolouration.

Conversion/Printing
Can be used on all conventional label printing technologies. UV Flexo and Letterpress are recommended. Suitable for conventional die-cutting processes and conventional inks and varnishes. Consult specialists for details. Thermal coating may exhibit poor scuff resistance in wet environments. Inks containing alcohol or volatile organic solvents may cause discolouration of the thermosensitive coating. Excessive press label rewind tension may cause labels to slip/misalign or adhesive to bleed. When converting filmic products, anti-static devices are strongly recommended and all dies should be proofed to the construction.

Note : The information in this datasheet is correct at time of publishing. Avery Dennison reserves the right to revise the content as required without prior notice.

Food Industry Labels
The adhesive complies with FDA regulations (section 175.105) for indirect food contact.

Statement of Practical Use
As with all pressure sensitive materials, this product should be tested thoroughly under end-use conditions to ensure it meets the requirements of the specific application.

Shelf Life
To obtain optimal performance, use this product within one year of delivery date, under storage conditions of 23 ± 2°C and 50 ± 5% RH. Prolonged storage outside of these conditions might reduce the shelf life.

Australia
4 Duigan Drive,
Moorabbin Airport,
VIC 3194
Australia
Tel +61392710384
Fax +61 3 9271 033

Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damages.

NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY ARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.