
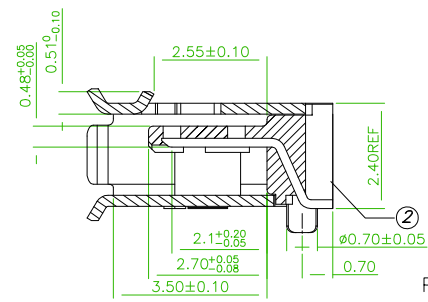
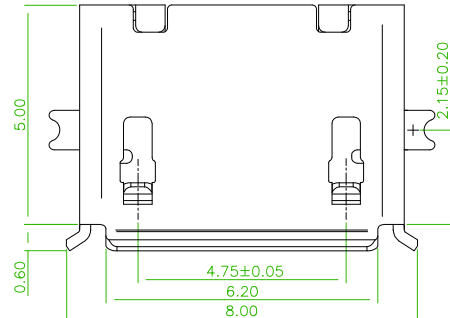
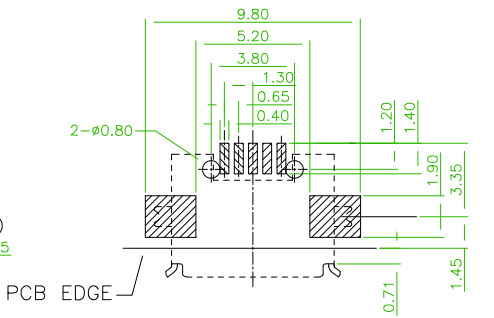


Specifications





Current Rating: 1.5A Max. per contact 
Voltage Rating: 5V AC(rms max)
Contact Resistance: 30mΩ maximum
Insulation Resistance: 100M minimum
Dielectric Withstanding Voltage: 100V AC for 1 Minute
Operating Temperature: -30° to +85°C
Storage Temperature: -40° to +85°C



SEC. A-A



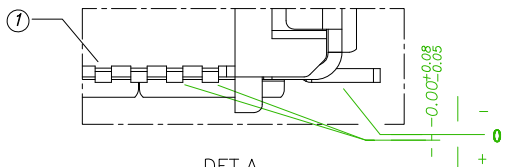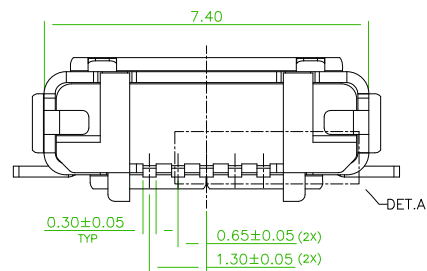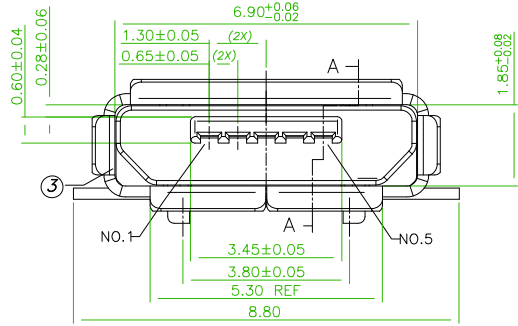

PCB LAYOUT(SCALE 4:1)
TOLERANCE:±0.05



DET.A
SCALE 10:1

3	SHELL	STAINLESS STEEL, T=0.25	40u" Min. NICKEL OVER PLATED
2	HOUSING	HIGH TEMPERATURE THERMAL PLASTIC	COLOR:GRAY
1	CONTACT	COPPER ALLOY,T=0.20	CONTACT AREA:Au 30u"Min, SOLDER AREA:Au 3u" Min.
ITEM	DESC.	MATERIAL	REMARKS

	B	Add the SPEC.	2011/08/02 Joe
AREA	REV.	DESCRIPTION	DATE

 Amtek Technology Co., Ltd. TEL:886-2-2268-8036 FAX:886-2-2268-8035	品名 TITLE	MICRO USB AB TYPE FEMALE SMT 5P				
	品號 PART NO.	MIUSB-F5M-ABG-U			日期 DATE	2010/09/03
	圖號 DRAWING NO.	MIUSB-F5M-ABG-U	版本 REV.	B	繪圖 DRAWN	Joe
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Debby
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	核准 APPROVED	James