


MCU / ISP: preserve RESET; 8 MHz internal oscillator







One RGBW package: independent dice, common anodes on PCB




PB3: OPEN = high / CLOSED = low; latch before PWM







LOCKED IR CONTACTS: no header needed on ring

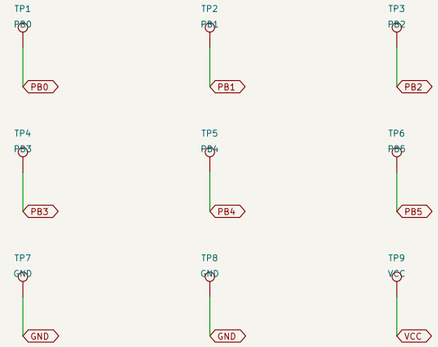


R / PB0 / OC0A

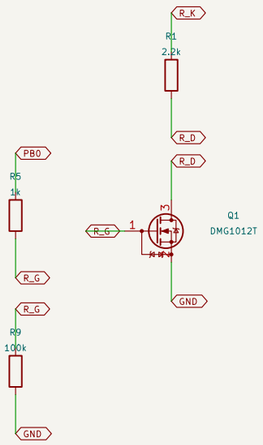


G / PB1 / OC0B

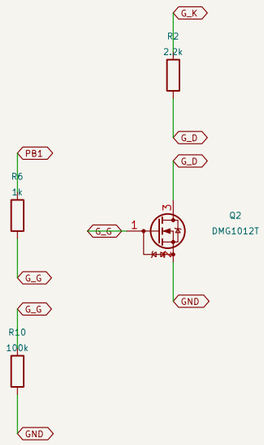

B / PB4 / OC1B

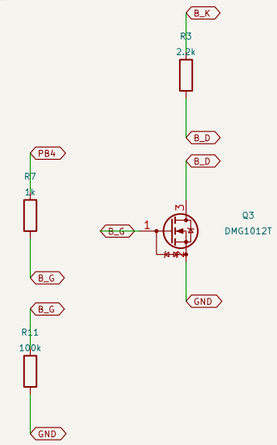

W / PB2 / SOFTWARE PWM

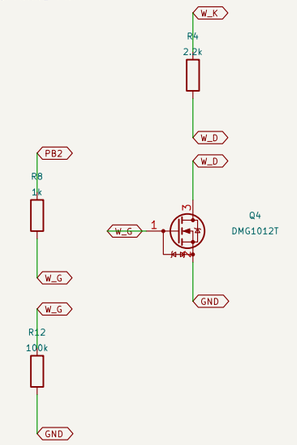

2.2k per die: conservative low current, NOT constant brightness. No boost: blue/white may dim on CR2032.

Programming: remove battery; single 5V supply, max 5.5V. ISP may light LEDs; current resistors remain in circuit.

Firmware must preserve RESET/SPI fuses. Physical current, colour, temperature, cell life and clip fit are unqualified.

Experimental; IR outline / TP1–TP9; battery removed for ISP

whatnick

Sheet: /

File: ring_pcb_RGBW.kicad_sch

Title: Lantern Ring RGBW – four-channel PWM

Size: A3	Date:	**Rev: 0.1**
KiCad E.D.A. 10.0.3		Id: 1/1