



1. Switch on and connect to cellular network

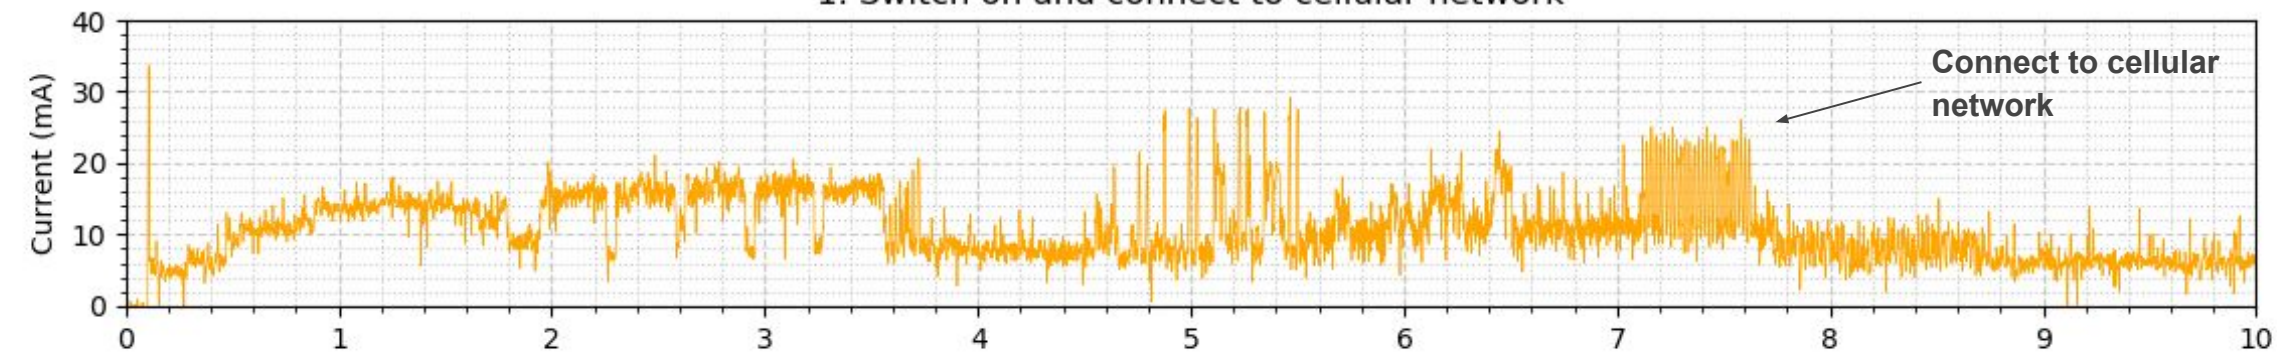

2.a Receive command message and send JTAG commands

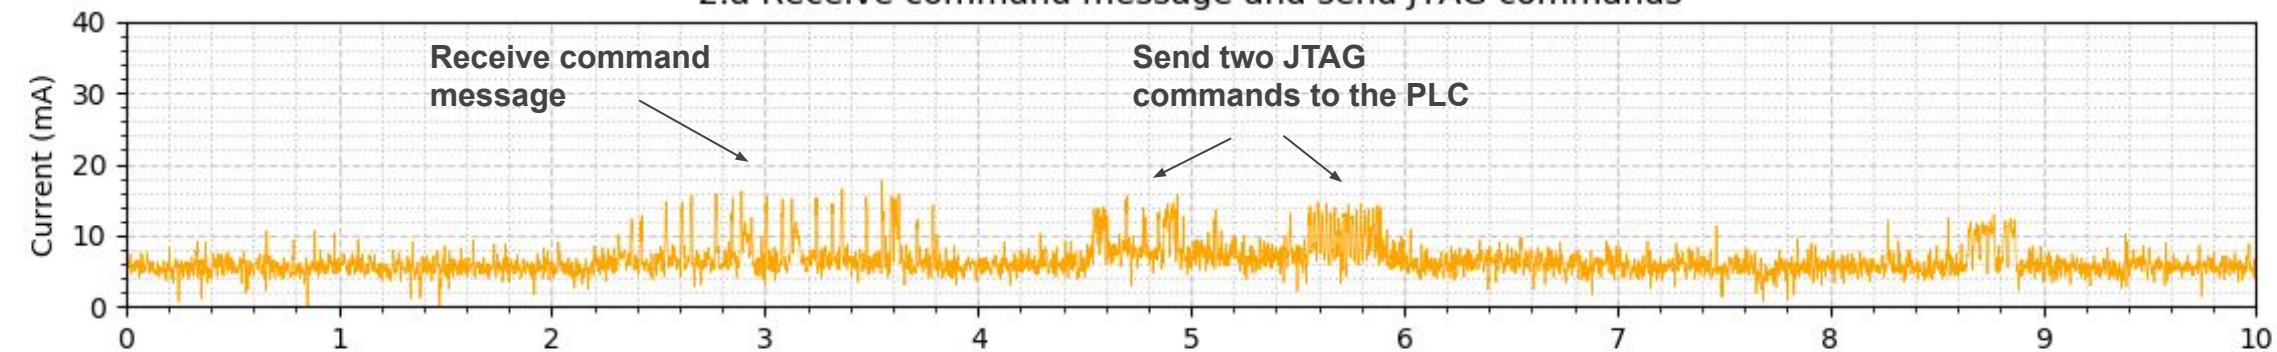

2.b One PLC pin output "1" due to the JTAG commands

