

M10R CELLS MONO PERC MODULE

RPS2MH78BDXXX

BIFACIAL
590-615 W



Comprehensive System and Product Certifications

ISO 9001:2015: Quality Management system
ISO 14001:2015: Environment Management system
ISO 45001:2018: Occupational health and safety




Advanced technologies

Multi-bus bar / PERC / Ga Doped / Half cut/
M10R cell / smart soldering.



Heavy snow, hail, wind-load resistant

Enhanced mechanical load up to 2400 Pascals of snow load
and up to 2400 Pascals of wind load.



Reliable modules with longer lifespan

Hotspot resistant, micro cracking resistant, 0.45% Linear degradation over
30 years, less damage due to weather stress.



Excellent low light performance

More power output in weak light conditions (early morning/sunset/cloudy).
Suitable for large scale utility and ground mount projects.



MAXIMUM POWER OUTPUT


MAXIMUM EFFICIENCY

POSITIVE POWER BINNING


2% FIRST YEAR POWER DEGRADATION

0.45 % SUBSEQUENT ANNUAL POWER DEGRADATION

30-year power warranty

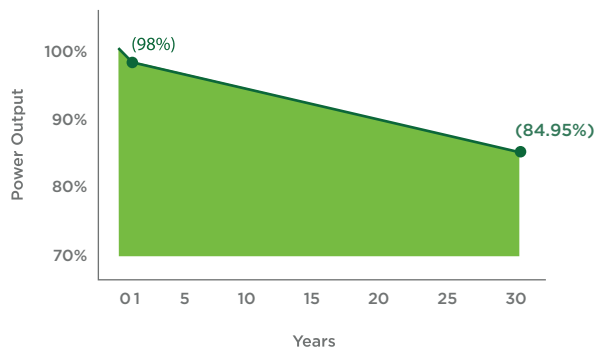

* Please refer to the Warranty Document for details.

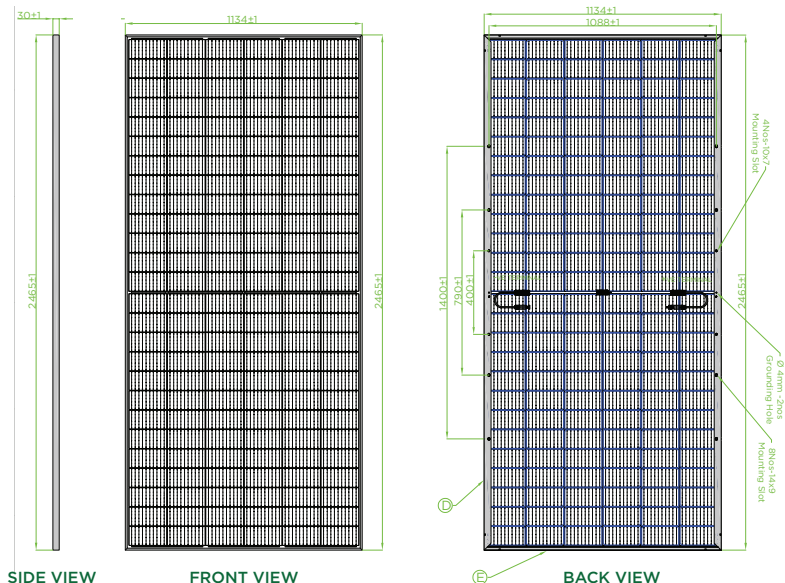

Electrical Data (STC)

Peak Power-P _{MAX} (Wp)*	590	595	600	605	610	615
Power Tolerance - P _{MAX} (W)	0 ~ +4.99					
Max Power Voltage - V _{MPP} (V)	45.12	45.46	45.81	46.15	46.50	46.84
Max Power Current - I _{MPP} (A)	13.08	13.09	13.10	13.11	13.12	13.13
Open Circuit Voltage - V _{OC} (V)	54.21	54.28	54.32	54.38	54.44	54.49
Short Circuit Current - I _{SC} (A)	13.91	13.94	13.95	13.97	13.99	14.01
Module Efficiency - η _m (%)	21.11	21.29	21.46	21.64	21.82	22.00

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.



FRAME DETAILS (D)



FRAME DETAILS (E)

All dimensions are in mm

Solar Cells	Bifacial PERC
No. of cells	156 Half cut
Module Dimensions	2465 x 1134 x 30 mm
Weight	35kg
Front Glass	2mm, High Transmission glass
Encapsulant	EVA/EPE
Rear Cover	2mm, High Transmission glass
Frame	30mm, Anodized Aluminum
Junction Box	IP68 / IP67
Bifacity	70±10%
Cable^	4.0 mm2, Cable length 300mm (Positive and Negative)
Connector*	PV-CO02-xy

*Please connect with the sales team for final connector details.
^ Cable length can be customised.

Temperature rating

NOCT	43°C ±2°C
Temperature Coefficient of P _{MAX}	- 0.32%/°C
Temperature Coefficient of V _{OC}	- 0.25%/°C
Temperature Coefficient of I _{SC}	0.06%/°C
Max Series Fuse rating	30A

WARRANTY


12-year Product Workmanship Warranty
30-year Power Warranty
2% first year degradation
0.45% Annual Power Attenuation

PACKING CONFIGURATION


Modules per box: 36 pieces
Modules per 40' HC container: 576 pieces

Document Number: RP/SS/M10R/156/R/001

IV Curve

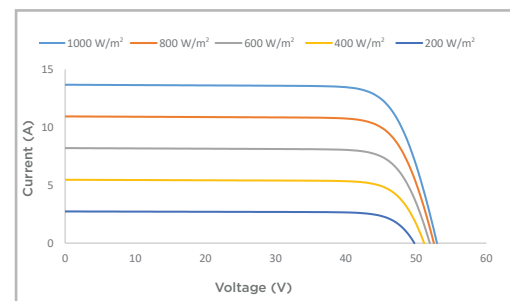

PV Curve

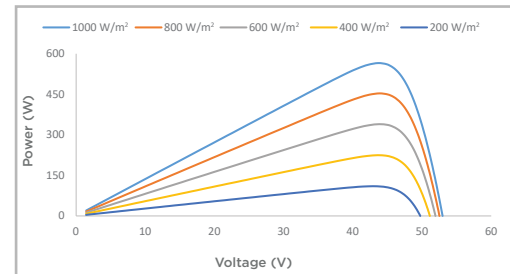

CAUTION:
READ SAFETY AND INSTALLATION INSTRUCTIONS
BEFORE USING THE PRODUCT.

Specifications included in this datasheet are subject to change without notice.



Contact pv.marketing@renew.com

ReNew.Hub,
Commercial Block-1, Zone-6, Golf Course Road,
DLF City Phase-V, Gurugram -122009

For any inquiries or queries about ReNew solar panels, call 9220 440 044