



500 lb capacity

Standard oversize roller bearing phenolic 6"x 2" load wheels and 4"x 2" steering casters provide ease of movement

Each machine is factory proof tested to 150% of load

Safety Swivel Hook is attached directly to boom

B-500CW

Counterweighted Crane



2 year warranty on entire machine, 5 year on frame weldment


P.O. Box 947 • New Philadelphia, Ohio 44663 • Phone 1-800-726-9491 • Fax 330-343-3037

www.beech-design.com

A Division of



Model B-500CW Hydraulic Floor Crane

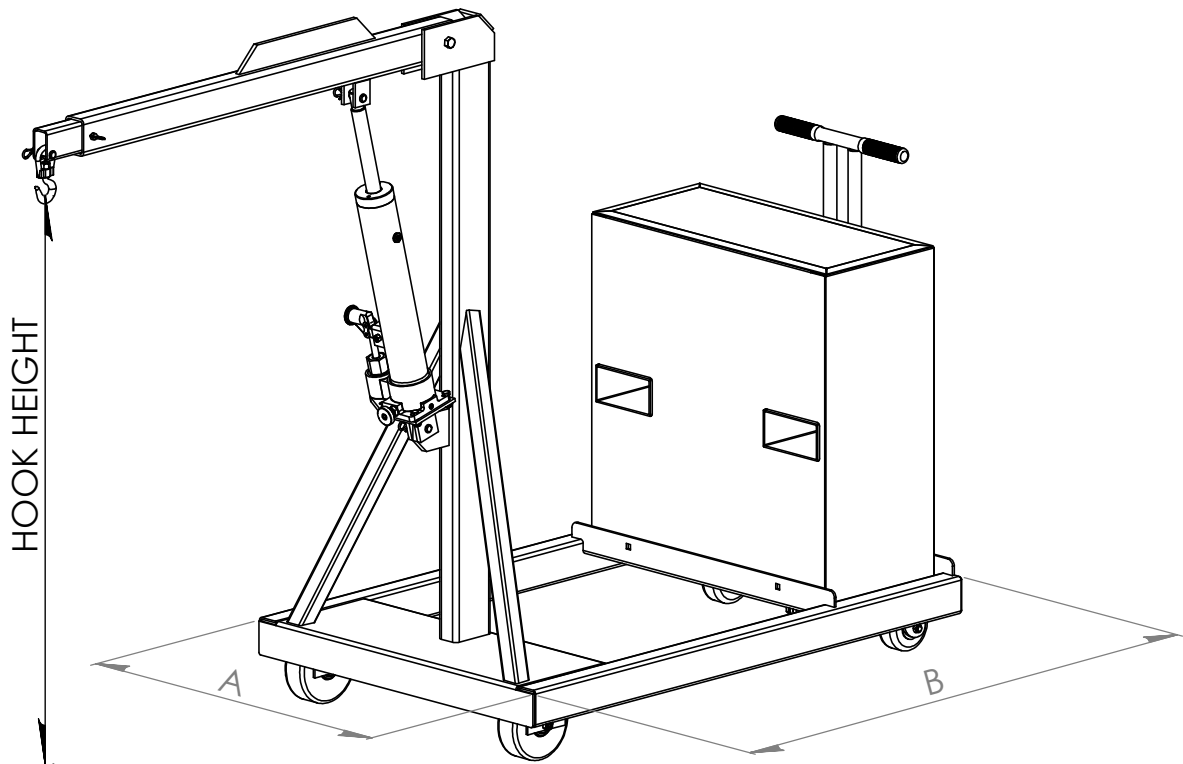

Model No.	Pump Type ¹	Machine Weight	Boom Position ²	Hook Capacity	Hook Height ³		Dimensions		
					Min	Max	A	B	OAH
B-500CW	Single Speed Manual	915 lbs.	38 1/2"	500 lbs.	22"	88"	30 1/2"	49 9/16"	57 1/4"
			44 1/2"	425 lbs.	17"	94"			
			50 1/2"	375 lbs.	13"	99"			
			56 1/2"	350 lbs.	9"	104"			

¹ Pump is equipped with internal load relief to protect both load and crane.

² Measured from the front of base channel to centerline of load hook.

³ Add 7" to maximum hook height to assure overhead clearance.

Beech Design & Manufacturing
P.O. Box 947 * New Philadelphia, Ohio 44663 * Phone 800-726-9491 * Fax 330-343-3037
www.beech-design.com