



Hydraulic Platform Stacker

Foot Pedal Pump

1000lb capacity

Lift heights of 60", 70" and 80"

Standard oversize roller bearing phenolic 5" x 2" load wheels and 4" x 2" steering casters provide ease of movement

Each machine is factory proof tested to 150% of load

Safety by-pass relief valve is standard to prevent dangerous overloading

Platforms available in sizes of 24" x 24" or 30" x 32"

Floor lock is standard

2 year warranty on entire machine, 5 year on frame weldment




P.O.Box 947 • New Philadelphia, Ohio 44663 • Phone 1-800-726-9491 • Fax 330-343-3037

www.beech-design.com

A Division of



Hydraulic Platform Stackers and Work Positioners

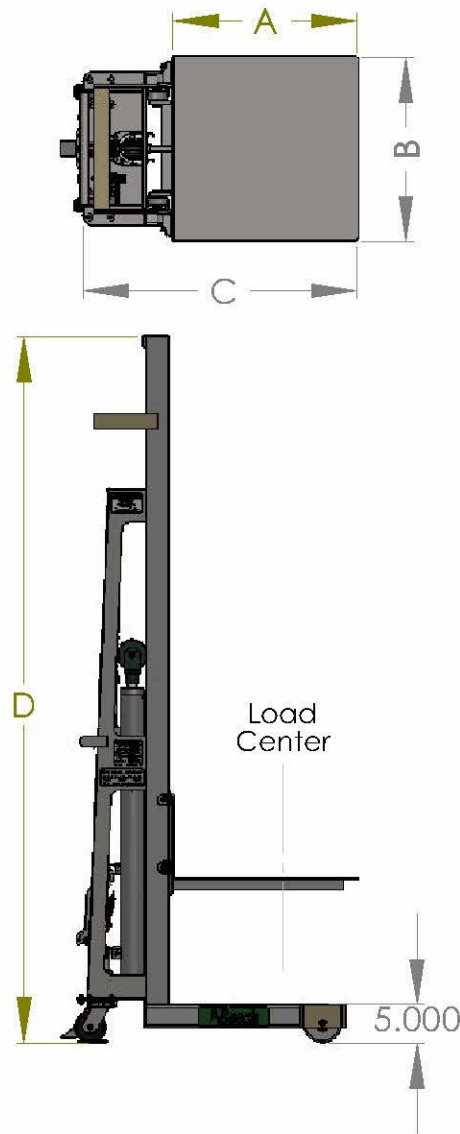

Model Numbers	Wheel Diameters		Platform Length Dim. A	Platform Width Dim. B	Legs ID	Legs OD	Overall Length Dim. C	Overall Height Dim. D	Load Center	Platform Lowered Height	Platform Raised Height	Machine Weight
	Front	Rear										
PS-2460	5"x2"	4"x2"	24"	24"	14"	22"	35 3/4"	72"	15"	5 1/4"	60"	282 Lbs
PS-2470	5"x2"	4"x2"	24"	24"	14"	22"	35 3/4"	82"	15"	5 1/4"	70"	297 Lbs
PS-2480	5"x2"	4"x2"	24"	24"	14"	22"	35 3/4"	92"	15"	5 1/4"	80"	312 Lbs
PS-3060	5"x2"	4"x2"	30"	32"	25"	33"	41 3/4"	72"	18"	5 1/4"	60"	305 Lbs
PS-3070	5"x2"	4"x2"	30"	32"	25"	33"	41 3/4"	82"	18"	5 1/4"	70"	320 Lbs
PS-3080	5"x2"	4"x2"	30"	32"	25"	33"	41 3/4"	92"	18"	5 1/4"	80"	335 Lbs