



Hydraulic Fork Stacker

Foot Pedal Pump



1000 lb capacity

Lift heights of 56", 66" and 76"

Standard oversize roller bearing phenolic 5"x 2" load wheels and 4"x 2" steering casters provide ease of movement

Each machine is factory proof tested to 150% of load

Safety by-pass relief valve is standard to prevent dangerous overloading

Forks are heavy duty 4" wide 1" thick solid steel and adjustable from 8" to 26 1/2" O.D.

Floor lock is standard

2 year warranty on entire machine, 5 year on frame weldment




P.O. Box 947 • New Philadelphia, Ohio 44663 • Phone 1-800-726-9491 • Fax 330-343-3037

www.beech-design.com

A Division of



Hydraulic Fork Stackers

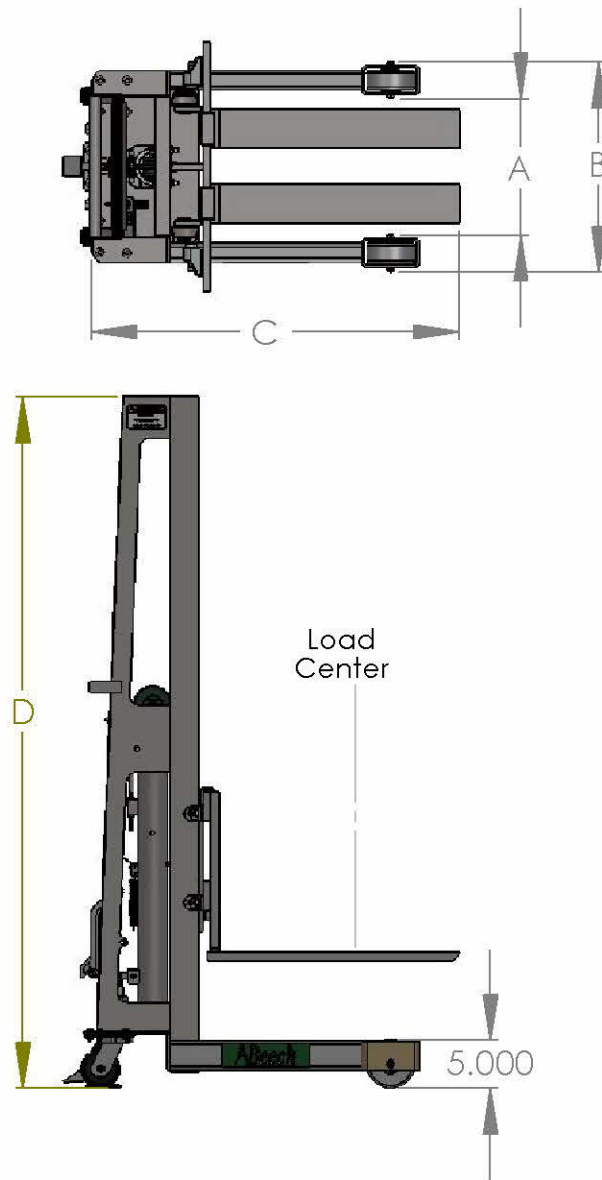

Model Numbers	Fork Length	Wheel Diameters		Fork OD Min	Fork OD Max	Leg ID Dim. A	Leg OD Dim. B	Overall Length Dim. C	Overall Height Dim. D	Load Center	Forks Lowered Height	Forks Raised Height	Machine Weight
		Front	Rear										
FS-2556	25"	5"x2"	4"x2"	8"	26 1/2"	14"	22"	38 1/4"	72"	15"	1"	56"	354 Lbs
FS-2566	25"	5"x2"	4"x2"	8"	26 1/2"	14"	22"	38 1/4"	82"	15"	1"	66"	369 Lbs
FS-2576	25"	5"x2"	4"x2"	8"	26 1/2"	14"	22"	38 1/4"	92"	15"	1"	76"	384 Lbs
FS-3056	30"	5"x2"	4"x2"	8"	26 1/2"	25"	33"	43 1/4"	72"	18"	1"	56"	389 Lbs
FS-3066	30"	5"x2"	4"x2"	8"	26 1/2"	25"	33"	43 1/4"	82"	18"	1"	66"	404 Lbs
FS-3076	30"	5"x2"	4"x2"	8"	26 1/2"	25"	33"	43 1/4"	92"	18"	1"	76"	419 Lbs

Beech Design and Manufacturing

P.O. Box 947 * New Philadelphia, Ohio 44663 * Phone 1-800-726-9491 * Fax 330-343-3037

www.beech-design.com