



Hydraulic Pallet Stacker

Foot Pedal Pump

1000 lb capacity at a 24" load center

Lift heights of 66" and 76"


Standard oversize roller bearing phenolic 5"x 2" load wheels and 4"x 2" steering casters provide ease of movement

Each machine is factory proof tested to 150% of load

Safety by-pass relief valve is standard to prevent dangerous overloading

Forks are heavy duty 4" wide 1" thick solid steel and adjustable from 8" to 26 1/2" O.D.

Floor lock is standard

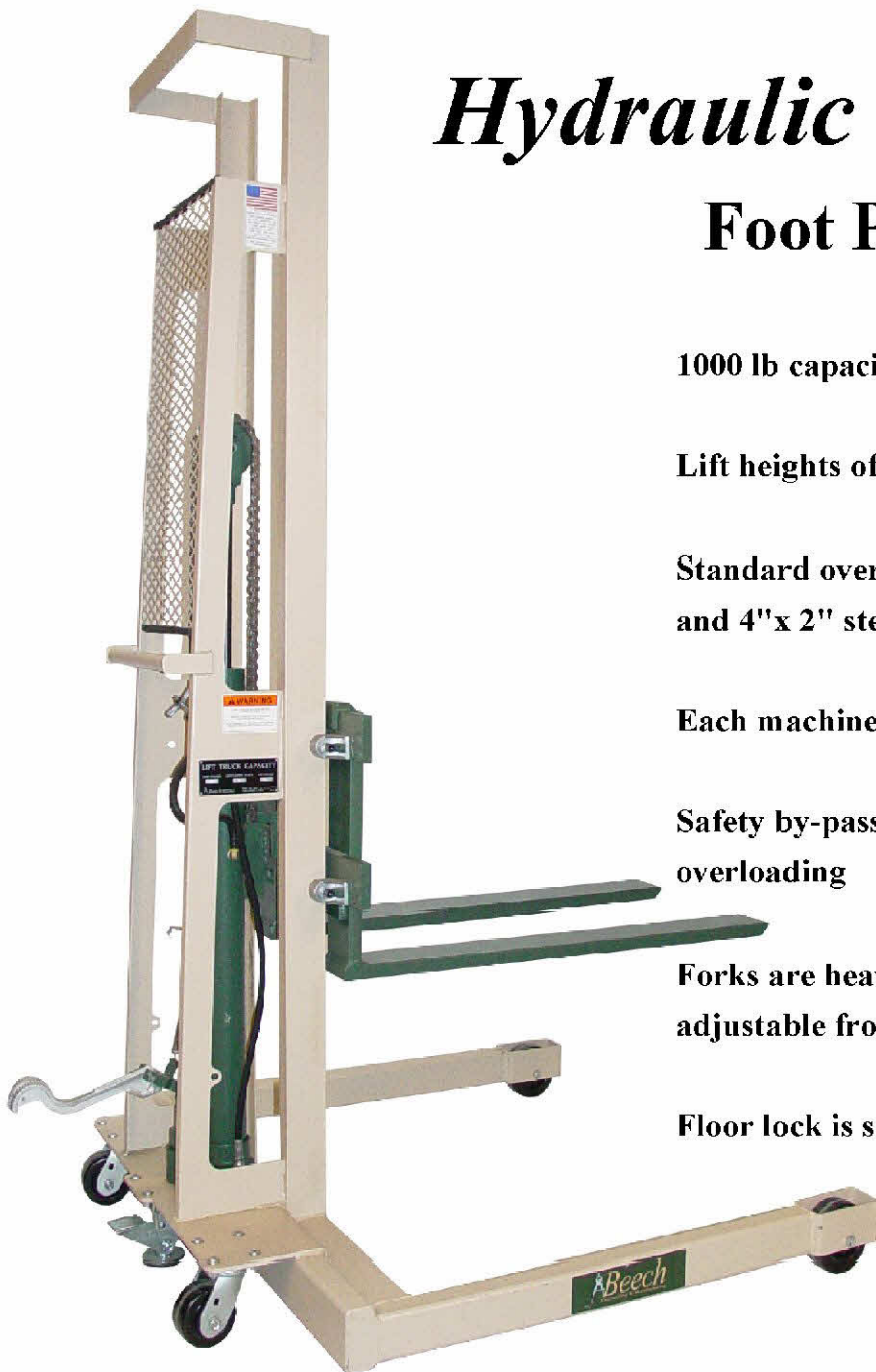

2 year warranty on entire machine, 5 year on frame weldment





P.O. Box 947 • New Philadelphia, Ohio 44663 • Phone 1-800-726-9491 • Fax 330-343-3037

www.beech-design.com

A Division of



Hydraulic Pallet Stackers

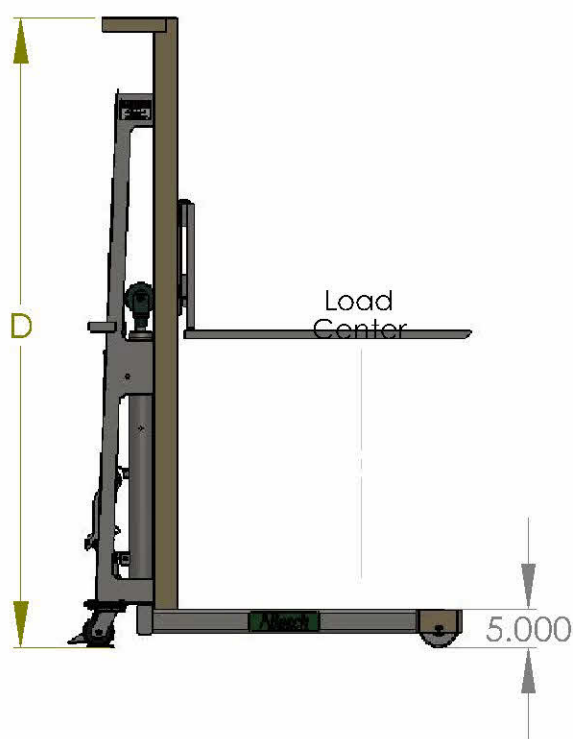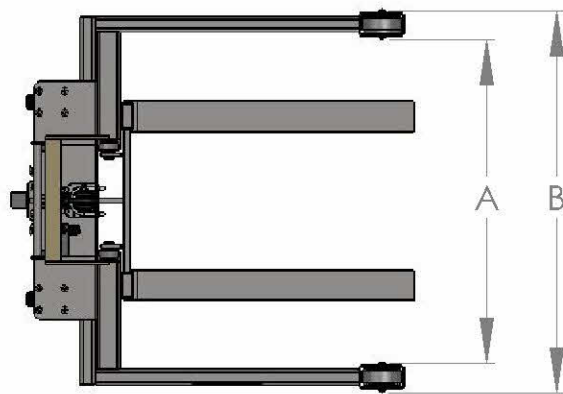

Model Numbers	Fork Length	Wheel Diameters		Fork OD Min	Fork OD Max	Leg ID Dim. A	Leg OD Dim. B	Overall Length Dim. C	Overall Height Dim. D	Load Center	Forks Lowered Height	Forks Raised Height	Machine Weight
		Front	Rear										
SS-4266	36"	5"x2"	4"x2"	8"	26 1/2"	42"	50"	53"	82"	24"	1"	66"	455 Lbs
SS-4276	36"	5"x2"	4"x2"	8"	26 1/2"	42"	50"	53"	92"	24"	1"	76"	470 Lbs
SS-5066	36"	5"x2"	4"x2"	8"	26 1/2"	50"	58"	53"	82"	24"	1"	66"	470 Lbs
SS-5076	36"	5"x2"	4"x2"	8"	26 1/2"	50"	58"	53"	92"	24"	1"	76"	480 Lbs