


# MEDIUM DUTY SCISSOR LIFTS



**LOAD REDI™** Tables can help maximize worker productivity while providing an ergonomically friendly workplace.

- Capacities 2000 to 7000 lbs.
- Three Platform Sizes: 24", 36" and 48" wide are standard on all models.
- Vertical Travel: 24", 36" and 48"
- Internally Mounted Power (motor, hydraulic pump and reservoir). Easy to remove for repair and maintenance.
- Motors: Single phase and three phase can be interchanged on most models.
- Rugged Steel Weldments (base, cross member, legs and platform) provide rigidity and stability.
- Hinged Platform for quick access to power pack and cylinder.

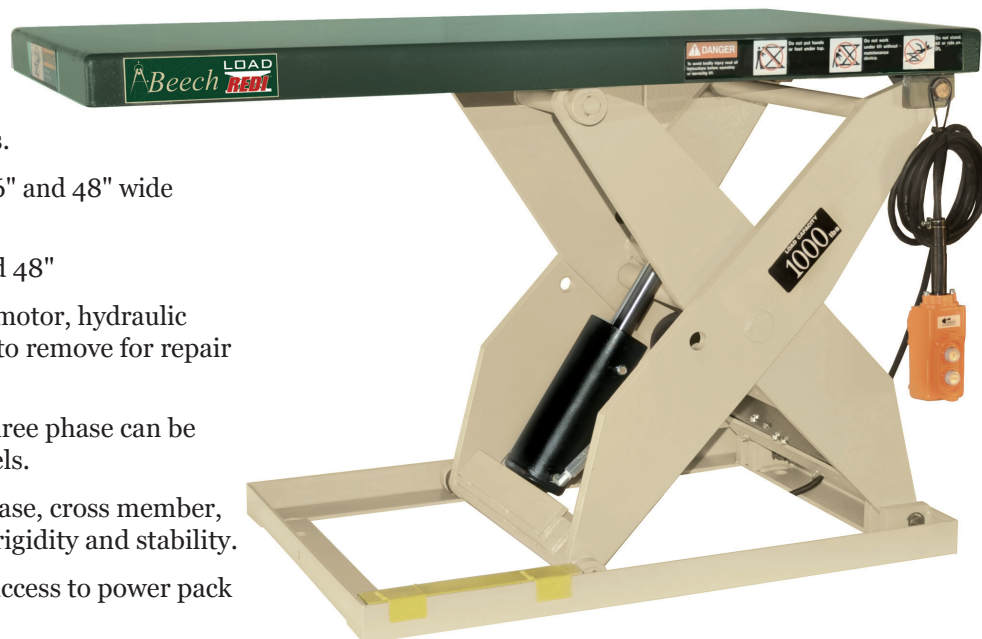

RM-24 Series 24" Travel, 31 <sup>1</sup> / <sub>4</sub> " Raised Height x 7 <sup>1</sup> / <sub>4</sub> " Lowered Height											
24"W x 36 <sup>5</sup> / <sub>8</sub> " L Platform				36"W x 36 <sup>5</sup> / <sub>8</sub> " L Platform				48"W x 48 <sup>5</sup> / <sub>8</sub> " L Platform			
Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*
RM 24-20-2W	2000	14 sec.	330 lbs.	RM 24-20-3W	2000	14 sec.	380 lbs.	RM 24-20-4W	2000	14 sec.	410 lbs.
RM 24-40-2W	4000	29 sec.	350 lbs.	RM 24-40-3W	4000	29 sec.	400 lbs.	RM 24-40-4W	4000	29 sec.	430 lbs.
RM 24-60-2W	6000	33 sec.	400 lbs.	RM 24-60-3W	6000	33 sec.	450 lbs.	RM 24-60-4W	6000	33 sec.	480 lbs.

RM-36 Series 36" Travel, 43 <sup>1</sup> / <sub>4</sub> " Raised Height x 7 <sup>1</sup> / <sub>4</sub> " Lowered Height											
24"W x 48 <sup>5</sup> / <sub>8</sub> " L Platform				36"W x 48 <sup>5</sup> / <sub>8</sub> " L Platform				48"W x 48 <sup>5</sup> / <sub>8</sub> " L Platform			
Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*
RM 36-20-2W	2000	27 sec.	440 lbs.	RM 36-20-3W	2000	27 sec.	490 lbs.	RM 36-20-4W	2000	27 sec.	520 lbs.
RM 36-30-2W	3000	28 sec.	480 lbs.	RM 36-30-3W	3000	28 sec.	530 lbs.	RM 36-30-4W	3000	28 sec.	560 lbs.
RM 36-40-2W	4000	49 sec.	520 lbs.	RM 36-40-3W	4000	49 sec.	590 lbs.	RM 36-40-4W	4000	49 sec.	600 lbs.
RM 36-50-2W	5000	31 sec.	650 lbs.	RM 36-50-3W	5000	31 sec.	720 lbs.	RM 36-50-4W	5000	31 sec.	710 lbs.
RM 36-60-2W	6000	37 sec.	680 lbs.	RM 36-60-3W	6000	37 sec.	130 lbs.	RM 36-60-4W	6000	37 sec.	760 lbs.
RM 36-70-2W	7000	43 sec.	690 lbs.	RM 36-70-3W	7000	43 sec.	740 lbs.	RM 36-70-4W	7000	43 sec.	770 lbs.

RM-48 Series 48" Travel, 55 <sup>1</sup> / <sub>4</sub> " Raised Height x 7 <sup>1</sup> / <sub>4</sub> " Lowered Height											
24"W x 64 <sup>5</sup> / <sub>8</sub> " L Platform				36"W x 64 <sup>5</sup> / <sub>8</sub> " L Platform				48"W x 64 <sup>5</sup> / <sub>8</sub> " L Platform			
Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*	Model No.	Capacity	Raise Time	Weight*
RM 48-20-2W	2000	18 sec.	740 lbs.	RM 48-20-3W	2000	18 sec.	770 lbs.	RM 48-20-4W	2000	18 sec.	800 lbs.
RM 48-40-2W	4000	33 sec.	790 lbs.	RM 48-40-3W	4000	33 sec.	840 lbs.	RM 48-40-4W	4000	33 sec.	870 lbs.
RM 48-60-2W	6000	48 sec.	840 lbs.	RM 48-60-3W	6000	48 sec.	890 lbs.	RM 48-60-4W	6000	48 sec.	920 lbs.

\* All weights are approximate

Beech is not responsible for printed errors. Design changes may occur without notice. Call Beech for more information.