



**2000 lb capacity**

**Standard oversize roller bearing phenolic 8" x 3" load wheels and 6" x 2" steering casters provide ease of movement**

**Each machine is factory proof tested to 150% of load**

**Safety Swivel Hook is attached directly to boom**

**Safety by-pass relief valve is standard to prevent dangerous overloading**

***B-2000CW***

**Counterweighted Crane**



*2 year warranty on entire machine, 5 year on frame weldment*


**P.O. Box 947 • New Philadelphia, Ohio 44663 • Phone 1-800-726-9491 • Fax 330-343-3037**

**[www.beech-design.com](http://www.beech-design.com)**

A Division of



# Model B-2000CW Hydraulic Floor Crane

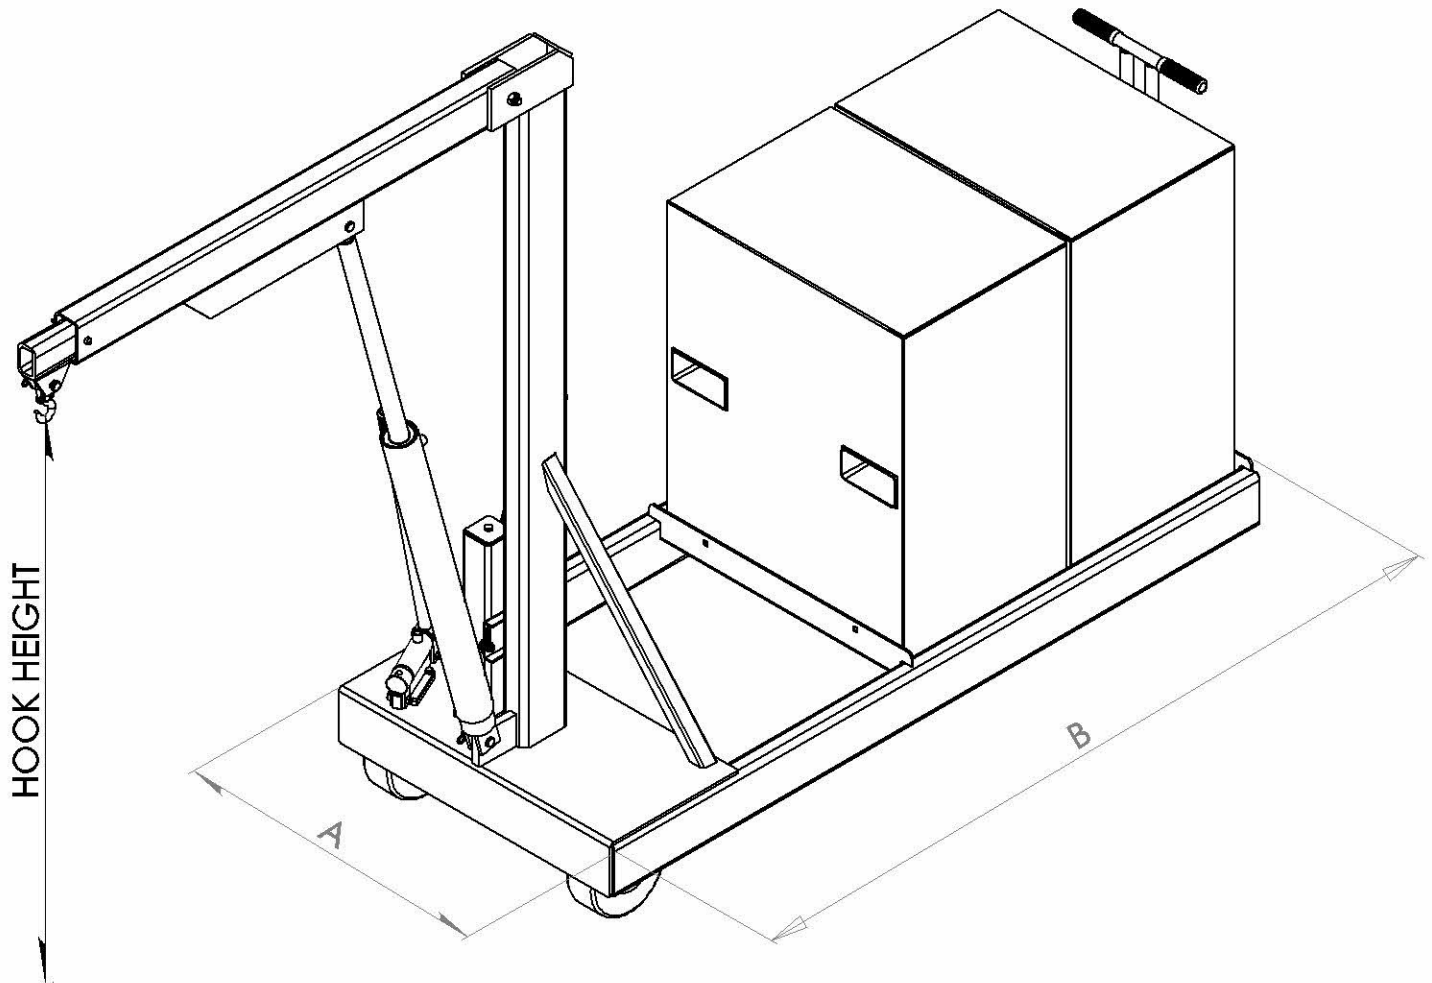

Model No.	Pump Type <sup>1</sup>	Machine Weight	Boom Position <sup>2</sup>	Hook Capacity	Hook Height <sup>3</sup>		Dimensions		
					Min	Max	A	B	OAH
B-2000CW	Two Speed Manual	3070 lbs.	51 3/4"	2000 lbs.	34"	107"	30 1/2"	72"	75 1/4"
			60 1/4"	1600 lbs.	28"	114"			
			70 1/2"	1400 lbs.	21"	122"			
			80 3/4"	1200 lbs.	14"	130"			
			91 1/4"	1000 lbs.	8"	138"			

<sup>1</sup> Measured from the front of base channel to centerline of load hook.

<sup>2</sup> Add 7" to maximum hook height to assure overhead clearance.

**Beech Design & Manufacturing**  
**P. O. Box 947 \* New Philadelphia, Ohio 44663 \* Phone 800-726-9491 \* Fax 330-343-3037**  
**www.beech-design.com**