

B-3000

3000 lb capacity

Standard oversize roller bearing phenolic 8"x 3" load wheels and 6"x 2" steering casters provide ease of movement. (Shown with optional steel load wheels.)

Each machine is factory proof tested to 150% of load

Safety swivel hook is attached directly to boom

Safety by-pass relief valve is standard to prevent dangerous overloading


Optional floor lock available



2 year warranty on entire machine, 5 year on frame weldment



Model B-3000 Hydraulic Floor Crane

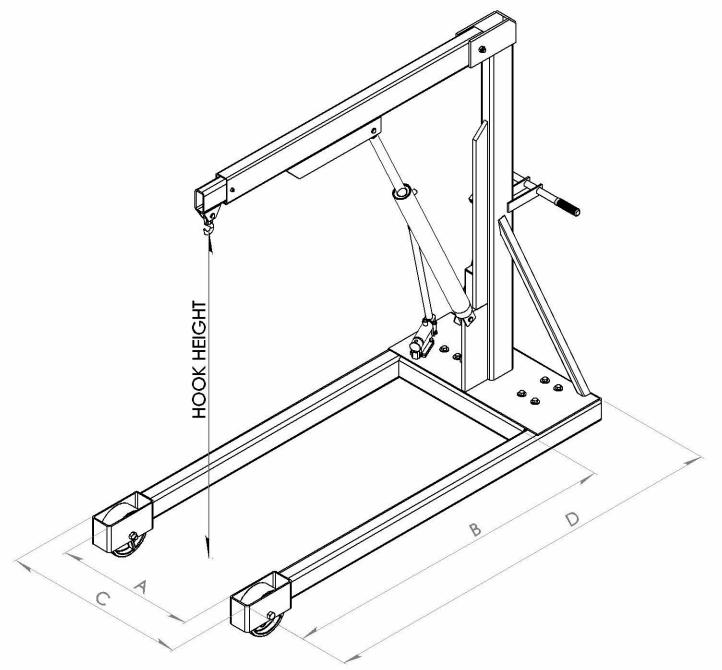

| Model | Pump | Machine Boom | | Hook | Hook Height³ | | Dimensions | | | | |
|--------|------------------------|--------------|-----------------------|-----------|--------------|----------|------------|---------|-----|-----|-----|
| No. | Type 1 | Weight | Position ² | Capacity | Min | Max | Α | В | С | D | ОАН |
| B-3000 | Two Speed Manual | 545 lbs. | 56" | 3000 lbs. | 39" | 105" | 24 1/2" | 64 1/2" | 35" | 79" | 76" |
| | | | 66 1/2" | 1200 lbs. | 34 1/2" | 112 1/2" | | | | | |
| | | | 77" | 700 lbs. | 30" | 120" | | | | | |
| | | | 87 1/2" | 500 lbs. | 25" | 127" | | | | | |

¹ Measured from the front of base channel to centerline of load hook.

² Add 9" to maximum hook height to assure overhead clearance.