

# DIGITAL / ANALOG TRAINER

## MODEL XK-700K

A COMPLETE MINI-LAB FOR BUILDING, TESTING  
AND PROTOTYPING ANALOG AND DIGITAL CIRCUITS



Tools and meter shown not included.

**Assembly & Instruction Manual**

# Elenco Electronics, Inc.

# PS-700-B

## XK-700K POWER SUPPLY KIT (PS-700-B) PARTS LIST

### RESISTORS

| Qty.                       | Symbol   | Value        | Description            | Part # |
|----------------------------|----------|--------------|------------------------|--------|
| <input type="checkbox"/> 2 | R1, R2   | 120Ω 5% 1/4W | (brown-red-brown-gold) | 131200 |
| <input type="checkbox"/> 1 | VR3      | 1kΩ          | Pot PC MNT             | 192412 |
| <input type="checkbox"/> 2 | VR1, VR2 | 2kΩ          | Pot PC MNT             | 192421 |
| <input type="checkbox"/> 1 | VR4      | 100kΩ        | Pot PC MNT             | 192612 |

### CAPACITORS

| Qty.                       | Symbol         | Value      | Description  | Part # |
|----------------------------|----------------|------------|--------------|--------|
| <input type="checkbox"/> 5 | C6 - C10       | .1μF 100V  | Mylar        | 251017 |
| <input type="checkbox"/> 7 | C11 - C17      | 100μF      | Electrolytic | 281045 |
| <input type="checkbox"/> 4 | C1, C2, C4, C5 | 1000μF 35V | Electrolytic | 291096 |
| <input type="checkbox"/> 1 | C3             | 2200μF 25V | Electrolytic | 292225 |


### SEMICONDUCTORS

| Qty.                        | Symbol   | Description               | Part # |
|-----------------------------|----------|---------------------------|--------|
| <input type="checkbox"/> 15 | D1 - D15 | 1N4001 Diode              | 314001 |
| <input type="checkbox"/> 1  | U1       | LM317 Integrated Circuit  | 330317 |
| <input type="checkbox"/> 1  | U5       | LM337 Integrated Circuit  | 330337 |
| <input type="checkbox"/> 1  | U3       | LM7805 Integrated Circuit | 337805 |
| <input type="checkbox"/> 1  | U2       | LM7812 Integrated Circuit | 337812 |
| <input type="checkbox"/> 1  | U4       | LM7912 Integrated Circuit | 337912 |


### MISCELLANEOUS

| Qty.                       | Description                           | Part # | Qty.                          | Description                      | Part # |
|----------------------------|---------------------------------------|--------|-------------------------------|----------------------------------|--------|
| <input type="checkbox"/> 1 | Transformer                           | 44K500 | <input type="checkbox"/> 4    | Screw #6 x 3/8" Phillips Thrd Ct | 643652 |
| <input type="checkbox"/> 1 | PC Board                              | 514550 | <input type="checkbox"/> 4    | Nut 7mm                          | 644101 |
| <input type="checkbox"/> 1 | Fuse 1.25A                            | 530125 | <input type="checkbox"/> 6    | Nut 6-32                         | 644601 |
| <input type="checkbox"/> 1 | Switch Illuminated                    | 541204 | <input type="checkbox"/> 2    | Nut 8-32                         | 644800 |
| <input type="checkbox"/> 2 | Connector 3-pin                       | 591032 | <input type="checkbox"/> 4    | Washer 8mm x 14mm (Pot)          | 645101 |
| <input type="checkbox"/> 1 | Connector 5-pin                       | 591052 | <input type="checkbox"/> 4    | Washer #6 Black                  | 645400 |
| <input type="checkbox"/> 4 | Bracket L 4-40 tap                    | 613008 | <input type="checkbox"/> 4    | Washer Fiber                     | 645404 |
| <input type="checkbox"/> 1 | Panel Top                             | 614108 | <input type="checkbox"/> 2    | Lockwasher #8 EXT                | 646828 |
| <input type="checkbox"/> 1 | Panel Side Left                       | 614506 | <input type="checkbox"/> 1    | Fuse Holder                      | 663000 |
| <input type="checkbox"/> 1 | Panel Side Right                      | 614507 | <input type="checkbox"/> 4    | Bredblox 4-pin                   | 665204 |
| <input type="checkbox"/> 1 | Panel Back                            | 614508 | <input type="checkbox"/> 2    | Terminal Male Crimp              | 666010 |
| <input type="checkbox"/> 4 | Knob                                  | 622009 | <input type="checkbox"/> 2    | Terminal Female Crimp            | 666011 |
| <input type="checkbox"/> 1 | Case                                  | 623051 | <input type="checkbox"/> 1    | Manual                           | 753029 |
| <input type="checkbox"/> 1 | Strain Relief                         | 624003 | <input type="checkbox"/> 5    | Insulator Mica                   | 780002 |
| <input type="checkbox"/> 1 | Spacer Nylon 7/16" x 3/16" Tap        | 624013 | <input type="checkbox"/> 5    | Insulator Washer                 | 780101 |
| <input type="checkbox"/> 1 | Connector Receptacle                  | 626020 | <input type="checkbox"/> 1    | Silicon Grease                   | 790004 |
| <input type="checkbox"/> 1 | Connector Plug                        | 626021 | <input type="checkbox"/> 6"   | Wire #20 Red Stranded            | 813210 |
| <input type="checkbox"/> 1 | Screw 4-40 x 1/4" Phillips, Flat Head | 641431 | <input type="checkbox"/> 2.5' | Wire #22 Bare Wire               | 845000 |
| <input type="checkbox"/> 9 | Screw 4-40 x 1/4" Phillips Truss      | 641438 | <input type="checkbox"/> 1    | Line Cord                        | 862105 |
| <input type="checkbox"/> 6 | Screw 6-32 x 5/16" Slotted            | 641641 | <input type="checkbox"/> 2"   | Shrink Tubing 3/16"              | 890120 |
| <input type="checkbox"/> 2 | Screw 8-32 x 3/8" Phillips            | 641840 | <input type="checkbox"/> 1"   | Shrink Tubing 1/4"               | 890701 |
| <input type="checkbox"/> 2 | Screw #4 x 1/4" Phillips AB           | 642430 | <input type="checkbox"/> 2"   | Shrink Tubing 1/2"               | 891101 |
| <input type="checkbox"/> 4 | Screw 4-40 x 1/4" Phillips Thrd Ct    | 642432 | <input type="checkbox"/> 2"   | Shrink Tubing 3/4"               | 899110 |
| <input type="checkbox"/> 4 | Screw #6 x 1/2 Phillips AB            | 642662 | <input type="checkbox"/> 1    | Solder Tube                      | 9ST4A  |

### Screw Identification




Phillips AB Screw




4-40 / #6 Thread Cutting Screw

(Type 23)



Flat Head Screw




Standard Screw



Truss Head Screw

## PARTS VERIFICATION

Before beginning the assembly process, first familiarize yourself with the components and this instruction book. Verify that all parts are present. This is done best by checking off each item in the parts list.

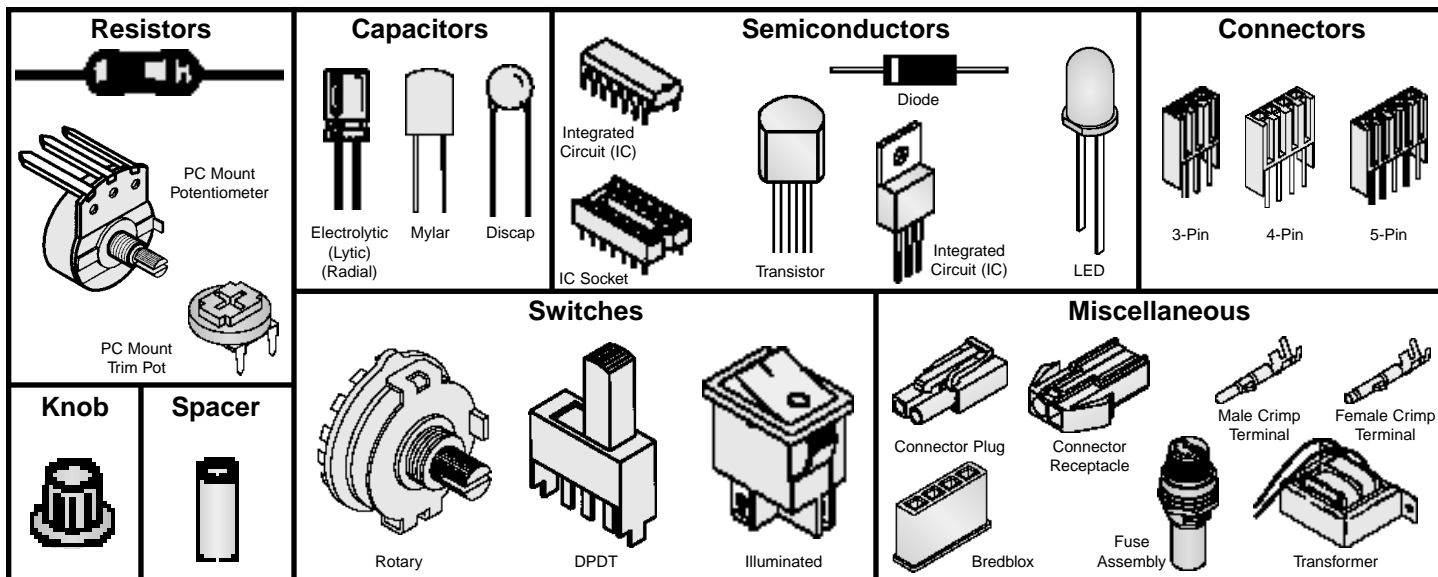

## IDENTIFYING RESISTOR VALUES

Use the following information as a guide in properly identifying the value of resistors.

|  | BAND 1<br>1st Digit |       | BAND 2<br>2nd Digit |       | Multiplier |            | Resistance<br>Tolerance |              |
|--|---------------------|-------|---------------------|-------|------------|------------|-------------------------|--------------|
|  | Color               | Digit | Color               | Digit | Color      | Multiplier | Color                   | Tolerance    |
|  | Black               | 0     | Black               | 0     | Black      | 1          | Silver                  | $\pm 10\%$   |
|  | Brown               | 1     | Brown               | 1     | Brown      | 10         | Gold                    | $\pm 5\%$    |
|  | Red                 | 2     | Red                 | 2     | Red        | 100        | Brown                   | $\pm 1\%$    |
|  | Orange              | 3     | Orange              | 3     | Orange     | 1,000      | Red                     | $\pm 2\%$    |
|  | Yellow              | 4     | Yellow              | 4     | Yellow     | 10,000     | Orange                  | $\pm 3\%$    |
|  | Green               | 5     | Green               | 5     | Green      | 100,000    | Green                   | $\pm 0.5\%$  |
|  | Blue                | 6     | Blue                | 6     | Blue       | 1,000,000  | Blue                    | $\pm 0.25\%$ |
|  | Violet              | 7     | Violet              | 7     | Silver     | 0.01       | Violet                  | $\pm 0.1\%$  |
|  | Gray                | 8     | Gray                | 8     | Gold       | 0.1        |                         |              |
|  | White               | 9     | White               | 9     |            |            |                         |              |

## IDENTIFYING CAPACITOR VALUES

Capacitors will be identified by their capacitance value in pF (picofarads), nF (nanofarads), or  $\mu$ F (microfarads). Most capacitors will have their actual value printed on them. Some capacitors may have their value printed in the following manner. The maximum operating voltage may also be printed on the capacitor.

|  | Multiplier  |   |    |     |    |     |      |     |     |  |
|--|-------------|---|----|-----|----|-----|------|-----|-----|--|
|  | For the No. | 0 | 1  | 2   | 3  | 4   | 5    | 8   | 9   |  |
|  | Multiply By | 1 | 10 | 100 | 1k | 10k | 100k | .01 | 0.1 |  |

The value is  $10 \times 1,000 = 10,000\text{pF}$  or  $.01\mu\text{F}$  100V

**Note:** The letter "R" may be used at times to signify a decimal point; as in 3R3 = 3.3

\* The letter M indicates a tolerance of  $\pm 20\%$   
 The letter K indicates a tolerance of  $\pm 10\%$   
 The letter J indicates a tolerance of  $\pm 5\%$

# CONSTRUCTION

## Introduction

The most important factor in assembling your XK-700K Digital / Analog Trainer Kit is good soldering techniques. Using the proper soldering iron is of prime importance. A small pencil type soldering iron of 25 - 40 watts is recommended. **The tip of the iron must be kept clean at all times and well tinned.**

## Safety Procedures

- Wear eye protection when soldering.
- Locate soldering iron in an area where you do not have to go around it or reach over it.
- **Do not hold solder in your mouth.** Solder contains lead and is a toxic substance. Wash your hands thoroughly after handling solder.
- Be sure that there is adequate ventilation present.

## Assemble Components

In all of the following assembly steps, the components must be installed on the top side of the PC board unless otherwise indicated. The top legend shows where each component goes. The leads pass through the corresponding holes in the board and are soldered on the foil side.


**Use only rosin core solder of 63/37 alloy.**

**DO NOT USE ACID CORE SOLDER!**


## What Good Soldering Looks Like

A good solder connection should be bright, shiny, smooth, and uniformly flowed over all surfaces.


1. Solder all components from the copper foil side only. Push the soldering iron tip against both the lead and the circuit board foil.



2. Apply a small amount of solder to the iron tip. This allows the heat to leave the iron and onto the foil. Immediately apply solder to the opposite side of the connection, away from the iron. Allow the heated component and the circuit foil to melt the solder.



3. Allow the solder to flow around the connection. Then, remove the solder and the iron and let the connection cool. The solder should have flowed smoothly and not lump around the wire lead.




4. Here is what a good solder connection looks like.




## Types of Poor Soldering Connections


1. **Insufficient heat** - the solder will not flow onto the lead as shown.




2. **Insufficient solder** - let the solder flow over the connection until it is covered. Use just enough solder to cover the connection.



3. **Excessive solder** - could make connections that you did not intend to between adjacent foil areas or terminals.



4. **Solder bridges** - occur when solder runs between circuit paths and creates a short circuit. This is usually caused by using too much solder. To correct this, simply drag your soldering iron across the solder bridge as shown.



## INTRODUCTION

The XK-700K Digital/Analog Trainer is divided into four separate kits: BB-700-A, PS-700-B, AN-700-C and DG-700D. Each bag of parts is clearly identified. Open only the kit called for in your procedure. DO NOT open any other bag at this time. The first kit is the BB-700-A which contains only the breadboard. The breadboard will be assembled to the front panel of the trainer during the assembly of the PS-700-B Power Supply. Read your instructions carefully.

### Power Supply

The XK-700K has five built-in power supplies which will satisfy most design needs. This includes two variable power supplies giving up to +20 volts and -20 volts at .5 amp. Below 15V, the current available is 1 amp. Three fixed power supplies give you +12VDC, -12VDC or +5VDC at 1 amp each. These fixed voltages are the most commonly used voltages for design work. All supplies are regulated to within 150mV. This means that you can increase the current draw from no load to 0.5 amp and the voltage will change less than 150mV. All supplies are also short circuit protected by using integrated circuit regulator devices.

### Analog Trainer Section Function Generator

The analog trainer contains a complete function generator capable of producing sine, square and triangle waveforms. The frequency of the generator is continuously variable from one hertz to over 100,000 hertz in five steps. A fine tuning control makes the selection of any frequency easy. The output voltage amplitude is variable between 0 to 15Vpp. The output impedance is approximately 330 ohms.

### Digital Trainer Section

The digital trainer has the necessary functions to do your digital experiments. They consist of a clock generator, two no-bounce switches, eight LED indicator lamps and eight data switches.

## POWER SUPPLY SPECIFICATIONS

### Power Supplies:


- +1.25V to 20VDC @ 0.5 amp (1.25V to 15V @ 1 amp).
- -1.25 to -20VDC @ 0.5 amp (-1.25V to -15V @ 1 amp).
- +12V  $\pm 5\%$  @ 1 amp.
- -12V  $\pm 5\%$  @ 1 amp.
- +5V  $\pm 5\%$  @ 1 amp.
- 30VAC center tapped @ 1 amp.
- Load regulation - all DC supplies less than 0.2V no load to 0.5A.
- Line regulation - all DC supplies less than 0.2V 105 to 135V.
- Hum and ripple - all DC supplies less than 0.01V RMS.
- Short protection - all DC supplies-internal IC thermal cutoff.
- Fuse 1.25A 250V.

### Variable Resistance (undedicated):

- 1k $\Omega$  Potentiometer
- 100k $\Omega$  Potentiometer

## USERS DESCRIPTION OF FRONT PANEL CONTROLS

- 1) **On/Off Switch** - Allows power to be applied to all outputs. Switch will light when on.
- 2) **Fuse Holder** - Easy access for replacement of 1.25A fuse.
- 3) **Power Output Terminals** - This provides 30VAC center tapped at 15 VAC; also provides output terminal for positive and negative variable voltages.
- 4) **Variable Positive Voltage Control** - Varies positive voltage from 1.25 to 20V at indicated output connector pin.
- 5) **Variable Negative Voltage Control** - Varies negative voltage from -1.25V to -20V at indicated output connector pin.
- 6) **Power Output Bredblox** - Output terminals for GND, -12, +12, and +5.
- 7) Output terminals for 1k and 100k undedicated potentiometers.
- 8) 1k $\Omega$  undedicated potentiometer.
- 9) 100k $\Omega$  undedicated potentiometer.

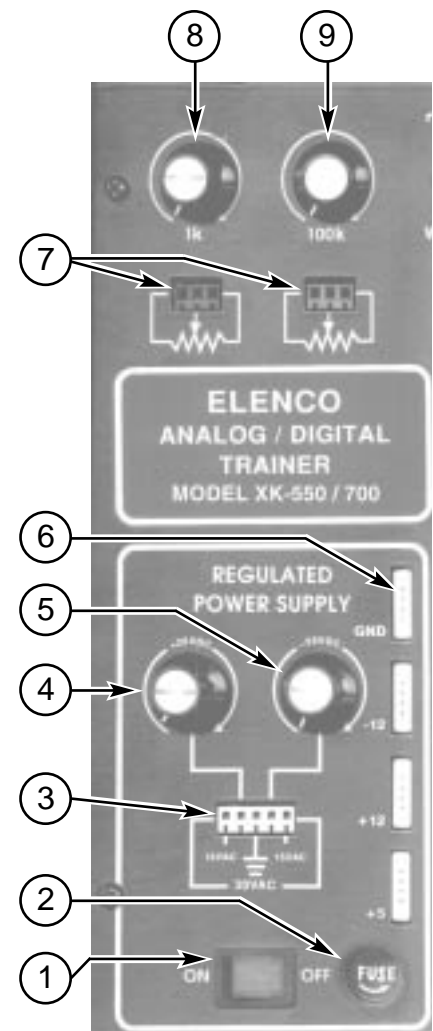



# INSTALL COMPONENTS TO PC BOARD


**Start Here**




- ☐ S1 - 5-Pin Connector  
(see Figure A)
- ☐ L-Bracket  
(see Figure B)

- ☐ VR4 - 100k $\Omega$  Pot
- ☐ VR3 - 1k $\Omega$  Pot  
(see Figure C)

- ☐ S3 - 3-Pin Connector
- ☐ S2 - 3-Pin Connector  
(see Figure A)
- ☐ L-Bracket  
(see Figure B)
- ☐ C8 - 0.1 $\mu$ F Mylar (104)  
(see Figure D)

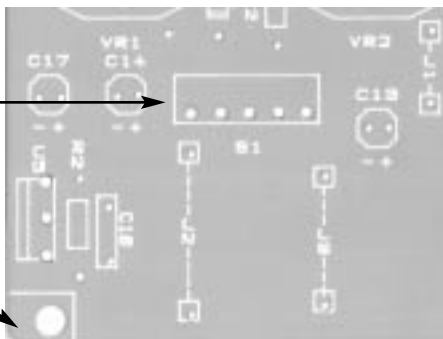


Bottom Left Corner of PC Board

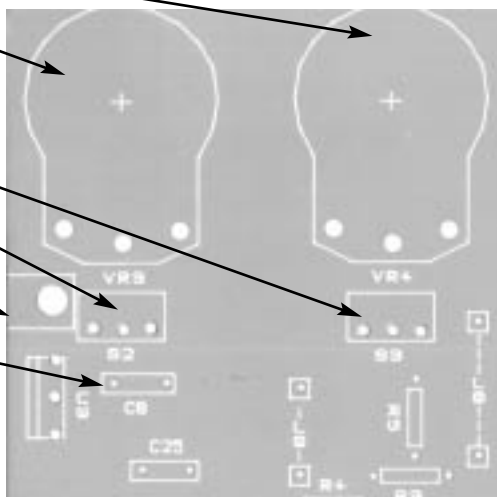

Top Left Corner of PC Board


**Figure A**

Mount the connector as shown and solder the pins of the connector.

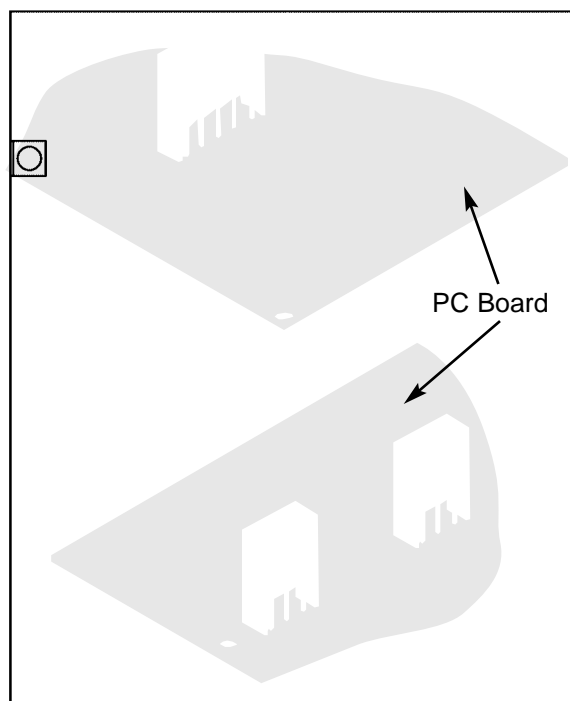


**Figure B**

Note: One side of the bracket is longer. Mount this side to the PC board. Mount the bracket to the top legend side of the PC board with a 4-40 x 1/4" screw and fiber washer.

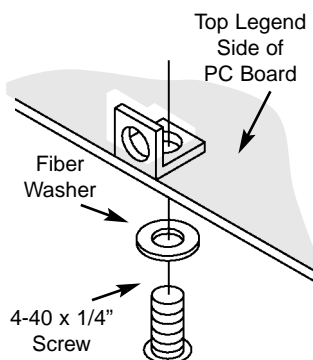

**Figure C**

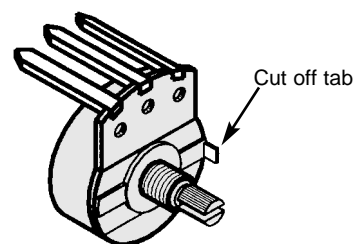

Mount down flush with PC board. The value may be marked on the back side of pot.

Cut off excess lead length after soldering.

**Figure D**



Bend the capacitor at a 45° angle before soldering. Cut off excess leads.


# INSTALL COMPONENTS TO PC BOARD

**Start Here**




Bottom Left Corner of PC Board

- ☐ C11 - 100 $\mu$ F 25V  
(see Figure E)
- ☐ R1 - 120 $\Omega$  5% 1/4W Resistor  
(brown-red-brown-gold)
- ☐ C6 - .1 $\mu$ F Mylar (104)  
(see Figure D)
- ☐ J28 - Jumper Wire  
(see Figure F)
- ☐ J6 - Jumper Wire  
(see Figure F)
- ☐ D12 - 1N4001 Diode  
☐ D11 - 1N4001 Diode  
(see Figure G)
- ☐ C14 - 100 $\mu$ F 25V Lytic  
☐ C17 - 100 $\mu$ F 25V Lytic  
(see Figure E)
- ☐ C10 - .1 $\mu$ F Mylar (104)  
(see Figure D)
- ☐ R2 - 120 $\Omega$  5% 1/4W Resistor  
(brown-red-brown-gold)
- ☐ J2 - Jumper Wire  
(see Figure F)
- ☐ J3 - Jumper Wire  
(see Figure F)

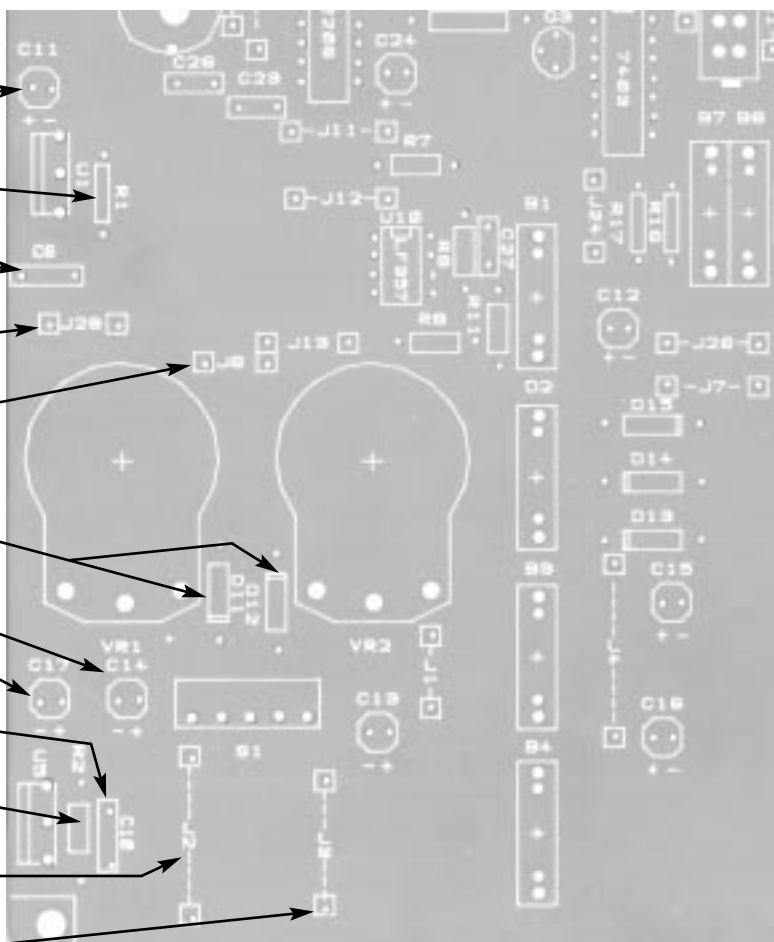

**Figure E**

These capacitors are polarized. Be sure to mount them with the "+" lead in the correct hole as marked on the PC board. Mount the capacitor lying flat on the PC board as shown below.



(-) (+)


**Figure F**

Cut a piece of the #22 bare wire long enough so that 1/4" of wire passes through each hole in the PC board after the wire is formed.




**Figure G**

Diodes have polarity. Mount them with the band as shown on the top legend.



## INSTALL COMPONENTS TO PC BOARD

Start Here

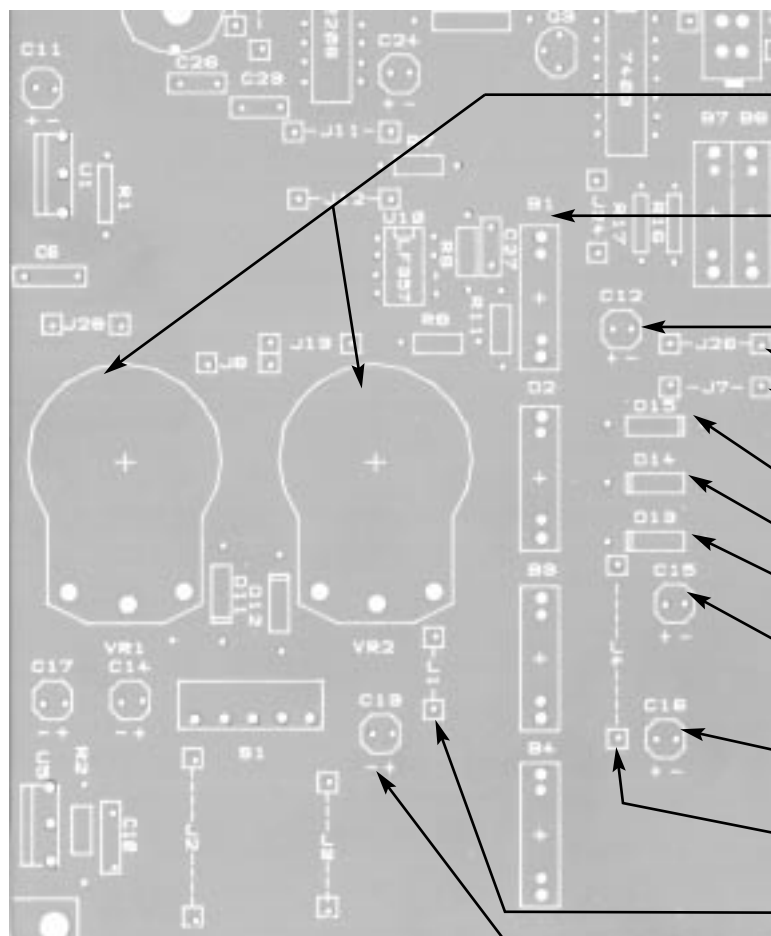


- ☐ VR1 - 2k $\Omega$  Pot
- ☐ VR2 - 2k $\Omega$  Pot  
(see Figure C)
- ☐ B1 - 4-Pin Bredblox
- ☐ B2 - 4-Pin Bredblox
- ☐ B3 - 4-Pin Bredblox
- ☐ B4 - 4-Pin Bredblox  
(see Figure H)
- ☐ C12 - 100 $\mu$ F 25V Lytic  
(see Figure E)
- ☐ J26 - Jumper Wire
- ☐ J7 - Jumper Wire  
(see Figure F)

- ☐ D15 - 1N4001 Diode
- ☐ D14 - 1N4001 Diode
- ☐ D13 - 1N4001 Diode  
(see Figure G)
- ☐ C15 - 100 $\mu$ F 25V Lytic
- ☐ C16 - 100 $\mu$ F 25V Lytic  
(see Figure E)
- ☐ J4 - Jumper Wire
- ☐ J1 - Jumper Wire  
(see Figure F)
- ☐ C13 - 100 $\mu$ F 25V Lytic  
(see Figure E)

Bottom Left Corner of PC Board

**Figure H**

Hold the bredblock down flush to the PC board from the top legend side and solder the metal pins in place. Then, melt the plastic pins with your soldering iron to hold the plastic blocks in place, as shown.





## INSTALL COMPONENTS TO PC BOARD


**Start Here**



- ☐ C2 - 1000 $\mu$ F 35V Lytic
- ☐ C4 - 1000 $\mu$ F 35V Lytic (see Figure J)

- ☐ C1 - 1,000 $\mu$ F 35V Lytic
- ☐ C5 - 1,000 $\mu$ F 35V Lytic (see Figure J)

Bottom Right Corner of PC Board

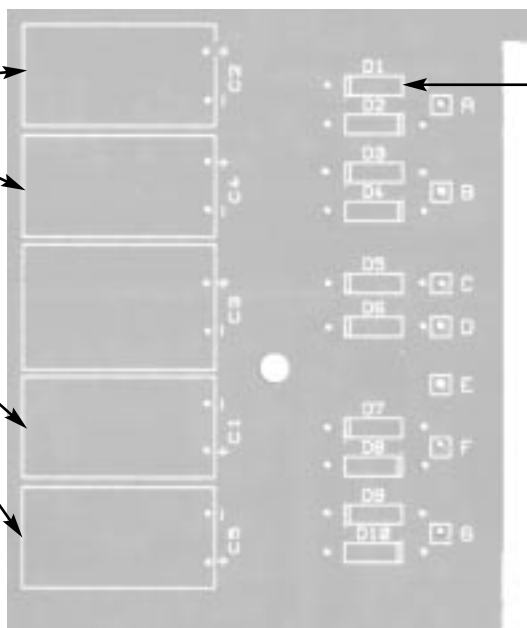


**Continue**



- ☐ D1 - 1N4001 Diode
- ☐ D2 - 1N4001 Diode
- ☐ D3 - 1N4001 Diode
- ☐ D4 - 1N4001 Diode
- ☐ D5 - 1N4001 Diode
- ☐ D6 - 1N4001 Diode
- ☐ D7 - 1N4001 Diode
- ☐ D8 - 1N4001 Diode
- ☐ D9 - 1N4001 Diode
- ☐ D10 - 1N4001 Diode (see Figure I)


**Figure J**

These lytics must be mounted horizontal to the PC board. Bend the leads at right angles and then insert the leads into the PC board with the negative (-) lead and the positive (+) lead in the correct holes as marked on the PC board.

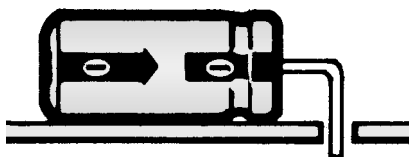

**Figure I**


Diodes have polarity. Mount them with the band as shown on the top legend.




**Start Here**



- ☐ C3 - 2200 $\mu$ F Lytic
- Mount on foil side of PC board  
**Note the polarity**  
(see Figure J)

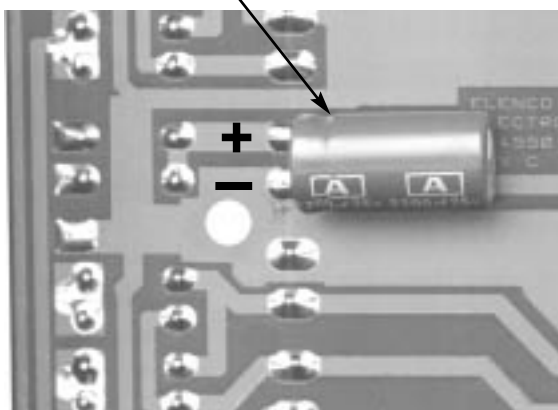

Top Right Corner of PC Board

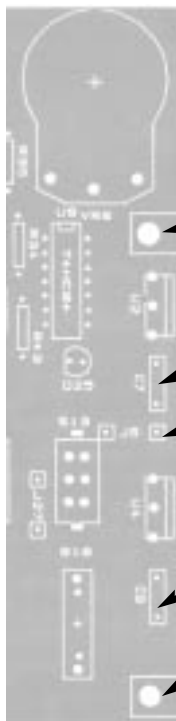

**Continue**



- ☐ L-Bracket (see Figure B)
- ☐ C7 - .1 $\mu$ F Mylar (104) (see Figure D)
- ☐ J5 - Jumper Wire \* (see Figure F)
- ☐ C9 - .1 $\mu$ F (104) Mylar (see Figure D)
- ☐ L-Bracket (see Figure B)


\* Leftover wire will be used in future sections.

## MOUNTING THE PC BOARD


**Note:** The holes in the two side panels have been punched differently. Be sure that you have the correct side panel when mounting them to the PC board.

**IMPORTANT:** Push the PC board up as far as possible before tightening the screws, as shown in Figure La.

- Mount the back panel using four 4-40 x 1/4" thread cutting screws (see Figure K).

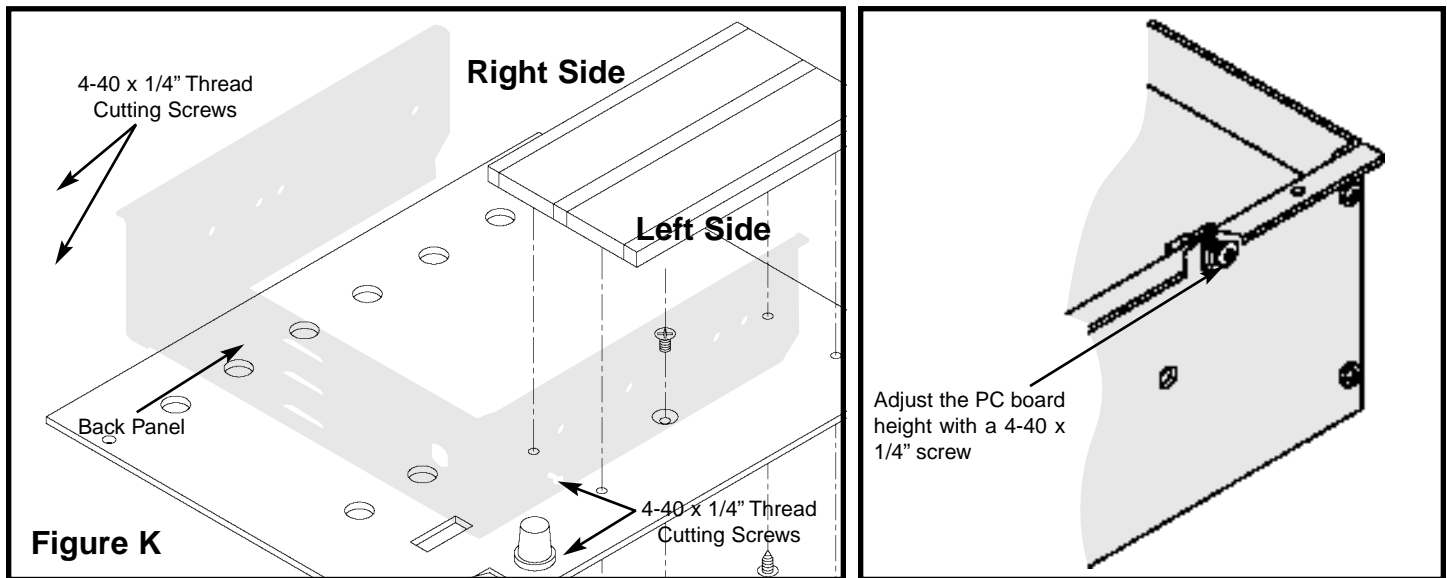

- Mount the PC board to the side panels with four 4-40 x 1/4" screws (see Figure L). Do not tighten the screws.

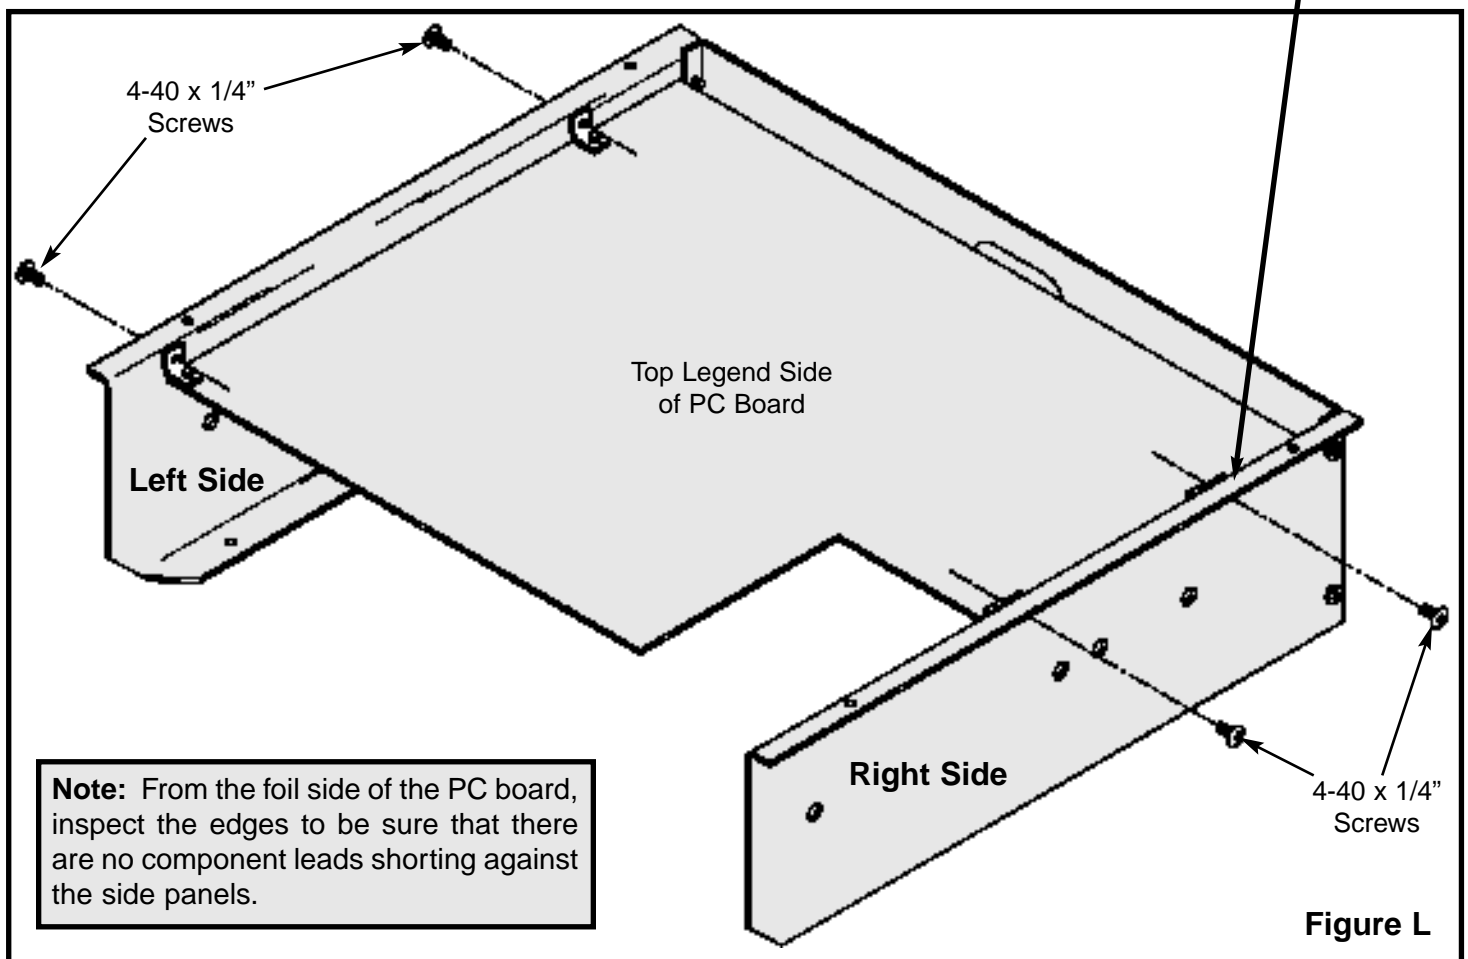

- Place the top panel onto the unit and align the components with the holes in the top panel. Push the PC board up until the components come through the top panel and tighten the screws.

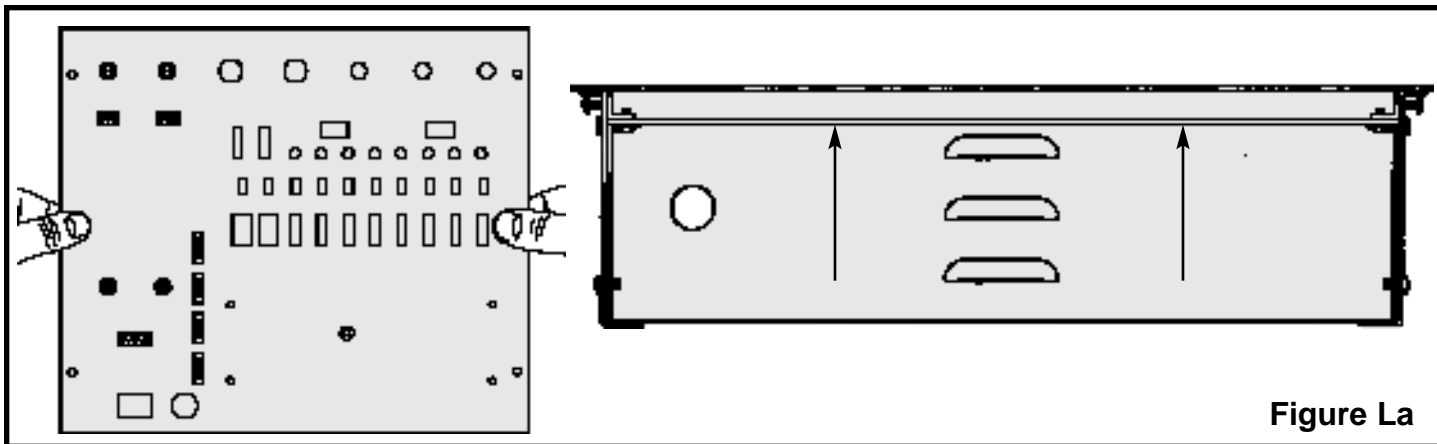


Figure La

## MOUNT COMPONENTS TO THE SIDE PANELS

Mount U1, U3 and U5 to the left side panel as shown in Figure N. Insert the pins of each IC into the holes of the PC board. Then, with the hardware shown in Figure M, attach each IC to the side panel. Solder the pins of the ICs to the PC board.

- U3 - LM7805
- U1 - LM317
- U5 - LM337

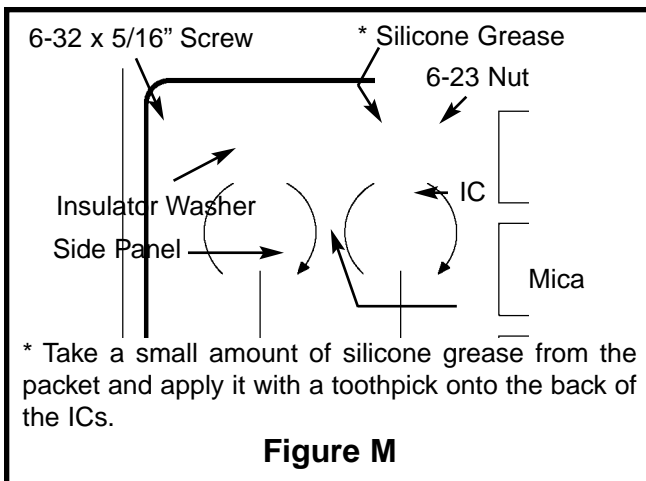


Figure M

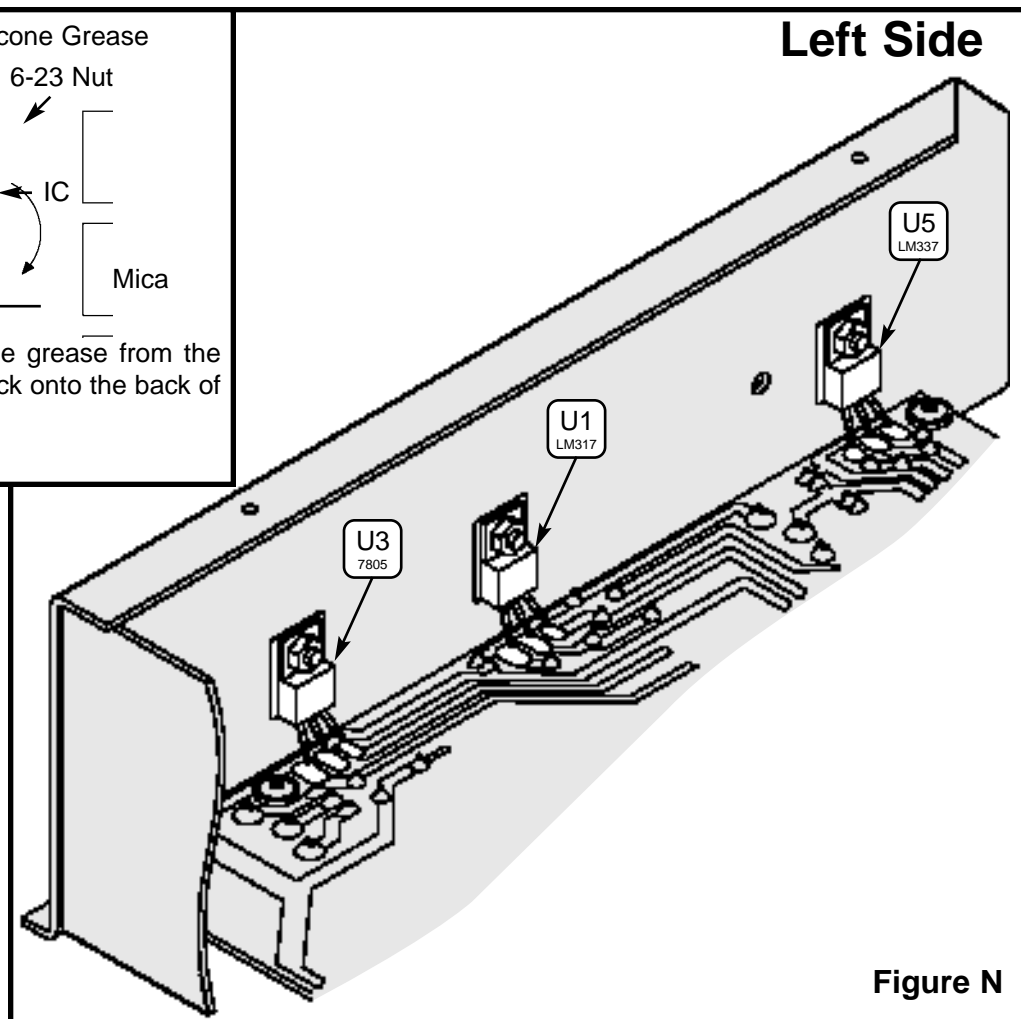


Figure N



Mount U2 and U4 to the right side panel as shown in Figure O. Insert the pins of each IC into the holes in the PC board. Then, with the hardware shown in Figure MA, attach each IC to the side panel. Solder the pins of the ICs to the PC board.

☐ U4 - LM7912

☐ U2 - LM7812

Mount the transformer with the black wires as shown in Figure O. Use the two 8-32 x 3/8" screws, #8 lockwashers, and 8-32 nuts.

☐ Transformer mounted

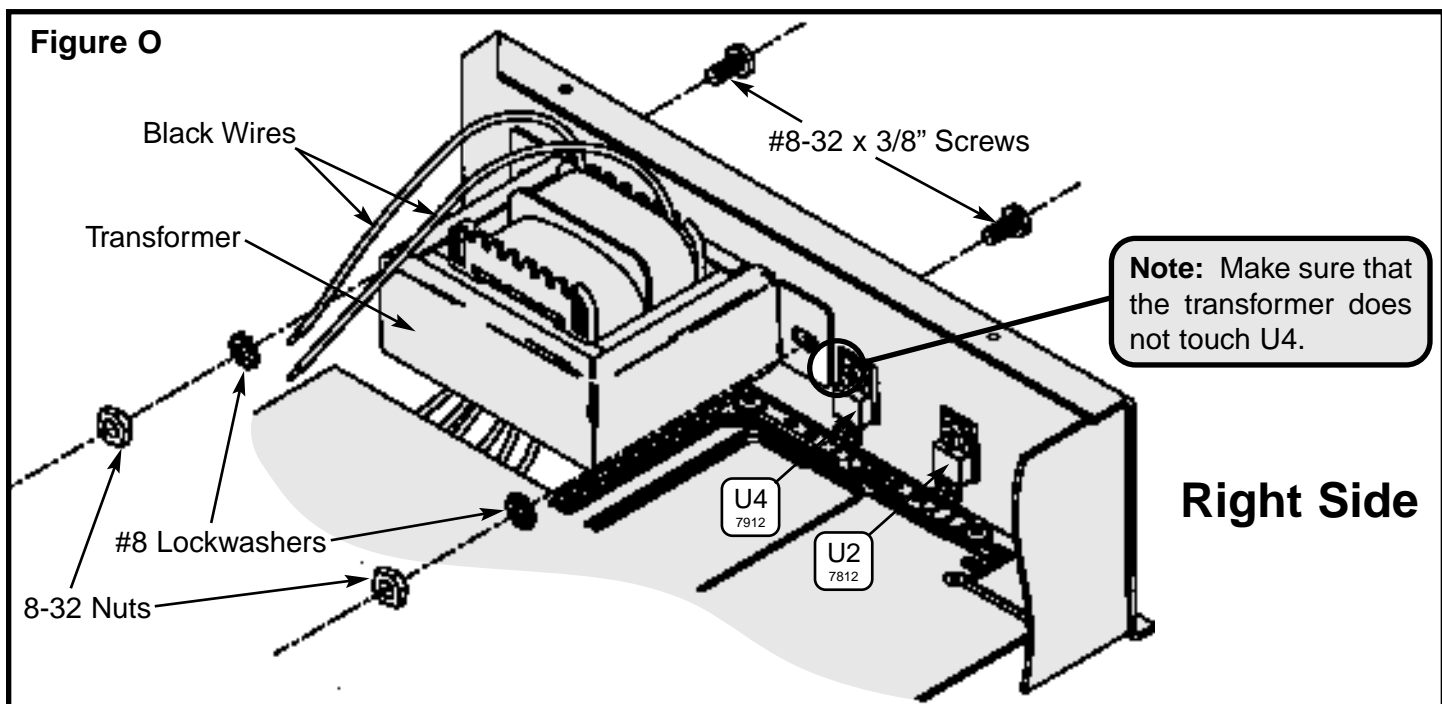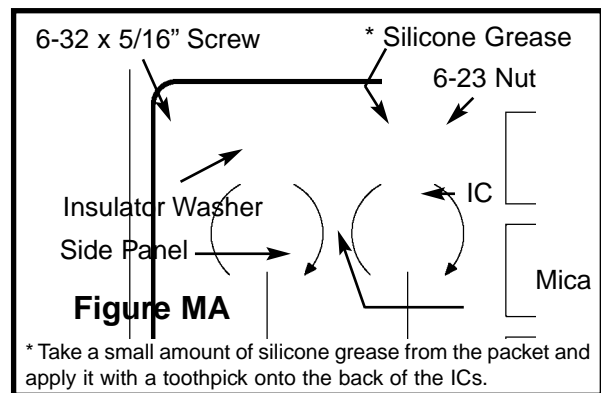

## WIRE THE TRANSFORMER TO THE PC BOARD

Solder the wires to the PC board starting with the top yellow wire as shown in Figure P.

☐ Yellow wire to point F on the PC board

☐ Blue wire to point A on the PC board


☐ Red wire to point C on the PC board

☐ White wire to point E on the PC board

☐ Red wire to point D on the PC board

☐ Blue wire to point B on the PC board

☐ Yellow wire to point G on the PC board

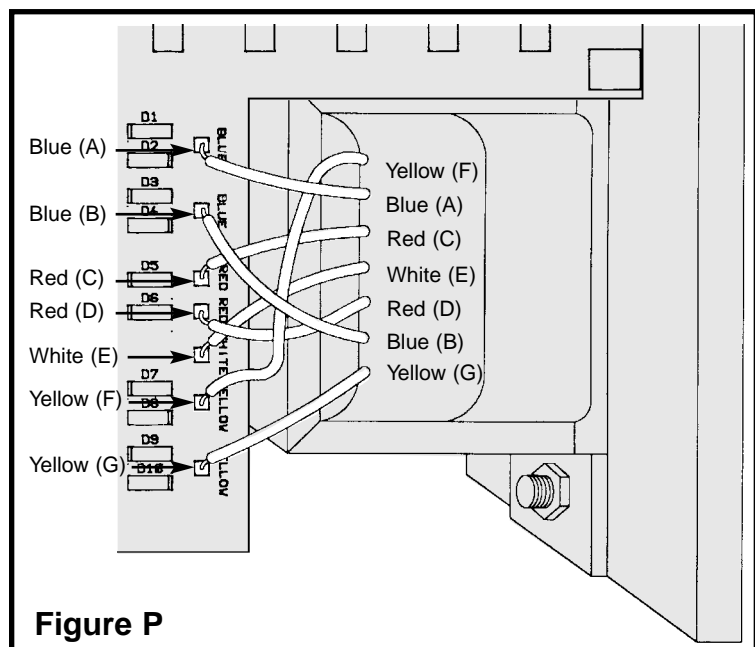

## HOW TO INSTALL CONNECTORS ONTO TRANSFORMER WIRES

A connector will be placed onto the primary wires of the transformer. This will allow you to remove the top panel from the trainer. Follow the procedures below.

- ☐ Cut a six inch length off of each black primary wire.
- ☐ Strip the insulation off of each end of the six inch wires to expose 1/4" of bare wire.
- ☐ Place one wire onto the female pin and crimp the outer crimp tabs with pliers over the insulation as shown in Figure 1A.
- ☐ Crimp the inner tabs with pliers onto the bare wire as shown in Figure 1B.
- ☐ Solder the wire to the pin as shown in Figure 1C.
- ☐ Connect the other female pin to the other wire using the same procedures above.
- ☐ Insert the two pin/wire assemblies into the female housing as shown in Figure 2. Pull on the wire to check that the pin is inserted all the way in. It should not pull out of the housing. The locking tabs should be bent outward to hold the pin in the housing.

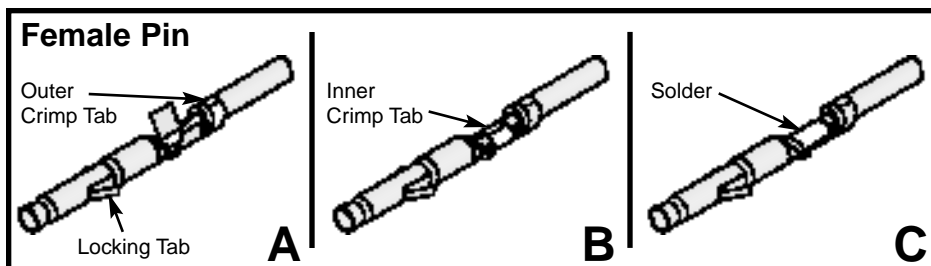


Figure 1

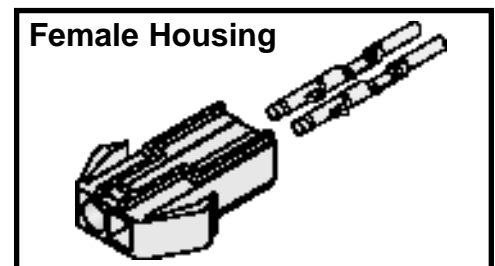


Figure 2

### Transformer Wires

- ☐ Strip the insulation off of each of the black primary wires to expose 1/4" of bare wire.
- ☐ Place the wire onto the male pin and crimp the outer crimp tabs with pliers over the insulation as shown in Figure 3A.
- ☐ Crimp the inner tabs with pliers onto the bare wire as shown in Figure 3B.
- ☐ Solder the wire to the pin as shown in Figure 3C.
- ☐ Connect the other male pin to the other primary wire using the same procedures above.
- ☐ Insert the two pin/wire assemblies into the male housing as shown in Figure 4. Pull on the wire to check that the pin is inserted all the way in. It should not pull out of the housing.
- ☐ Connect the male and female housing as shown in Figure 5. Note that the connector only fits together one way.
- ☐ To detach the connector, push down on the end of the lock arm and pull the two apart.

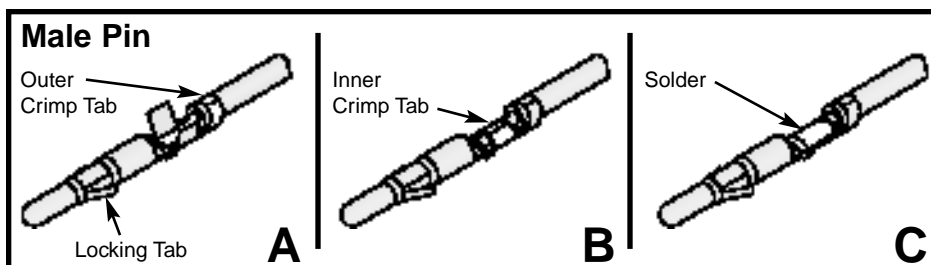


Figure 3

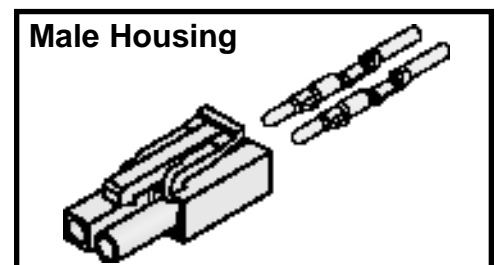


Figure 4

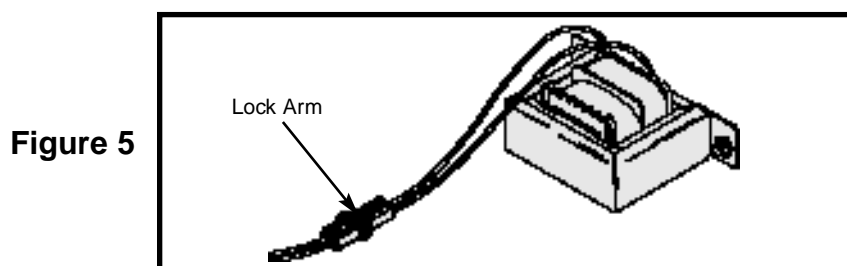


Figure 5



## MOUNT COMPONENTS TO PANEL

- Push the illuminated switch into the hole in the top panel with the lugs as shown in Figure Q.
- Install the fuse holder with the side lug in the position shown in Figure Q. Fasten the fuse holder in place with the nut as shown in Figure Q. Unscrew the cap and insert the fuse into the holder.
- There is a raised area on the back side of the top panel. Screw the spacer to the raised area by inserting a 4-40 x 1/4" flat head screw into the hole in the raised area from the top side of the panel (see Figure R).
- When mounting the breadboard, use the holes shown in Figure S. Mount the breadboard with two #4 x 1/4" AB black screws from the back side of the top panel as shown in Figure R. The negative (blue) stripe should be on top and the numbers reading from left to right should start with number 1 (see Figure T). **CAUTION: Do not remove the paper backing from the back of the breadboards.** Do not over-tighten the black screws.

### Back Side - Lower Right Corner

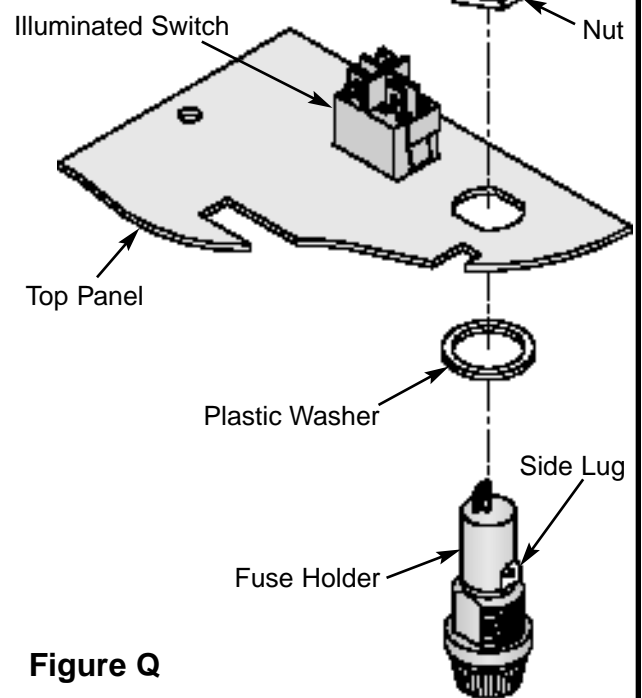


Figure Q

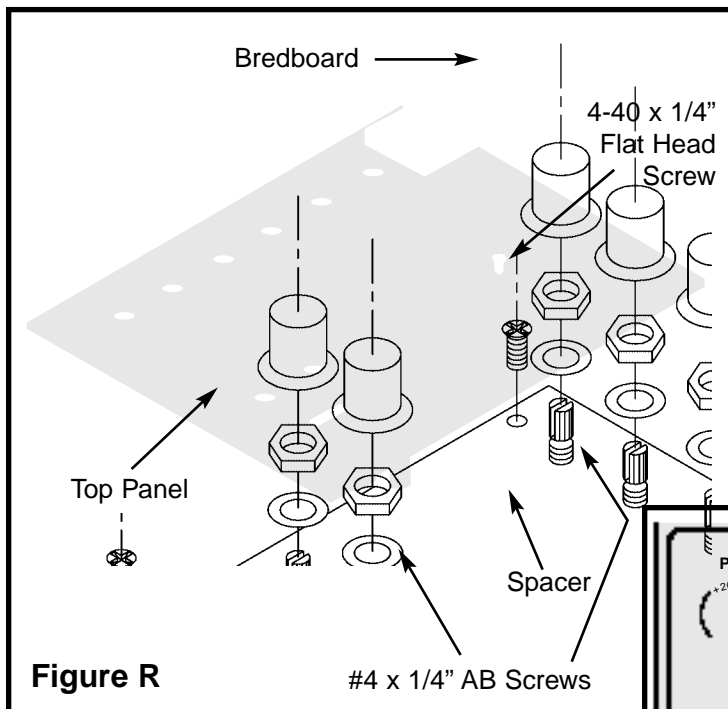


Figure R

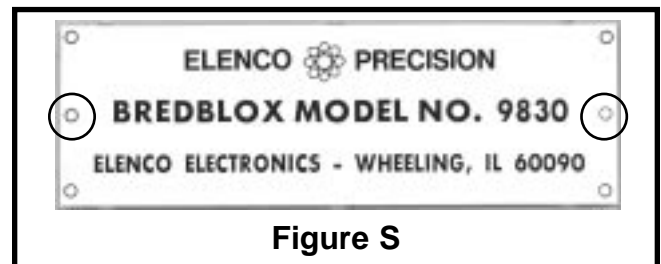


Figure S

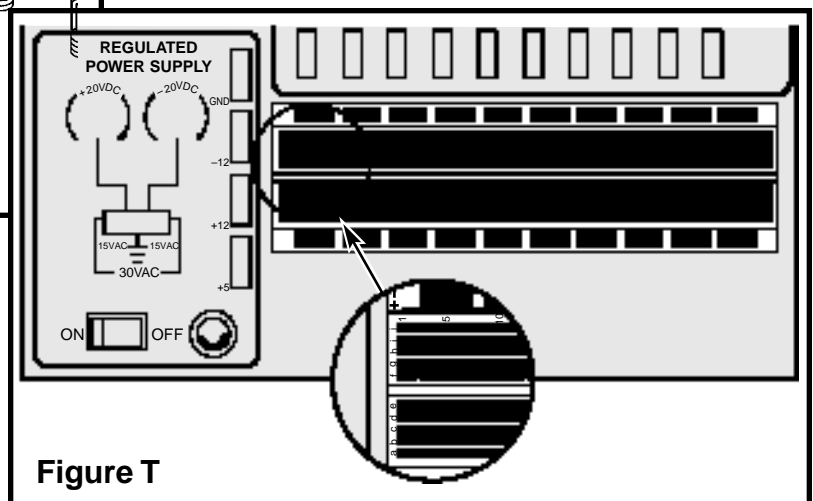


Figure T

## WIRE SWITCH AND FUSE HOLDER (see Figure U)

### Line Cord

- Slide the line cord through the back panel as shown.
- Spread the three line cord wires apart 6" from the end.




### Fuse

- Strip the insulation off of both ends of the 6" red wire to expose 1/4" of bare wire. Pass the wire through the 1/2" diameter shrink tubing. Attach one end to the side lug on the fuse holder and then solder into place.
- Pass the smooth edged line cord wire through the 1/2" diameter shrink tubing and attach to the end lug on the fuse holder, solder into place.
- Slide the shrink tubing over the fuse holder covering both lugs. Shrink the tubing for a snug fit. You may use a hair dryer, heat gun (at lowest setting or you will melt the tubing) or the heat emitting from your soldering iron (do not touch the tubing or the wires with the iron).
- Mount the solder lug to the side panel using a 6-32 x 5/16" screw and 6-32 nut.

### Switch

Disconnect the connector for the transformer.

- Pass the 6" strip of red wire (leading from the side lug of the fuse holder), the (A) and (B) black transformer wire, and the ribbed line cord wire through the 3/4" diameter piece of shrink tubing.
- Cut the 2" section of 3/16" diameter shrink tubing in half to create two 1" sections. Slide a 3/16" diameter piece of shrink tubing over the loose end of the red wire. Attach the red wire to lug 1 on the switch and then solder into place.
- Pass the black transformer wire labeled (B) through a 3/16" diameter piece of shrink tubing. Attach the wire to lug 2 on the switch and then solder into place.
- Slide the shrink tubing over lug 1 and lug 2 on the switch. Shrink the tubing into place.
- Strip the insulation off of the black transformer wire (A) and the ribbed edged line cord wire to expose 1/2" of bare wire. Twist the two bare wires together. Pass the wires through the 1/4" diameter piece of shrink tubing.
- Attach the wires to lug 3 on the switch and solder into place. Slide the tubing over the lug. Shrink the tubing into place.
- Slide the 3/4" diameter shrink tubing over the switch and shrink into place.
- Reconnect the connector for the transformer.

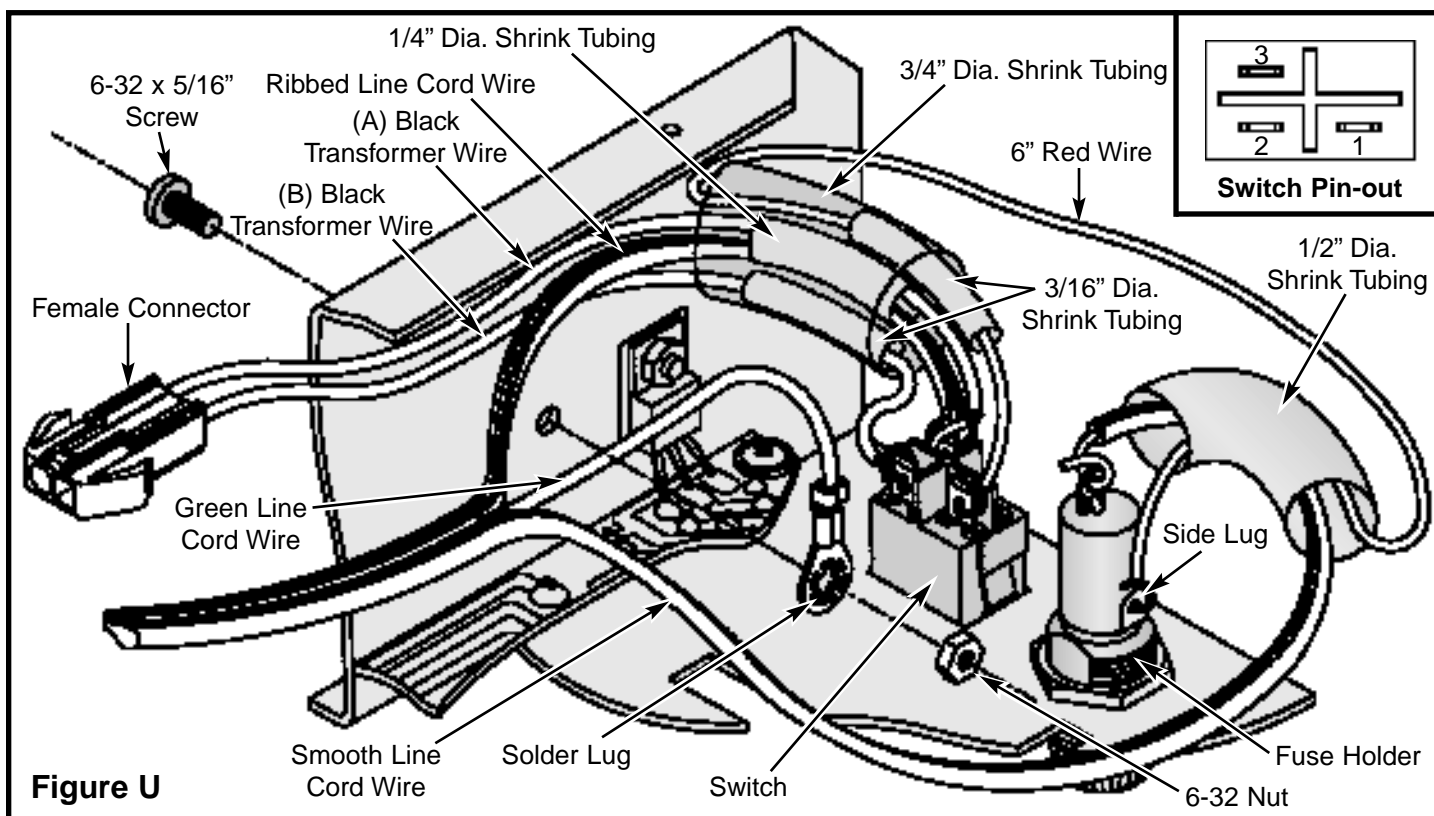

**Figure U**


## RESISTANCE ANALYSIS OF POWER SUPPLY

Static testing of the power supply circuits. **Do not plug the power supply into the 120VAC power supply source until all resistance readings check out. The values given below are approximate.**

See Figure O for locations of testing points.

| From       | To                            | Circuit                    | Ohms               | Resistance Measured |
|------------|-------------------------------|----------------------------|--------------------|---------------------|
| 1          | Right Side Panel              | Earth Ground               | less than 1Ω       |                     |
| 2          | 3                             | On/Off Switch, Fuse        | Infinite (SW1 Off) |                     |
| 2          | 3                             | On/Off, Fuse               | 7Ω (SW1 On)        |                     |
| 4          | 5                             | 12V Secondary              | 1.5Ω               |                     |
| 6          | 7                             | 5V Secondary               | 1.2Ω               |                     |
| 8          | 9                             | Variable Voltage           | 1.6Ω               |                     |
| 10         | GND 5-pin connector           | +12V Regulator Input       | greater than 20kΩ  |                     |
| ✦ 11 (com) | GND (VΩ) (5-pin connector)    | -12V Regulator Input       | greater than 20kΩ  |                     |
| 12         | GND (B1)                      | +5V Regulator Input        | greater than 20kΩ  |                     |
| 13         | GND (B1)                      | +Variable Regulator Input  | greater than 20kΩ  |                     |
| ✦ 14 (com) | GND (VΩ) (5-pin connector)    | -Variable Regulator Input  | greater than 20kΩ  |                     |
| ★ 25 (com) | GND (VΩ) (5-pin connector)    | Voltage ADJ +20V Regulator | CCW <1Ω CW >1.4kΩ  |                     |
| ★ 26       | GND (VΩ) (5-pin connector)    | Voltage ADJ -20V Regulator | greater than 1.4kΩ |                     |
| 27         | GND (5-pin connector)         | +5V Regulator GND          | less than 1Ω       |                     |
| 28         | GND (5-pin connector)         | +12V Regulator GND         | less than 1Ω       |                     |
| 29         | GND (5-pin connector)         | -12V Regulator GND         | less than 1Ω       |                     |
| 10         | 15                            | +12V Regulator Input       | less than 1Ω       |                     |
| 11         | 16                            | -12V Regulator Input       | less than 1Ω       |                     |
| 12         | 17                            | +5V Regulator Input        | less than 1Ω       |                     |
| 13         | 18                            | +Variable Regulator Input  | less than 1Ω       |                     |
| 14         | 19                            | -Variable Regulator Input  | less than 1Ω       |                     |
| ★ 20       | GND (5-pin connector)         | +Variable Regulator Output | CCW 100Ω CW 2.12k  |                     |
| 20         | +20 (5-pin connector)         | +Variable Regulator Output | less than 1Ω       |                     |
| ★ 21       | GND (5-pin connector)         | -Variable Regulator Output | CCW 100Ω CW 2.12k  |                     |
| 21         | -20 (5-pin connector)         | -Variable Regulator Output | less than 1Ω       |                     |
| 22         | GND (5-pin connector)         | +5V Regulator Output       | greater than 5kΩ   |                     |
| 22         | B4                            | +5V Regulator Output       | less than 1Ω       |                     |
| 23         | GND (5-pin connector)         | +12V Regulator Output      | greater than 5kΩ   |                     |
| 23         | B3                            | +12V Regulator Output      | less than 1Ω       |                     |
| 24         | GND (5-pin connector)         | -12V Regulator Output      | greater than 5kΩ   |                     |
| 24         | B2                            | -12V Regulator Output      | less than 1Ω       |                     |
| 5          | 15VAC (5-pin connector right) | 15VAC                      | less than 1Ω       |                     |
| 4          | 15VAC (5-pin connector left)  | 15VAC                      | less than 1Ω       |                     |

★ ±30% ✦ Note: meter lead polarity CCW - Counter Clockwise CW - Clockwise VR1 & VR2 Adjustment

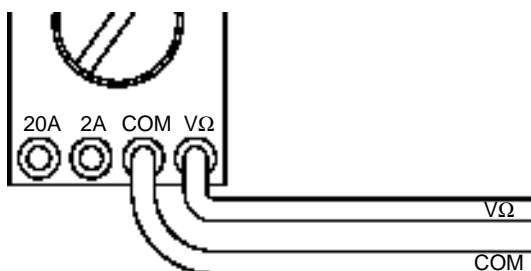

# Locations for Testing Points

Plug of line cord

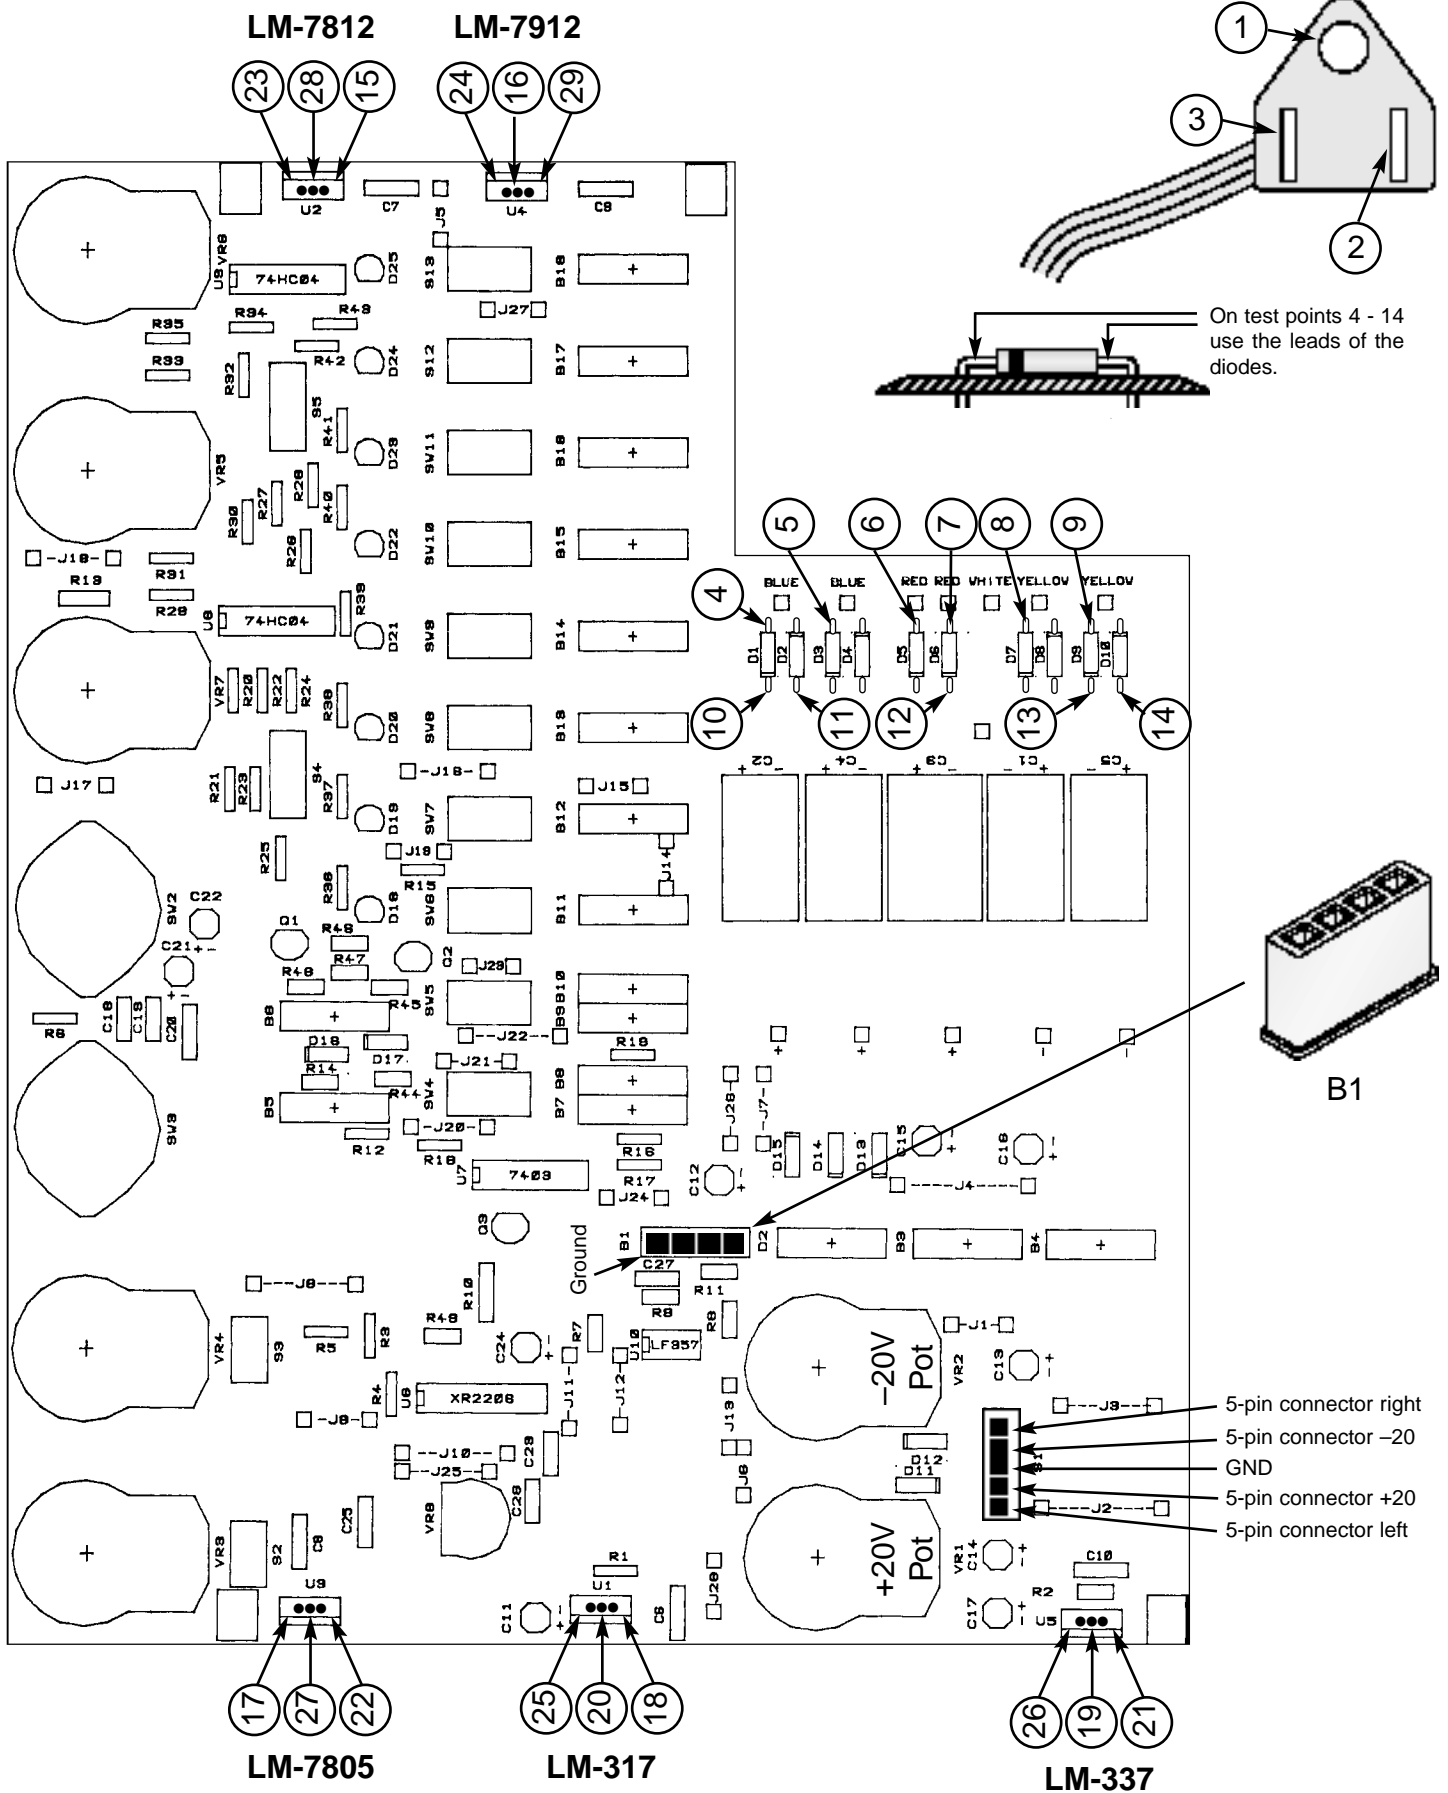


Figure O

## VOLTAGE ANALYSIS OF POWER SUPPLY

Proceed with the voltage analysis only if the resistance readings were satisfactory.

Place the top panel on the unit. If any capacitors are inserted backwards, the panel will shield you if they explode. Make sure that the ON/OFF switch is in the **OFF** position. Plug the line cord into the 120VAC power source. Turn the unit on and let it sit for a few minutes. Turn OFF the ON/OFF switch and remove the top panel, placing it along the left side of the trainer. Turn ON the ON/OFF switch and measure the voltage point as listed in the chart below. **The values given are approximate.**

See Figure O for locations of the testing points.

| From                                | To                                   | Circuit                    | Volts              | Volts Measured |
|-------------------------------------|--------------------------------------|----------------------------|--------------------|----------------|
| 15                                  | GND                                  | +12V Regulator Input       | +21V               |                |
| B3                                  | GND                                  | +12V Regulator Output      | +12V               |                |
| 16                                  | GND                                  | -12V Regulator Input       | -21V               |                |
| B2                                  | GND                                  | -12V Regulator Output      | -12V               |                |
| 17                                  | GND                                  | +5V Regulator Input        | +12.5V             |                |
| B4                                  | GND                                  | +5V Regulator Output       | +5V                |                |
| 18                                  | GND                                  | +20V Regulator Input       | +28V               |                |
| ★ 25                                | GND                                  | Voltage ADJ +20V Regulator | CCW 0V CW +18V     |                |
| ★ +20 5-pin connector               | GND                                  | +20V Output                | CCW +1.25V CW +20V |                |
| 19                                  | GND                                  | -20 Regulator Input        | -28V               |                |
| ★ 26                                | GND                                  | Voltage ADJ -20V Regulator | CCW 0V CW -18V     |                |
| ★ -20 5-pin connector               | GND                                  | -20V Output                | CCW -1.25V CW -20V |                |
| 15VAC<br>5-pin<br>connector<br>left | 15VAC<br>5-pin<br>connector<br>right | 30VAC                      | 30VAC              |                |

★  $\pm 30\%$

CCW - Counter-Clockwise CW - Clockwise

☐ Turn unit off.

Place the top panel on top of the unit.

### FUSE REPLACEMENT

1. Turn the trainer off and unplug it from 120VAC power source.
2. Unscrew fuse holder cap and remove fuse.
3. **Use only a 1.25A fuse. Larger fuses or other fuse bypass will void the warranty of the trainer.**
4. Place the new fuse into the fuse holder cap and screw it back into the holder.
5. Plug trainer into 120VAC power source and turn the unit on.



## POWER SUPPLY TESTING

Plug the trainer into a 120VAC outlet and switch to the “ON” position (the power switch should light). With a digital voltmeter, measure the voltage outputs at the power blocks. The +12V should measure between 11.4 and 12.6 volts. The 5V supply should read between 4.75 and 5.25 volts. The –12V supply should read between –11.4 and 12.6 volts.

### Do not short the 15VAC output to ground.

Short the +12V, –12V and +5V supply to ground. They should turn off and recover when the short is removed. If you have a 25Ω 10 watt resistor, place it across the output terminal (2 watt resistor will work, but use it only for a few seconds). The output of the 12V supply should not change more than 0.20 volts. Do the same on the 5V supply using a 10Ω 5 watt resistor. Again, the output should not change more than 0.20 volts. In making this test, the voltmeter leads should be clipped to the terminal directly and no to the load leads. This is to prevent errors due to voltage drop from contact resistance of the load.

Check the variable voltage supplies in the same manner. Set the output voltage between 10-15 volts. Place the 25Ω 10 watt resistor across the output terminal. The voltage should stay within 0.20 volts of the no load voltage.

## TROUBLESHOOTING CHART

This chart lists the condition and possible causes of several malfunctions. If a particular part is mentioned as a possible cause, check that part to see if it was installed correctly. Also, check it and the parts connected to it for good solder connections. Note: The values given in this troubleshooting chart are an approximation.

| PROBLEM  | POSSIBLE CAUSE  |
|--|---|
| Switch doesn't light.                                    | 1. Check fuse and line cord.  |
| Fuse blows when the unit is turned on.                   | 1. Voltage supply shorted to GND. Use resistance analysis chart to find short.  |
| No or low voltage at positive variable output.           | 1. Measure for an AC voltage of 18VAC at anode of D7 & D9.<br>A. Transformer and/or secondary connection to PC board defective<br>2. Measure for a DC voltage of 28VDC at pin 3 of U1 LM317.<br>A. Diodes D7, D9 in backwards or defective, check capacitor C1.<br>3. Set the voltage for minimum 1.25VDC and measure pin 2 of U1.<br>A. Voltage adjusts only from 7.8 - 9.8V R1 open or defective.<br>B. Voltage 27V, check VR1 connections. |
| No or low voltage at positive variable output with load. | 1. Check that capacitor C1 1000μF is inserted in the correct polarity.<br>2. Check ripple on pin 3 of U1. 8VP-P Max.<br>A. Capacitor C1, and/or diodes D7, D9 defective.  |

| PROBLEM  | POSSIBLE CAUSE   |
|--|--|
| No voltage at negative variable output.                  | <ol style="list-style-type: none"> <li>1. Measure for an AC voltage of 18VAC at cathode of D8, D10. <ul style="list-style-type: none"> <li>A. Transformer and/or secondary connection to PC board defective.</li> </ul> </li> <li>2. Measure DC voltage of -28VDC at pin 2 of U5 LM337.</li> <li>3. Set voltage for minimum -1.25VDC and measure pin 3 of U5. <ul style="list-style-type: none"> <li>A. Voltage adjusts only from -7.8 to -9.8V R2 open or defective.</li> <li>B. Voltage -27V, check VR2 connections.</li> </ul> </li> </ol>                                |
| No or low voltage at negative variable output with load. | <ol style="list-style-type: none"> <li>1. Check to see if capacitor C5 1000<math>\mu</math>F is inserted in the correct polarity.</li> <li>2. Check ripple on pin 2 of U5. 6VP-P max. <ul style="list-style-type: none"> <li>A. Capacitor C5 and/or diodes D8, D10 defective.</li> </ul> </li> </ol>   |
| No +12V at output.                                       | <ol style="list-style-type: none"> <li>1. Measure an AC voltage of 15VAC at anode of D1, D3. <ul style="list-style-type: none"> <li>A. Transformer and/or secondary connection to PC board defective.</li> </ul> </li> <li>2. Measure for a DC voltage of 21VDC at pin 1 of U2 LM7812. <ul style="list-style-type: none"> <li>A. Diodes D1, D3 in backwards or defective, check capacitor C1.</li> </ul> </li> <li>3. Measure for a DC voltage of 12VDC on pin 3 of U2. <ul style="list-style-type: none"> <li>A. U2 LM7812 defective or open ground.</li> </ul> </li> </ol> |
| No +12V at output with load.                             | <ol style="list-style-type: none"> <li>1. Check capacitor C2 1000<math>\mu</math>F is inserted in the correct polarity.</li> <li>2. Check ripple on pin 1 of U2. 7VP-P Max. <ul style="list-style-type: none"> <li>A. Capacitor C2 or diodes D1, D3 defective.</li> </ul> </li> </ol>  |
| No -12V at output.                                       | <ol style="list-style-type: none"> <li>1. Measure an AC voltage of 15VAC at anode of D2, D4. <ul style="list-style-type: none"> <li>A. Transformer and/or secondary connection to PC board defective.</li> </ul> </li> <li>2. Measure for a DC voltage of -21VDC at pin 2 of U4 LM7912. <ul style="list-style-type: none"> <li>A. Diodes D2, D4 in backwards or defective, check capacitor C4.</li> </ul> </li> <li>3. Measure for a -12VDC voltage on pin 3 of U4. <ul style="list-style-type: none"> <li>A. U4 LM7912 defective or open ground.</li> </ul> </li> </ol>     |
| No -12V at output with load.                             | <ol style="list-style-type: none"> <li>1. Check capacitor C4 is inserted in the correct polarity.</li> <li>2. Check ripple on pin 2 of U3. 7VP-P Max. <ul style="list-style-type: none"> <li>A. Capacitor C4 and/or diodes D1, D3 defective.</li> </ul> </li> </ol>  |
| No +5VDC at output                                       | <ol style="list-style-type: none"> <li>1. Measure an AC voltage of 9VAC at anode of D5, D6. <ul style="list-style-type: none"> <li>A. Transformer and/or secondary connection to PC board defective.</li> </ul> </li> <li>2. Measure for a DC voltage of 12VDC at pin 1 of U3 LM7805. <ul style="list-style-type: none"> <li>A. Diodes D5, D6 in backwards or defective, check capacitor C3.</li> </ul> </li> <li>3. Measure for a 5VDC voltage on pin 3 of U3 LM7805. <ul style="list-style-type: none"> <li>A. U3 LM7805 defective or open ground.</li> </ul> </li> </ol>  |
| No +5VDC at output with load.                            | <ol style="list-style-type: none"> <li>1. Check that capacitor C3 is inserted in the correct polarity.</li> <li>2. Check ripple on pin 1 of U3. 4VP-P Max. <ul style="list-style-type: none"> <li>A. Capacitor C3 and/or diodes D5, D6 defective.</li> </ul> </li> </ol>   |

## FINAL ASSEMBLY

If you are immediately going to build the remaining sections, do not continue with the instructions on this page and proceed to page 22.

- Fasten the front panel in place with four #6 x 3/8" thread cutting screws, as shown in Figure W.
- Fasten the PC board to the spacer on the front panel with a fiber washer and a 4-40 x 1/4" screw (from Power Supply Section) from the foil side of the PC board, in the location shown in Figure X.
- Fasten the pots to the front panel with an 8mm washer and a 7mm nut, as shown in Figure W.
- Turn the shafts on the two switches fully counter-clockwise. Push the knobs onto the shafts so that the line on the knob is in line with the end of the circle on the front panel (see Figure Y). If the knob is loose on the shaft, insert a screwdriver into the slot and expand the slot slightly (see Figure Z).

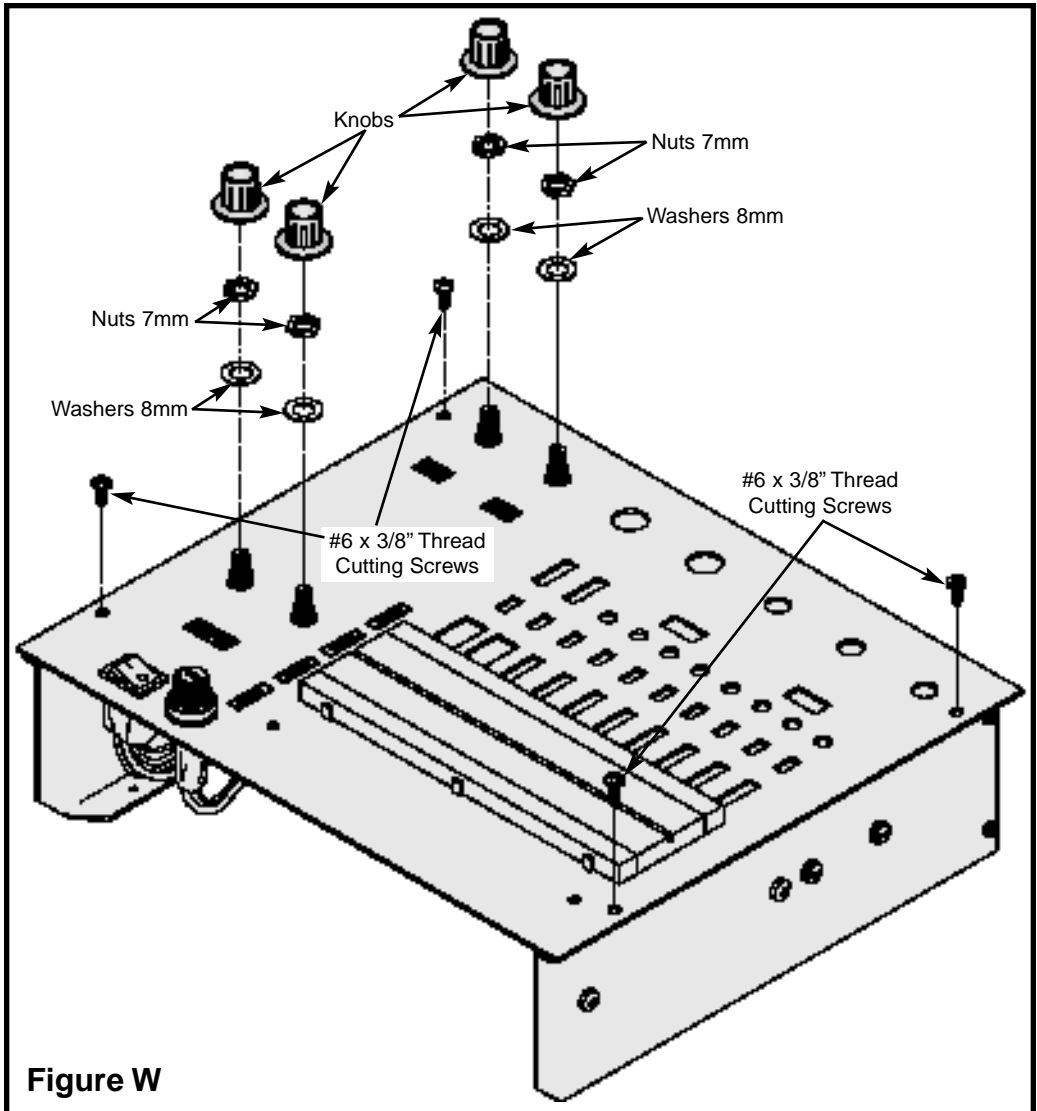


Figure W

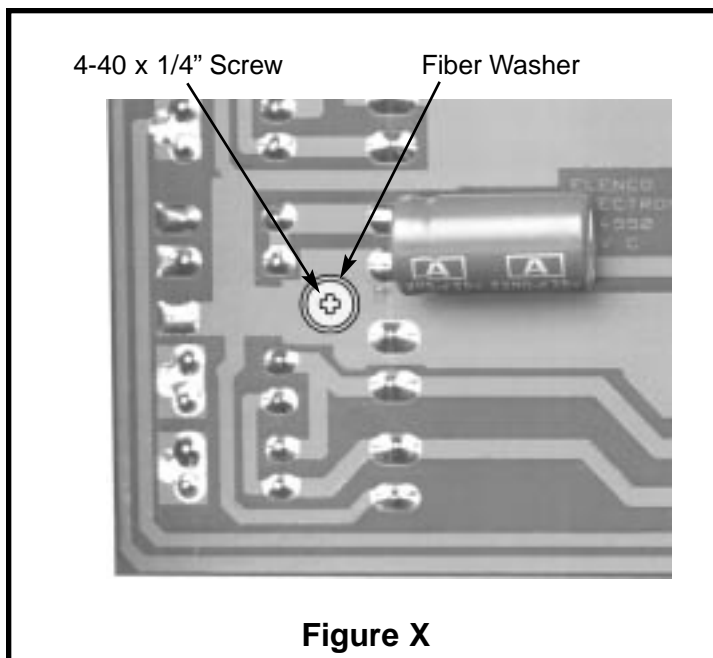


Figure X

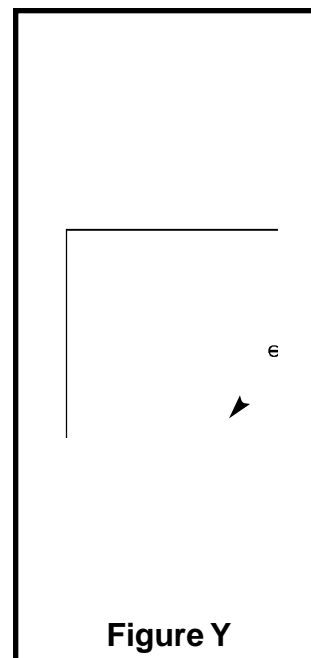


Figure Y

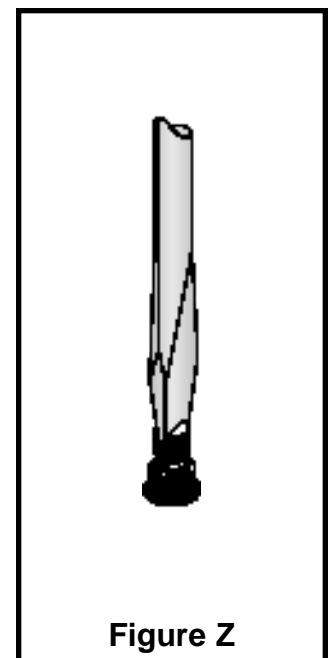


Figure Z

## INSTALL COMPLETED UNIT INTO CASE

- ☐ Place the strain relief onto the line cord as shown in Figure AA.
- ☐ Squeeze the two sections together with pliers as shown in Figure BB. Then, insert the strain relief into the hole.
- ☐ Lay the trainer inside of the case as shown in Figure CC.
- ☐ Align the holes in the bottom case with those in the trainer and secure it into place with four #6 x 1/2" AB screws and four #6 washer as shown in Figure DD.

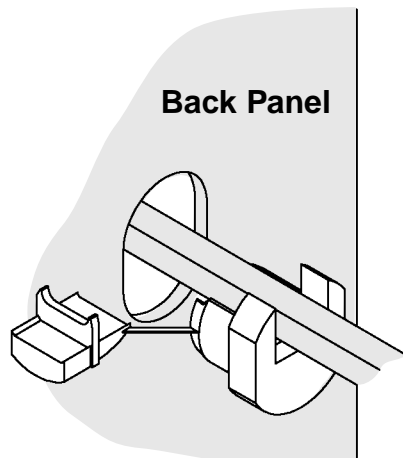


Figure AA

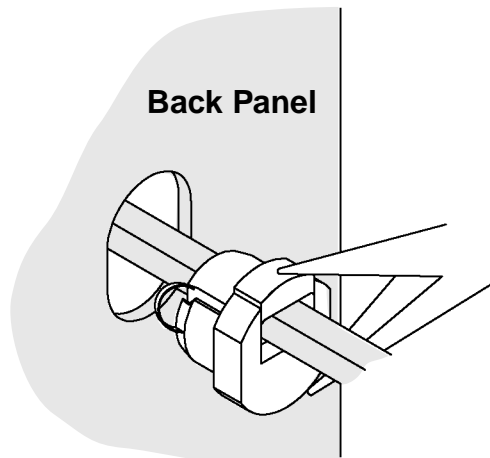


Figure BB

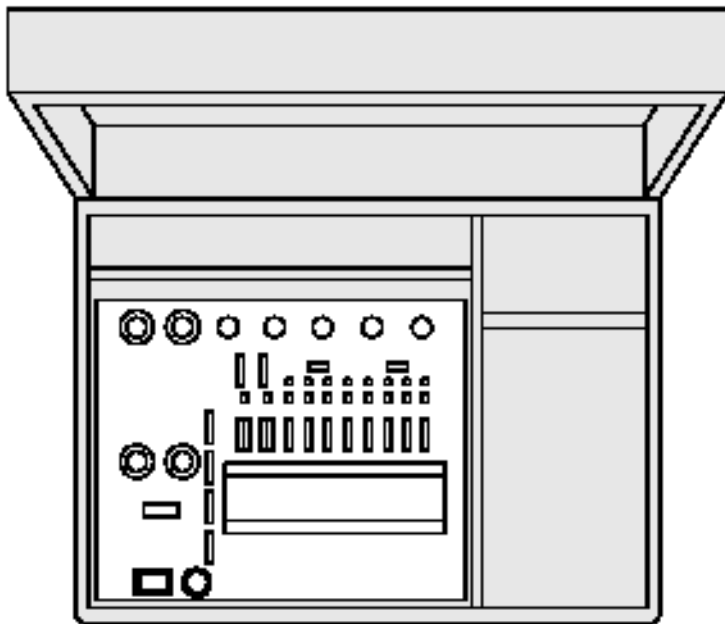


Figure CC

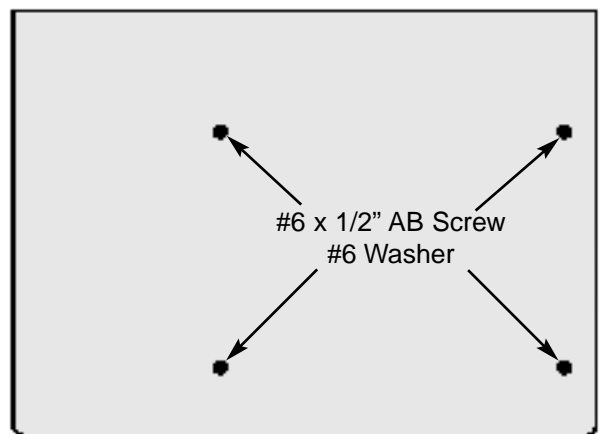


Figure DD

## CIRCUIT DESCRIPTION

The power supply features two variable output voltages and three fixed 12V, -12V and 5V variable output voltages are 1.25V to 20V and -1.25 to -20V at up to 1 ampere maximum current. All supplies are regulated to better than 0.2V when going from no load to full load. Varying the input AC voltage from 105 to 135V will have practically no effect on the output voltages. This is because of the specially designed ICs used in the XK-700 Digital/Analog Trainer. Severe overloading or even shorting the output circuits will not damage the supplies. Special turn-off circuits in the ICs sense the overload and turn off the output.

### THE POSITIVE 1.25 TO 20V POWER SUPPLY

Figure 1 shows a simplified circuit diagram of the positive supply. It consists of a power transformer, a DC rectifier stage and the regulator stage.

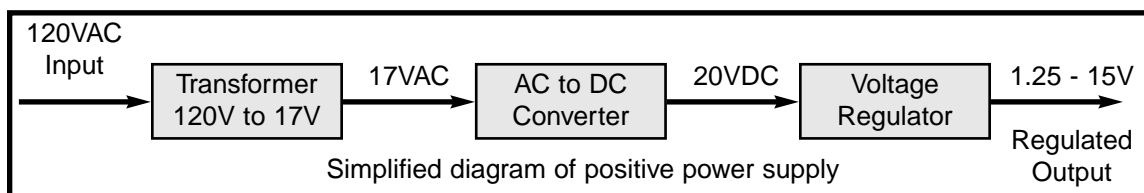


Figure 1

### TRANSFORMER

The transformer T1 serves two purposes. First, it reduces the 120VAC input to 17VAC to allow the proper voltage to enter the rectifier stages. Second, it isolates the power supply output from the 120VAC line. This prevents the user from dangerous voltages should he or she be standing in a grounded area.

### AC TO DC CONVERTER

The AC to DC converter consists of diodes D1, D3 and capacitor C1. Transformer T1 has two secondary windings which are 180 degrees out of phase. The output at each winding is shown in Figure 2A and 2B.

Diodes are semiconductor devices that allow current to flow in only one direction. The arrow in Figure 3 points to the direction that the current will flow. Only when the transformer voltage is positive will current flow through the diodes. Figure 3 shows the simplest possible rectifier circuit. This circuit is known as a half-wave rectifier. Here the diode conducts only half of the time when the AC wave is positive as shown in Figure 2C. Use of this circuit is simple but inefficient. The big gap between cycles require much more filtering to obtain a smooth DC voltage.

By the addition of a second diode and transformer winding we can fill in the gap between cycles as shown in Figure 4. This circuit is called full-wave rectification. Each diode conducts when the voltage is positive. By adding the two outputs, the voltage presented to capacitor C1 is more complete, thus easier to filter, as shown in Figure 2E. When used in 60 cycles AC input power, the output of a full wave rectifier will be 120 cycles.

Capacitor C1 is used to store the current charges, thus smoothing the DC voltage. The larger the capacitor, the more current is stored. In this design, 1000 $\mu$ F capacitors are used, which allows about 5 volts AC ripple when one amp is drawn.

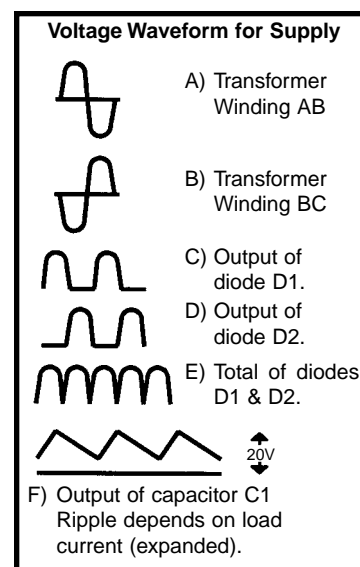


Figure 2




Figure 3





Figure 4



In practice, the current through the diodes is not as shown in Figure 2C. Because capacitor C1 has a charge after the first cycle, the diode will not conduct until the positive AC voltage exceeds the positive charge in the capacitor. Figure 5 shows a better picture of what the current flow looks like assuming no loss in the diode. It takes a few cycles for the voltage to build up on the capacitor. This depends on the resistance of the winding and the diode. After the initial start-up, there will be a charge and discharge on the capacitor depending on the current drawn by the output load. Remember, current only flows through the diode when the anode is more positive than the cathode. Thus, current will flow in short bursts as shown in Figure 5.

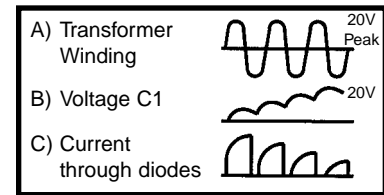


**Figure 5**

The DC load current may be one ampere, but the peak diode current may be three times that. Therefore, the diode rating must be sufficient to handle the peak current. The 1N4001 has a peak current rating of 10 amps.

## REGULATOR CIRCUIT

The regulator circuit in the power supply consists of a LM-317 integrated circuit. This IC is specially designed to perform the regulation function. Figure 6 shows a simplified circuit of how the LM-317 IC works.

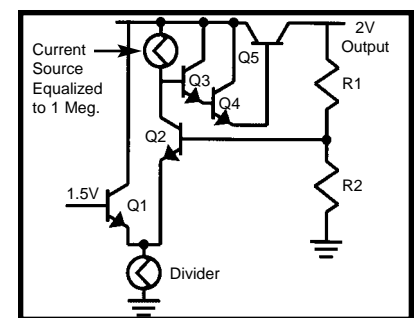


**Figure 6**

Transistors Q1 and Q2 form a circuit known as a differential amplifier. The base of transistor Q1 is connected to a stable 1.5V reference voltage. The base of Q2 is connected to the regulator output circuit through a voltage divider network. The collector of transistor Q2 is connected to a current source. This basically is a PNP transistor biased to draw about 1mA of current. Transistor Q2 sees the current source as a very high resistor of about 1 meg ohms. Thus, the gain of transistor Q2 is extremely high.

Transistor Q5 is called the pass transistor. It controls the current reaching the output. Transistor Q3 and Q4 are emitter followers. Their function is to raise the impedance of the pass transistor. Note that transistors Q2, Q3, Q4, Q5 and resistor R1 form a closed loop. Also, note that the feedback to the base of Q2 is negative, that is, when the base of Q2 goes positive, the output at emitter Q5 goes negative. Now if the 2 volt output voltage goes down because of current drain at the output, the base of Q2 will drop, forcing the collector voltage to go higher. This will bring the output voltage back to 2 volts. This is the basis of all negative feedback regulators.

Another feature of the LM-317 regulator is to protect the IC against overload and output shorts. If the IC is overloaded, the junction of an overload transistor will overheat. A transistor will sense this overheating and shut down transistor Q5.


The LM-317 IC is basically a 1.25 volt regulator. To be able to vary the output from 1.25V to 20V, we stack the IC on the a DC voltage as shown in Figure 7. When VR1 equals 0, the output voltage is 1.25 volts as determined by the LM-317 IC. Note that the voltage across VR1 will equal the 1.25 volts across R1, therefore the output voltage will be 2.5 volts. When VR1 is 5 times R1, the output voltage is 6.25 volts. As you can see, varying resistor VR1 will vary the voltage from 1.25 volts to 20 volts.

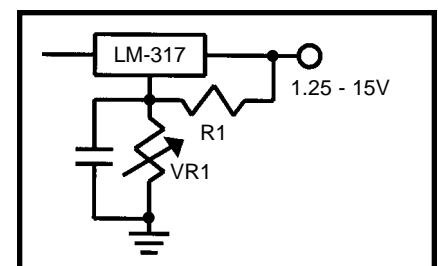

**Figure 7**

## THE NEGATIVE VOLTAGE REGULATOR

The theory of the negative regulator is the same as the previously discussed positive regulator. The basic difference is that diodes D1 and D3 are reversed, producing a negative voltage across capacitor C1. The LM-317 IC is designed to operate from a negative supply.

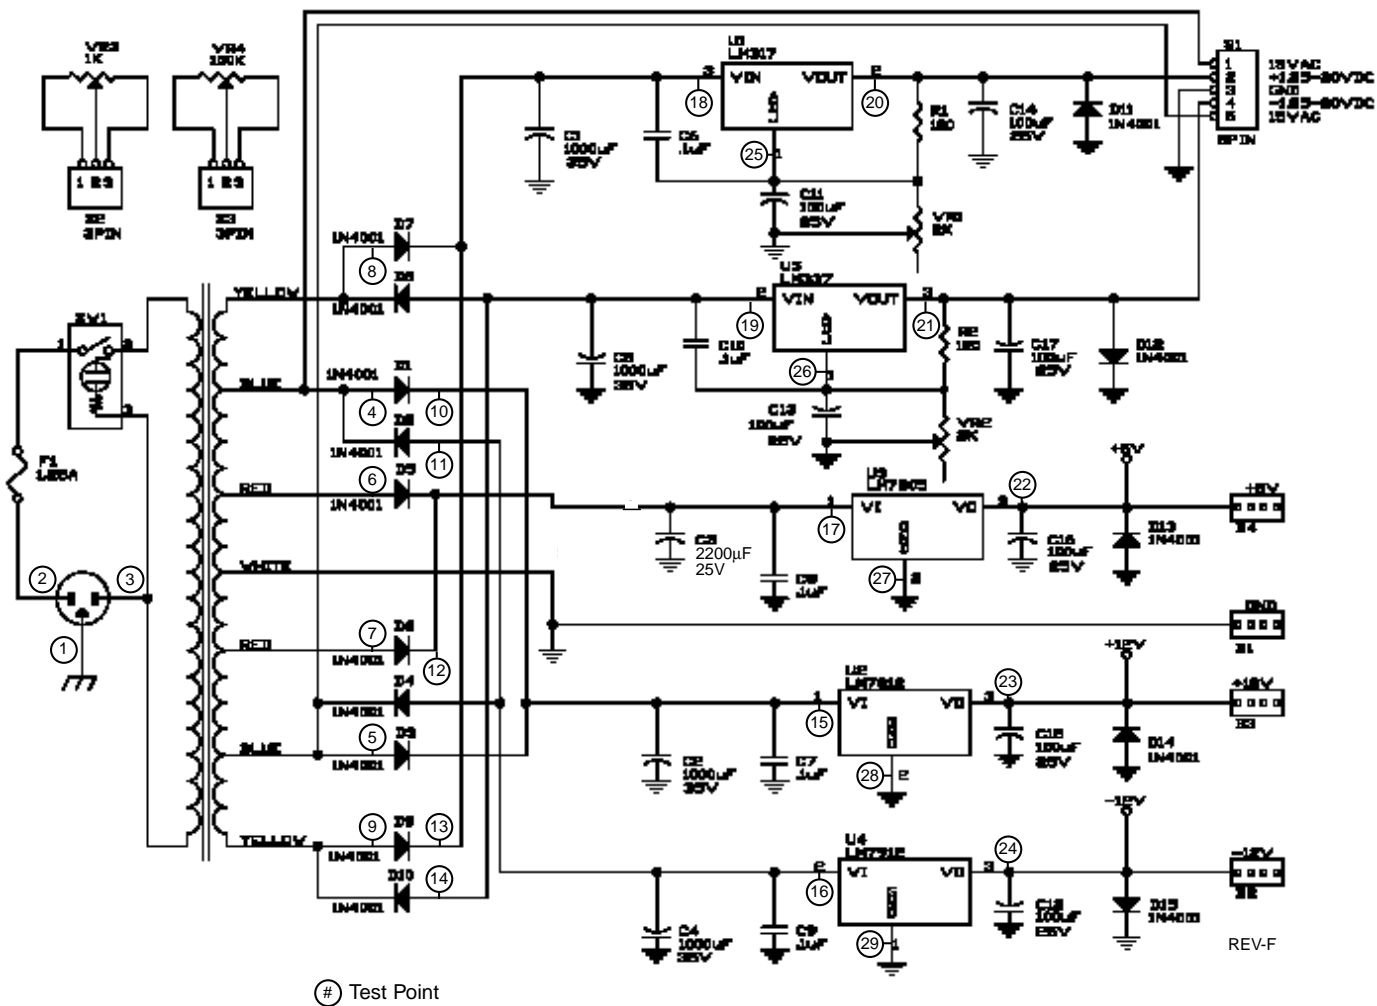

## QUIZ - POWER SUPPLY SECTION

INSTRUCTIONS - Complete the following examination and check your answers carefully.

1. AC voltage is supplied to the rectifier stages by the . . .
  - ☐ A. step-up transformer.
  - ☐ B. step-down transformer.
  - ☐ C. 1 to 1 transformer.
  - ☐ D. AC to DC transformer.
2. The secondary windings of the transformer are . . .
  - ☐ A. 90° out of phase.
  - ☐ B. 180° out of phase.
  - ☐ C. 270° out of phase.
  - ☐ D. 320° out of phase.
3. Diodes allow current to flow . . .
  - ☐ A. when the anode is more negative than the cathode.
  - ☐ B. when the cathode is more positive than the anode.
  - ☐ C. in one direction.
  - ☐ D. when a negative or positive voltage is on the anode.
4. What circuit is more efficient for rectifying AC to DC?
  - ☐ A. Hartley oscillator.
  - ☐ B. Half-wave.
  - ☐ C. Schmitt trigger.
  - ☐ D. Full wave.
5. The DC voltage is smoothed by using a . . .
  - ☐ A. half-wave rectification circuit.
  - ☐ B. small value capacitor with a high voltage value.
  - ☐ C. Large value capacitor.
  - ☐ D. 90° out of phase.
6. An inefficient rectification circuit usually contains . . .
  - ☐ A. large gaps between cycles.
  - ☐ B. twice the AC voltage needed.
  - ☐ C. more diodes.
  - ☐ D. all of the above.
7. The maximum current that a diode can handle is determined by . . .
  - ☐ A. the transformer's current rating.
  - ☐ B. the amount of AC ripple.
  - ☐ C. three times the diode rating.
  - ☐ D. peak current rating.
8. The LM-317 will shut down when . . .
  - ☐ A. the output voltage is too high.
  - ☐ B. no current is being drawn.
  - ☐ C. the junction overheats.
  - ☐ D. the output voltage drops to 1.25V.
9. The LM-317 regulator contains . . .
  - ☐ A. a pass transistor.
  - ☐ B. a constant current source.
  - ☐ C. a differential amplifier.
  - ☐ D. all of the above.
10. The LM-317 is basically . . .
  - ☐ A. a 1.25V regulator.
  - ☐ B. a 6.25V regulator.
  - ☐ C. a 2.5V regulator.
  - ☐ D. a negative voltage regulator.

Answers: 1. B; 2. B; 3. C; 4. D; 5. C; 6. D; 7. D; 8. C; 9. D; 10. A

# AN-700-C

## XK-700 ANALOG KIT (AN-700-C) PARTS LIST

| RESISTORS                  |              |                |                           |        |
|----------------------------|--------------|----------------|---------------------------|--------|
| Qty.                       | Symbol       | Value          | Color Code                | Part # |
| <input type="checkbox"/> 2 | R14, R44     | 100Ω 5% 1/4W   | brown-black-brown-gold    | 131000 |
| <input type="checkbox"/> 1 | R5           | 200Ω 5% 1/4W   | red-black-brown-gold      | 132000 |
| <input type="checkbox"/> 2 | R46, R47     | 330Ω 5% 1/4W   | orange-orange-brown-gold  | 133300 |
| <input type="checkbox"/> 1 | R12          | 1kΩ 5% 1/4W    | brown-black-red-gold      | 141000 |
| <input type="checkbox"/> 1 | R49          | 2kΩ 5% 1/4W    | red-black-red-gold        | 142000 |
| <input type="checkbox"/> 2 | R7, R11      | 4.7kΩ 5% 1/4W  | yellow-violet-red-gold    | 144700 |
| <input type="checkbox"/> 1 | R3           | 6.8kΩ 5% 1/4W  | blue-gray-red-gold        | 146800 |
| <input type="checkbox"/> 1 | R13          | 8.2kΩ 5% 1/4W  | gray-red-red-gold         | 148200 |
| <input type="checkbox"/> 1 | R10          | 10kΩ 5% 1/4W   | brown-black-orange-gold   | 151000 |
| <input type="checkbox"/> 1 | R6           | 12kΩ 5% 1/4W   | brown-red-orange-gold     | 151200 |
| <input type="checkbox"/> 3 | R4, R45, R48 | 22kΩ 5% 1/4W   | red-red-orange-gold       | 152200 |
| <input type="checkbox"/> 1 | R9           | 47kΩ 5% 1/4W   | yellow-violet-orange-gold | 154700 |
| <input type="checkbox"/> 1 | R8           | 51kΩ 5% 1/4W   | green-brown-orange-gold   | 155100 |
| <input type="checkbox"/> 1 | VR8          | 100kΩ Trim Pot |                           | 191610 |
| <input type="checkbox"/> 1 | VR5          | 10kΩ Pot       |                           | 192531 |
| <input type="checkbox"/> 2 | VR6, VR7     | 100kΩ Pot      |                           | 192612 |

| CAPACITORS                 |          |               |              |        |
|----------------------------|----------|---------------|--------------|--------|
| Qty.                       | Symbol   | Value         | Description  | Part # |
| <input type="checkbox"/> 1 | C27      | 5pF (5)       | Discap       | 205010 |
| <input type="checkbox"/> 1 | C26      | 22pF (22)     | Discap       | 212210 |
| <input type="checkbox"/> 1 | C23      | 100pF (101)   | Discap       | 221017 |
| <input type="checkbox"/> 1 | C18      | .001μF (102)  | Mylar        | 231017 |
| <input type="checkbox"/> 1 | C25      | .0022μF (222) | Discap       | 232216 |
| <input type="checkbox"/> 1 | C19      | .01μF (103)   | Mylar        | 241017 |
| <input type="checkbox"/> 1 | C20      | .1μF (104)    | Mylar        | 251017 |
| <input type="checkbox"/> 1 | C21      | 1μF 50V       | Electrolytic | 261047 |
| <input type="checkbox"/> 2 | C22, C24 | 10μF 25V      | Electrolytic | 271045 |

| SEMICONDUCTORS             |          |        |                    |        |
|----------------------------|----------|--------|--------------------|--------|
| Qty.                       | Symbol   | Value  | Description        | Part # |
| <input type="checkbox"/> 2 | D16, D17 | 1N4148 | Diode              | 314148 |
| <input type="checkbox"/> 2 | Q1, Q3   | 2N3904 | Transistor PNP     | 323904 |
| <input type="checkbox"/> 1 | Q2       | 2N3906 | Transistor NPN     | 323906 |
| <input type="checkbox"/> 1 | U10      | LF357  | Integrated Circuit | 330357 |
| <input type="checkbox"/> 1 | U6       | XR2206 | Integrated Circuit | 332206 |

| MISCELLANEOUS              |        |                      |        |  |
|----------------------------|--------|----------------------|--------|--|
| Qty.                       | Symbol | Description          | Part # |  |
| <input type="checkbox"/> 1 | SW2    | Switch Rotary 12-pin | 542206 |  |
| <input type="checkbox"/> 1 | SW3    | Switch Rotary 16-pin | 542405 |  |
| <input type="checkbox"/> 5 |        | Knob Push-on         | 622009 |  |
| <input type="checkbox"/> 3 |        | Nut 7mm              | 644101 |  |
| <input type="checkbox"/> 2 |        | Nut 9mm              | 644102 |  |
| <input type="checkbox"/> 3 |        | Washer Flat 8mm      | 645101 |  |
| <input type="checkbox"/> 2 |        | Washer Flat 9mm      | 645103 |  |
| <input type="checkbox"/> 1 | U10    | IC Socket 8-Pin      | 664008 |  |
| <input type="checkbox"/> 1 | U6     | IC Socket 16-Pin     | 664016 |  |
| <input type="checkbox"/> 2 | B5, B6 | 4-Pin Bredblox       | 665204 |  |
| <input type="checkbox"/> 1 |        | Solder               | 9ST4A  |  |

---

## INTRODUCTION - ANALOG SECTION

The Analog Section of your trainer contains a complete function generator capable of producing sine, square, and triangle waveforms. The frequency of this generator can be continuously varied from 1 hertz to over 100,000 hertz in five steps: 10, 100, 1k, 10k, and 100k. A fine frequency control makes selection of any frequency in between easy. The amplitude of the waveforms are adjustable from 0-15Vpp. A waveform of function generator capable of producing sine, square and triangle waveform outputs has a wide range of applications in electrical measurements and laboratory instrumentation. This complete function generator system is suitable for experimentation and applications by the student. The entire function generator is comprised of a single XR-2206 monolithic IC and a limited number of passive circuit components.

---

## SPECIFICATIONS

Waveforms - Sine, square, triangle and complementary square.


Frequency - 1Hz to 100kHz in 5 steps continuously variable.

Fine frequency adjust - 10:1 approximate.

Amplitude variable 0-15 Vpp.

Output impedance 330 ohms: short protected.

DC offset change 10V from zero crossing.

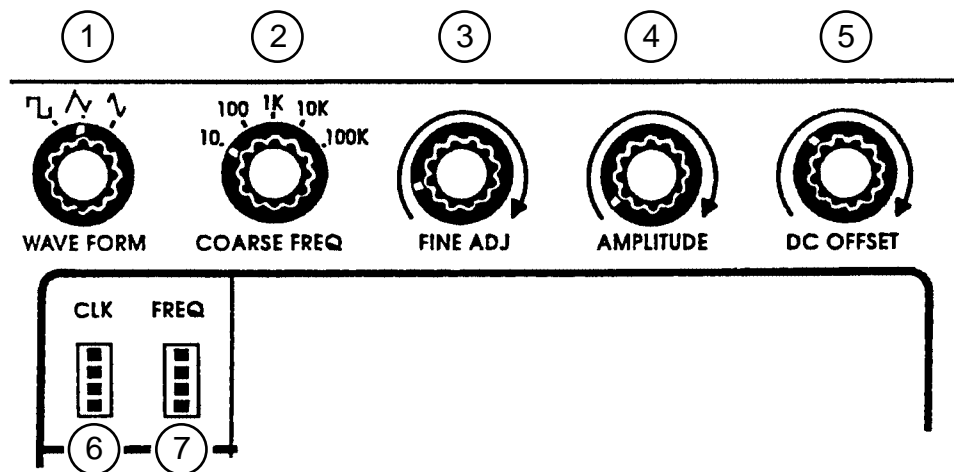

---

## USERS DESCRIPTION OF FRONT PANEL CONTROLS

1. **WAVEFORM** - Selects square, triangle or sine waveform at the FREQ output.
2. **COURSE FREQUENCY** - Selects five ranges of frequencies 10, 100, 1k, 10k and 100k hertz.
3. **FINE FREQUENCY** - Allows easy selection of desired frequency according to the frequency range.
4. **AMPLITUDE** - Controls the amplitude of the FREQ output signal from 0-15Vpp.
5. **DC OFFSET** - Controls the DC level of the FREQ output signal. The DC level may be varied 10 volts from zero level.
6. **CLK** - A 4-pin output block for function generator's square wave. The amplitude of the signal is 5Vpp and frequency is dependent on WAVEFORM selection.
7. **FREQ** - A 4-pin output block for function generator's signals, output is dependent on WAVEFORM selection and frequency is set by COURSE FREQ control. The amplitude of the output is variable from 0-15Vpp.




# INSTALL COMPONENTS TO PC BOARD

**Start Here**



- ☐ J9 - Jumper Wire  
(see Figure A)
- ☐ C25 - .0022 $\mu$ F (222) Discap
- ☐ J10 - Jumper Wire
- ☐ J25 - Jumper Wire  
(see Figure A)
- ☐ VR8 - 100k $\Omega$  Trim Pot  
(see Figure E)
- ☐ C26 - 22pF (22) Discap
- ☐ C23 - 100pF (101) Discap
- ☐ J11 - Jumper Wire
- ☐ J12 - Jumper Wire
- ☐ J13 - Jumper Wire  
(see Figure A)
- ☐ U10 - IC socket 8-pin
- ☐ U10 - LF357 IC  
(see Figure B)
- ☐ R8 - 51k $\Omega$  5% 1/4W Resistor  
(green-brown-orange-gold)
- ☐ R11 - 4.7k $\Omega$  5% 1/4W Resistor  
(yellow-violet-red-gold)
- ☐ C27 - 5pF (5) Discap

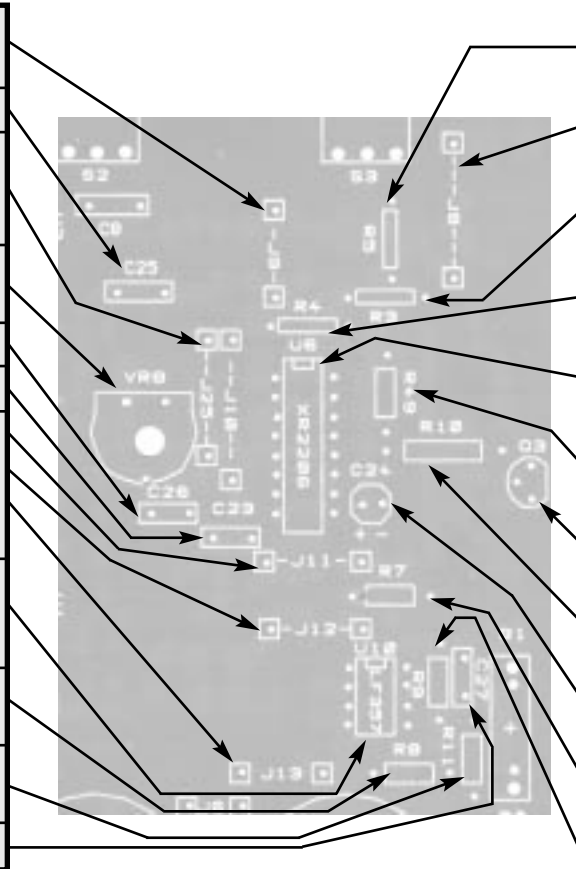

**Continue**




- ☐ R5 - 200 $\Omega$  5% 1/4W Resistor  
(red-black-brown-gold)
- ☐ J8 - Jumper Wire  
(see Figure A)
- ☐ R3 - 6.8k $\Omega$  5% 1/4W Resistor  
(blue-gray-red-gold)
- ☐ R4 - 22k $\Omega$  5% 1/4W Resistor  
(red-red-orange-gold)
- ☐ U6 - IC socket 16-pin
- ☐ U6 - XR2206 IC  
(see Figure B)
- ☐ R49 - 2k $\Omega$  5% 1/4W Resistor  
(red-black-red-gold)
- ☐ Q3 - 2N3904 Transistor  
(see Figure C)
- ☐ R10 - 10k $\Omega$  5% 1/4W Resistor  
(brown-black-orange-gold)
- ☐ C24 - 10 $\mu$ F 25V Lytic  
(see Figure D)
- ☐ R7 - 4.7k $\Omega$  5% 1/4W Resistor  
(yellow-violet-red-gold)
- ☐ R9 - 47k $\Omega$  5% 1/4W Resistor  
(yellow-violet-orange-gold)

**Figure A**

Cut a piece of bare wire long enough so that 1/4" of wire passes through each hole in the PC board after the wire is formed (provided in the second package).




**Figure B**



Insert the IC socket into the PC board with the notch in the direction shown on the top legend. Solder the IC socket into place. Insert the IC into the socket with the notch in the same direction as the notch on the socket.

**Figure C**




Mount the transistor with the flat side in the direction shown on the top legend.


**Figure D**

Electrolytics have a polarity marking on them indicating the negative (-) lead. The PC board is marked to show the lead positions.

Mount the capacitors horizontal to the PC board. Bend the leads at right angles and then insert the leads into the PC board.



Polarity Mark




# INSTALL COMPONENTS TO PC BOARD

**Start Here**



- ☐ B6 - 4-pin Bredblox (see Figure F)
- ☐ D16 - 1N4148 Diode (see Figure G)
- ☐ R14 - 100Ω 5% 1/4W Resistor (brown-black-brown-gold)
- ☐ B5 - 4-pin Bredblox (see Figure F)
- ☐ R12 - 1kΩ 5% 1/4W Resistor (brown-black-red-gold)
- ☐ R44 - 100Ω 5% 1/4W Resistor (brown-black-brown-gold)
- ☐ D17 - 1N4148 Diode (see Figure G)
- ☐ J23 - Jumper Wire (see Figure A)

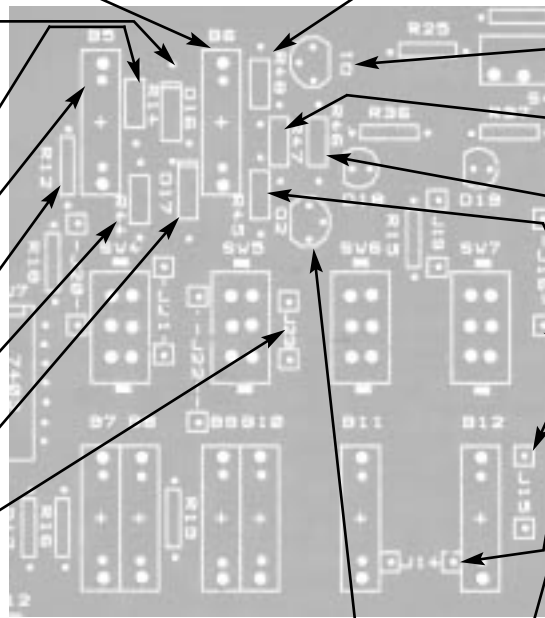


**Continue**



- ☐ R48 - 22kΩ 5% 1/4W Resistor (red-red-orange-gold)
- ☐ Q1 - 2N3904 Transistor (see Figure C)
- ☐ R47 - 330Ω 5% 1/4W Resistor (orange-orange-brown-gold)
- ☐ R46 - 330Ω 5% 1/4W Resistor (orange-orange-brown-gold)
- ☐ R45 - 22kΩ 5% 1/4W Resistor (red-red-orange-gold)
- ☐ J16 - Jumper Wire
- ☐ J15 - Jumper Wire
- ☐ J14 - Jumper Wire (see Figure A)
- ☐ Q2 - 2N3906 Transistor (see Figure C)


**Figure E**

Mount the trim pot to the PC board as shown below.

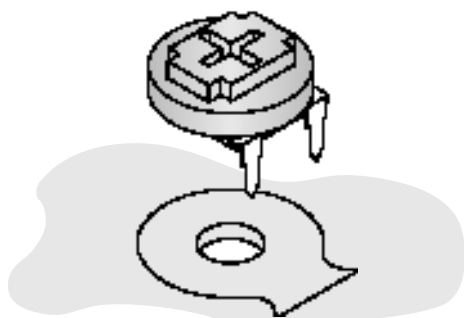


**Figure F**

Hold the bredblox down flush to the PC board from the top legend side and solder the metal pins in place. Then, melt the plastic pins with your soldering iron to hold the bredblox down as shown. Re-tin the solder tip afterwards.



**Figure G**

Diodes have polarity. Mount with band in the direction shown on the PC board.



**Figure EA**

Bend the capacitors at a 45° angle before soldering it to the PC board.



# INSTALL COMPONENTS TO PC BOARD

**Start Here**




- ☐ J18 - Jumper Wire (see Figure A)
- ☐ R13 - 8.2k $\Omega$  5% 1/4W Resistor (gray-red-red-gold)
- ☐ J17 - Jumper Wire (see Figure A)
- ☐ C18 - .001 $\mu$ F (102) Mylar (see Figure EA)
- ☐ R6 - 12k $\Omega$  5% 1/4W Resistor (brown-red-orange-gold)

**Figure H**


Mount down flush with PC board. The value may be marked on the back side of pot.

Cut off excess lead length after soldering.



**Potentiometers**

**Switches**

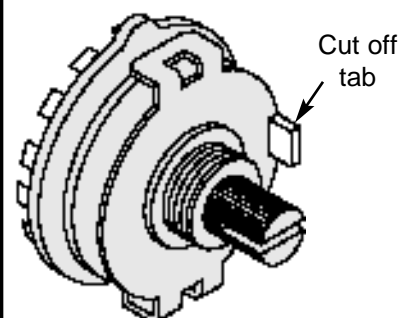

**Figure I**


Mount down flush with PC board. Note: SW2 has 12 pins and SW3 has 16 pins.

**Continue**



- ☐ VR6 - 100k $\Omega$  Pot (see Figure H)
- ☐ VR5 - 10k $\Omega$  Pot (see Figure H)
- ☐ VR7 - 100k $\Omega$  Pot (see Figure H)
- ☐ SW2 - SW Rotary 12-Pin (see Figure I)
- ☐ SW3 - SW Rotary 16-Pin (see Figure I)

- ☐ C21 - 1 $\mu$ F 50V Electrolytic (see Figure D)
- ☐ C22 - 10 $\mu$ F 25V Electrolytic (see Figure D)
- ☐ C20 - .1 $\mu$ F (104) Mylar (see Figure EA)
- ☐ C19 - .01 $\mu$ F (103) Mylar (see Figure EA)

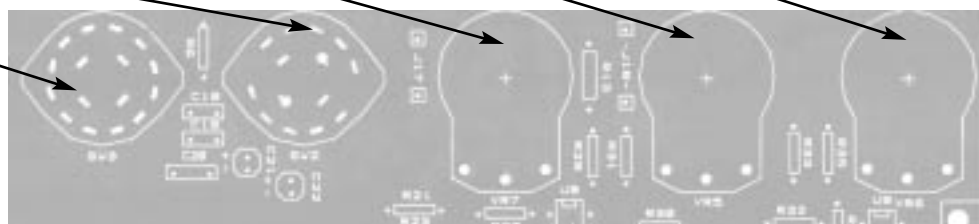

## RESISTANCE ANALYSIS OF ANALOG SECTION

Static testing of the analog circuits. **Do not plug in the power supply into 120VAC power source until all resistance readings check out. The values given below are approximated.**

**SET SW3 TO SQUARE WAVE** (refer to top panel)

|   | From        | To          | Circuit     | Ohms                   | Resistance Measured |
|---|-------------|-------------|-------------|------------------------|---------------------|
| + | Pin 11 (U6) | Pin 3 (U10) | Square Wave | VR5 CCW 12.3k $\Omega$ |                     |
|   | Pin 11 (U6) | Pin 3 (U10) | Square Wave | VR5 CW 6.7k $\Omega$   |                     |

**SET SW3 TO TRIANGLE WAVE**

|   | From        | To          | Circuit       | Ohms                     | Resistance Measured |
|---|-------------|-------------|---------------|--------------------------|---------------------|
| + | Pin 2 (U6)  | Pin 3 (U10) | Triangle Wave | VR5 CCW 14.7k $\Omega$   |                     |
|   | Pin 2 (U6)  | Pin 3 (U10) | Triangle Wave | VR5 CW 4.7k $\Omega$     |                     |
|   | Pin 13 (U6) | Pin 14 (U6) | Triangle Wave | Greater than 1k $\Omega$ |                     |


**SET SW3 TO SINE WAVE**

|   | From        | To          | Circuit       | Ohms                    | Resistance Measured |
|---|-------------|-------------|---------------|-------------------------|---------------------|
| + | Pin 2 (U6)  | Pin 3 (U10) | Sine Wave     | VR5 CCW 14.7k $\Omega$  |                     |
| + | Pin 2 (U6)  | Pin 3 (U10) | Sine Wave     | VR5 CW 4.7k $\Omega$    |                     |
|   | Pin 13 (U6) | Pin 14 (U6) | Sine Wave     | 200 $\Omega$            |                     |
|   | Pin 3 (U6)  | GND (B1)    | Mult          | VR8 CCW < 10 $\Omega$   |                     |
| + | Pin 3 (U6)  | GND (B1)    | Mult          | VR8 CW 100k $\Omega$    |                     |
|   | Pin 4 (U6)  | +12V (B3)   | VCC           | Less than 3 $\Omega$    |                     |
| + | Pin 7 (U6)  | -12V (B2)   | Fine Freq Adj | VR7 CCW 108.2k $\Omega$ |                     |
|   | Pin 7 (U6)  | -12V (B2)   | Fine Freq Adj | VR7 CW 8.2k $\Omega$    |                     |
|   | Pin 12 (U6) | -12V (B2)   | GND           | Less than 3 $\Omega$    |                     |

⚡30%

CCW - Counter-Clockwise

CW - Clockwise

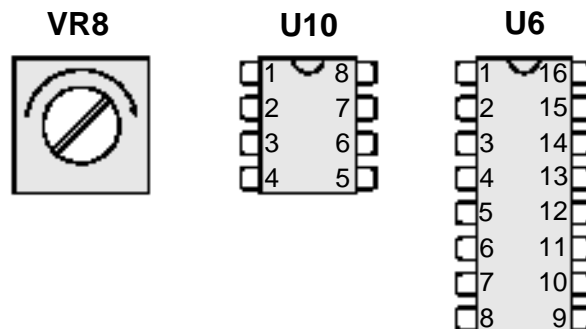


## VOLTAGE ANALYSIS OF ANALOG SECTION

Proceed with the voltage analysis only if the resistance readings were satisfactory. **The values given below are approximate.**

The following measurements will be taken from the copper side of the PC board. Turn the unit on and place it upside down.

See Figure J for locations of the testing points.

| From        | To       | Circuit  | Volts | Volts Measured |
|-------------|----------|----------|-------|----------------|
| Pin 4 (U6)  | GND (B1) | U6 Vcc   | +12V  |                |
| Pin 12 (U6) | GND (B1) | U6 GND   | -12V  |                |
| Pin 7 (U10) | GND (B1) | U10 Vcc  | +12V  |                |
| Pin 4 (U10) | GND (B1) | U10 Vcc- | -12V  |                |

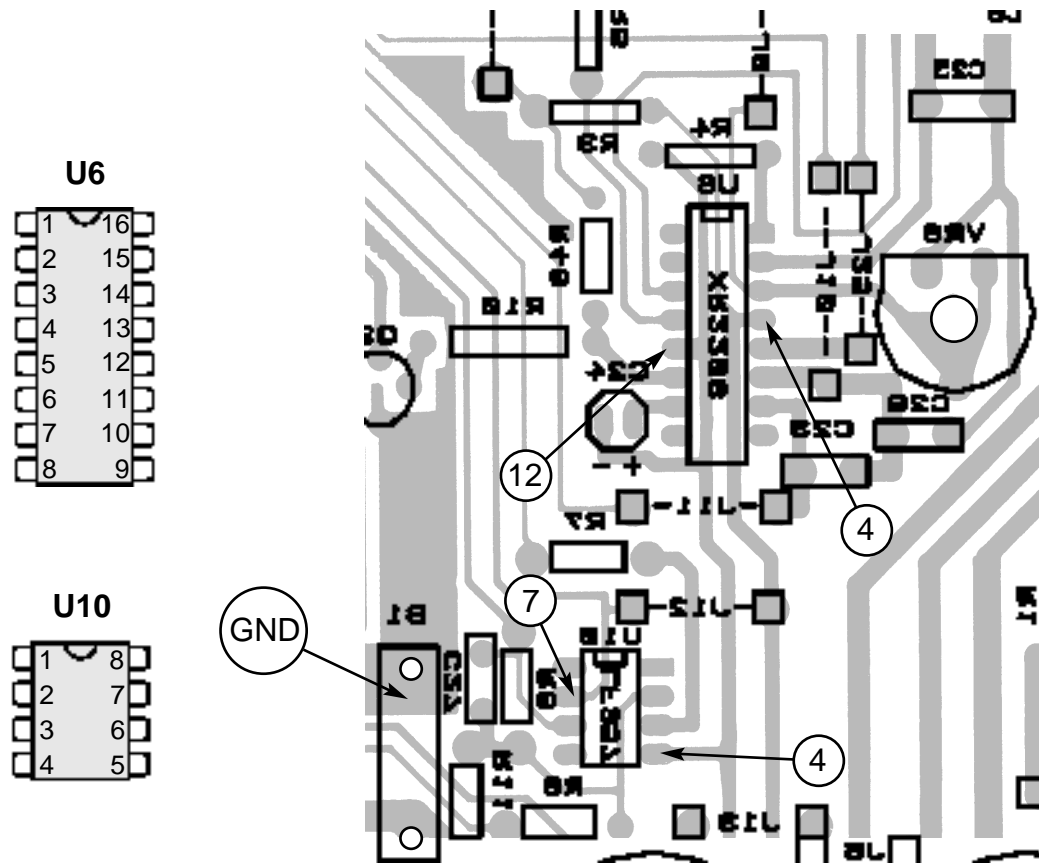

Turn unit right side up.

Figure J

## TESTING THE FUNCTION GENERATOR

Note: Use the knobs when turning the switches.

### TESTING THE SINE WAVE

1. Set your meter to the 200mV DC range.
2. Connect the red meter lead to the 4-pin breadblock marked FREQ and the black lead wire to the 4-pin breadblock marked GND.
3. Set the WAVEFORM knob to SINE, COARSE FREQUENCY knob to 1k and the FINE ADJ and AMPLITUDE knobs fully clockwise.
4. Set the DC offset to the middle position. Then, turn on the trainer.

- Set VR8 fully counter-clockwise.
- Adjust the DC OFFSET knob until the meter reads 0 volts DC.
- Set the meter to the 20 volts AC range and slowly turn VR8 clockwise until the meter reads 5.8 volts AC.


**Note:** Adjusting the DC offset will affect the VAC readings.

#### TESTING THE TRIANGLE WAVEFORM

- Switch the WAVEFORM knob to its triangle wave setting.
- With the meter set to the 20 volts AC range, you should read about 6.3 volts AC.

#### TESTING THE SQUARE WAVEFORM

- Switch the WAVEFORM knob to its square wave setting.
- Set your meter to the 20 volts AC range, you should now read about 12.5 volts AC.

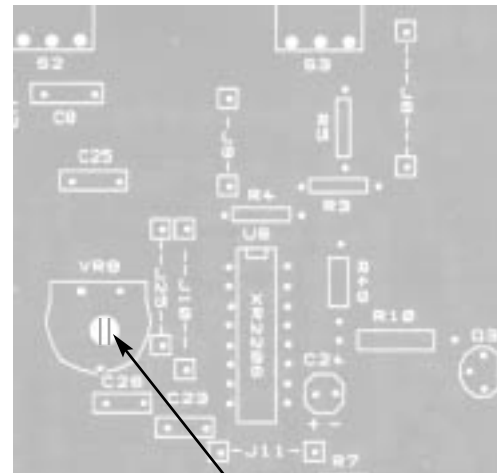

Trim Pot Adjustment

**Turn the unit off and unplug it from the AC outlet.**

## TROUBLESHOOTING CHART

This chart lists the condition and possible causes of several malfunctions. If a particular part is mentioned as a possible cause, check that part to see if it was installed correctly. Also, check it and the parts connected to it for good solder connections.

| PROBLEM                                       | POSSIBLE CAUSE   |
|---|--|
| No wave form at FREQ                          | <ol style="list-style-type: none"> <li>Check voltage at pins 4 (+12V) and 12 (–12V) of U6.</li> <li>Check for wave forms at pin 2 of U6 and pin 3 of U10. <ol style="list-style-type: none"> <li>Check R3-4, R7, R13, C18-22, C24, SW2-3, VR5 &amp; VR7.</li> </ol> </li> <li>Measure voltage at pins 7 (+12V) and 4 (–12V) of U10.</li> <li>Check R8, R9, R11, R14, R44-48, D16, D17, Q1 and Q2.</li> </ol> |
| No sine, triangle or low amplitude            | <ol style="list-style-type: none"> <li>Check U6 pin 2 for wave form. <ol style="list-style-type: none"> <li>Check VR8, voltage to IC.</li> </ol> </li> </ol>   |
| Saw wave in sine position                     | <ol style="list-style-type: none"> <li>R5 wrong value.</li> </ol>  |
| Wave forms clip top or bottom                 | <ol style="list-style-type: none"> <li>Measure voltage at pins 7 (+12V) and 4 (–12V).</li> <li>Adjust VR8.</li> <li>Check R7, R9, R11, R14, R44-49, D16-17 and Q2-3.</li> </ol>  |
| No CLK wave output or low amplitude           | <ol style="list-style-type: none"> <li>Check pin 11 of U6 for square wave. <ol style="list-style-type: none"> <li>Check Q2 shorted to ground.</li> <li>Check R10, R12 and Q3.</li> <li>Defective IC.</li> </ol> </li> </ol>  |
| No square wave or low amplitude (FREQ output) | <ol style="list-style-type: none"> <li>Check pin 11 of U6 for square wave. <ol style="list-style-type: none"> <li>Check Q2 shorted to ground.</li> <li>Check R3, R49, SW3.</li> <li>Defective IC.</li> </ol> </li> </ol>   |
| Outputs wrong frequency                       | <ol style="list-style-type: none"> <li>Check C18-22, C24, R13, SW2 and VR7.</li> </ol>   |
| DC offset not working                         | <ol style="list-style-type: none"> <li>Check voltage on VR6 for +12V and –12V; check R8.</li> </ol>  |



## FINAL ASSEMBLY

If you are immediately going to build the remaining section, do not continue with the instructions on this page, proceed to page 35.

- Fasten the front panel in place with four #6 x 3/8" thread cutting screws, as shown in Figure K.
- Fasten the PC board to the spacer on the front panel with a fiber washer and a 4-40 x 1/4" screw from the foil side of the PC board, in the location shown in Figure L.
- Fasten the pots to the front panel with an 8mm washer and a 7mm nut, as shown in Figure K.
- Turn the shafts on the two switches fully counter-clockwise. Push the knobs onto the shafts so that the line on the knob is in line with the "Squarewave" on the waveform control and "10" on the Coarse Frequency control (see Figure M).  
If the knobs are loose on the shafts, insert a screwdriver into the slot and expand the slot slightly (see Figure O).

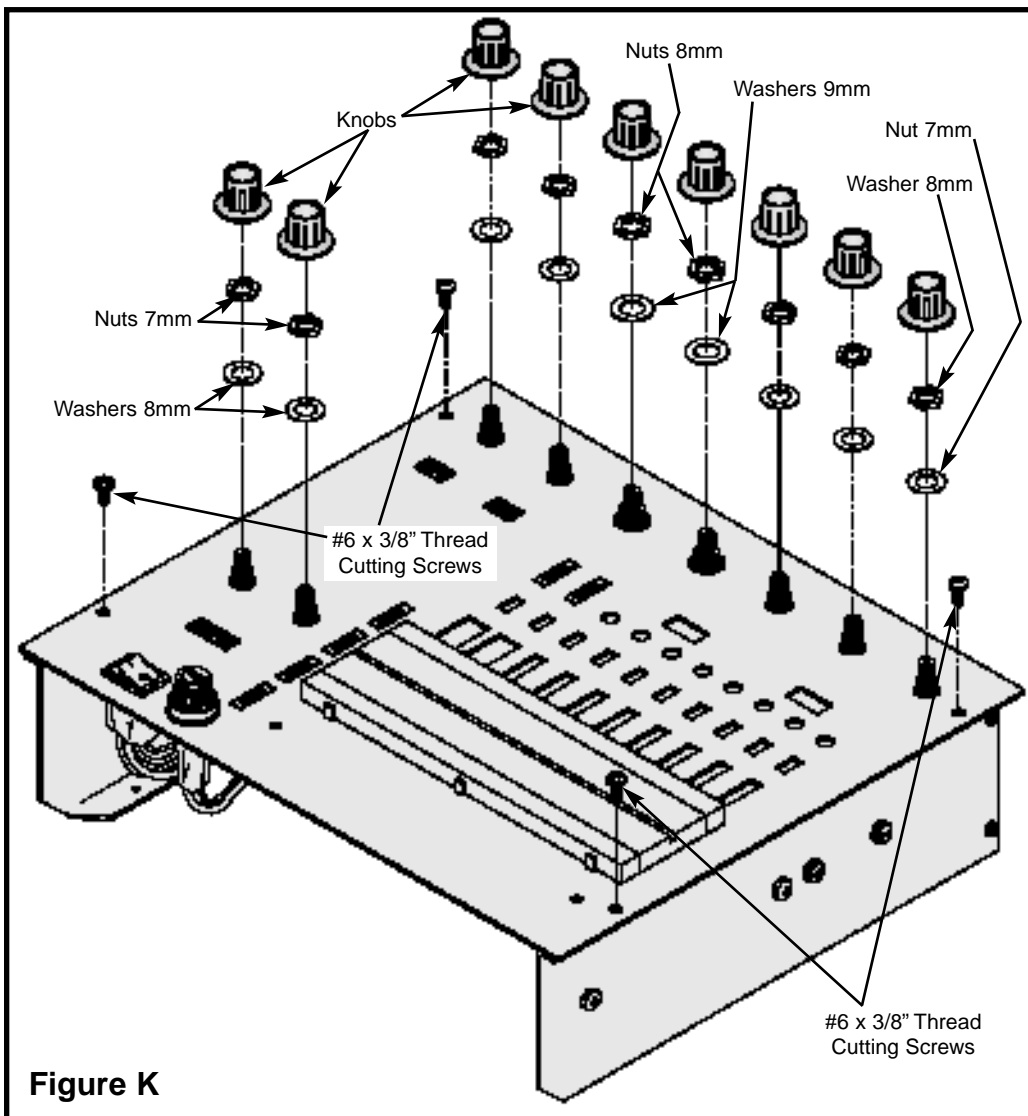


Figure K

- Turn the shafts on the pots fully counter-clockwise. Push the knobs onto the shafts so that the line on the knob is in line with the end of the circle on the front panel, as shown in Figure N.  
If the knobs are loose on the shafts, insert a screwdriver into the slot and expand the slot slightly (see Figure O).

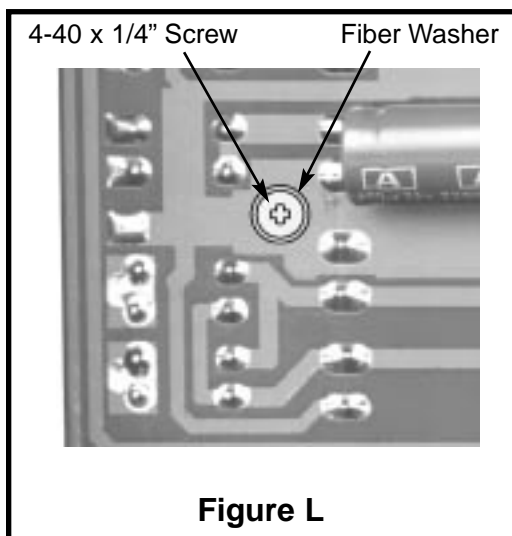


Figure L

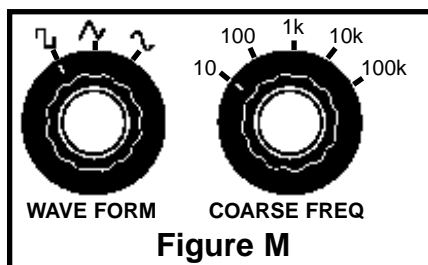


Figure M

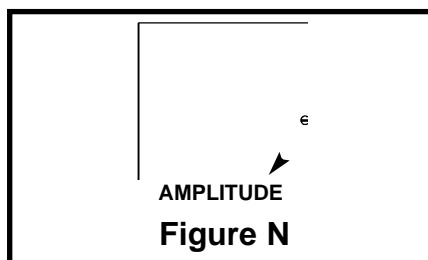


Figure N

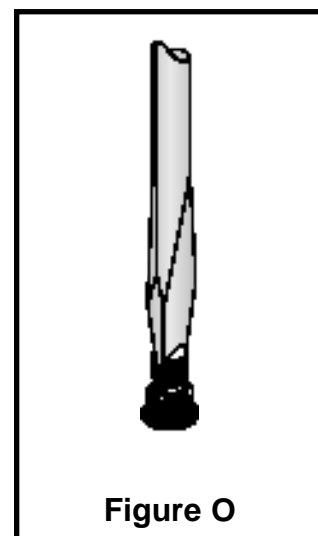


Figure O


## CIRCUIT DESCRIPTION

The function generator frequencies are produced by an XR2206 integrated circuit. This IC is capable of producing high quality sine, square and triangle waveforms of high stability and accuracy. The output waveform can be both amplitude and frequency modulated by an external voltage. Figure P shows the block diagram of the XR2206 IC.

The XR2206 is comprised of four functions blocks, a voltage controlled oscillator (VCO), an analog multiplier and sine shaper, a unity gain buffer amplifier, and a set of current switches.

The VCO actually produces an output frequency proportional to an input current. Across pins 5 and 6, a timing capacitor is switched in to give 5 different ranges of frequencies via COARSE FREQ switch. On pin 7, the FINE FREQ ADJ variable resistor controls the actual frequency output. These two components form the RC time constants for the oscillator frequency.

The VCO produces a square wave signal. This square wave is sent to a shaper and converted into a sine wave.

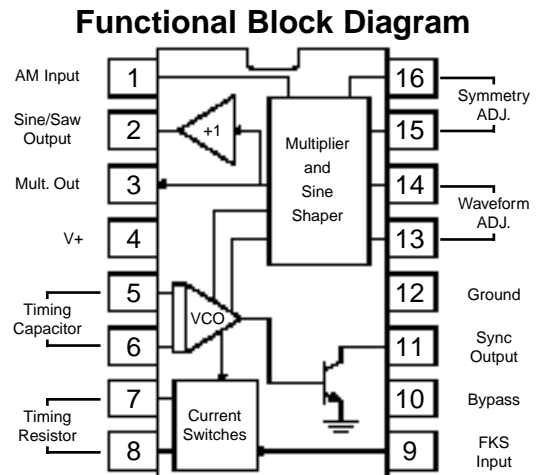

**Figure P**

## QUIZ - ANALOG SECTION

INSTRUCTIONS: Complete the following examination and check your answers carefully.

- The analog multiplier is part of . . .
  - ☐ A. the voltage controlled oscillator.
  - ☐ B. unity gain buffer amplifier.
  - ☐ C. four function blocks.
  - ☐ D. timing capacitor circuit.
- Increasing the current of the VCO will effect the . . .
  - ☐ A. amplitude.
  - ☐ B. DC offset.
  - ☐ C. AM modulation.
  - ☐ D. frequency.
- The RC time constant is determined by . . .
  - ☐ A. pins 5 and 6.
  - ☐ B. voltage controlled oscillator.
  - ☐ C. pin 7 and a variable resistor.
  - ☐ D. components on pins 5, 6, and 7.
- What pins on the 2206 IC are used to change the sine wave to a saw wave?
  - ☐ A. 5, 6
  - ☐ B. 15, 16
  - ☐ C. 13, 14
  - ☐ D. 4, 12
- Adjusting P4 from +12V to -12V effects . . .
  - ☐ A. sine wave amplitude.
  - ☐ B. modulation.
  - ☐ C. frequency stability.
  - ☐ D. DC offset.
- Coarse frequency is set by . . .
  - ☐ A. P6.
  - ☐ B. capacitor C11 through C15.
  - ☐ C. C21.
  - ☐ D. P1 and SW9.
- A 1 volt DC level on the FM input will . . .
  - ☐ A. shift the frequency 1kHz.
  - ☐ B. shift the frequency to DC.
  - ☐ C. have no effect.
  - ☐ D. shift the frequency 1MHz.
- The square wave and CLK output are 180° out of phase because . . .
  - ☐ A. Q2 inverts the CLK output.
  - ☐ B. Q1 inverts the square wave output.
  - ☐ C. a negative voltage is applied to P5.
  - ☐ D. pin 12 is tied to -12V.
- Clipping of the sine wave outputs can be corrected by . . .
  - ☐ A. P5.
  - ☐ B. the DC offset pot.
  - ☐ C. lowering the +5V power supply.
  - ☐ D. none of the above.
- The sync output produces . . .
  - ☐ A. a sine wave.
  - ☐ B. a saw wave.
  - ☐ C. voltage spikes.
  - ☐ D. a square wave.

Answers: 1. C; 2. D; 3. D; 4. C; 5. D; 6. B; 7. C; 8. A; 9. D; 10. D

### SCHEMATIC DIAGRAM - ANALOG SECTION



# DG-700-D

## XK-700 DIGITAL KIT (DG-700-D) PARTS LIST

### RESISTORS

| Qty.                        | Symbol    | Value         | Color Code              | Part # |
|-----------------------------|-----------|---------------|-------------------------|--------|
| <input type="checkbox"/> 8  | R36 - R43 | 120Ω 5% 1/4W  | brown-red-brown-gold    | 131200 |
| <input type="checkbox"/> 1  | R15       | 220Ω 5% 1/4W  | red-red-brown-gold      | 132200 |
| <input type="checkbox"/> 4  | R16 - R19 | 1kΩ 5% 1/4W   | brown-black-red-gold    | 141000 |
| <input type="checkbox"/> 16 | R20 - R35 | 100kΩ 5% 1/4W | brown-black-yellow-gold | 161000 |

### SEMICONDUCTORS

| Qty.                       | Symbol    | Value  | Description     | Part # |
|----------------------------|-----------|--------|-----------------|--------|
| <input type="checkbox"/> 1 | U7        | SN7403 | IC              | 337403 |
| <input type="checkbox"/> 8 | D18 - D25 |        | LED Diode (red) | 350002 |
| <input type="checkbox"/> 2 | U8, U9    | 74HC04 | IC              | 39HC04 |

### MISCELLANEOUS

| Qty.                        | Symbol     | Description       | Part # |
|-----------------------------|------------|-------------------|--------|
| <input type="checkbox"/> 10 | SW4 - SW13 | Slide Switch SPDT | 541009 |
| <input type="checkbox"/> 2  | S4, S5     | Connector 4-pin   | 591042 |
| <input type="checkbox"/> 8  |            | Spacer 1/4" #8    | 624124 |
| <input type="checkbox"/> 2  |            | Screw             | 642430 |
| <input type="checkbox"/> 3  | U7 - U9    | Socket IC 14-Pin  | 664014 |
| <input type="checkbox"/> 12 | B7 - B18   | Bredboard         | 665204 |
| <input type="checkbox"/> 1  |            | Bredblox          | 99426  |


## INTRODUCTION

The Digital Section is the fourth package of the XK-700K kit that you are building. The Digital Section of your trainer contains all of the necessary functions to do your digital designs. They consist of a clock generator, two no bounce logic switches, 8 LED indicator lamps and 8 data switches. We have also added a 730 tie point Bredblox to your already existing 830 tie points, giving you a total of 1560 tie points to handle complex circuit designs.

## SPECIFICATIONS

- Data switches, eight DPDT, Hi 5V, low 0V.
- Logic switches, two no bounce with complementary output.  
"On" voltage level 2.8V min., "Off" voltage level 1V max.  
Input impedance 100kΩ.
- Eight LED readouts, 100kΩ input impedance.
- Clock frequency, 1Hz to 100kHz in 5 steps continuously variable.
- Clock amplitude, 5Vpp squarewave.
- Clock rise time, better than 100 nsec.
- Bredboard 730 tie points.

## USERS DESCRIPTION OF FRONT PANEL

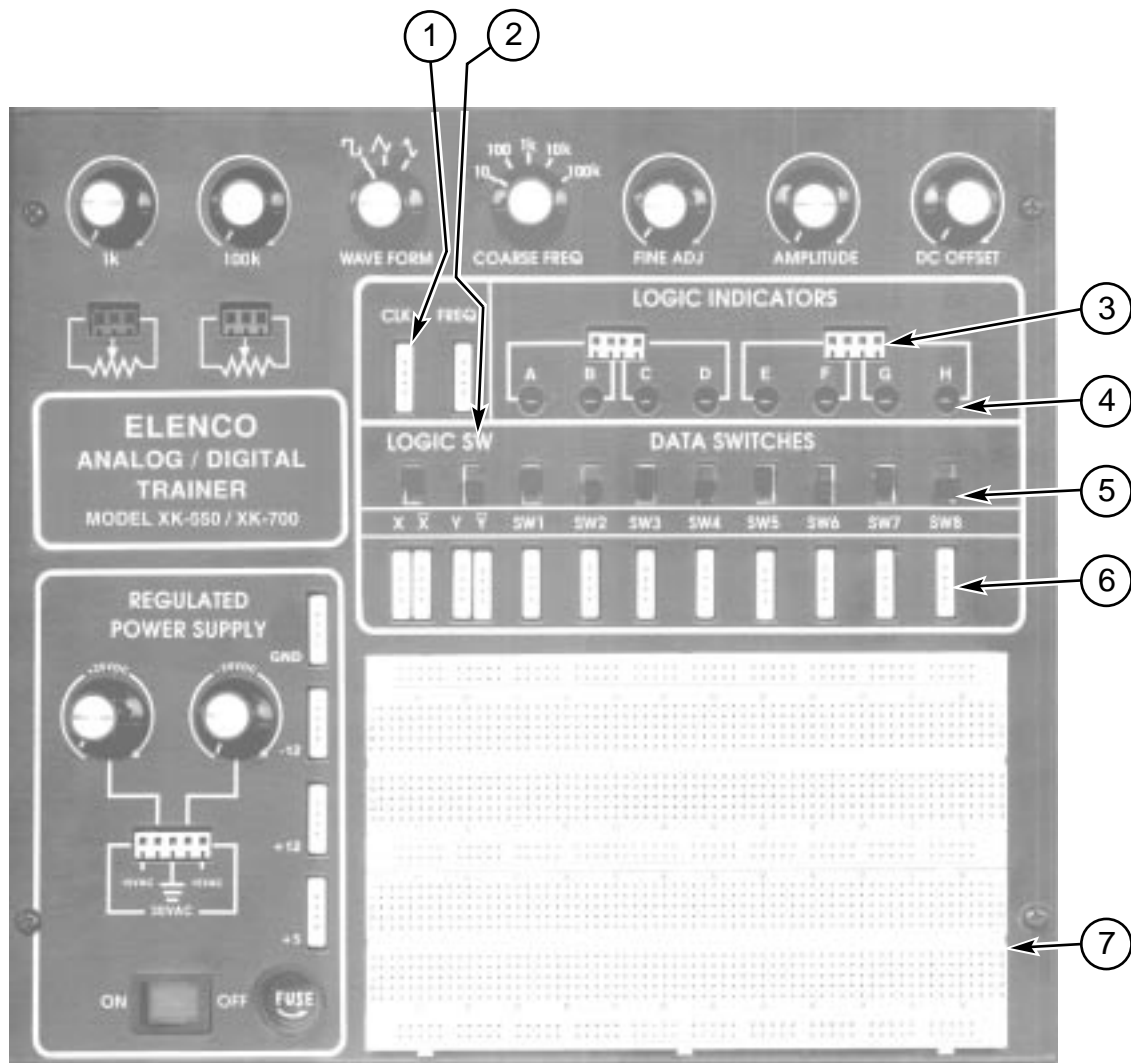


1. **Output Terminals** - For all functions as stated. 4 pins per block.
2. **Two Logic Switches** - These are no bounce logic switches. Give one signal state change per movement of switch.
3. **Input Terminals for Logic Indicator LEDs** - "A" input corresponds with "A" lamp, etc.
4. **Logic Indictators** - Eight LEDs.
5. **Eight Data Switches** - Lets output of 5V or 0V depending on position.
6. **Output Terminal** - For all functions as stated. 4 pins per block.
7. **Bredboard** - One bredboard containing 730 tie points.

## INSTALL COMPONENTS TO PC BOARD

Start Here



|  |
|--|
| <input type="checkbox"/> R34 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R35 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R33 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R32 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R28 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R27 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R30 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R31 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R29 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R26 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R20 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R22 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R24 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R21 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R23 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |
| <input type="checkbox"/> R25 - 100k $\Omega$ 5% 1/4W Resistor<br>(brown-black-yellow-gold) |

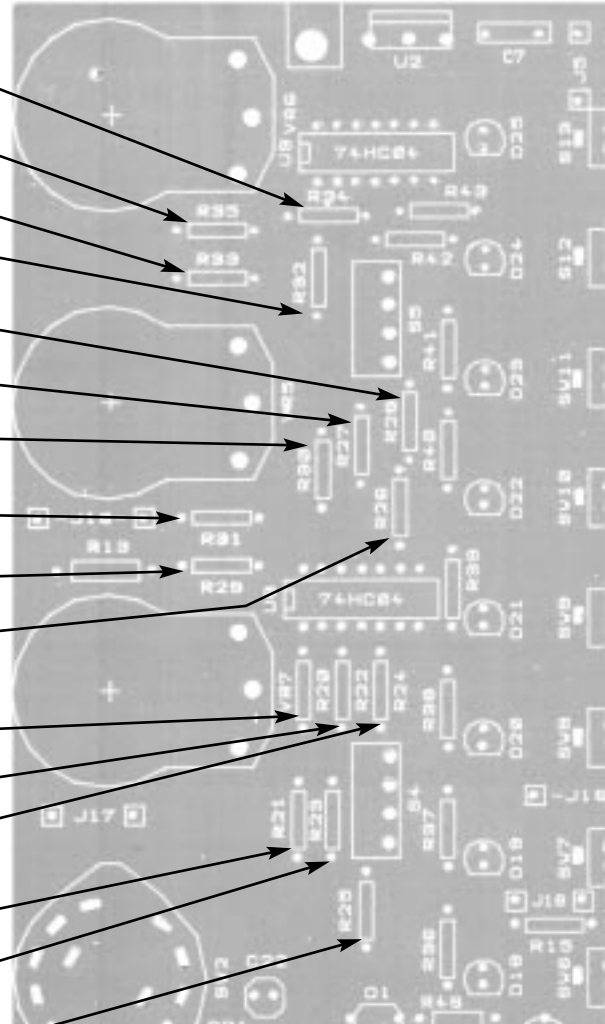



## INSTALL COMPONENTS TO PC BOARD

Start Here




|  |
|--|
| <input type="checkbox"/> R43 - 120Ω 5% 1/4W Resistor<br>(brown-red-brown-gold) |
| <input type="checkbox"/> R42 - 120Ω 5% 1/4W Resistor<br>(brown-red-brown-gold) |
| <input type="checkbox"/> S5 - 4-pin connector<br>(see Figure A)                |
| <input type="checkbox"/> R41 - 120Ω 5% 1/4W Resistor<br>(brown-red-brown-gold) |
| <input type="checkbox"/> R40 - 120Ω 5% 1/4W Resistor<br>(brown-red-brown-gold) |
| <input type="checkbox"/> R39 - 120Ω 5% 1/4W Resistor<br>(brown-red-brown-gold) |
| <input type="checkbox"/> R38 - 120Ω 5% 1/4W Resistor<br>(brown-red-brown-gold) |
| <input type="checkbox"/> S4 - 4-pin connector<br>(see Figure A)                |
| <input type="checkbox"/> R37 - 120Ω 5% 1/4W Resistor<br>(brown-red-brown-gold) |
| <input type="checkbox"/> R36 - 120Ω 5% 1/4W Resistor<br>(brown-red-brown-gold) |



**Figure A**

Mount the connector as shown and solder the pins of the connector.

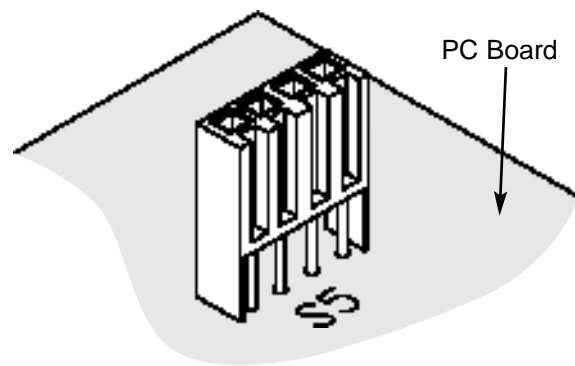

# INSTALL COMPONENTS TO PC BOARD

**Start Here**



- ☐ U9 - IC socket 14-pin
- ☐ U9 - 74HC04 IC (see Figure D)

**Continue**




- ☐ U8 - 14-pin IC socket
- ☐ U8 - 74HC04 IC (see Figure D)
- ☐ J19 - Jumper Wire (see Figure C)
- ☐ R15 - 220 $\Omega$  5% 1/4W Resistor (red-red-brown-gold)
- ☐ J22 - Jumper Wire (see Figure C)
- ☐ J21 - Jumper Wire (see Figure C)
- ☐ J20 - Jumper Wire (see Figure C)
- ☐ R18 - 1k $\Omega$  5% 1/4W Resistor (brown-black-red-gold)
- ☐ U7 - IC socket 14-pin
- ☐ U7 - 7403 IC (see Figure D)
- ☐ J24 - Jumper Wire (see Figure C)


**Continue**



- ☐ D25 - LED and Spacer (see Figure B)
- ☐ J27 - Jumper Wire (see Figure C)
- ☐ D24 - LED and Spacer (see Figure B)
- ☐ D23 - LED and Spacer (see Figure B)
- ☐ D22 - LED and Spacer (see Figure B)
- ☐ D21 - LED and Spacer (see Figure B)
- ☐ D20 - LED and Spacer (see Figure B)
- ☐ D19 - LED and Spacer (see Figure B)
- ☐ D18 - LED and Spacer (see Figure B)
- ☐ R19 - 1k $\Omega$  5% 1/4W Resistor (brown-black-red-gold)
- ☐ R16 - 1k $\Omega$  5% 1/4W Resistor (brown-black-red-gold)
- ☐ R17 - 1k $\Omega$  5% 1/4W Resistor (brown-black-red-gold)

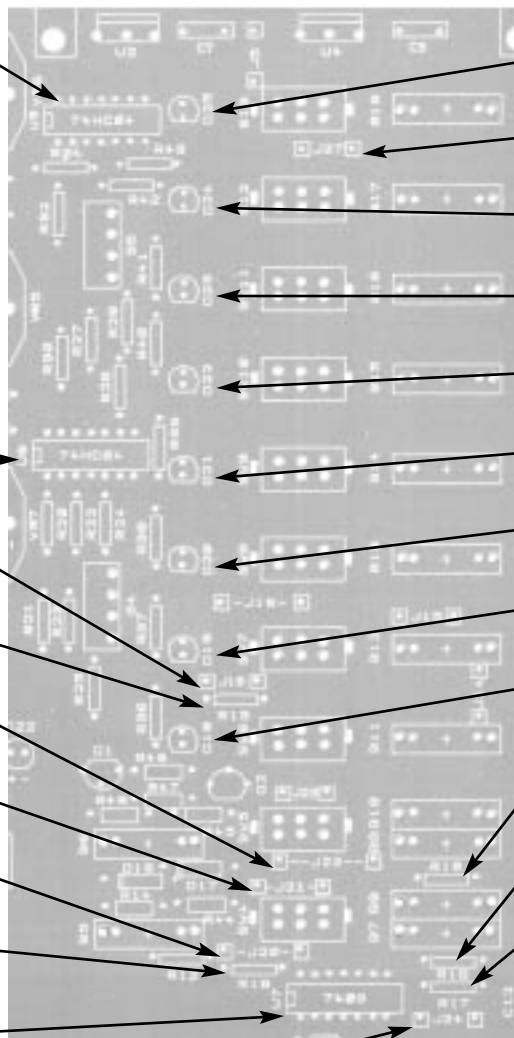

**Figure B**




Mount with the flat side of the LED as shown on the top legend side of the PC board.

**Figure C**

Cut a piece of bare wire long enough so that 1/4" of wire passes through each hole in the PC board after the wire is formed (provided in the second package).



**Figure D**




Insert the IC socket into the PC board with the notch in the direction shown on the top legend. Solder the IC socket into place. Insert the IC into the socket with the notch in the same direction as the notch on the socket.

## INSTALL COMPONENTS TO PC BOARD

**Start Here**

- |   |   |  |
|---|---|--|
| <input type="checkbox"/> SW4 - Slide Switch | <input type="checkbox"/> SW7 - Slide Switch | <input type="checkbox"/> SW10 - Slide Switch |
| <input type="checkbox"/> SW5 - Slide Switch | <input type="checkbox"/> SW8 - Slide Switch | <input type="checkbox"/> SW11 - Slide Switch |
| <input type="checkbox"/> SW6 - Slide Switch | <input type="checkbox"/> SW9 - Slide Switch | <input type="checkbox"/> SW12 - Slide Switch |
| (see Figure F)                              |   | <input type="checkbox"/> SW13 - Slide Switch |

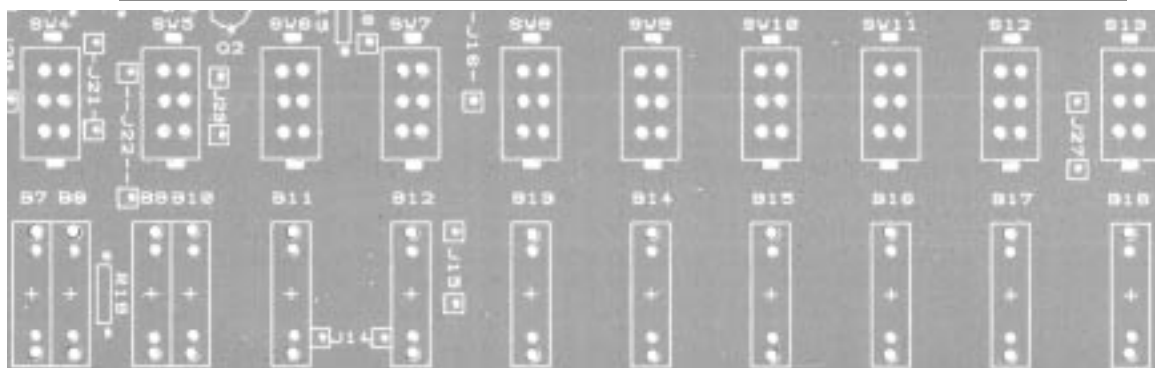


**Continue**

- |   |   |   |
|---|---|---|
| <input type="checkbox"/> B7 - 4-pin Breadbox  | <input type="checkbox"/> B11 - 4-pin Breadbox | <input type="checkbox"/> B15 - 4-pin Breadbox |
| <input type="checkbox"/> B8 - 4-pin Breadbox  | <input type="checkbox"/> B12 - 4-pin Breadbox | <input type="checkbox"/> B16 - 4-pin Breadbox |
| <input type="checkbox"/> B9 - 4-pin Breadbox  | <input type="checkbox"/> B13 - 4-pin Breadbox | <input type="checkbox"/> B17 - 4-pin Breadbox |
| <input type="checkbox"/> B10 - 4-pin Breadbox | <input type="checkbox"/> B14 - 4-pin Breadbox | <input type="checkbox"/> B18 - 4-pin Breadbox |
| (see Figure E)                                |   |   |


**Figure E**

Hold the breadbox down flush to the PC board from the top legend side and solder the metal pins into place. Then, melt the plastic pins with your soldering iron to hold the plastic blocks in place as shown.



**Figure F**

Mount the switch onto the legend side of the PC board as shown. Flip the board over and solder the part into place. Be sure to keep the three soldered sets of leads separate as shown.



## INSTALL COMPONENTS TO FRONT PANEL


- ☐ Interlock the breadboard to the bottom edge of the existing breadboard on the top panel as shown in Figure H. Fasten the breadboards in place with two #4 x 1/4" AB black screws from the back side of the panel. Use the holes on the 9426 breadboard as shown in Figure G. **CAUTION:** Do not remove the paper backing from the breadboard.

**Figure G**



Use these holes

**Figure H**

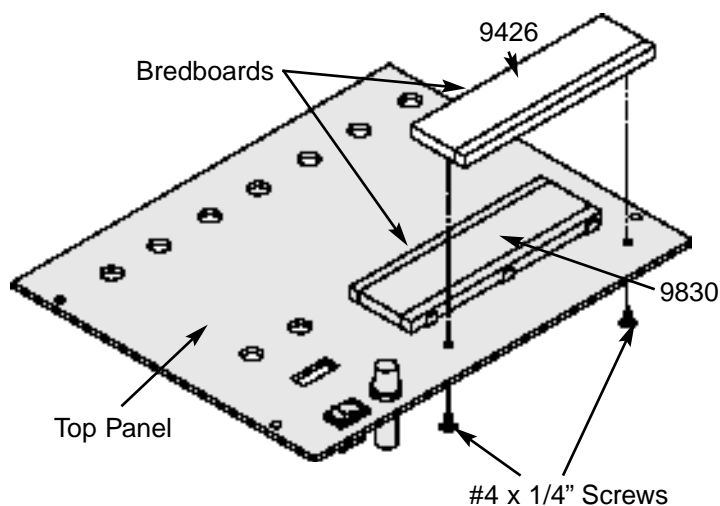


Note: The 9418 and the power strip 9408 make up the 9426 breadboard.

## RESISTANCE ANALYSIS OF DIGITAL SECTION

Place the top panel onto the unit. Static testing of the digital section circuits. Do not plug the power supply into a 117 volt power source until all of the resistance readings check out. **The values given below are approximate.**

| From | To  | Switch Position  | Ohms                     | Resistance Measured |
|------|-----|------------------|--------------------------|---------------------|
| SW1  | GND | In down position | less than 1 $\Omega$     |                     |
| SW2  | GND | In down position | less than 1 $\Omega$     |                     |
| SW3  | GND | In down position | less than 1 $\Omega$     |                     |
| SW4  | GND | In down position | less than 1 $\Omega$     |                     |
| SW5  | GND | In down position | less than 1 $\Omega$     |                     |
| SW6  | GND | In down position | less than 1 $\Omega$     |                     |
| SW7  | GND | In down position | less than 1 $\Omega$     |                     |
| SW8  | GND | In down position | less than 1 $\Omega$     |                     |
| SW1  | GND | In up position   | greater than 3k $\Omega$ |                     |
| SW2  | GND | In up position   | greater than 3k $\Omega$ |                     |
| SW3  | GND | In up position   | greater than 3k $\Omega$ |                     |
| SW4  | GND | In up position   | greater than 3k $\Omega$ |                     |
| SW5  | GND | In up position   | greater than 3k $\Omega$ |                     |
| SW6  | GND | In up position   | greater than 3k $\Omega$ |                     |
| SW7  | GND | In up position   | greater than 3k $\Omega$ |                     |
| SW8  | GND | In up position   | greater than 3k $\Omega$ |                     |
| SW1  | +5V | In up position   | less than 300 $\Omega$   |                     |
| SW2  | +5V | In up position   | less than 300 $\Omega$   |                     |
| SW3  | +5V | In up position   | less than 300 $\Omega$   |                     |
| SW4  | +5V | In up position   | less than 300 $\Omega$   |                     |
| SW5  | +5V | In up position   | less than 300 $\Omega$   |                     |
| SW6  | +5V | In up position   | less than 300 $\Omega$   |                     |
| SW7  | +5V | In up position   | less than 300 $\Omega$   |                     |
| SW8  | +5V | In up position   | less than 300 $\Omega$   |                     |

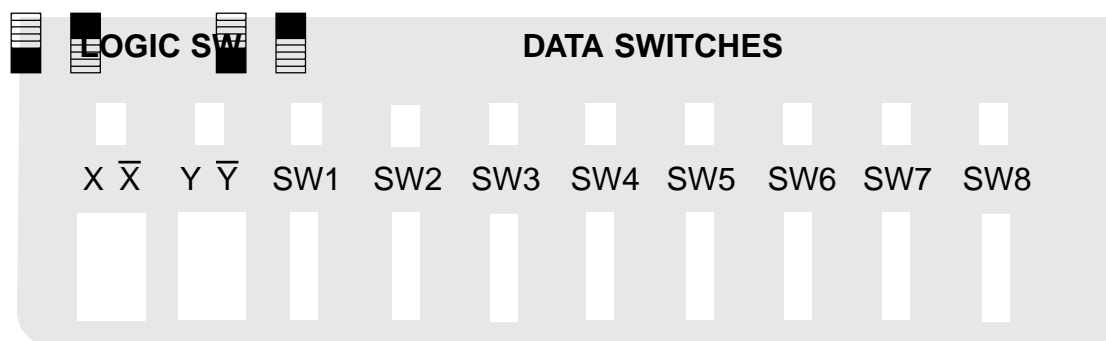


## VOLTAGE ANALYSIS OF DIGITAL SECTION

Plug the power supply into a 117 volt power source. The values given below are approximate.

| From      | To  | Switch Position  | Volts        | Volts Measured |
|-----------|-----|------------------|--------------|----------------|
| X         | GND | In up position   | 5V           |                |
| $\bar{X}$ | GND | In up position   | less than 1V |                |
| Y         | GND | In up position   | 5V           |                |
| $\bar{Y}$ | GND | In up position   | less than 1V |                |
| SW1       | GND | In up position   | 5V           |                |
| SW2       | GND | In up position   | 5V           |                |
| SW3       | GND | In up position   | 5V           |                |
| SW4       | GND | In up position   | 5V           |                |
| SW5       | GND | In up position   | 5V           |                |
| SW6       | GND | In up position   | 5V           |                |
| SW7       | GND | In up position   | 5V           |                |
| SW8       | GND | In up position   | 5V           |                |
| X         | GND | In down position | less than 1V |                |
| $\bar{X}$ | GND | In down position | 5V           |                |
| Y         | GND | In down position | less than 1V |                |
| $\bar{Y}$ | GND | In down position | 5V           |                |
| SW1       | GND | In down position | less than 1V |                |
| SW2       | GND | In down position | less than 1V |                |
| SW3       | GND | In down position | less than 1V |                |
| SW4       | GND | In down position | less than 1V |                |
| SW5       | GND | In down position | less than 1V |                |
| SW6       | GND | In down position | less than 1V |                |
| SW7       | GND | In down position | less than 1V |                |
| SW8       | GND | In down position | less than 1V |                |

### High Positions

X   $\bar{X}$   Y   $\bar{Y}$   SW1-8

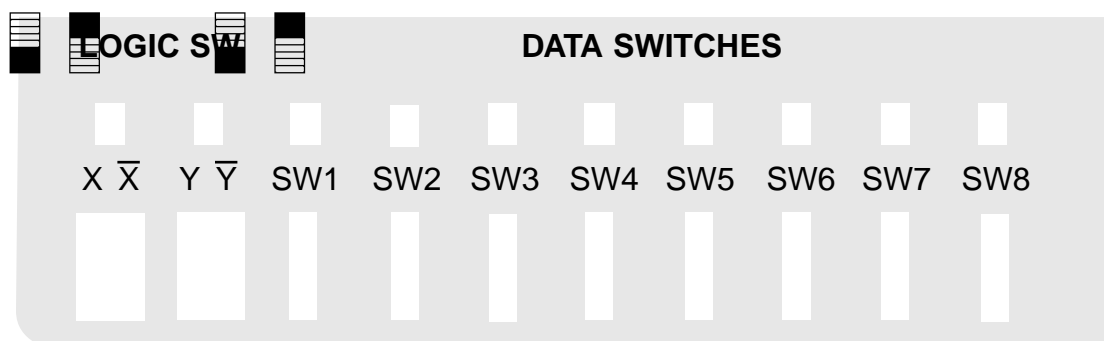

---

## TESTING THE DIGITAL SECTION

### TESTING THE LOGIC INDICATOR FUNCTION

There are eight logic indicators which you will be checking out. Put a wire to the 5V power supply and touch the "A" logic indicator test pin. The "A" LED should light up. Remove the wire and the LED should go out. Do the same for the B, C, D, E, F, G and H pins.

### TESTING THE LOGIC SWITCHES

There are two logic switches and four conditions to be checked out. Connect a wire from the "X" test pin to the "A" logic indicator test pin. Connect another wire to the "X" test pin to the "B" test pin.

Apply power and note that the "A" LED indicator should be lit when the logic switch is in the "X" position and the "B" LED should light and the "A" LED not light. Check the "Y" logic switch in the same manner.

### TESTING THE DATA SWITCHES

There are eight data switches to be checked. The output of the switches are 5V or ground depending on the position. Connect a wire to the SW1 test pin and the "A" test pin. The "A" LED should light when the switch is placed toward the top of the case. Repeat the same test on SW2, SW3, SW4, SW5, SW6, SW7 and SW8.

☐ **Unplug the unit from the AC outlet.**

---


## DIGITAL TROUBLESHOOTING CHART

| PROBLEM                           | POSSIBLE CAUSE  |
|-----------------------------------|---|
| No +5V on data switch terminals.  | 1. Measure for a DC voltage of +5V across R15.<br>A. Check R15, J19, J23 and J13.<br>B. Switch shorted to ground.   |
| LED doesn't light                 | 1. Check that the LED is in correctly.<br>2. Check the input and output resistors.<br>3. Measure input for +5V and output at ground.<br>A. Short to ground or defective IC. |
| LED always on                     | 1. Measure for zero voltage voltage at input pin.<br>A. Pin shorted or defective IC<br>2. Measure voltage to output pin for +5V.<br>A. Pin shorted or defective IC.         |
| Logic switch terminal always high | 1. Check that input resistor is grounded.<br>A. Bad ground connection or switch.<br>2. Measure for +5V on R16 - R19.<br>A. Check resistor.<br>3. Defective IC.              |






## FINAL ASSEMBLY

- Fasten the front panel in place with four #6 x 3/8" thread cutting screws, as shown in Figure I.
- Fasten the PC board to the spacer on the front panel with a fiber washer and a 4-40 x 1/4" screw (from Power Supply Section) from the foil side of the PC board, in the location shown in Figure J.
- Fasten the pots to the front panel with an 8mm washer and a 7mm nut, as shown in Figure I.
- Turn the shafts on the two switches fully counter-clockwise. Push the knobs onto the shafts so that the line on the knob is in line with the "Squarewave" on the waveform control and "10" on the Coarse Frequency control (see Figure K). If the knobs are loose on the shafts, insert a screwdriver into the slot and expand the slot slightly (see Figure M).

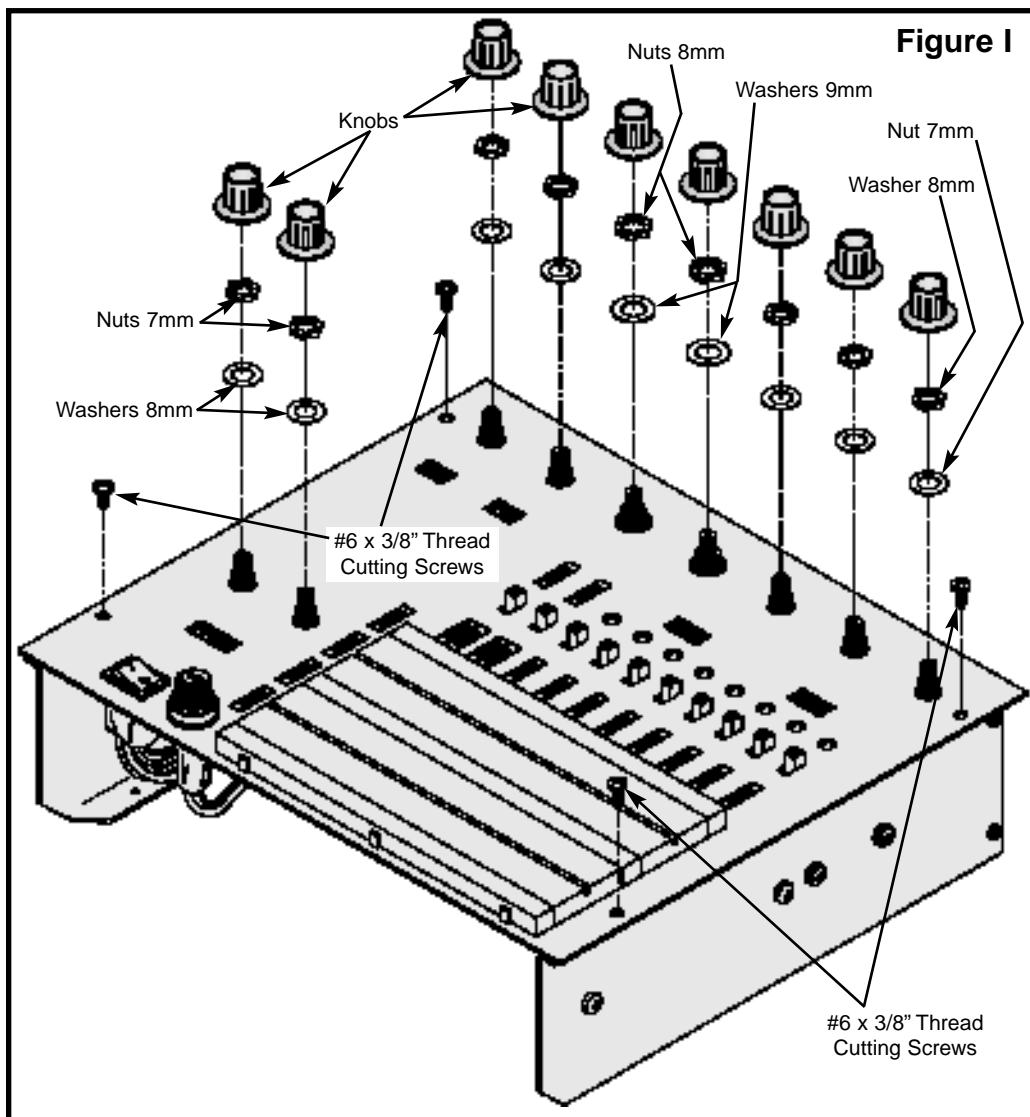

- Turn the shafts on the pots fully counter-clockwise. Push the knobs onto the shafts so that the line on the knob is in line with the end of the circle on the front panel, as shown in Figure L. If the knobs are loose on the shafts, insert a screwdriver into the slot and expand the slot slightly (see Figure M).

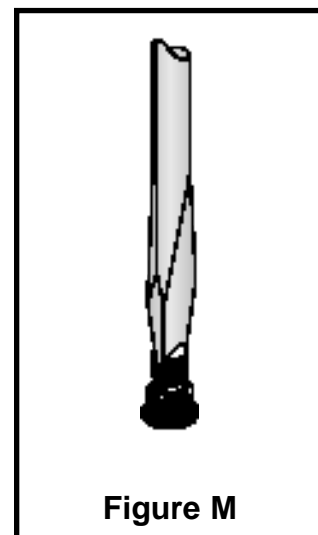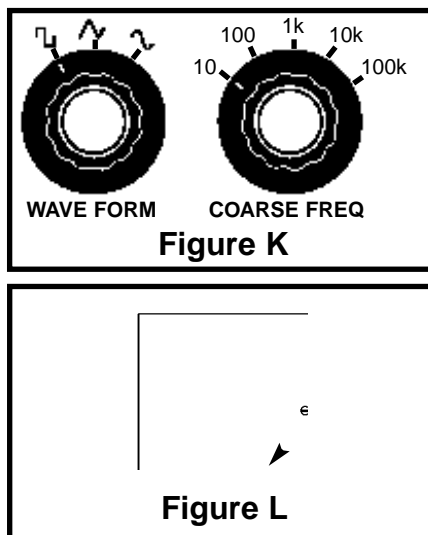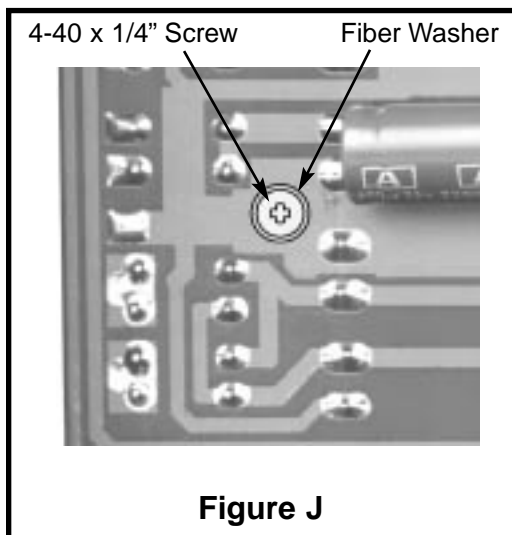

## INSTALL COMPLETED UNIT INTO CASE

- ☐ Place the strain relief onto the line cord as shown in Figure N.
- ☐ Squeeze the two sections together with pliers as shown in Figure O. Then, insert the strain relief into the hole.
- ☐ Lay the trainer inside of the case as shown in Figure P.
- ☐ Align the holes in the bottom case with those in the trainer and secure it into place with four #6 x 1/2" AB screws and four #6 washer as shown in Figure Q.

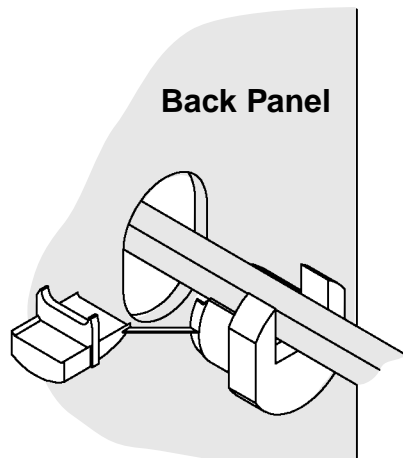


Figure N

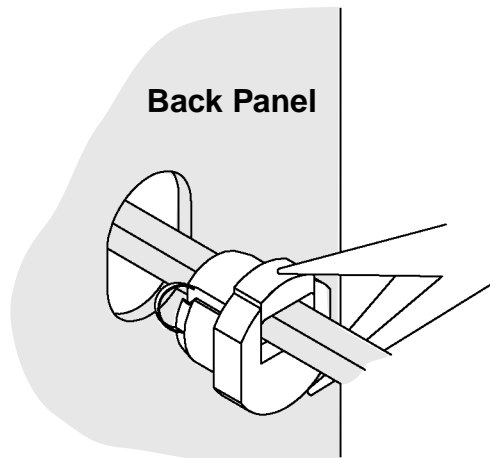


Figure O

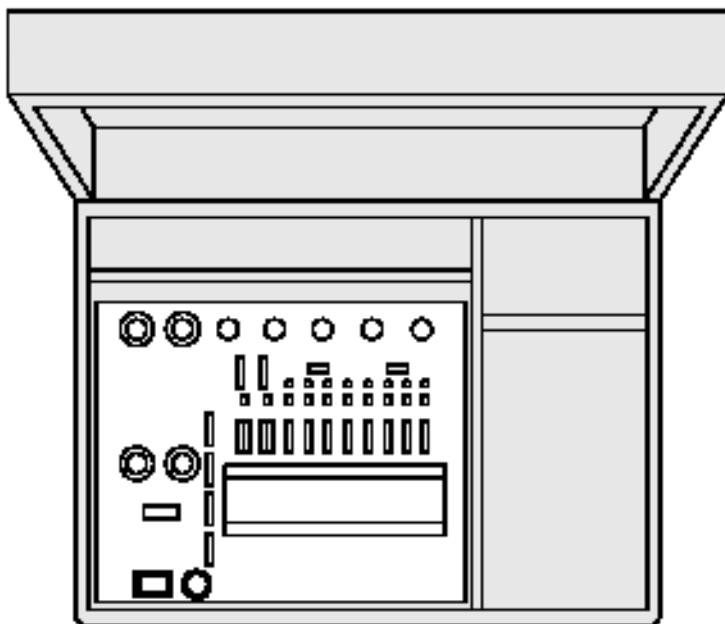


Figure P

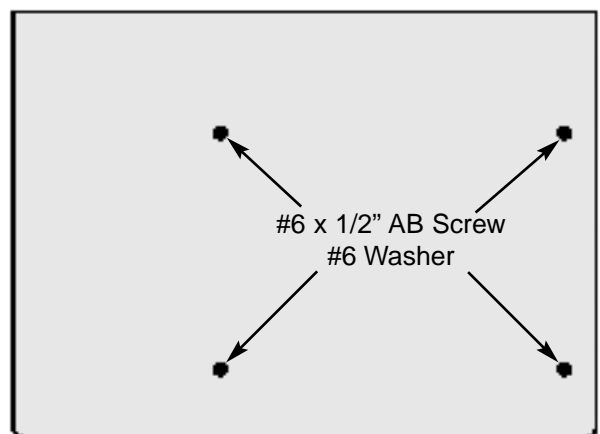


Figure Q

## CIRCUIT DESCRIPTION - DIGITAL SECTION

### THE DATA SWITCHES

There are eight data switches labeled SW1 through SW8. The circuit is very simple. To perform the desired functions, there is a double throw double pole switch, wired as a single pole double throw. One end is connected to the 5V, the other to ground and the center lug is connected to the output.

### THE LOGIC SWITCHES

The logic switches are also DPDT switches wired as SPST switches. The logic switches perform the same function as the data switches. That is, they produce high or low states. But there is one big difference. When switching the data switches, many pulses may be produced due to bouncing of the contacts.

In the logic switches, only one pulse is produced at the IC output no matter how many times the contacts bounce. This is extremely important if you are producing pulses for counting circuits. Figure R shows the wiring of the logic switch. The two NAND gates are connected so that when the X input is grounded, the X output goes high. Opening and closing the ground at X will not change the output. Only when  $\bar{X}$  is grounded will the output change to low. Thus, only one output change is produced with one movement of the X switch. There are two outputs from each logic switch, X and  $\bar{X}$  or Y and  $\bar{Y}$ .

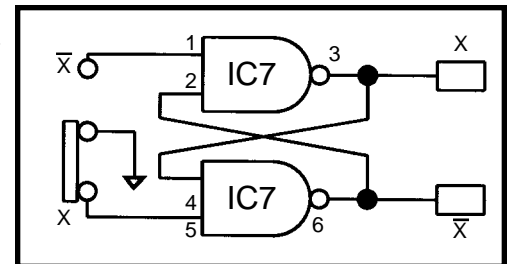


Figure R

### THE LOGIC INDICATORS

There are eight logic indicators. Figure S shows the circuit. It consists of a 74HC04 IC. When the input is over 2.8V, the output of the IC will be low, drawing current through the LED indicator. The 120 $\Omega$  resistor limits the current in the LED to less than 20mA. When there is no connection to the input of the logic indicators, the two 100k $\Omega$  resistor bias the input to GND. This insures that the LED will be off.


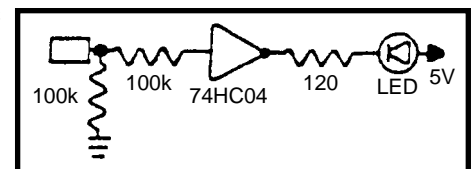


Figure S

# SCHEMATIC DIAGRAM

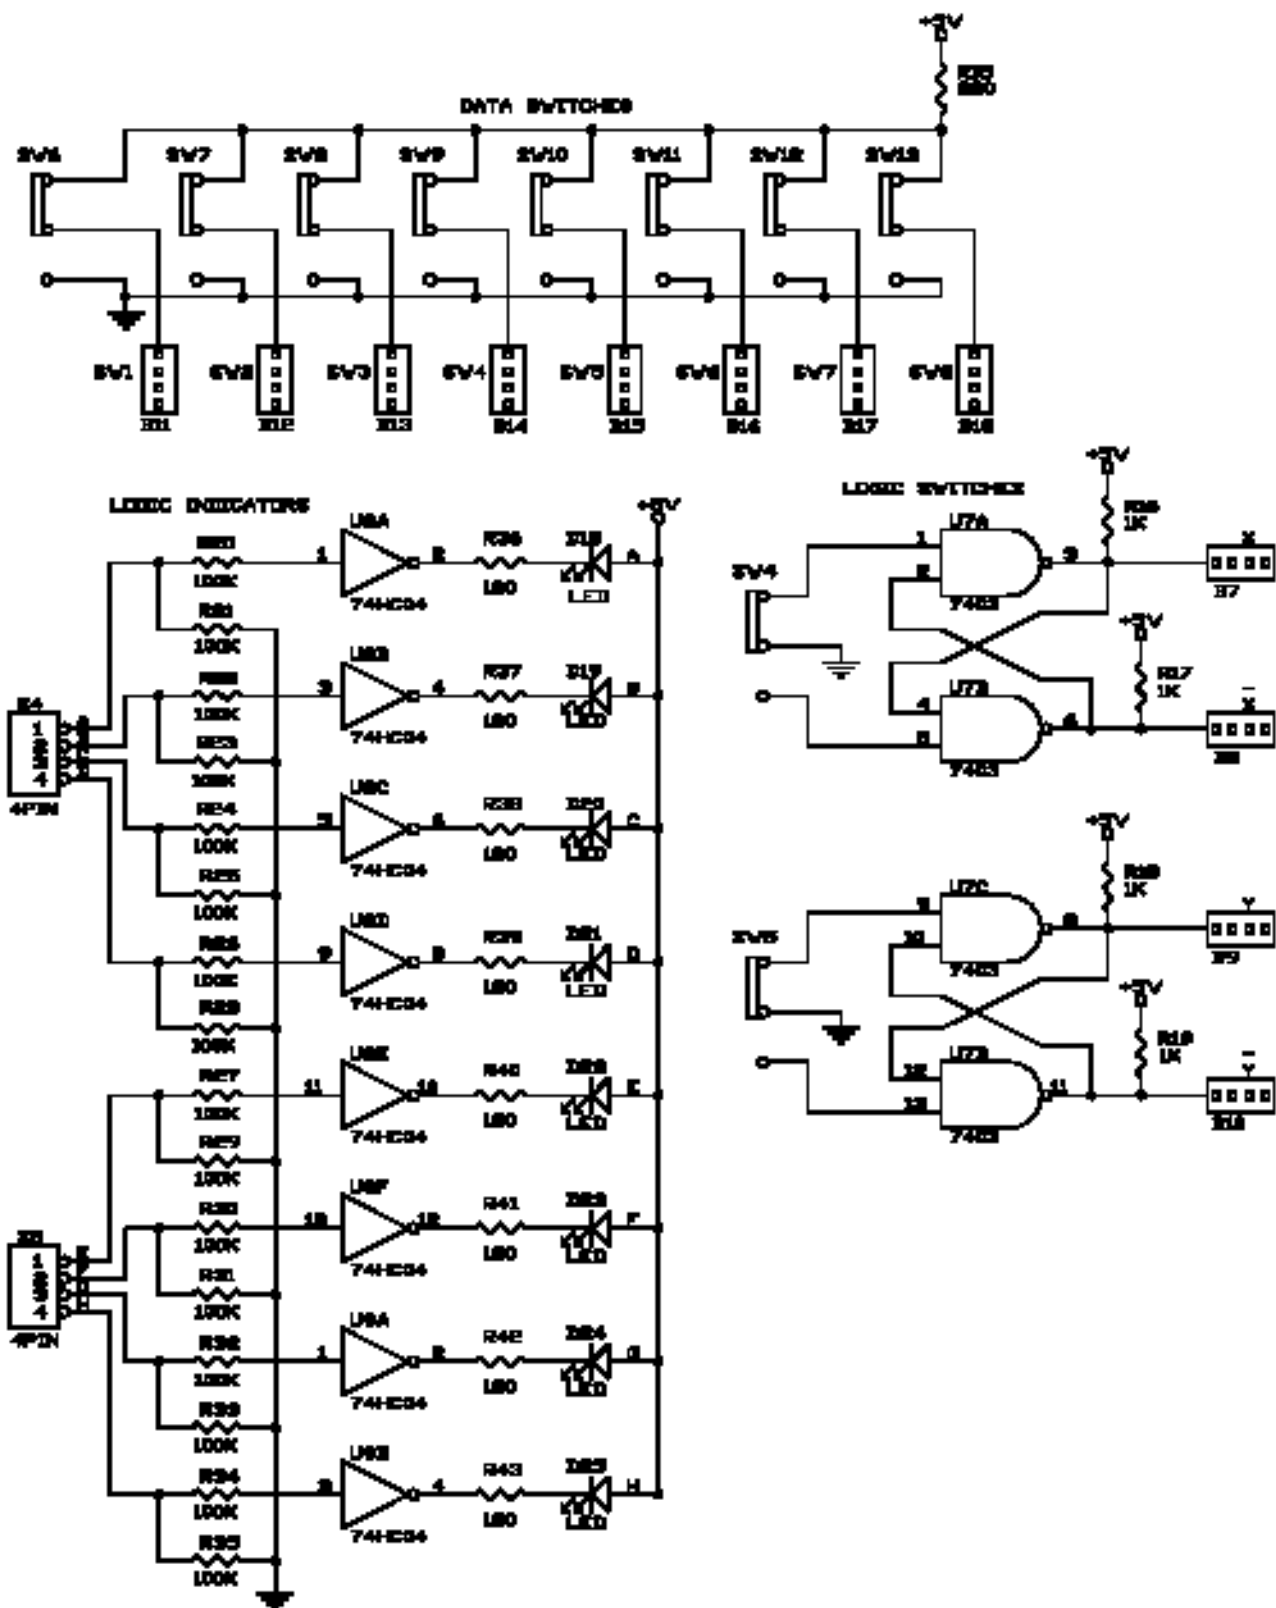

## QUIZ - DIGITAL SECTION

INSTRUCTIONS: Complete the following examination, check your answers carefully.

1. The logic switches consist of . . .
  - ☐ A. two NAND gates and an SPST switch.
  - ☐ B. three OR gates.
  - ☐ C. two NAND gates and a DPDT switch.
  - ☐ D. one OR gate.
2. When the logic switch is thrown . . .
  - ☐ A. the contacts do not bounce.
  - ☐ B. a single transition is produced at the NAND gate output.
  - ☐ C. a multiple transition is produced at the NAND gate output.
  - ☐ D. none of the above.
3. If the X output is high, opening and closing the ground at X switch will . . .
  - ☐ A. cause the  $\overline{X}$  output to go low.
  - ☐ B. cause the  $\overline{X}$  output to go high.
  - ☐ C. cause the  $\overline{X}$  output to go from high to low.
  - ☐ D. none of the above.
4. The logic indicator LED lights up when . . .
  - ☐ A. input voltage is 2V.
  - ☐ B. input voltage is greater than 2.8.
  - ☐ C. the IC output is high.
  - ☐ D. all of the above.
5. The logic switches use . . .
  - ☐ A. single pole single throw switches.
  - ☐ B. double pole double throw switches wired as single pole double throw switches.
  - ☐ C. two pole 5 position rotary switches.
  - ☐ D. 4 pole 3 position rotary switches.
6. The 100k $\Omega$  resistor on the logic indicator input . . .
  - ☐ A. divides the input voltage in half.
  - ☐ B. bias the input to +5V.
  - ☐ C. bias the input to GND.
  - ☐ D. turn on the LED.
7. When the logic switch is in the X position . . .
  - ☐ A. X is high,  $\overline{X}$  is low.
  - ☐ B. X is high,  $\overline{X}$  is high.
  - ☐ C. X is low,  $\overline{X}$  is high.
  - ☐ D. X is low,  $\overline{X}$  is low.
8. When the data switch is up and connected to the logic indicator . . .
  - ☐ A. the switch output is greater than 2.8V.
  - ☐ B. the switch output is GND.
  - ☐ C. the LED will be out.
  - ☐ D. none of the above.
9. The +5VDC power for the digital section comes from a . . .
  - ☐ A. 7805 IC.
  - ☐ B. 7905 IC.
  - ☐ C. 5V battery.
  - ☐ D. 7812 IC.
10. If pin 4 on U7B is high . . .
  - ☐ A. pin 3 is low.
  - ☐ B. pin 1 is low.
  - ☐ C. pin 2 and 6 are high.
  - ☐ D. pin 5 is high.

Answers: 1. C, 2. B, 3. D, 4. B, 5. B, 6. C, 7. A, 8. A, 9. A, 10. B

**Elenco Electronics, Inc.**

150 W. Carpenter Ave.

Wheeling, IL 60090

(847) 541-3800

Web Site: <http://www.elenco.com>

e-mail: [elenco@elenco.com](mailto:elenco@elenco.com)