NFP-5840-31ZY

Worm Gear Motor




Typical Applications

- **Smart Cars, Automation Equipment, Automatic Doors And Windows**
- **Vending Machine, Smart Home, office Equipment**
- **Automatic Grill, Automatic Drying Rack, Parking Lock, Medical Equipment**

Dimension

UNIT:MILLIMETERS
WEIGHT: 360.0g(APPROX)

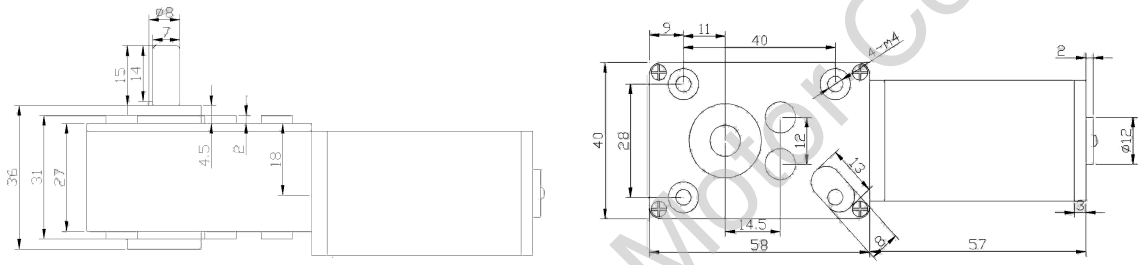

Need For Power Motor Co., Ltd

Datasheet 1

Voltage	Rated	V	DC 12V							
Reducer	Ratio	i:1	17	31	50	100	200	290	505	670
	Size	mm	L58*W40*H36							
No Load	Speed	rpm	470	260	160	80	40	27	16	12
	Current	A	≤0.35	≤0.35	≤0.35	≤0.35	≤0.35	≤0.35	≤0.35	≤0.35
Rated Load	Speed	rpm	380	200	130	60	30	20	12	9
	Torque	Kgf.cm	2.7	5	8	16	32	46	70	70
	Current	A	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6
	Output	W	10.74	10.47	10.89	10.05	10.05	9.63	8.80	6.60
Stall	Torque	Kgf.cm	4.4	8	13	25	51	70	70	70
	Current	A	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5
Weight	g		360							

Voltage	Rated	V	DC 24V							
Reducer	Ratio	i:1	17	31	50	100	200	290	505	670
	Size	mm	L58*W40*H36							
No Load	Speed	rpm	200	110	70	35	17	12	7	5
	Current	A	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1
Rated Load	Speed	rpm	150	80	50	27	13	9	5	4
	Torque	Kgf.cm	2.7	5	8	16	32	46	70	70
	Current	A	≤0.6	≤0.6	≤0.6	≤0.6	≤0.6	≤0.6	≤0.6	≤0.6
	Output	W	4.24	4.19	4.19	4.52	4.36	4.34	3.66	2.93
Stall	Torque	Kgf.cm	4.4	8	13	25	51	70	70	70
	Current	A	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
Weight	g		360							

Datasheet 2

Voltage	Rated	V	DC 24V							
Reducer	Ratio	i:1	17	31	50	100	200	290	505	670
	Size	mm	L58*W40*H36							
No Load	Speed	rpm	300	160	100	50	25	17	10	7
	Current	A	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1
Rated Load	Speed	rpm	230	130	80	40	20	14	8	5
	Torque	Kgf.cm	2.7	5	8	16	32	46	70	70
	Current	A	≤0.6	≤0.6	≤0.6	≤0.6	≤0.6	≤0.6	≤0.6	≤0.6
	Output	W	6.50	6.81	6.70	6.70	6.70	6.74	5.86	3.66
Stall	Torque	Kgf.cm	4.4	8	13	25	51	70	70	70
	Current	A	2	2	2	2	2	2	2	2
Weight	g		360							

Voltage	Rated	V	DC 24V							
Reducer	Ratio	i:1	17	31	50	100	200	290	505	670
	Size	mm	L58*W40*H36							
No Load	Speed	rpm	470	260	160	80	40	27	16	12
	Current	A	≤0.2	≤0.2	≤0.2	≤0.2	≤0.2	≤0.2	≤0.2	≤0.2
Rated Load	Speed	rpm	380	200	130	60	30	20	12	9
	Torque	Kgf.cm	2.7	5	8	16	32	46	70	70
	Current	A	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6
	Output	W	10.74	10.47	10.89	10.05	10.05	9.63	8.80	6.60
Stall	Torque	Kgf.cm	4.4	8	13	25	51	70	70	70
	Current	A	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
Weight	g		360							

* Other Parameters: According To Customer Demand For Design

Conventional Custom Specifications

Voltage DC 6~24V
Speed: 5~470rpm
Shaft Type: D shaft, Screw Shaft
Shaft Length: Customizable

Need-For-Power Motor CO., Ltd