

Printer settings




initial failures

Quality

- Process profile: 0.16 mm Optimal – BBL A1M.
- Layer height: 0.16 mm.
- Initial layer height: 0.20 mm.[wiki.bambulab+1](https://www.bambulab.com/en-us/wiki/bambulab+1)

Strength

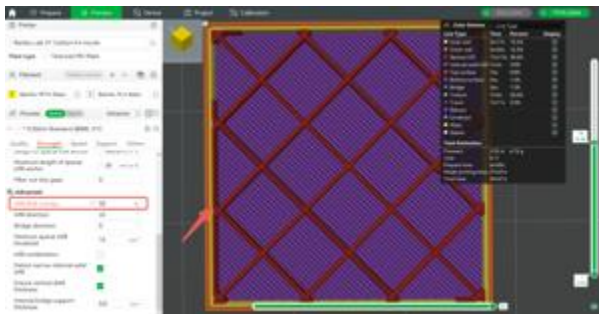

- Walls (perimeters): 4.
- Top solid layers: 5.
- Bottom solid layers: 4.
- Infill density: 25%.
- Infill pattern: Gyroid.


Material (PLA)

- Nozzle temperature: 215 °C.
- Bed temperature: 60 °C on smooth plate (55 °C textured).
- Fan: 100% after layer 3.

Speed

- Mode: Standard.
- Outer wall speed: 60 mm/s.
- Inner wall / infill: leave A1 mini defaults ($\approx 200\text{--}250$ mm/s).

Supports

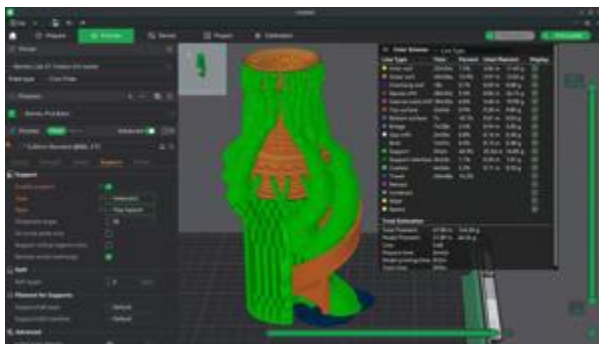

- Support type: Normal.
- Style: Snug.
- Threshold angle: 50°.
- Support density: 25%.
- Pattern: Grid.
- Interface: On, 2 top interface layers, lines pattern, spacing 0.3 mm.
- Top Z distance: 0.25 mm.
- Bottom Z distance: 0.20 mm.
- Initial support density: 80%.
- Initial support expansion: 3.0 mm.
- Support wall loops: 1.
- Support/object XY distance: 0.25 mm.

Brim / adhesion

- Brim: Outer brim only.
- Brim width: 8 mm.
- Brim layers: 1.