


MicoAir743v2

STM32H743VIT6, BMIO88+BMI270, SPL06, QMC5883L, OSD, 8xUART, 1xI2C, 1xPWM, 5V 3A BEC, 12V 3A BEC

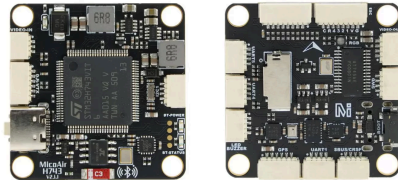

MicoAir743v2 Flight Controller

High performance H743 flight controller, with dual IMU and bluetooth telemetry built-in, supports Ardupilot/PX4/INAV/Betaflight

Gallery

Specifications

Ports

Diagram

BlueTooth

Connecting to MicoAir743v2 via Bluetooth using QGC


QGC Download

1.Power on the MicoAir743v2 and Check Bluetooth Power:

- Ensure the flight controller is powered on correctly. Check if the Bluetooth power indicator LED is solid blue (refer to the ports diagram for the LED location).
- If the Bluetooth power indicator is off, press and hold the flight controller's BOOT button for 2 seconds (this operation is only effective after 3 seconds of power-on) to enable Bluetooth power.
- Similarly, with Bluetooth power on, press and hold the BOOT button to turn it off. These settings will be saved.

2.Open QGroundControl(QGC) App on Your Android phone and Access Application Settings:

- Open the QGC app and go to the Application Settings page.
- Select the "Comm Links" option.
- Tap "Add" to add a new connection.

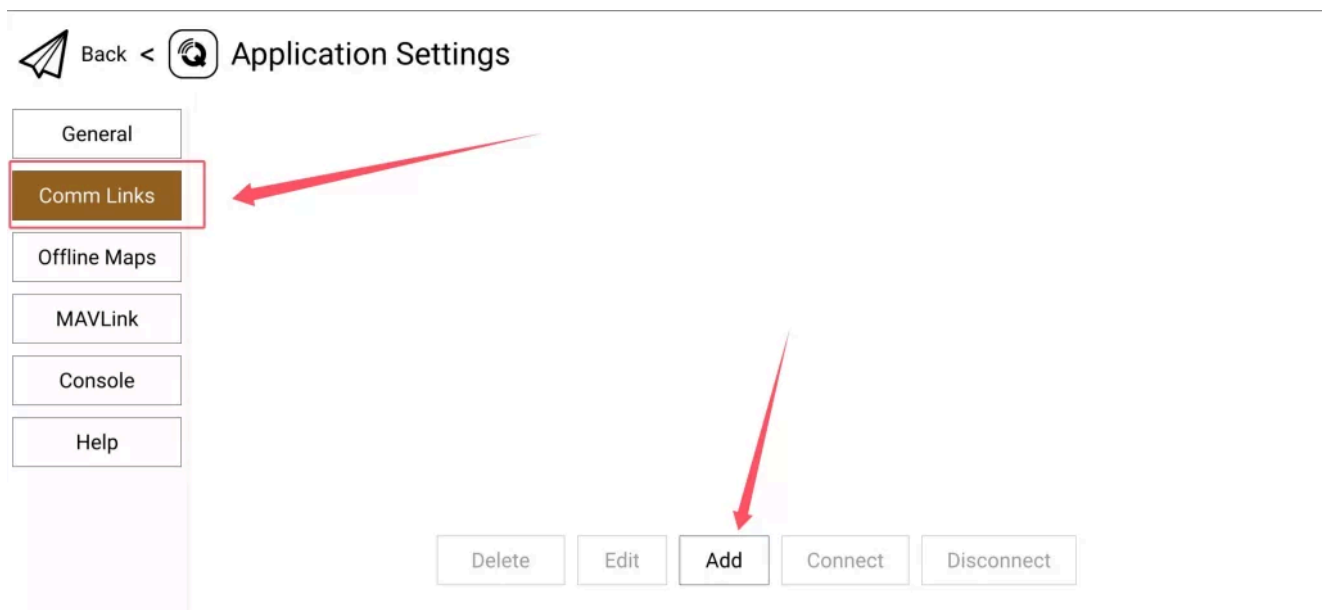

3.Select Bluetooth as the Connection Type:

Back < Application Settings

General

Comm Links

Offline Maps

MAVLink

Console

Help

Create New Link Configuration

General

Name: Unnamed

Type: Bluetooth

☐ Automatically Connect on Start

☐ High Latency

OK Cancel

4.Scan for Bluetooth Devices:

- Scroll down the page and tap “Scan” to search for Bluetooth devices.
- Ensure your phone is close to the drone(flight controller).
- The Bluetooth device name should be “MicoAir743v2-xxxxx” (where “xxxxx” represents unique characters). Select this device and tap “OK”.

Back < Application Settings

General

Comm Links

Offline Maps

MAVLink

Console

Help

Create New Link Configuration

Address: 24:33:4C:02:0F:A1

Bluetooth Devices:

DESKTOP-4PL0J5P


MicoAir743v2-05475

Scan Stop

OK Cancel


5. Connect to the Bluetooth Device:

- Once the Bluetooth device is added, select it from the Comm Links interface.
- Tap “Connect” at the bottom of the screen.
- Wait for a few seconds. The green Bluetooth status indicator LED on the flight controller will light up constantly when the connection is successful.

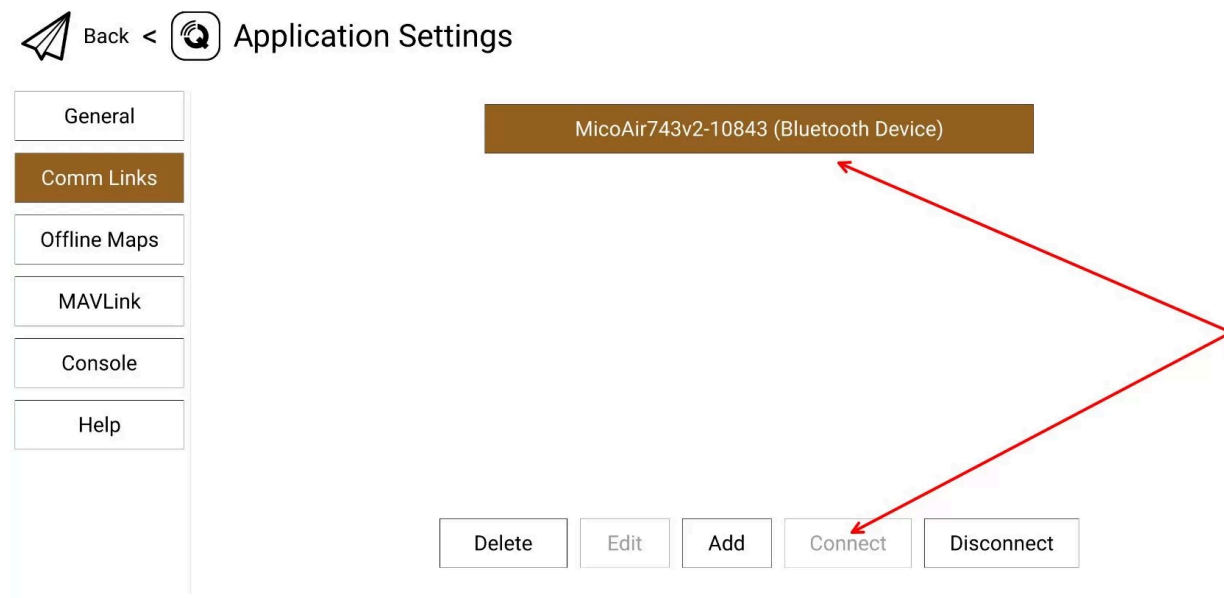

6. Return to Home Page and Wait for Connection:

- Return to the QGC app's home page.
- If everything is working correctly, the app will automatically connect to the flight controller and reading the parameter list. This usually takes around 5s for PX4 firmware and approximately 10s for ArduPilot firmware.

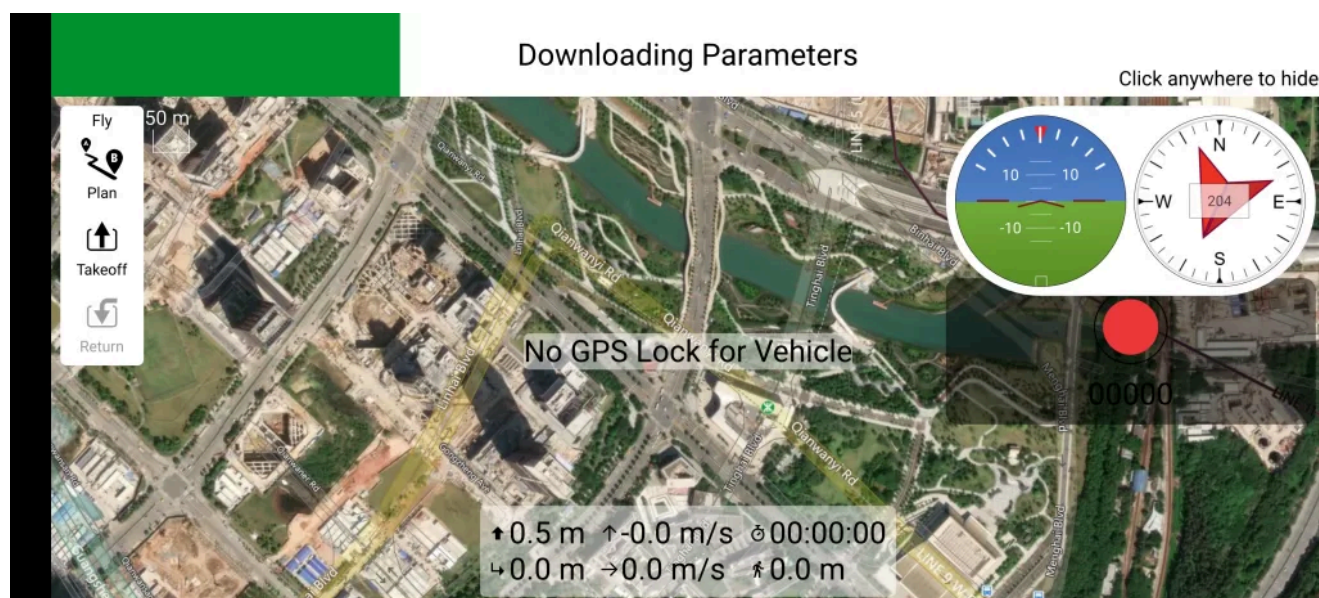

Back <  Vehicle Setup

 Summary

 Airframe

 Sensors

 Radio

 Flight Modes

 Power

 Motors

Airframe

System ID	1
Airframe type	Quadrotor x
Vehicle	Generic Quadcopter
Firmware Version	1.14.3dev
Custom Fw. Ver.	0.0.0

Sensors

Compass 0	Setup required
Gyro	Ready
Accelerometer	Ready

Radio


Roll	Setup required
Pitch	Setup required
Yaw	Setup required

Flight Modes

Mode switch	Setup required
Flight Mode 1	Unassigned
Flight Mode 2	Unassigned

 Not Ready  Hold      Ok 



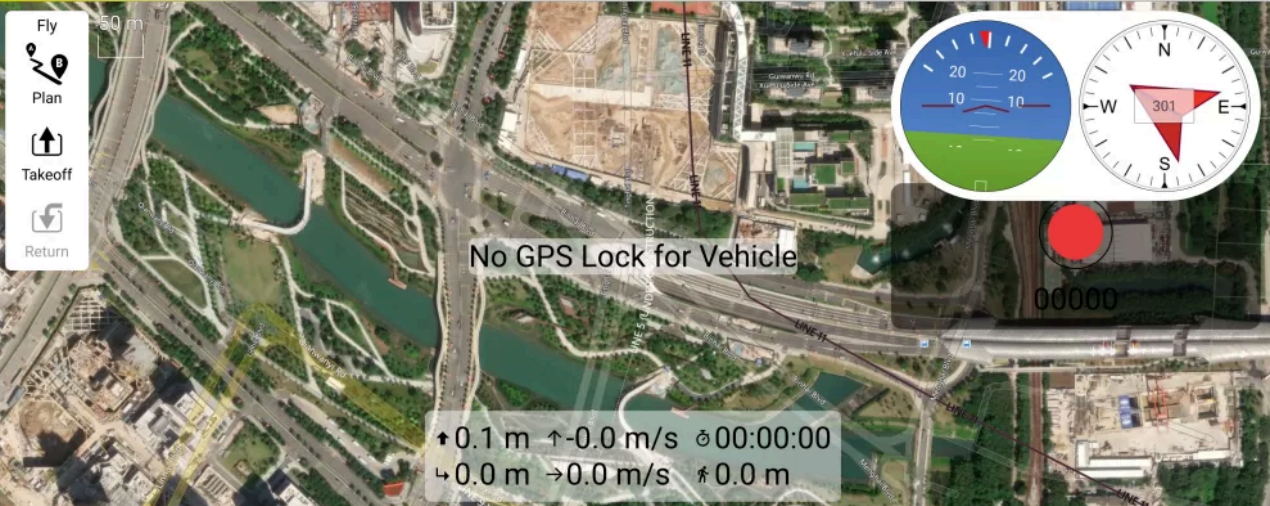

Pinout

Firmware

Buy Now

MicoAir743 V2 AM32 55A 30×30 FC&ESC Stack

\$53.99 – \$104.99


MicoAir H743 V2 BMI088 30.5×30.5 2-6S 55A Flight Stack
BlueTooth Telemetry



MicoAir743

\$51.99 – \$93.99

MicoAir H743 BMI088 30.5×30.5 2-6S Flight Controller



[Read more](#)




MicoAir Tech Store

MicoAir743-AIO-35A

\$58.99

MicoAir H743 AIO 35A AM32 25.5×25.5 3-6S Flight Controller &
ESC



[Read more](#)



MicoAir Tech Store

[Home](#)

[Products](#)

[Tools](#)

[Store](#)

[Docs](#)

[Resellers](#)

[About](#)



Building Your Own Drones