
Auditable cross-source battery lifetime evaluation

6 source cases | 429 verified cells | observed-record EOL80 proxy

1 Audit endpoints

Endpoint schematic

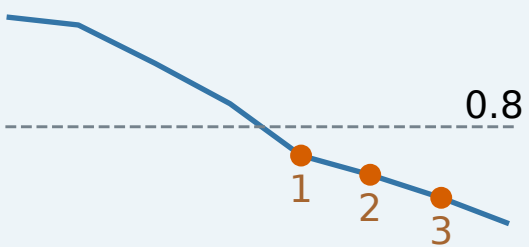

First low record; third confirms

2 Test transfer

5 train / 1 held out

MIT	XJTU	TJU
NASA	CALCE	HUST

Rotate through all 6 sources

3 Bound conclusions

Winners vary by source

Adaptation can worsen IBS

Source-specific support

Conditional uncertainty

Evidence checks before storage decisions; system benefits remain unvalidated