

廈門鍛壓機床廠，熱忱為國內外廣大用戶提供優質〈力牌〉壓力機。

本廠專業生產壓力機歷史悠久，產品質量穩定，用戶使用滿意，暢銷國內外。其中J 23-6.3噸開式雙柱可傾壓力機榮獲國家機械工業部“質量信得過產品”稱號，深受用戶歡迎。

主要產品規格：

- 壓力機 J23-6.3型 J23-6.3B型 J23-25型 J23-10B型 JC23-63型 J23-16B型 JA23-125型 J23-25B型

• 專為皮革、橡膠、鞋帽、服裝、塑料行業製造的5噸裁料機。

• 組合式J04M-1型、J04M-25型精密小噸位壓力機。

Xiamen metalforming plant takes great pleasure in supplying overseas users with "power brand" presses of excellent quality.

Time-honoured, this plant is specialized in the manufacturing of presses. Its products are of excellent quality and sell very well both at home and abroad. One of our products, the 6.3 T open and double column inclinable power press, has been honoured with the title of "reliable product in quality" by the Ministry of Machine Building, and has been spoken highly of by the users.

Specifications of our main products:

1. Model J23-6.3 power press
 2. Model J23-25 power press
 3. Model JC23-63 power press
 4. Model JA23-125 power press
 5. Model J23-6.3B lengthened stroke power press
 6. Model J23-10B lengthened stroke power press
 7. Model J23-16B lengthened stroke power press
 8. Model J23-25B lengthened stroke power press
- In addition, our plant also produces cutting off machines with 5 T pressure to be used in tanning, shoes-and-hats making, clothing rubber, and plastics industries, as well as table-shaped precision model J04M-1 and model J04M-25 power presses with small pressure.

由於生產技術不斷改進，本廠本內所列產品的品名、型號、規格、數據等如有更改，不另通知。

Names, models, specifications and data given herein are subject to alteration without notice owing to the continuous technical improvements being made on the products.

主要技術規格

型號 Model		J23-6.3	J23-6.3B	J23-25	J23-25B	J23-10B	J23-16B	JC23-63	JA23-125
公稱壓力 Nominal pressure		6.3T	6.3T	25T	25T	10T	16T	63T	125T
滑塊行程 Stroke of slide (ram)		35mm	50mm	65mm	115mm	60mm	70mm	120mm	145mm
每分鐘行程數 Strokes per minute		170	170	55	55	145	115	50	38
最大封閉高度 Max. shut height		160mm	170mm	270mm	300mm	180mm	220mm	360mm	480mm
封閉高度調節量 Shut height adjustment		30mm	40mm	55mm	70mm	50mm	60mm	80mm	110mm
滑塊中心線到機身間距離 Distance between the center the ram to the frame		110mm	110mm	200mm	200mm	130mm	160mm	260mm	380mm
工作台面尺寸： Size of table surface:	前後 Front to back	200mm	200mm	370mm	370mm	240mm	300mm	480mm	710mm
	左右 Right to left	310mm	315mm	560mm	560mm	360mm	450mm	710mm	1080mm
立柱間距離 Distance between uprights		150mm	155mm	270mm	300mm	180mm	230mm	350mm	530mm
工作孔尺寸： Opening in table:	前後 Front to back	110mm	70mm	200mm	130mm	90mm	110mm	200mm	340mm
	左右 Right to left	160mm	150mm	290mm	260mm	180mm	220mm	340mm	500mm
	直徑 Diameter	140mm	110mm	260mm	180mm	130mm	160mm	250mm	450mm
	前後 Front to back	120mm	135mm	220mm	220mm	155mm	190mm	270mm	340mm
滑塊底面尺寸 Ram bottom size:	左右 Right to left	140mm	145mm	250mm	290mm	170mm	220mm	315mm	440mm
	直徑 Diameter	30mm	30mm	40mm	40mm	30mm	30mm	50mm	60mm
模柄孔尺寸： Recess hole in ram for punch shank:	直徑 Diameter	50mm	50mm	60mm	60mm	55mm	50mm	80mm	80mm
	深度 Depth	30mm	40mm	50mm	70mm	50mm	60mm	90mm	100mm
工作台面厚度 Thickness of working table		30mm	40mm	50mm	70mm	50mm	60mm	90mm	100mm
機身最大傾角 Maximum inclination of frame		45°	30°	30°	30°	30°	30°	30°	25°
電動機： Electric motor:	型號 Model	JO ₂ -221-6	JO ₂ -21-6	JO ₂ -21-4	JO ₂ -31-4	JO ₂ -22-6	JO ₂ -31-6	JO ₂ -51-6	JO ₂ -52-4
	功率 Power	0.8kw	0.8kw	2.2kw	2.2kw	1.1kw	1.5kw	5.5kw	10kw
	轉速 Speed	935rpm	935rpm	1430rpm	1430rpm	935rpm	940rpm	965rpm	1450rpm
外形尺寸： Overall dimensions:	長 Length	780mm	755mm	1345mm	1295mm	835mm	1120mm	1700mm	2520mm
	寬 width	600mm	628mm	950mm	1000mm	660mm	800mm	1373mm	1765mm
	高 Height	1502mm	1502mm	2130mm	2465mm	1617mm	1900mm	2750mm	3425mm
淨重 Net weight approx		360mm	400kg	1780kg	1850kg	580kg	1100kg	4800kg	12000kg

UCW系列无刷交流同步发电机

UCW Series Brushless Synchronous Alternators

表1 Table 1

机座号 Frame no.	1500r/min				1000r/min			
	额定功率 Rated power		效率 Efficiency	重量 Weight	额定功率 Rated power		效率 Efficiency	重量 Weight
	kVA	kW	%	Kg	kVA	kW	%	Kg
225	37.5	30	88.5	300				
225	50	40	89.4	360				
225	62.5	50	90	380				
250M	80	64	90.2	440				
250M	93.75	75	90.6	540				
250M	112.5	90	91	570				
250M	125	100	91.6	610				
250L	150	120	91.8	710				
315M	187.5	150	92.2	760				
315M	225	180	92.8	840				
315M	250	200	92.2	900	200	160	91.8	1000
315L	312.5	250	92.6	980	225	180	92.2	1100
315L	350	280	93	1060				
315L	375	300	93.3	1180				
315L	400	320	93.8	1300				
355S	437.5	350	93.1	1410	250	200	92.5	1180
355S	437.5	350	93.1	1410	312.5	250	92.2	1300
355M	500	400	93.5	1460	350	280	92.4	1400
355M	562.5	450	94	1630	375	300	92.6	1500
355L	625	500	94.2	1760	400	320	92.8	1600
355L					437.5	350	93	1700
400M					500	400	92.3	2000
400M	700	560	93.4	2000	562.5	450	92.6	2100
400M	787.5	630	93.8	2150	625	500	92.9	2200
400L	875	700	94	2230				
400L	937.5	750	94.2	2420				
400L	1000	800	94.5	2600	700	560	93.2	2500
400L	1125	900	94.8	2780	787.5	630	93.6	2700
400L	1250	1000	95	2940	875	700	94	2900

T2W3 系列發電機電樞繞組為帶有中性點引出綫的星形接法，三相四綫制，額定電壓為 400V，額定頻率為 50Hz，額定轉速為 1500rpm，額定功率因數為 0.8（滯后）。

T2W3 系列發電機按照中國最新標準 GB 755，并吸取國際上同類產品的優點進行設計、製造，本系列發電機全面符合國際電工委員會推薦標準中的有關規定。

WT-2 型自動電壓調節器結構簡單、性能可靠、維護方便，T2W3 系列發電機性能優良、效率較高，合理的設計和精密的加工降低了電機的振動和噪音。

電機的安裝結構型式是機座上帶底腳，兩個端蓋軸承、單軸伸且在軸伸端具有帶小凸緣止口（或不帶小凸緣止口）的端蓋，即 IMB34（或 IMB3）型結構。採用了這種結構，發電機可以方便、可靠地與各種不同類型的原動機對接。

主發電機轉子是帶有分布繞組的隱極結構，并加裝全阻尼條和阻尼端環。

Series T2W3 alternators are 3-phase alternators with the armature winding star-connected, 3-phase, 4-wire. The rated voltage is 400 volts, the rated frequency is 50HZ, the rated speed is

1500rpm, the rated power factor is 0.8 (lagging).

Series T2W3 alternators are designed and manufactured in accordance with China's newest technical standards GB755', and adopted the advantages of the similar products of other countries of the world. These alternators are completely conformed to the requirements recommended by IEC.

WT-2 Type automatic voltage regulator (A. V. R.) are characterized by simple structure, reliable and convenient maintenance. The alternator of series T2W3 have excellent operating characteristics and have higher efficiency levels. Due to rational design and precise mechanical processing, vibration and noise have been greatly reduced.

The mounting structure of the alternators T2W3 conforms with that of type IMB34 (or IMB3), that is with two end-shield with bearing housings, feet on fram, single extension and small flange (or non-small flange) on driving-end end shield. With this mounting structure, the alternator is able to connect reliably and easily to the prime mover of different type.

The rotor of the main alternator is a non-salient pole rotor with distributed field winding. Whole damper bars and damper rings are fitted to the rotor.

Main Technical Data

Table 1

Type	Frame No.	KVA	KW	Current(A)	Speed(rpm)	Eff.(%)	Input P.P	GD ² .kg-m ²
T2W3-12	180S	15	12	21.7	1500	85.0	18.9	1.49
T2W3-16	180M	20	16	28.9	1500	86.5	24.8	1.86
T2W3-20	200S	25	20	36.1	1500	87.5	30.6	2.27
T2W3-24	200M	30	24	43.3	1500	88.5	36.4	2.62
T2W3-30	225S	37.5	30	54.1	1500	89.0	45.2	3.61
T2W3-40	225M	50	40	72.2	1500	90.0	59.6	4.36
T2W3-50	225L	62.5	50	90.2	1500	90.5	74.1	4.97
T2W3-64	250M	80	64	115	1500	91.0	94.3	7.90
T2W3-75	250L	93.8	75	135	1500	91.4	110	8.67
T2W3-90	280S	113	90	162	1500	91.8	131	10.6
T2W3-120	280L	150	120	217	1500	92.2	175	13.2
T2W3-150	355S	188	150	271	1500	92.4	218	28.0
T2W3-200	355S	250	200	361	1500	92.6	290	34.9
T2W3-250	355M	313	250	451	1500	92.8	361	41.9

电压整定范围

Voltage Setting Range $\pm 5\% U_N$

过载能力(1小时)

Over Load (for one hour) $110\% P_N$

(U_N , I_N , P_N —Rated Voltage, Rated Current, Rated power)

电压波形正弦畸变率

Voltage Wave Form 5%

稳态电压调整率

Static Voltage Regulation $\pm 2.5\%$

短时(15秒)过电流能力

Short Time (15 seconds) Over Current 150%

瞬态电压调整率(小于1秒)


Dynamic Voltage Regulation

(less than 1 second) $-15\% \sim +20\%$

型號 Type	機座號 Frame size	額定容量		額定電流 (安) Rated cur. (A)	額定轉速 (轉/分) Rated speed (r/min)	效率 (%) Eff. (%)	重量 (公斤) Weight (kg)	原動機拖 動最小馬力 (匹) Min. dr. power (HP)	飛輪力矩 (公斤-米 ²) GD ² (kg-m ²)	直接起動時 最大電流 (安) Max. start cur. (A)
		千伏安	千瓦							
		kVA	kW							
TZH-12	180S	15	12	21.7	1500	84.5	210	19	1.15	55
TZH-16	180M	20	16	28.9	1500	85.3	215	25.1	1.41	55
TZH-20	200S	25	20	36.1	1500	86.0	270	31.2	2.26	55
TZH-24	200M	30	24	43.3	1500	87.0	300	37	2.40	55
TZH-30	225S	37.5	30	54.1	1500	88.0	370	45.7	3.38	55
TZH-40	225M	50	40	72.2	1500	89.0	450	60.3	4.36	55
TZH-50	225L	62.5	50	90.2	1500	89.5	490	74.9	4.97	55
TZH-64	250M	80	64	115	1500	90.5	600	94.8	8.08	55
TZH-75	250L	93.8	75	135	1500	90.8	670	110.7	9.75	55
TZH-90	280S	113	90	162	1500	91.0	850	132.6	11.7	55
TZH-120	280L	150	120	217	1500	91.5	1020	176	15.4	55
TZH-150	355S	188	150	271	1500	92.0	1450	219	26.2	75
TZH-200	355S	250	200	361	1500	92.3	1620	290	34.8	75
TZH-250	355M	313	250	451	1500	92.5	1800	362	46.5	95

圖 2：外形及安裝尺寸圖

Figure 2: Overall and Mounting Dimensions of TZh Generator

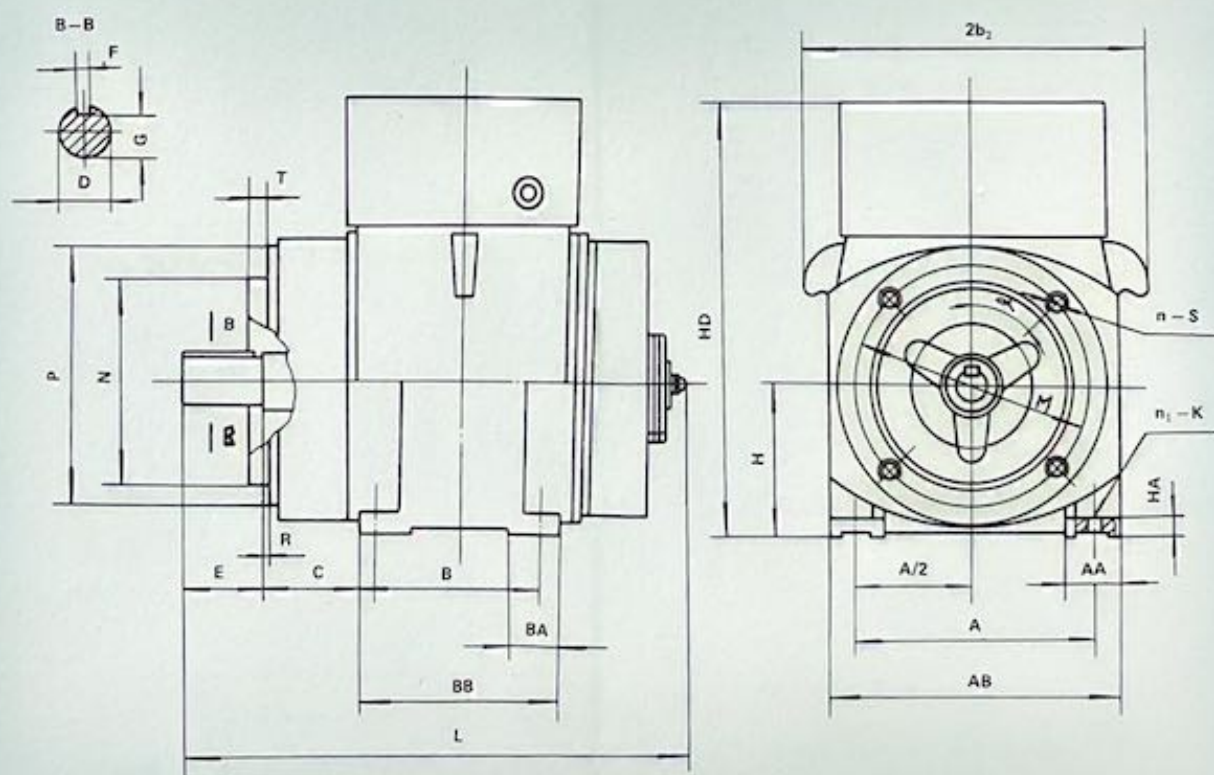

T2W3-N 系列三相无刷同步发电机

T2W3-N Series Brushless Synchronous Alternator

Type of Designation



Specification and Parameters

- Alternator can normally running under the condition below:
 - Altitude: $\leq 1000\text{m}$
 - Ambient temperature: $\leq 40^{\circ}\text{C}$ (Automatic Voltage Regulator: $\leq 50^{\circ}\text{C}$)
 - Relative Humidity in Air: 95 % (at 25°C)
 - Salt Spray, Condensed Dew and Mycete: affective
- Rated Voltage: 400V, 3-phases and 4-wires
- Rated Power Factor: 0.8(lag)
- Rated Frequency: 50Hz/60Hz
- Voltage Setting Range: $\pm 5\% U_n$
- Steady Voltage Setting Range: $\pm 1\%$
- Transient Voltage Regulation: 85% ~ 120% U_n , $\leq 1.5\text{s}$
- Sinusoid Wave Form Distortion of linear Voltage: $\leq 5\%$
- 10% Overload in hot State Running: 1h

型号 Type	机座号 Frame No	额定容量 Rated output (kVA)	额定功率 Rated power (kW)	额定电流 Rated current (A)	额定转速 Rated speed (r/min)	效率 Efficiency (%)	重量 Weight (kg)
T2W3-N - 20	200S	25	20	36	1500	81	218
T2W3-N - 24		30	24	43.3	1500	84.0	235
T2W3-N - 30		37.5	30	54.1	1500	86.0	263
T2W3-N - 40	225M	50	40	72.2	1500	89	380
T2W3-N - 50		62.5	50	90.2	1500	90.0	420
T2W3-N - 64	225L	80	64	115	1500	90.2	460
T2W3-N - 75		93.8	75	135	1500	90.3	500
T2W3-N - 90	250S	112.5	90	162	1500	90.5	560
T2W3-N - 100	250L	125	100	180	1500	91.0	610
T2W3-N - 120		150	120	217	1500	91.0	660
T2W3-N - 150	315M	187.5	150	271	1500	92	1040
T2W3-N - 200		250	200	361	1500	92.5	1180
T2W3-N - 250	315M	312.5	250	451	1500	93	1370
T2W3-N - 300	315L	375	300	541	1500	93.5	1470
T2W3-N - 320		400	320	577	1500	93.5	1470
T2W3-N - 350	355M	437.5	350	631	1500	93.5	1500
T2W3-N - 400		500	400	721.5	1500	94.5	1650
T2W3-N - 450		562.5	450	811	1500	93.5	1700
T2W3-N - 500	355L	625	500	902	1500	94	1900
T2W3-N - 630	400M	787.5	630	1136	1500	94.4	2320
T2W3-N - 700		875	700	1263	1500	94	2480
T2W3-N - 800	400L	1000	800	1443	1500	95	2960
T2W3-N - 900		1125	900	1624	1500	95	3050



TZH-N 184

Land Use Alternator

Voltage: 120V~600V
Power: 15~50KVA

Advantage:

- Self excitation
- Advanced AVR
- The 2/3 pitch design avoids excessive neutral current
- Single bearing or double bearing
- Easy to install and maintenance
- Standard IP22

Optional Part

- Anti-condensation heater
- Air filter
- Anti-radio interference suppressors
- Droop transformer for parallel operation
- AS440 AVR Plus a three phase induction detection module can meet $\pm 0.5\%$ voltage regulation

Frequency/RPM	Three-Phase Cont.H-125°C/40°C							Single-Phase Cont.H-125°C/40°C					
	50Hz(1500rpm)			60Hz(1800rpm)				50Hz(1500rpm)			60Hz(1800rpm)		
Series star(V)	380	400	415	416	440	460	480	220	230	240	220	230	240
Parallel star(V)	190	200	208	208	220	230	240	110	115	120	110	115	120
Series delta(V)	220	230	240	240	254	266	277	N/A	N/A	N/A	N/A	N/A	N/A
TZH-N184E Capacity(KVA)	22.5	22.5	22.5	27.5	28.8	28.8	30.0	15.0	15.0	15.0	18.4	18.4	18.4
Power(KW)	18.0	18.0	18.0	22.0	23.0	23.0	24.0	12.0	12.0	12.0	14.7	14.7	14.7
Efficiency(%)	83.7	84.2	84.5	83.4	83.6	84.1	84.2	81.3	81.7	81.9	79.9	80.6	81.1
TZH-N184FS Capacity(KVA)	25.0	25.0	25.0	30.0	31.3	31.3	32.5	16.0	16.0	16.0	19.2	19.2	19.2
Power(KW)	20.0	20.0	20.0	24.0	25.0	25.0	26.0	12.8	12.8	12.8	15.4	15.4	15.4
Efficiency(%)	83.7	84.2	84.4	83.4	83.6	83.9	84.2	81.3	81.7	81.9	79.9	80.6	81.1
TZH-N184F Capacity(KVA)	27.5	27.5	27.5	32.5	34.4	34.4	35.0	18.5	18.5	18.5	21.9	21.9	21.9
Power(KW)	22.0	22.0	22.0	26.0	27.5	27.5	28.0	14.8	14.8	14.8	17.5	17.5	17.5
Efficiency(%)	85.3	85.8	86.0	85.4	85.5	86.0	86.1	82.7	83.0	83.3	81.9	81.9	82.8
TZH-N184G Capacity(KVA)	31.3	31.3	31.3	35.0	37.5	37.5	37.5	21.0	21.0	21.0	25.0	25.0	25.0
Power(KW)	25.0	25.0	25.0	28.0	30.0	30.0	30.0	16.8	16.8	16.8	20.0	20.0	20.0
Efficiency(%)	85.7	86.2	86.4	86.3	86.3	86.7	87.0	83.7	83.9	83.9	83.0	83.0	83.8
TZH-N184H Capacity(KVA)	37.5	37.5	37.5	44.3	46.9	46.9	46.9	25.0	25.0	25.0	31.3	31.3	31.3
Power(KW)	30.0	30.0	30.0	35.4	37.5	37.5	37.5	20.0	20.0	20.0	25.0	25.0	25.0
Efficiency(%)	86.2	86.6	86.9	86.2	86.3	86.7	87.0	82.9	82.9	82.9	82.8	82.8	82.8
TZH-N184J Capacity(KVA)	40.0	42.5	40.0	47.3	50.0	50.0	50.0	28.0	28.0	28.0	35.0	35.0	35.0
Power(KW)	32.0	34.0	32.0	37.8	40.0	40.0	40.0	22.4	22.4	22.4	28.0	28.0	28.0
Efficiency(%)	87.6	86.6	87.1	87.3	86.7	86.8	87.2	87.5	83.0	83.0	82.9	83.0	83.0

Note: All LANZHOU generator ratings are based on 40°C ambient temperature and within 1000 meters altitude.
Other voltage ranges of generators need to be manufactured according to needs of customer.



TZH-N 224 Land Use Alternator

Voltage: 120V~690V
Power: 42.5~103.8KVA

Advantage:

- Meets all requirements of the world's leading generator standards
- Self-excitation control or optional permanent magnet generator provides continuous short circuit current capability
- H class insulation ensure the generator running in dreadful conditions
- The 2/3 pitch design avoids excessive neutral current
- You can reconnect 12 ends of the terminals to meet other voltage
- Single bearing or double bearing
- Easy to install and maintenance
- Standard IP22

Optional Part

- Winding temperature sensor RTD
- Bearing temperature sensor RTD
- Winding temperature protection thermistor and relays
- Optional PMG supply separate excitation system power
- Optional AVR MX321 OR MX341, optional AS440 AVR Plus a three phase induction detection module can meet $\pm 0.5\%$ voltage regulation
- Anti-condensation heater
- Air filter
- Droop transformer for parallel operation
- Anti-radio interference suppressors
- Power Factor Controller PFC3

TZH-N224 THREE PHASE ALTERNATOR

	50Hz(1500rpm)									60Hz(1800rpm)								
环境温度 Ambient Temp	Cont.H-125°C/40°C			Cont.H-150°C/40°C			Cont.H-163°C/27°C			Cont.H-125°C/40°C			Cont.H-150°C/40°C			Cont.H-163°C/27°C		
温升 Temp Rise																		
电压 Voltage	380	400	415	380	400	415	380	400	415	416	440	480	416	440	480	416	440	480
TZH-N224C Capacity(KVA)	42.5	42.5	42.5	45.0	45.0	45.0	46.8	46.8	46.8	50.0	52.5	55.0	53.1	55.0	58.1	55.0	56.3	60.0
Power(KW)	34.0	34.0	34.0	36.0	36.0	36.0	37.4	37.4	37.4	40.0	42.0	44.0	42.5	44.0	46.5	44.0	45.0	48.0
Efficiency(%)	86.6	87.1	87.4	86.2	86.2	87.1	86.0	86.6	86.9	87.1	87.5	88.1	86.7	87.2	87.8	86.5	87.1	87.6
TZH-N224D Capacity(KVA)	50.0	50.0	50.0	53.0	53.0	53.0	55.0	55.0	55.0	60.0	62.5	65.0	62.5	65.0	68.8	65.0	66.3	71.3
Power(KW)	40.0	40.0	40.0	42.4	42.4	42.4	44.0	44.0	44.0	48.0	50.0	52.0	50.0	52.0	55.0	52.0	53.0	57.0
Efficiency(%)	87.7	88.2	88.5	87.4	87.4	88.2	87.2	87.7	88.0	88.0	88.4	89.0	87.8	88.2	88.7	87.5	88.1	88.5
TZH-N224E Capacity(KVA)	60.0	60.0	60.0	61.0	61.0	61.0	63.0	63.0	63.0	67.5	70.0	75.0	70.0	73.8	78.8	72.5	75.0	80.0
Power(KW)	48.0	48.0	48.0	48.8	48.8	48.8	50.4	50.4	50.4	54.0	56.0	60.0	56.0	59.0	63.0	58.0	60.0	64.0
Efficiency(%)	88.3	88.8	89.1	88.2	88.2	89.0	88.0	88.5	88.8	88.8	89.2	89.6	88.6	88.9	89.4	88.4	88.8	89.3
TZH-N224F Capacity(KVA)	72.5	72.5	72.5	77.0	77.0	77.0	80.0	80.0	80.0	83.8	87.5	93.8	88.8	92.5	100.0	91.9	95.0	102.5
Power(KW)	58.0	58.0	58.0	61.6	61.6	61.6	64.0	64.0	64.0	67.0	70.0	75.0	71.0	74.0	80.0	73.5	76.0	82.0
Efficiency(%)	89.6	89.9	90.1	89.4	89.4	89.9	89.2	89.6	89.8	90.0	90.3	90.6	89.8	90.1	90.4	89.6	89.9	90.3
TZH-N224FL Capacity(KVA)	80.0	80.0	80.0	84.8	84.8	84.8	88.0	88.0	88.0	91.0	95.0	103.0	98.0	102.5	110.0	100.9	105.0	112.5
Power(KW)	64.0	64.0	64.0	67.8	67.8	67.8	70.4	70.4	70.4	72.8	76.0	82.4	78.4	82.0	88.0	80.7	84.0	90.0
Efficiency(%)	89.6	89.9	90.1	89.4	89.4	89.9	89.2	89.6	89.8	90.0	90.3	90.6	89.8	90.1	90.4	89.6	89.9	90.3
TZH-N224G Capacity(KVA)	85.0	85.0	85.0	87.5	87.5	87.5	90.8	90.8	90.8	93.8	97.5	103.8	98.1	102.5	110.0	101.3	106.3	113.8
Power(KW)	68.0	68.0	68.0	70.0	70.0	70.0	72.6	72.6	72.6	75.0	78.0	83.0	78.5	82.0	88.0	81.0	85.0	91.0
Efficiency(%)	89.8	90.2	90.4	89.7	89.7	90.3	89.6	89.9	90.1	90.5	90.8	91.0	90.3	90.6	90.9	90.2	90.4	90.8

Note: All LANZHOU generator ratings are based on 40°C ambient temperature and within 1000 meters altitude.
Other voltage ranges of generators need to be manufactured according to needs of customer.



TZH-N 274 ▲ Land Use Alternator

Voltage: 120V~690V

Power: 100~255KVA

◎ Advantage:

- Meets all requirements of the world's leading generator standards
- Self-excitation control or optional permanent magnet generator provides continuous short circuit current capability
- H class insulation ensure the generator running in loadful conditions
- The 2/3 pitch design avoids excessive neutral current
- You can reconnect 12 ends of the terminals to meet other voltage
- Single bearing or double bearing
- Easy to install and maintenance
- Standard

◎ Optional Part

- Winding temperature sensor RTD
- Bearing temperature sensor RTD
- Winding temperature protection thermistors and
- Optional PMG supply separate excitation system
- Optional AVR MX321 OR MX341, optional AS440 Plus a three phase induction detection module can meet 0.5% voltage regulation
- Anti-condensation heater
- Air filter
- Droop transformer for parallel operation
- Anti-radio interference suppressors
- Power Factor Controller PFC3

TZH-N274 THREE PHASE ALTERNATOR

	50Hz(1500rpm)									60Hz(1800rpm)								
环境温度 Ambient Temp	Cont.H-125°C/40°C			Cont.H-150°C/40°C			Cont.H-163°C/27°C			Cont.H-125°C/40°C			Cont.H-150°C/40°C			Cont.H-163°C/27°C		
温升 Temp Rise																		
电压 Voltage	380	400	415	380	400	415	380	400	415	416	440	480	416	440	480	416	440	480
TZH-N274C Capacity(KVA)	100.0	100.0	100.0	106.0	106.0	106.0	110.0	110.0	110.0	112.5	117.5	125.0	116.3	125.0	132.5	120.0	127.5	137.5
Power(KW)	80.0	80.0	80.0	84.8	84.8	84.8	88.0	88.0	88.0	90.0	94.0	100.0	93.0	100.0	106.0	96.0	102.0	110.0
Efficiency(%)	89.8	90.3	90.6	89.5	90.0	90.4	89.2	89.8	90.2	90.2	90.6	91.1	90.0	90.2	90.8	89.8	90.1	90.6
TZH-N274D Capacity(KVA)	114.0	120.0	114.0	121.0	127.0	121.0	125.0	130.0	125.0	131.3	137.5	146.3	137.5	145.0	156.3	142.5	150.0	158.8
Power(KW)	91.2	96.0	91.2	96.8	101.6	96.8	100.0	104.0	100.0	105.0	110.0	117.0	110.0	116.0	125.0	114.0	120.0	127.0
Efficiency(%)	90.3	90.6	91.1	91.1	91.6	91.8	91.0	91.4	91.7	90.5	90.8	91.3	91.2	91.5	92.0	91.0	91.4	91.9
TZH-N274DL Capacity(KVA)	125.0	125.0	125.0	130.0	130.0	130.0	135.0	135.0	135.0	150.0	156.0	162.2	156.0	173.1	190.5	161.0	178.1	195.5
Power(KW)	100.0	100.0	100.0	104.0	104.0	104.0	108.0	108.0	108.0	120.0	124.8	129.8	124.8	138.5	152.4	128.8	142.5	156.4
Efficiency(%)	90.4	90.6	91.1	91.1	91.6	91.8	91.0	91.4	91.7	90.5	90.8	91.3	91.2	91.5	92.0	91.0	91.4	91.9
TZH-N274E Capacity(KVA)	140.0	140.0	140.0	145.0	145.0	145.0	150.0	150.0	150.0	160.0	167.5	178.8	170.0	175.0	187.5	175.0	181.3	193.8
Power(KW)	112.0	112.0	112.0	116.0	116.0	116.0	120.0	120.0	120.0	128.0	134.0	143.0	136.0	140.0	150.0	140.0	145.0	155.0
Efficiency(%)	91.3	91.7	92.0	91.1	91.6	91.8	91.0	91.4	91.7	91.4	91.7	92.1	91.2	91.5	92.0	91.0	91.4	91.9
TZH-N274EL Capacity(KVA)	150.0	150.0	150.0	155.0	155.0	155.0	160.0	160.0	160.0	172.6	179.5	186.7	180.0	185.0	192.5	185.0	192.4	200.1
Power(KW)	120.0	120.0	120.0	124.0	124.0	124.0	128.0	128.0	128.0	138.1	143.6	149.4	144.0	148.0	153.9	148.0	153.9	160.1
Efficiency(%)	91.3	91.7	92.0	91.1	91.6	91.8	91.0	91.4	91.7	91.4	91.7	92.1	91.2	91.5	92.0	91.0	91.4	91.9
TZH-N274F Capacity(KVA)	160.0	160.0	160.0	170.0	170.0	170.0	175.0	175.0	175.0	181.3	190.0	206.3	187.5	200.0	212.5	192.5	206.3	218.8
Power(KW)	128.0	128.0	128.0	136.0	136.0	136.0	140.0	140.0	140.0	145.0	152.0	165.0	150.0	160.0	170.0	154.0	165.0	175.0
Efficiency(%)	92.0	92.3	92.5	91.7	92.1	92.3	91.6	92.0	92.2	92.1	92.4	92.7	92.0	92.2	92.6	91.9	92.1	92.5
TZH-N274G Capacity(KVA)	182.0	182.0	182.0	187.0	187.0	187.0	200.0	200.0	200.0	205.0	218.5	231.4	213.0	228.8	250.0	218.5	234.0	253.3
Power(KW)	145.6	145.6	145.6	149.6	149.6	149.6	160.0	160.0	160.0	164.0	174.8	185.1	170.4	183.0	200.0	174.8	187.2	202.6
Efficiency(%)	92.0	92.4	92.6	91.9	92.2	92.5	91.7	92.1	92.3	92.2	92.4	92.7	92.0	92.2	92.5	91.9	92.1	92.5
TZH-N274H Capacity(KVA)	200.0	200.0	200.0	212.0	212.0	212.0	220.0	220.0	220.0	237.5	245.0	255.0	250.0	258.8	275.0	256.3	265.0	280.0
Power(KW)	160.0	160.0	160.0	169.6	169.6	169.6	176.0	176.0	176.0	190.0	196.0	204.0	200.0	207.0	220.0	205.0	212.0	224.0
Efficiency(%)	93.0	93.3	93.4	92.8	93.1	93.3	92.7	93.0	93.2	93.0	93.2	93.6	92.8	93.1	93.4	92.7	93.0	93.3
TZH-N274J Capacity(KVA)	230.0	230.0	230.0	250.0	250.0	250.0	260.0	260.0	260.0	269.0	281.0	300.0	288.0	300.0	319.0	294.0	306.0	325.0
Power(KW)	184.0	184.0	184.0	200.0	200.0	200.0	208.0	208.0	208.0	215.2	224.8	240.0	230.4	240.0	255.2	235.2	244.8	260.0
Efficiency(%)	92.4	92.4	92.4	92.1	92.2	92.3	91.8	92.0	92.1	92.8	92.8	92.8	92.5	92.5	92.5	92.4	92.4	92.4
TZH-N274K Capacity(KVA)	250.0	250.0	250.0	265.0	265.0	265.0	275.0	275.0	275.0	291.0	299.0	312.5	304.0	312.5	331.3	312.0	320.0	343.8
Power(KW)	200.0	200.0	200.0	212.0	212.0	212.0	220.0	220.0	220.0	232.8	239.2	250.0	243.2	250.0	265.0	249.6	256.0	275.0
Efficiency(%)	92.5	92.7	92.8	92.2	92.4	92.6	92.0	92.2	92.4	92.8	92.7	92.9	92.4	92.6	92.7	92.2	92.4	92.5

Note: All LANZHOU generator ratings are based on 40°C ambient temperature and within 1000 meters altitude.

Other voltage ranges of generators need to be manufactured according to needs of customer.