



# HIGH-QUALITY PRODUCTS DIODE PACKAGES

Package Characteristics								
Code	Package		Temperature Range		Outer Dimensions			Figure
	type	materials	operating °C	storage °C	length mm	width mm	height mm	no
CR	LCC67	ceramic package, epoxy window	-20 to +60	-20 to +80	10.6	8.8	1.26	1
CR	LCC112	ceramic package, epoxy window	-20 to +60	-20 to +80	16.5	14.5	1.26	2
CU	LCC67	ceramic package, UV-window	-20 to +60	-20 to +80	10.6	8.8	1.96	1
CU	LCC112	ceramic package, UV-window	-20 to +60	-20 to +80	16.5	14.5	1.96	2
CB	LCC67 / LCC112	ceramic package, light-tight epoxy window	-20 to +60	-20 to +80	10.6 / 16.5	8.8 / 14.5	1.26	1 / 2
CX	LCC67 / LCC112	ceramic package, radhard epoxy window	-20 to +60	-20 to +80	10.6 / 16.5	8.8 / 14.5	1.26	1 / 2
MU	TO-5	metal package, UV window	-30 to +70	-40 to +80	9.14		4.43	3
MU	TO-8	metal package, UV window	-30 to +70	-40 to +80	13.97		5.5	4
PR	PR34	polymer package, epoxy window	-10 to +60	-20 to +70	34.0		1.50	5
CN	LCC67 / LCC112	ceramic package, no window	available on special order		10.6 / 16.5	8.8 / 14.5	1.26	1 / 2
D	N/A	die	available on special order					
CUSTOM	to be specified with the customer							

Figure 1 LCC67 - Ceramic Package


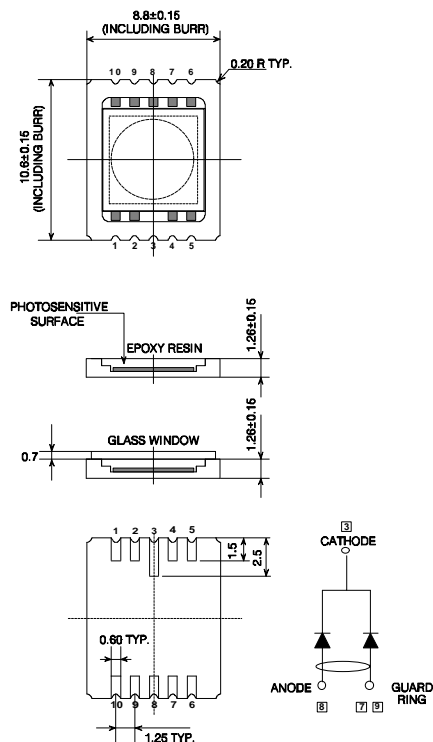


Figure 2 LCC112 - Ceramic Package

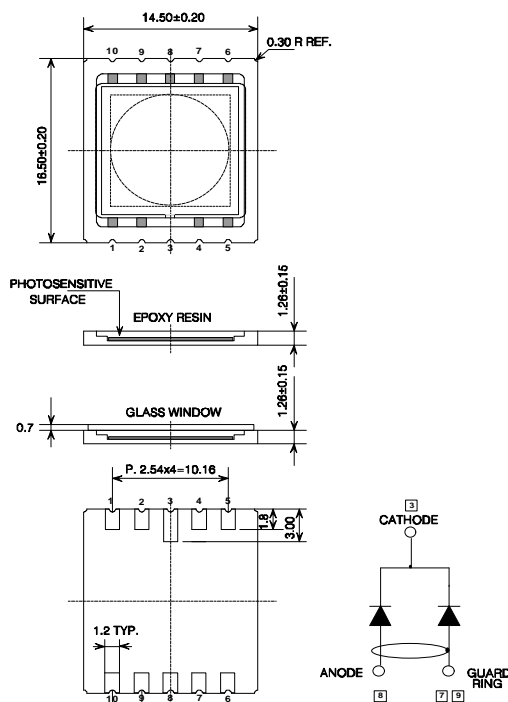

# HIGH-QUALITY PRODUCTS

## DIODE PACKAGES CONT.

Figure 3 TO-5 - Metal Package

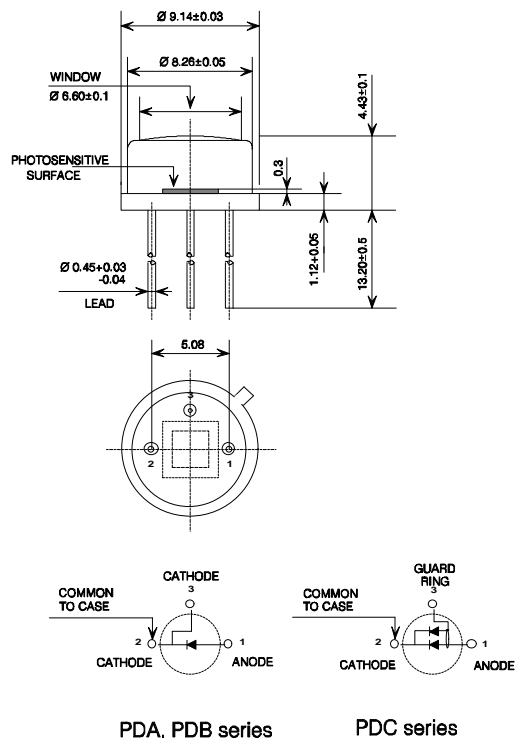


Figure 4 TO-8 - Metal Package

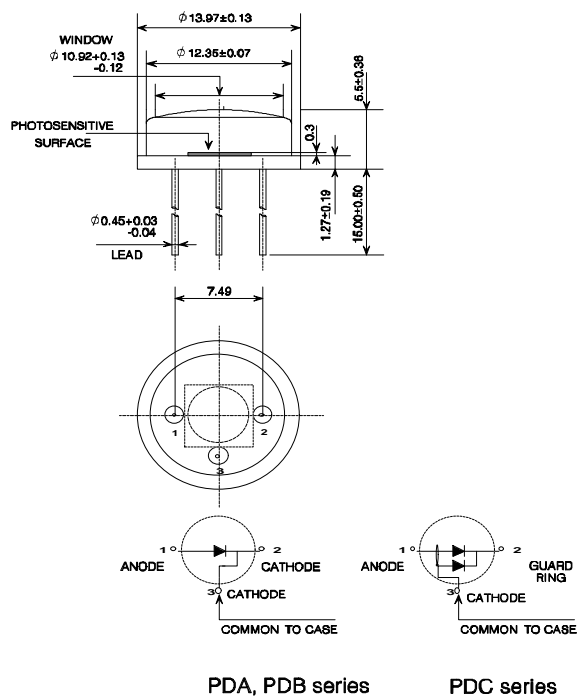


Figure 5 PR34 - Polymer Package

