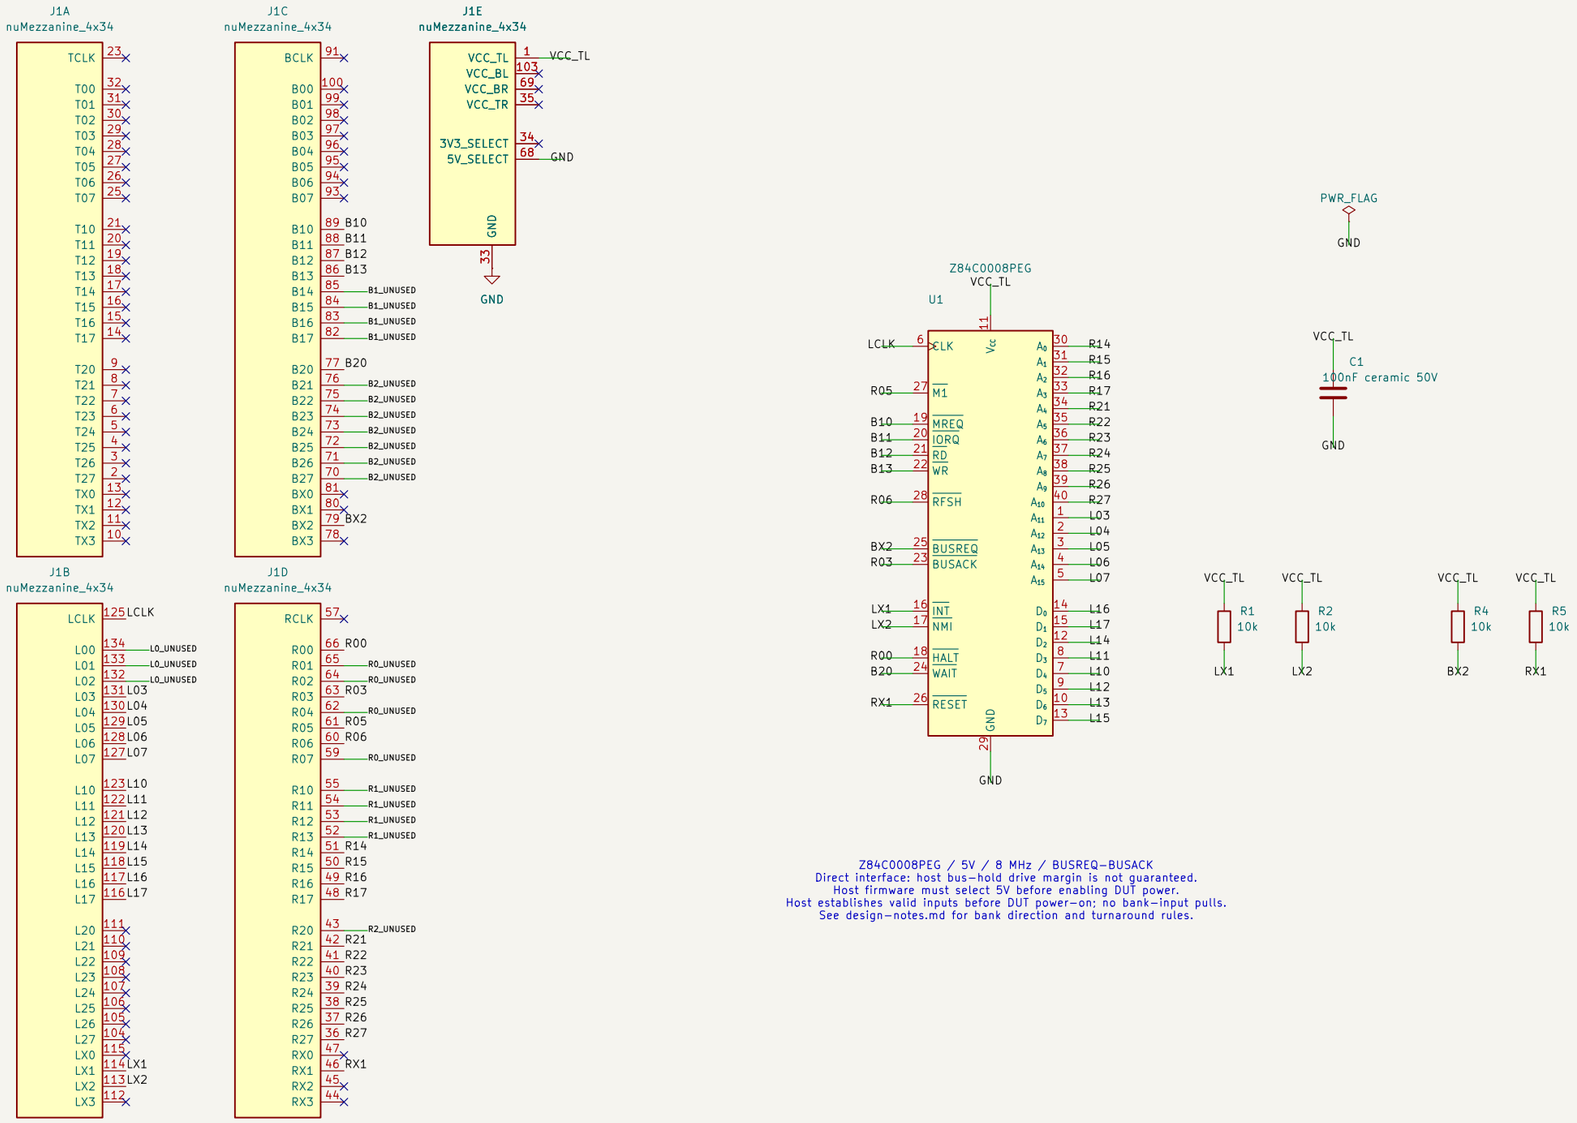


Z84C0008PEG / 5V / 8 MHz / BUSREQ-BUSACK
Direct interface: host bus-hold drive margin is not guaranteed.
Host firmware must select 5V before enabling DUT power.
Host establishes valid inputs before DUT power-on; no bank-input pulls.
See design-notes.md for bank direction and turnaround rules.

UNUSED PINS IN USED BANKS: ONE SHARED 47k PULL-DOWN PER BANK
Drive all tied unused bits LOW together whenever host -> DUT, including startup.
See unused-bank-pins.csv for connector pad numbers.

Z84C0008PEG - CMOS - 5V - 8MHz

Sheet: /
File: z80.kicad_sch

Title: Z80 DUT daughter board

Size: A3	Date: 2026-09-13	**Rev: 1.0**
KiCad E.D.A. 10.0.6-rc2		Id: 1/1