IF2230 CPU Scheduling

Basic Concepts

- Maximum CPU utilization obtained with multiprogramming
- CPU–I/O Burst Cycle – Process execution consists of a *cycle* of CPU execution and I/O wait
- CPU burst distribution

Alternating Sequence of CPU And I/O Bursts

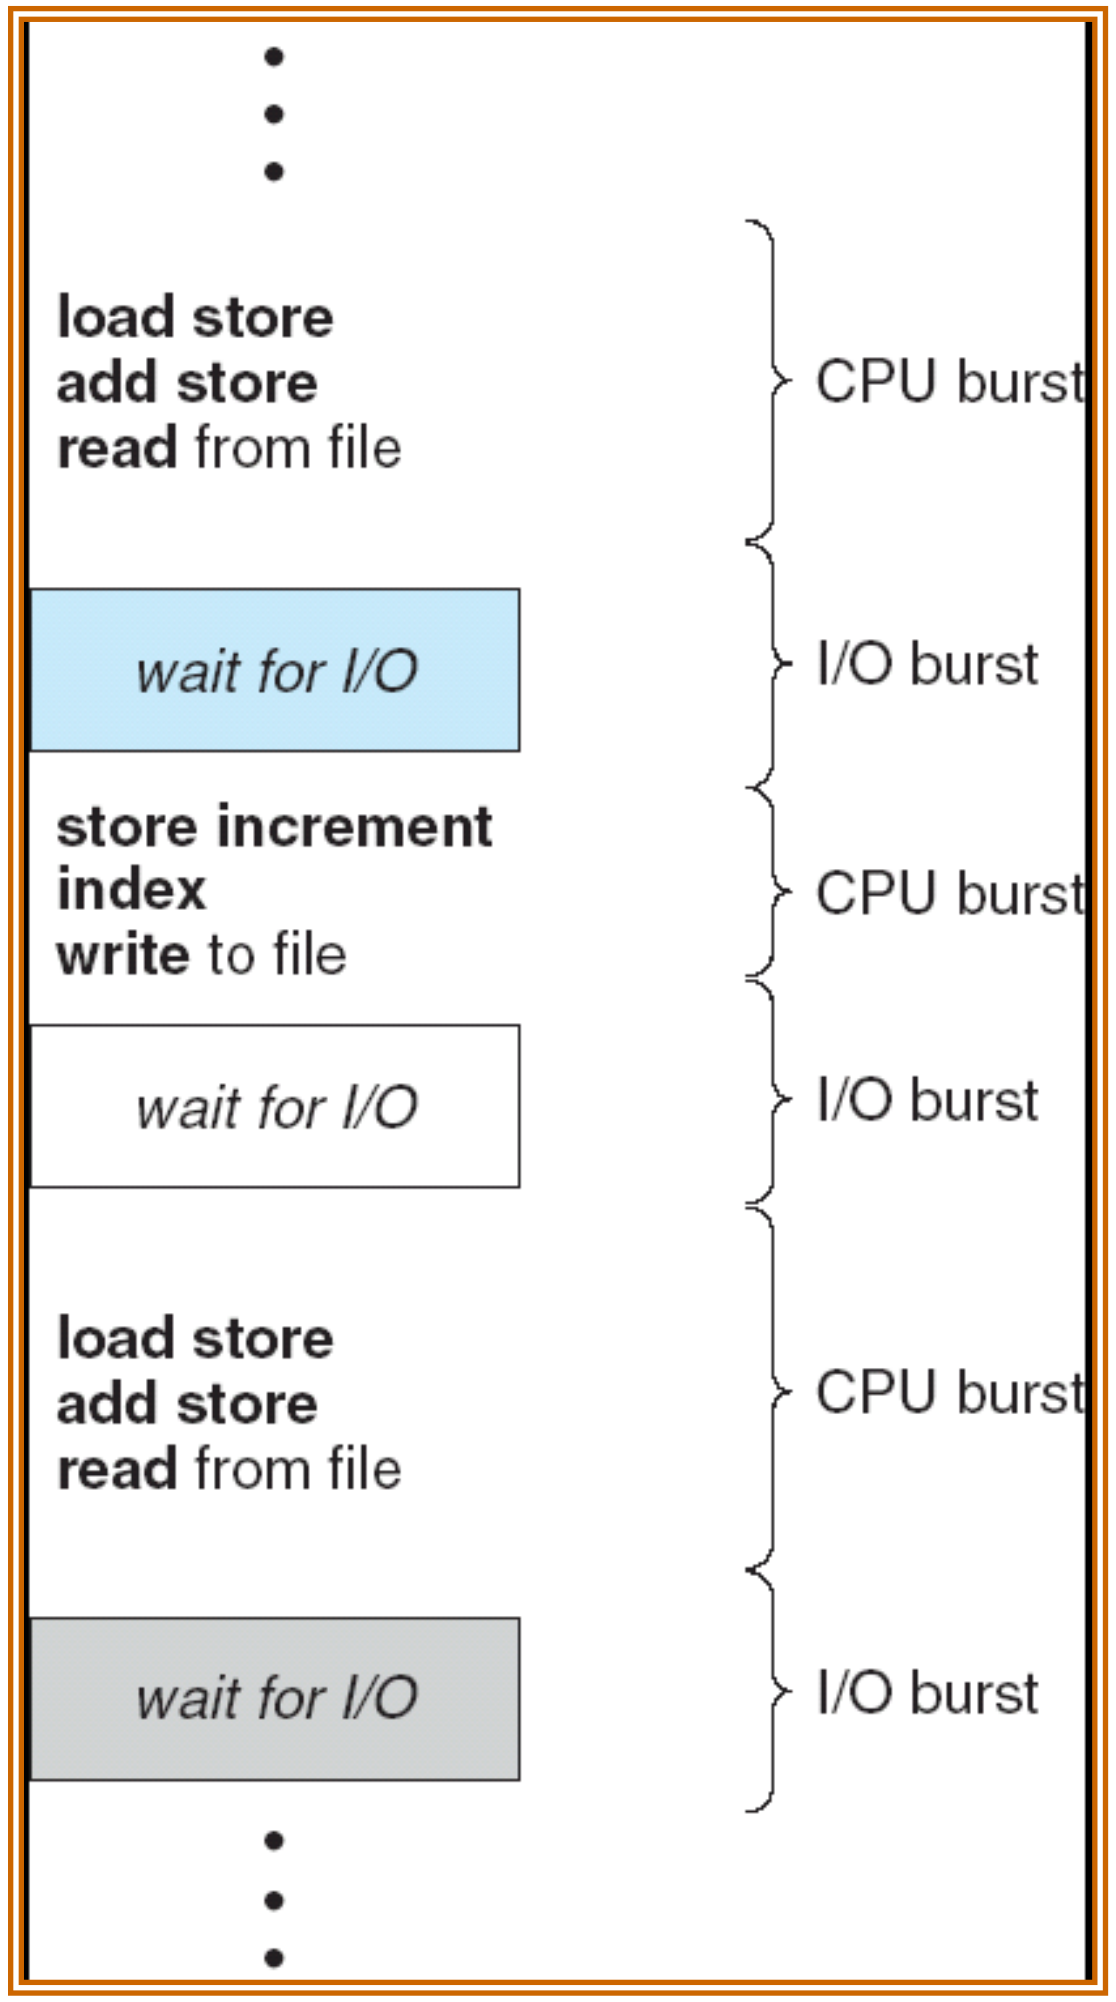

Histogram of CPU-burst Times

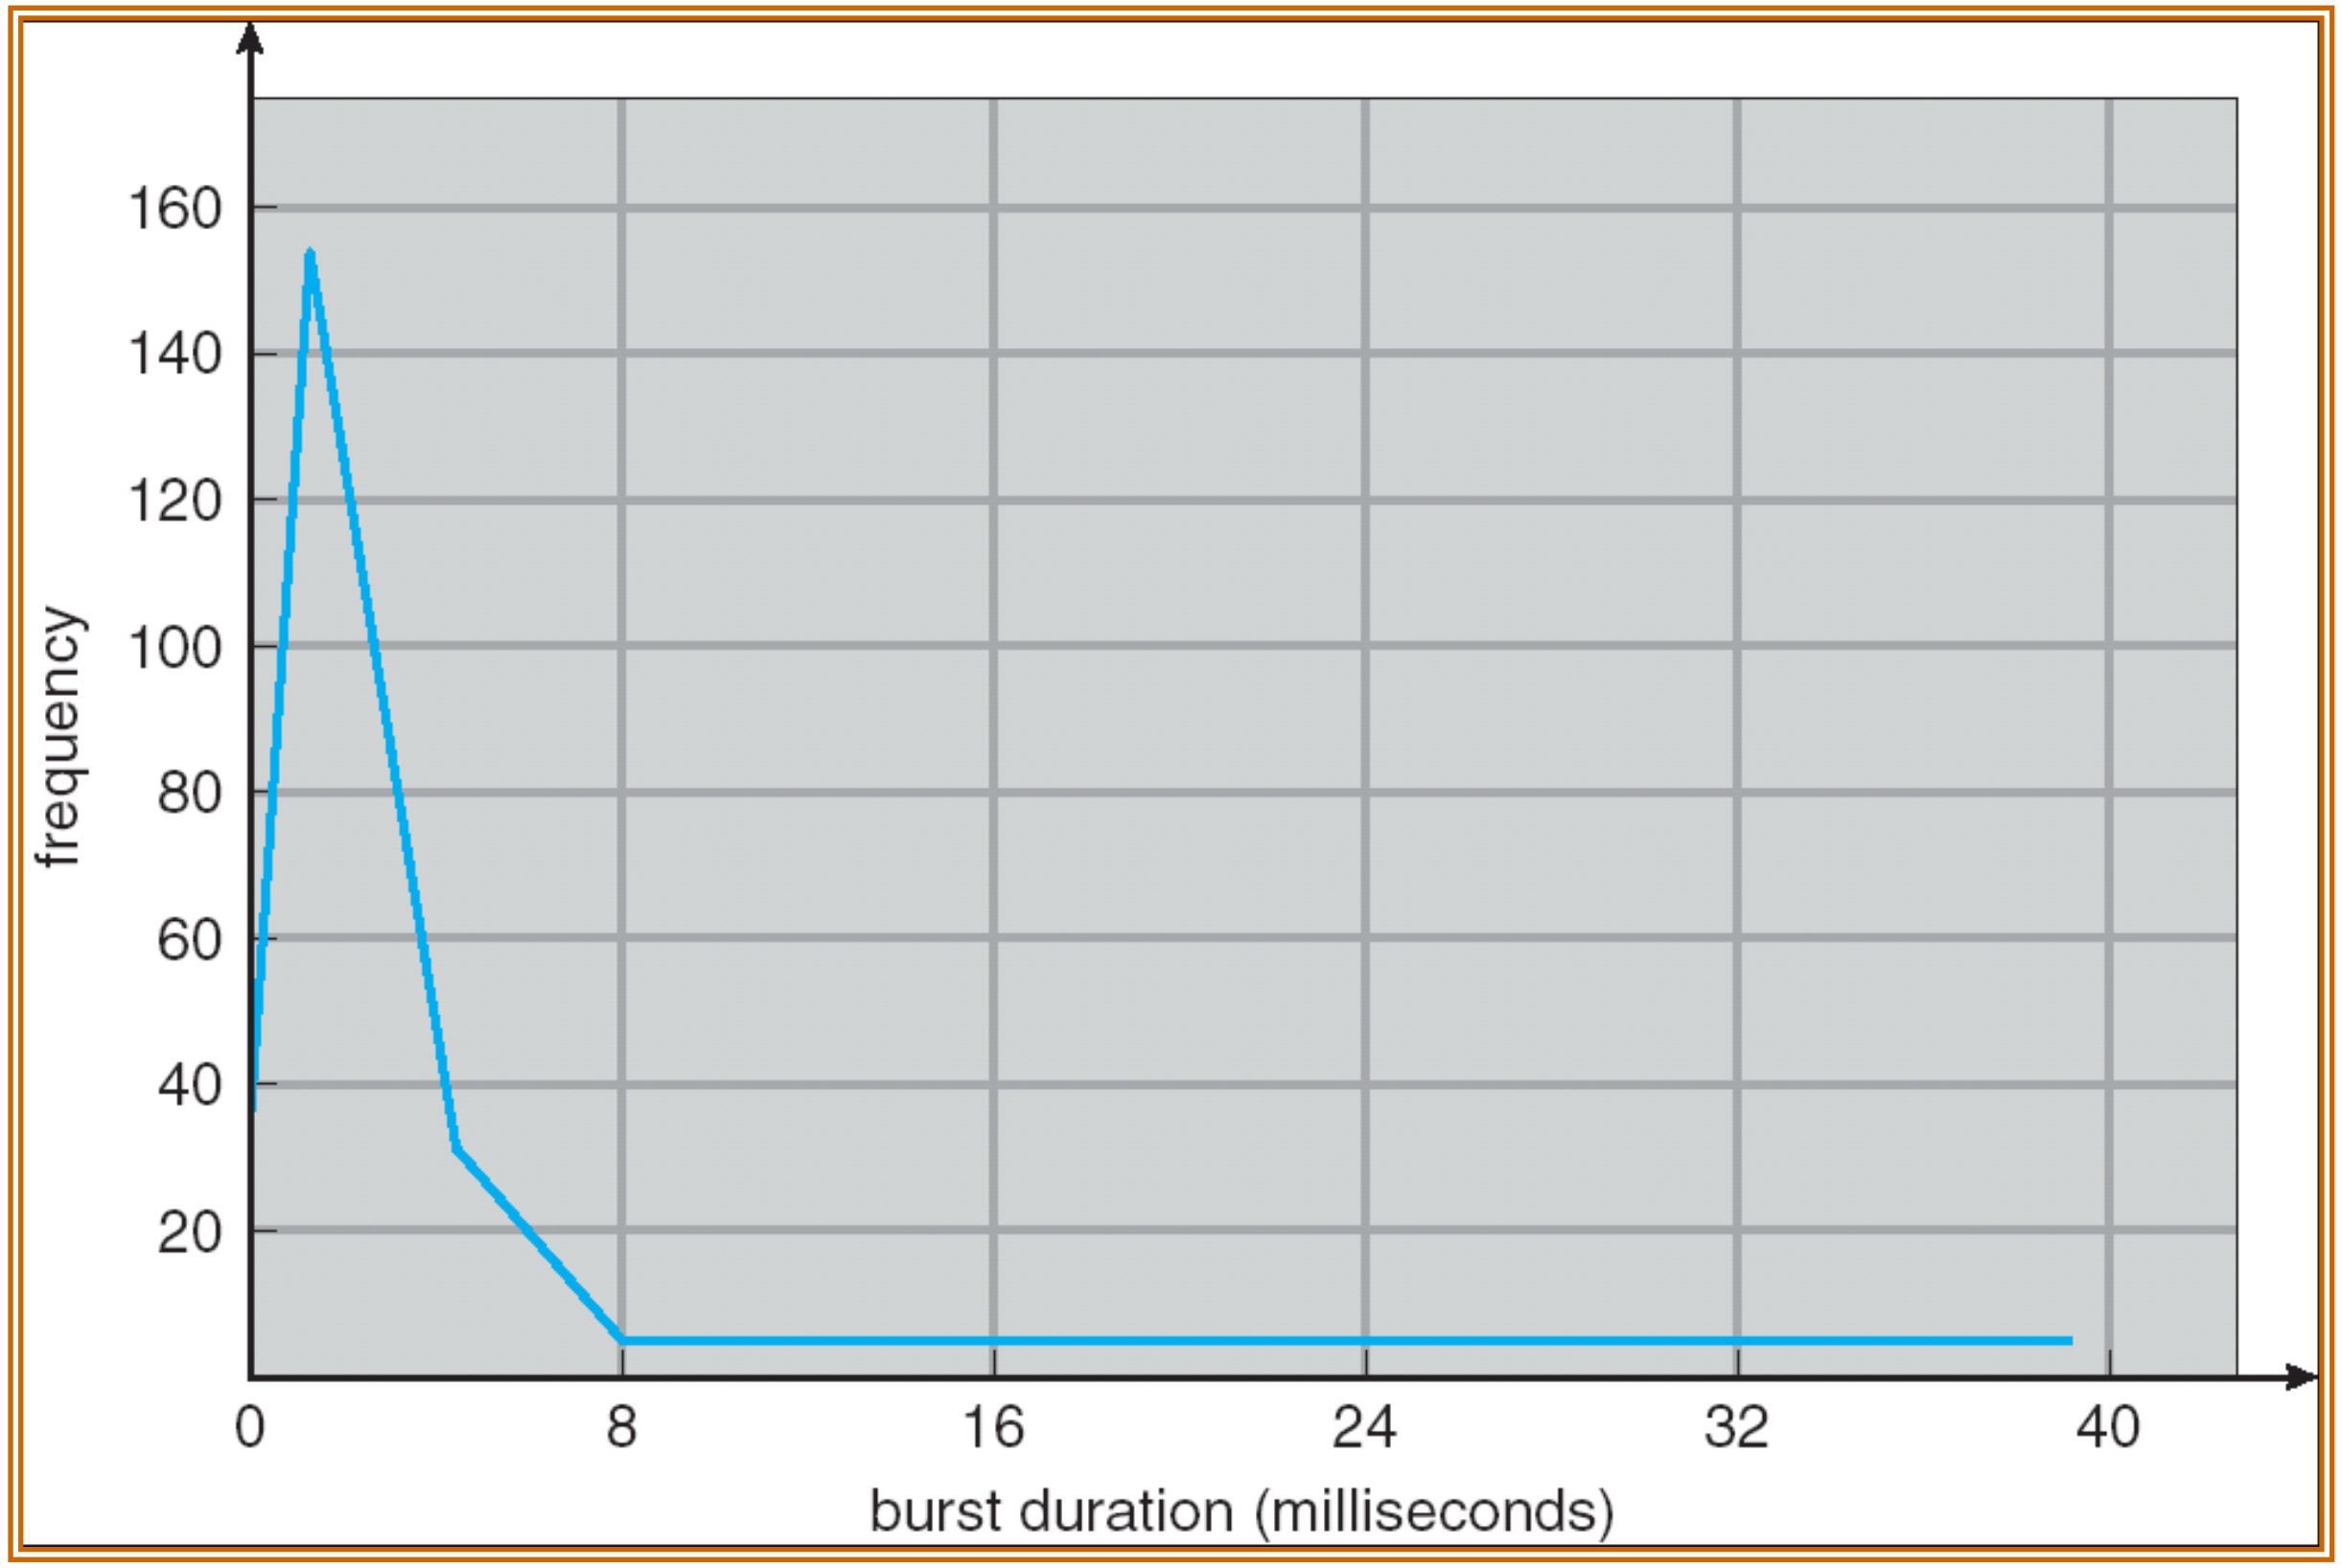

CPU Scheduler

- Selects from among the processes in memory that are ready to execute, and allocates the CPU to one of them
- CPU scheduling decisions may take place when a process:
  1. Switches from running to waiting state
  2. Switches from running to ready state
  3. Switches from waiting to ready
  4. Terminates
- Scheduling under 1 and 4 is *nonpreemptive*
- All other scheduling is *preemptive*

Dispatcher

- Dispatcher module gives control of the CPU to the process selected by the short-term scheduler; this involves:
  - switching context
  - switching to user mode
  - jumping to the proper location in the user program to restart that program
- *Dispatch latency* – time it takes for the dispatcher to stop one process and start another running

Scheduling Criteria

- CPU utilization – keep the CPU as busy as possible
- Throughput – # of processes that complete their execution per time unit
- Turnaround time – amount of time to execute a particular process
- Waiting time – amount of time a process has been waiting in the ready queue
- Response time – amount of time it takes from when a request was submitted until the first response is produced, **not** output (for time-sharing environment)

Optimization Criteria

- Max CPU utilization
- Max throughput
- Min turnaround time
- Min waiting time
- Min response time

First-Come, First-Served (FCFS) Scheduling

Process	Burst Time
P_1	24
P_2	3
P_3	3

- Suppose that the processes arrive in the order: P_1 , P_2 , P_3
  The Gantt Chart for the schedule is:

- Waiting time for P_1 = 0; P_2 = 24; P_3 = 27
- Average waiting time: (0 + 24 + 27)/3 = 17

FCFS Scheduling (Cont.)

Suppose that the processes arrive in the order

$$P_2 , P_3 , P_1$$

- The Gantt chart for the schedule is:

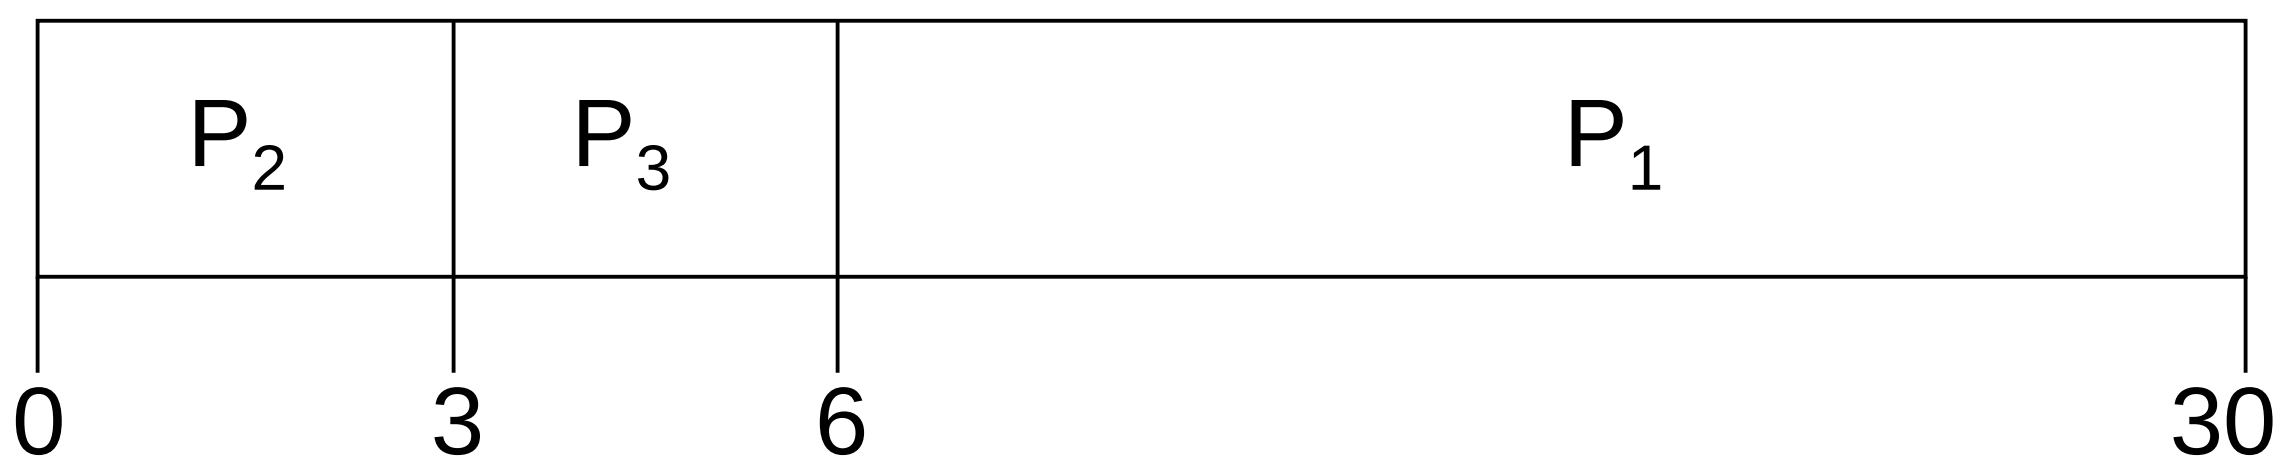

- Waiting time for $P_1 = 6; P_2 = 0; P_3 = 3$
- Average waiting time: $(6 + 0 + 3)/3 = 3$
- Much better than previous case
- *Convoy effect* short process behind long process

Shortest-Job-First (SJR) Scheduling

- Associate with each process the length of its next CPU burst. Use these lengths to schedule the process with the shortest time
- Two schemes:
  - nonpreemptive – once CPU given to the process it cannot be preempted until completes its CPU burst
  - preemptive – if a new process arrives with CPU burst length less than remaining time of current executing process, preempt. This scheme is know as the Shortest-Remaining-Time-First (SRTF)
- SJF is optimal – gives minimum average waiting time for a given set of processes

Example of Non-Preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4

- SJF (non-preemptive)

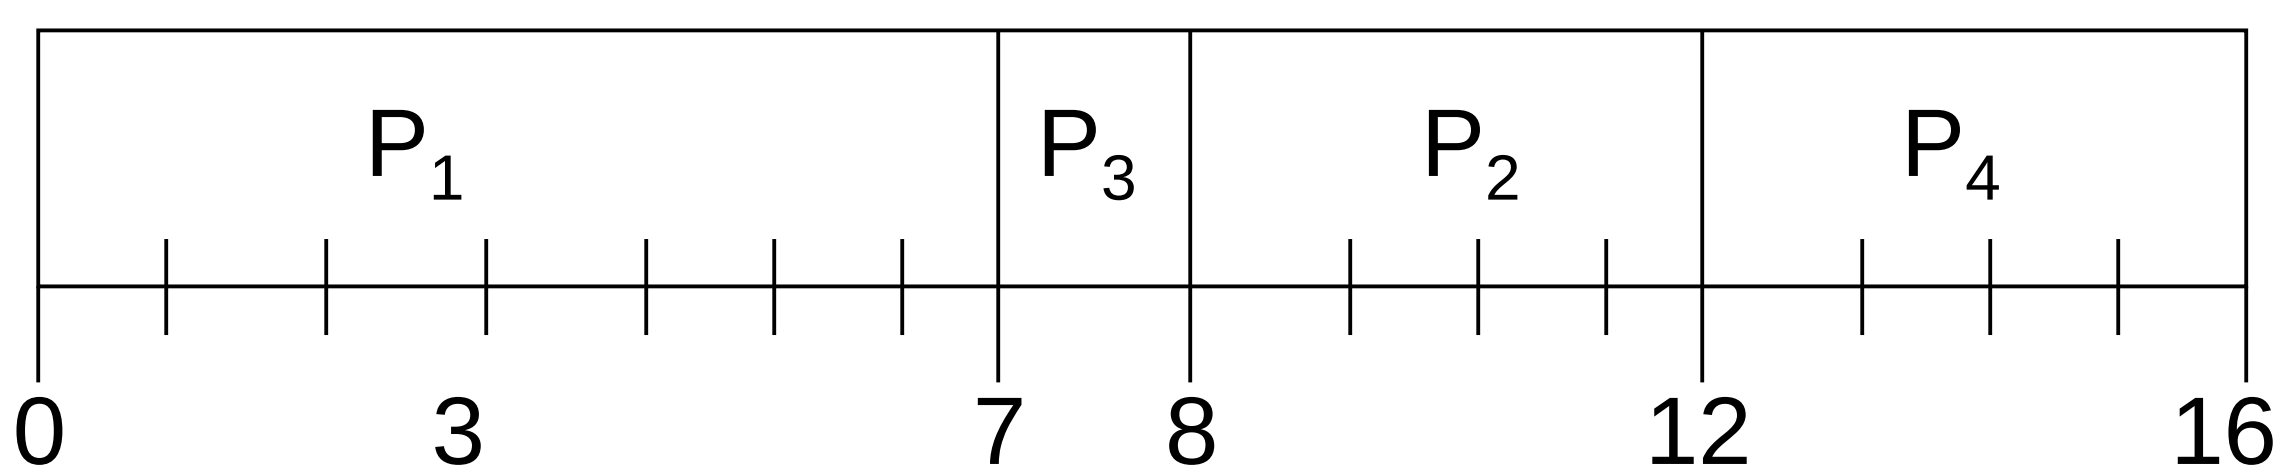

- Average waiting time = (0 + 6 + 3 + 7)/4 = 4

Example of Preemptive SJF

Process	Arrival Time	Burst Time
P_1	0.0	7
P_2	2.0	4
P_3	4.0	1
P_4	5.0	4

- SJF (preemptive)

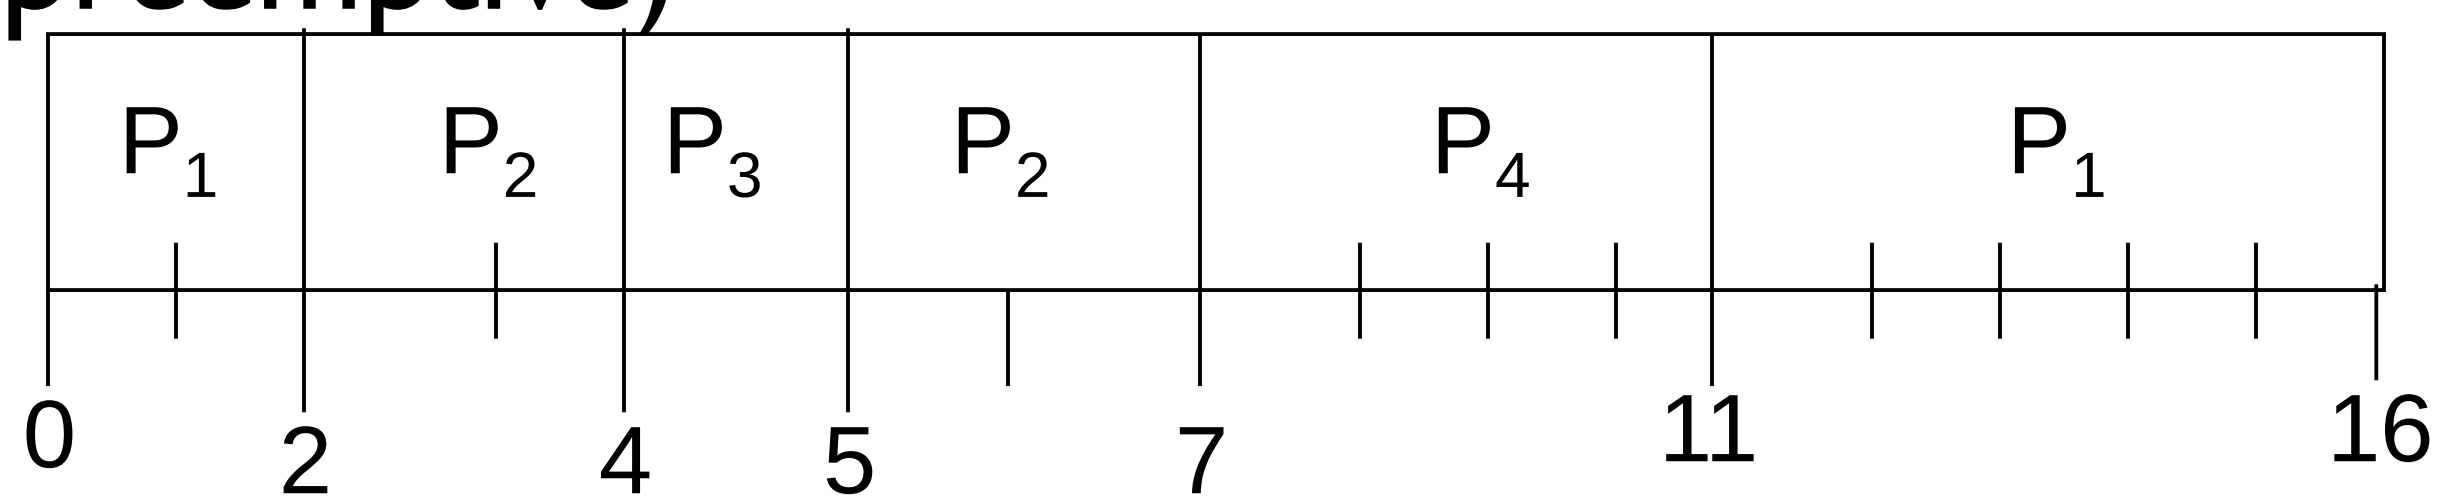

- Average waiting time = (9 + 1 + 0 +2)/4 = 3

Determining Length of Next CPU Burst

- Can only estimate the length
- Can be done by using the length of previous CPU bursts, using exponential averaging

1. $t_n =$ actual lenght of n^{th} CPU burst
2. $\tau_{n+1} =$ predicted value for the next CPU burst
3. $\alpha, 0 \leq \alpha \leq 1$
4. Define : $\tau_{n=1} = \alpha\, t_n + (1 - \alpha)\tau_n .$

Prediction of the Length of the Next CPU Burst

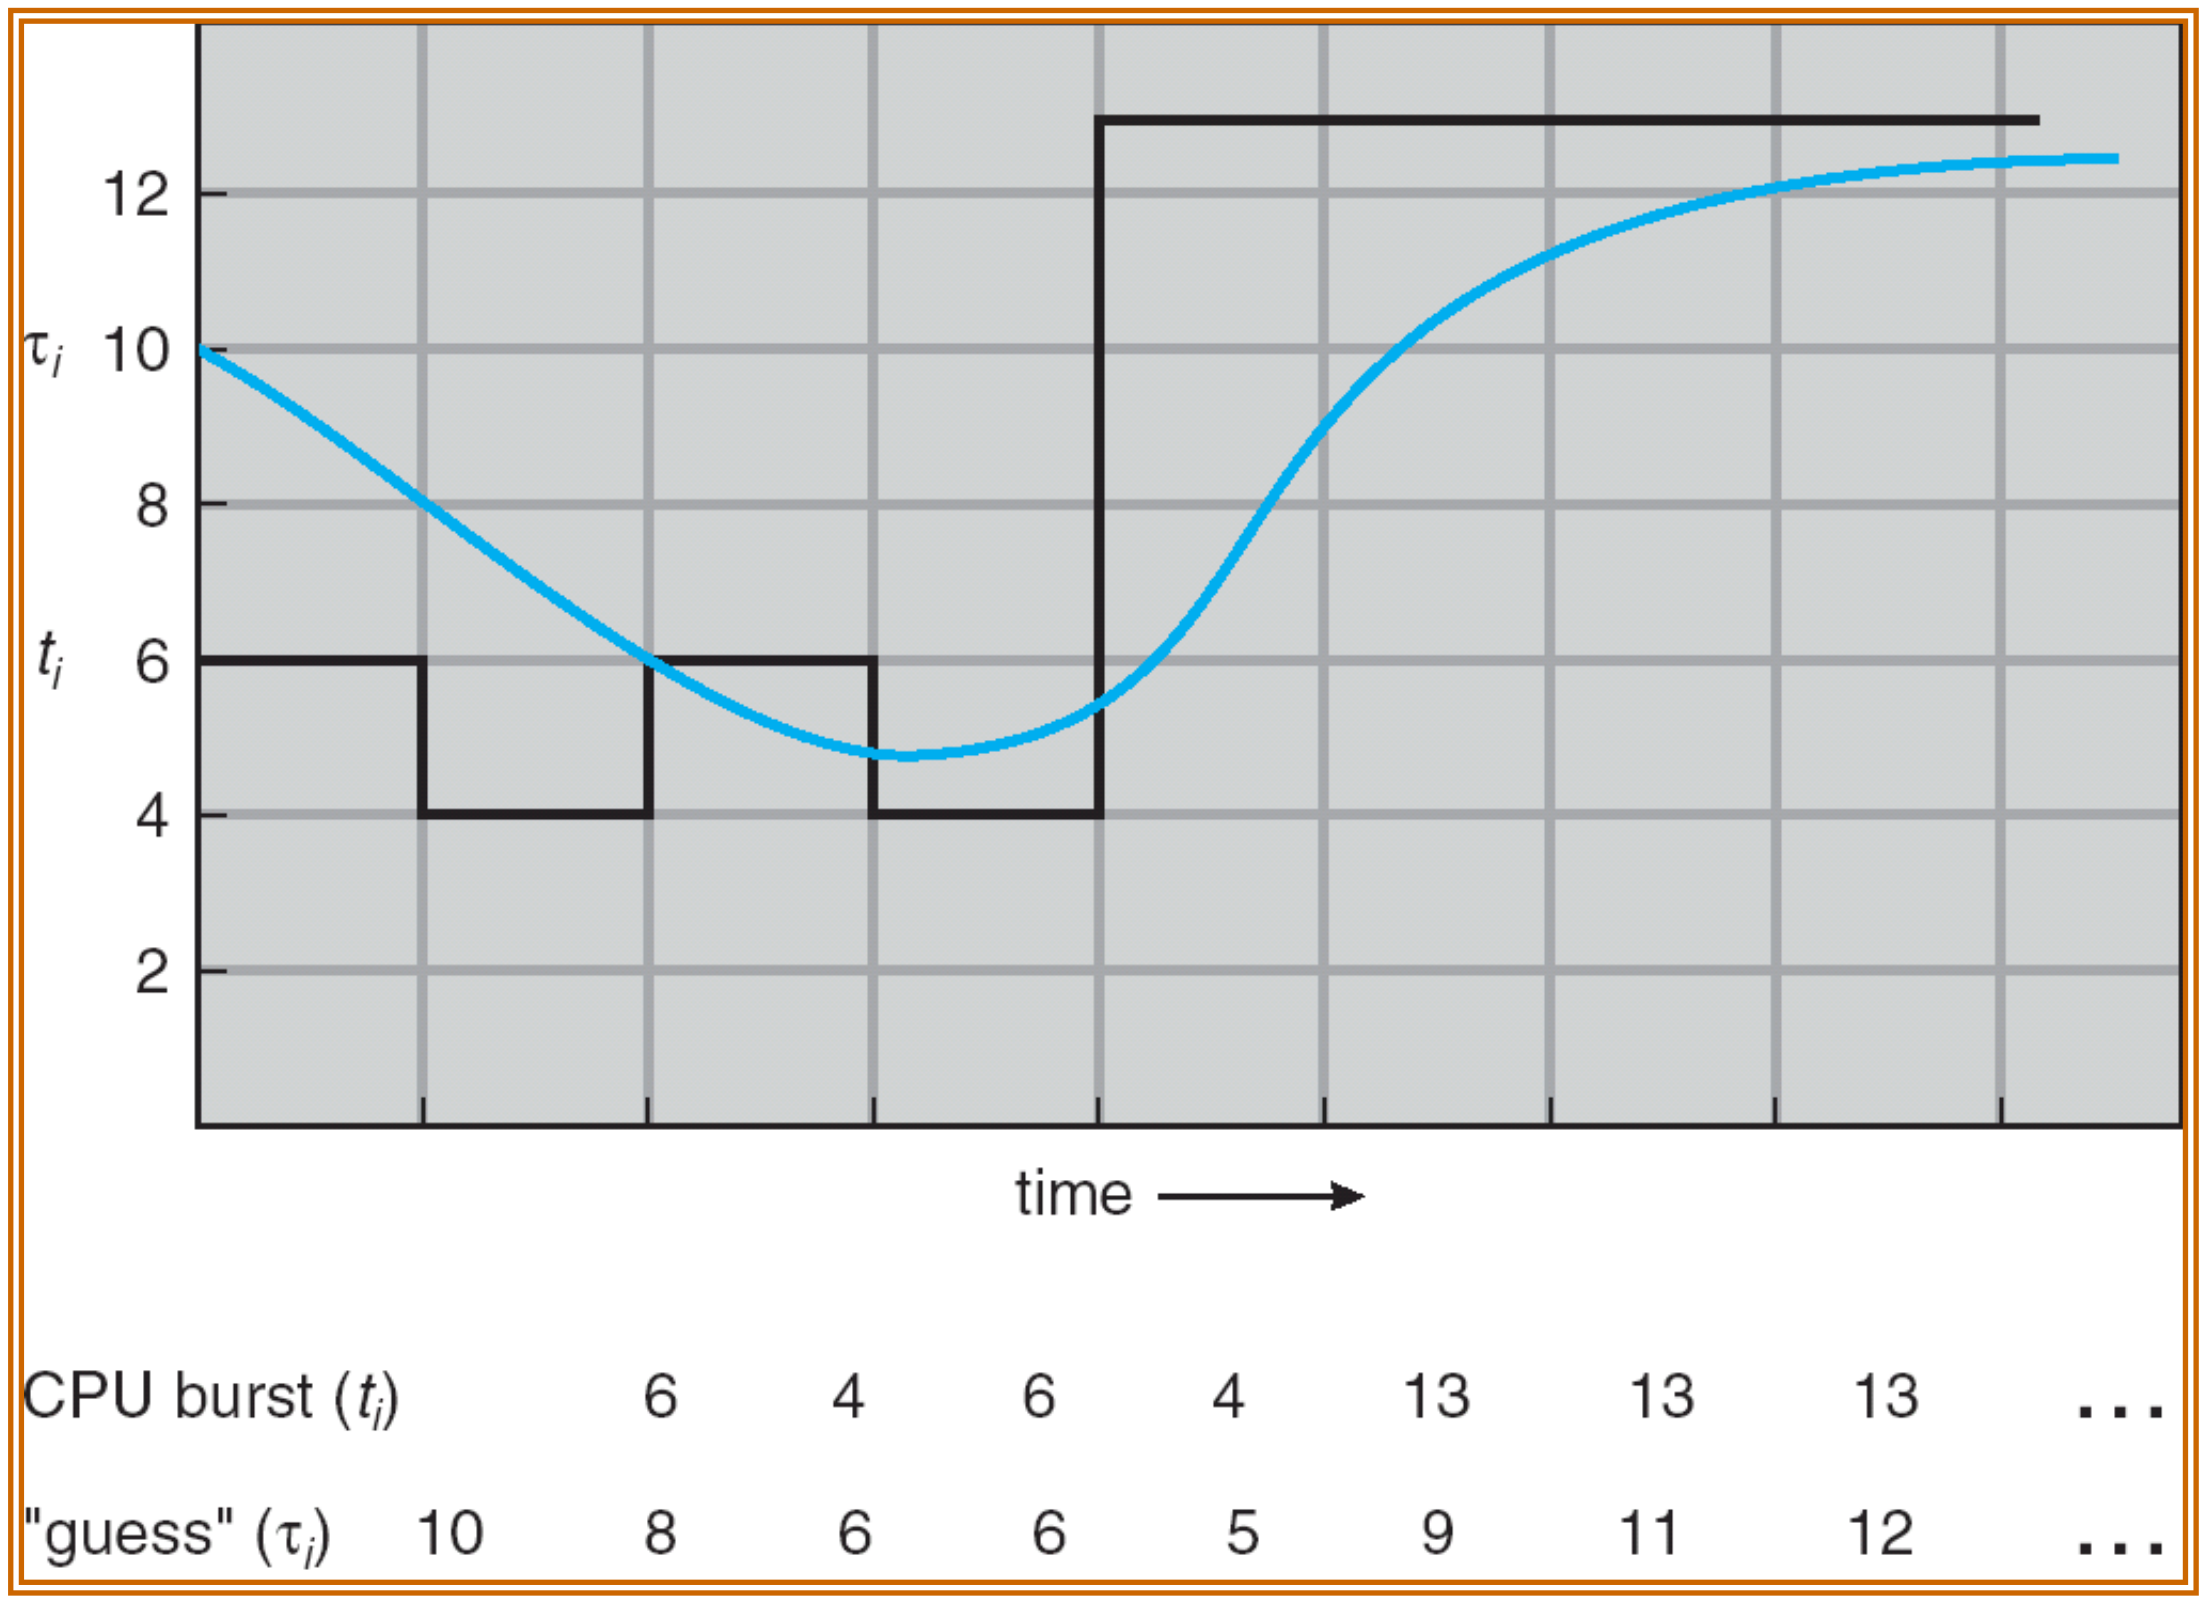

Examples of Exponential Averaging

- $\alpha = 0$
  - $\tau_{n+1} = \tau_n$
  - Recent history does not count
- $\alpha = 1$
  - $\tau_{n+1} = \alpha\, t_n$
  - Only the actual last CPU burst counts
- If we expand the formula, we get:

$$
\begin{aligned}
\tau_{n+1} = {} & \alpha\, t_n + (1 - \alpha)\alpha\, t_{n-1} + \ldots \\
& + (1 - \alpha)^j \alpha\, t_{n-j} + \ldots \\
& + (1 - \alpha)^{n+1} \tau_0
\end{aligned}
$$

- Since both α and $(1 - \alpha)$ are less than or equal to 1, each successive term has less weight than its predecessor

Priority Scheduling

- A priority number (integer) is associated with each process
- The CPU is allocated to the process with the highest priority (smallest integer ≡ highest priority)
  - Preemptive
  - nonpreemptive
- SJF is a priority scheduling where priority is the predicted next CPU burst time
- Problem ≡ Starvation – low priority processes may never execute
- Solution ≡ Aging – as time progresses increase the priority of the process

Round Robin (RR)

- Each process gets a small unit of CPU time (*time quantum*), usually 10-100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
- If there are n processes in the ready queue and the time quantum is q, then each process gets $1/n$ of the CPU time in chunks of at most q time units at once. No process waits more than $(n-1)q$ time units.
- Performance
  - q large $\Rightarrow$ FIFO
  - q small $\Rightarrow$ q must be large with respect to context switch, otherwise overhead is too high

Example of RR with Time Quantum = 20

Process	Burst Time
P_1	53
P_2	17
P_3	68
P_4	24

- The Gantt chart is:

P_1	P_2	P_3	P_4	P_1	P_3	P_4	P_1	P_3	P_3

0 20 37 57 77 97 117 121 134 154 162

- Typically, higher average turnaround than SJF, but better *response*

Time Quantum and Context Switch Time

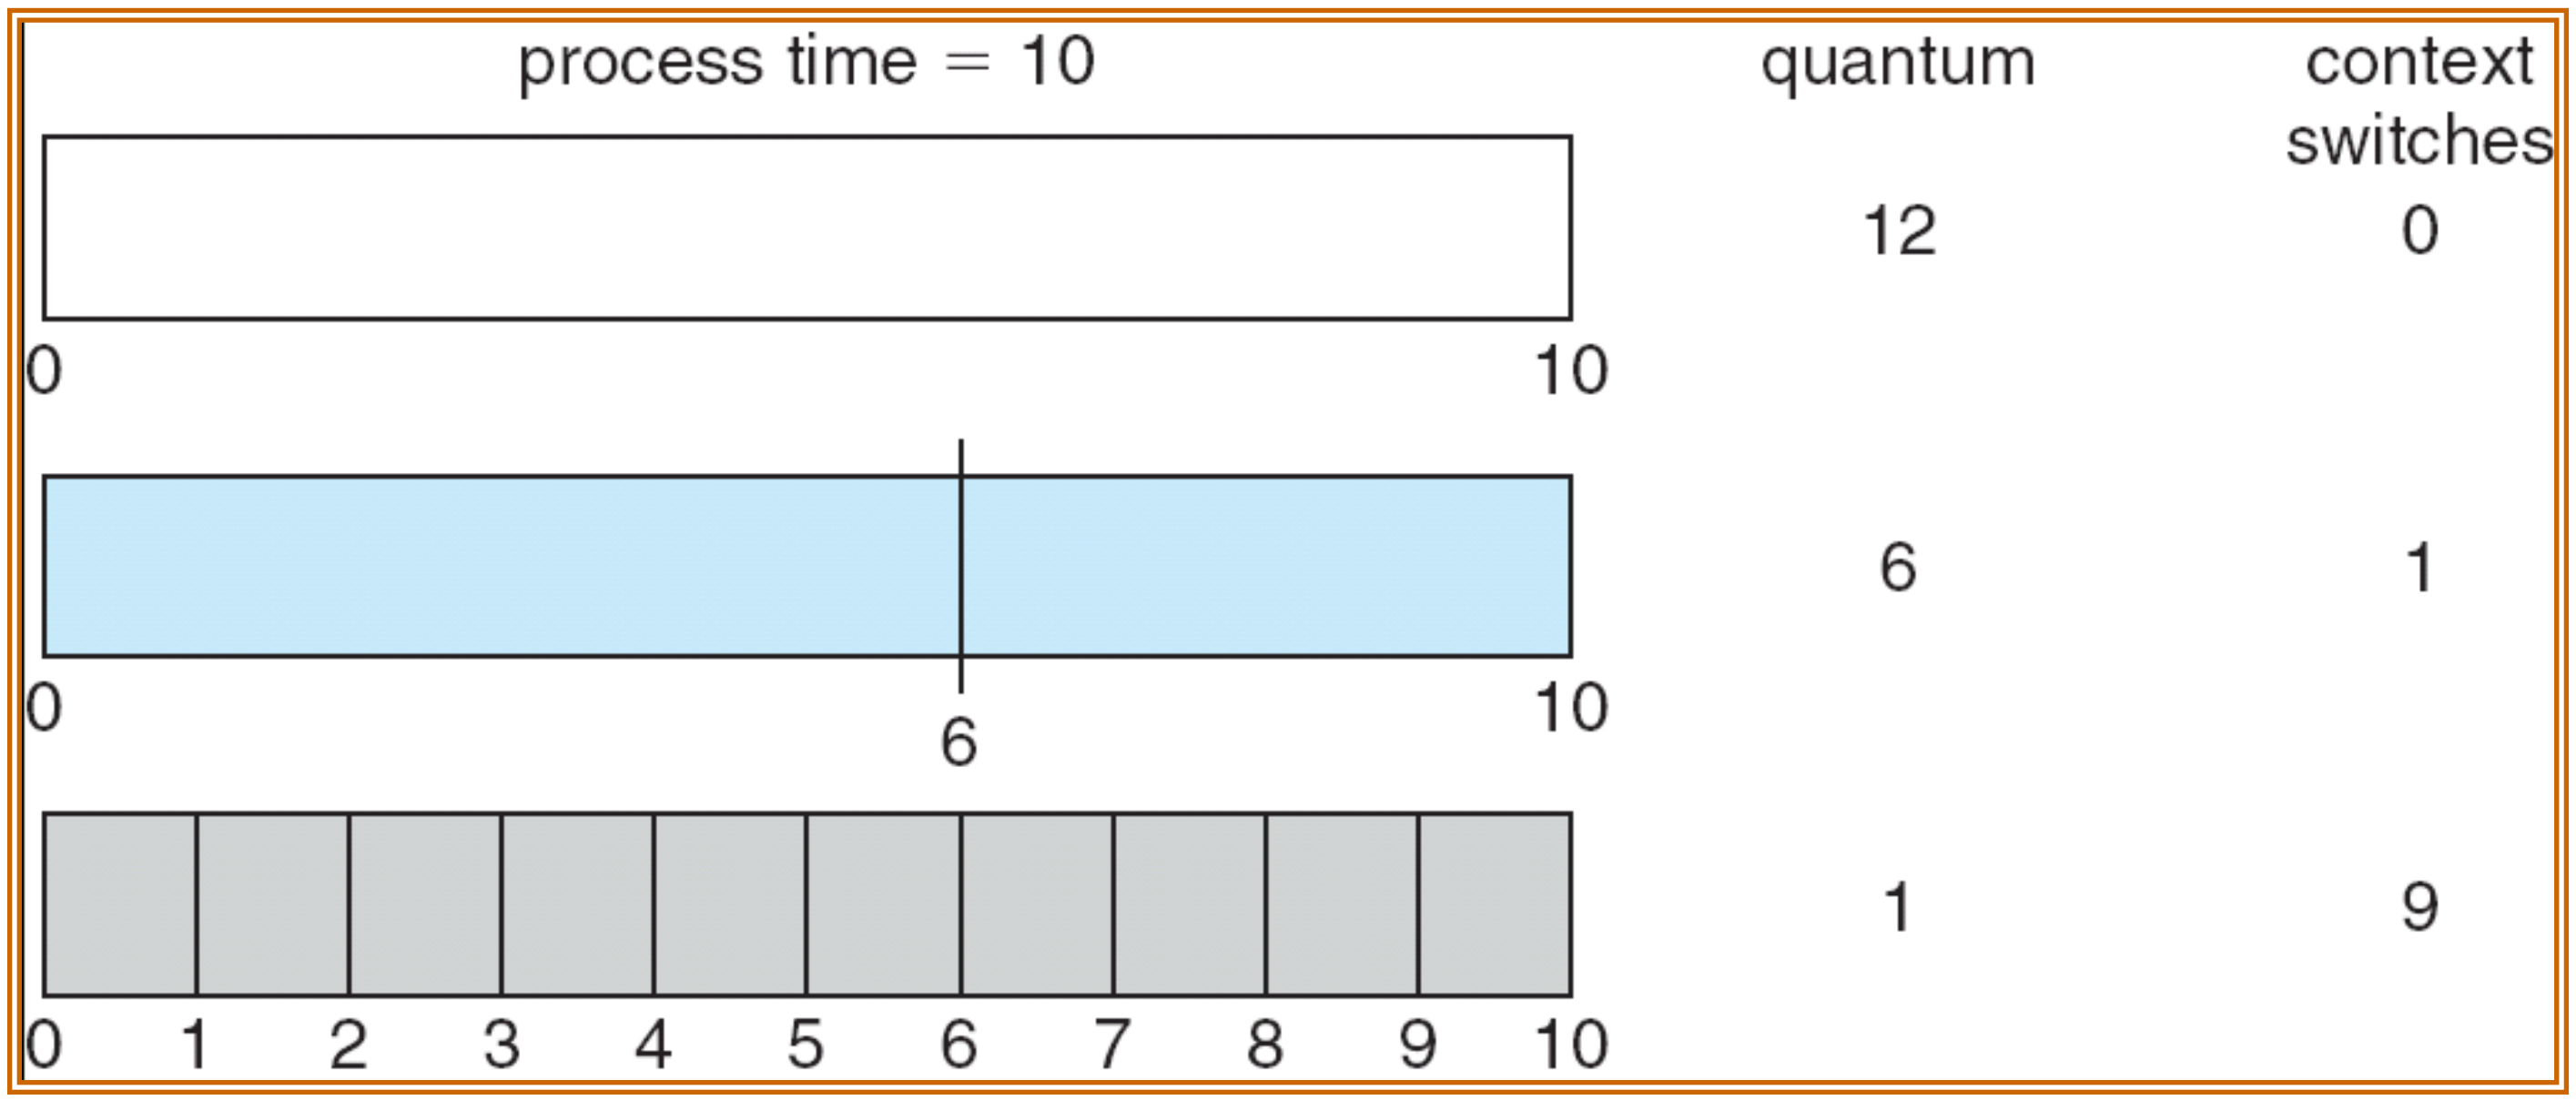

Turnaround Time Varies With The Time Quantum

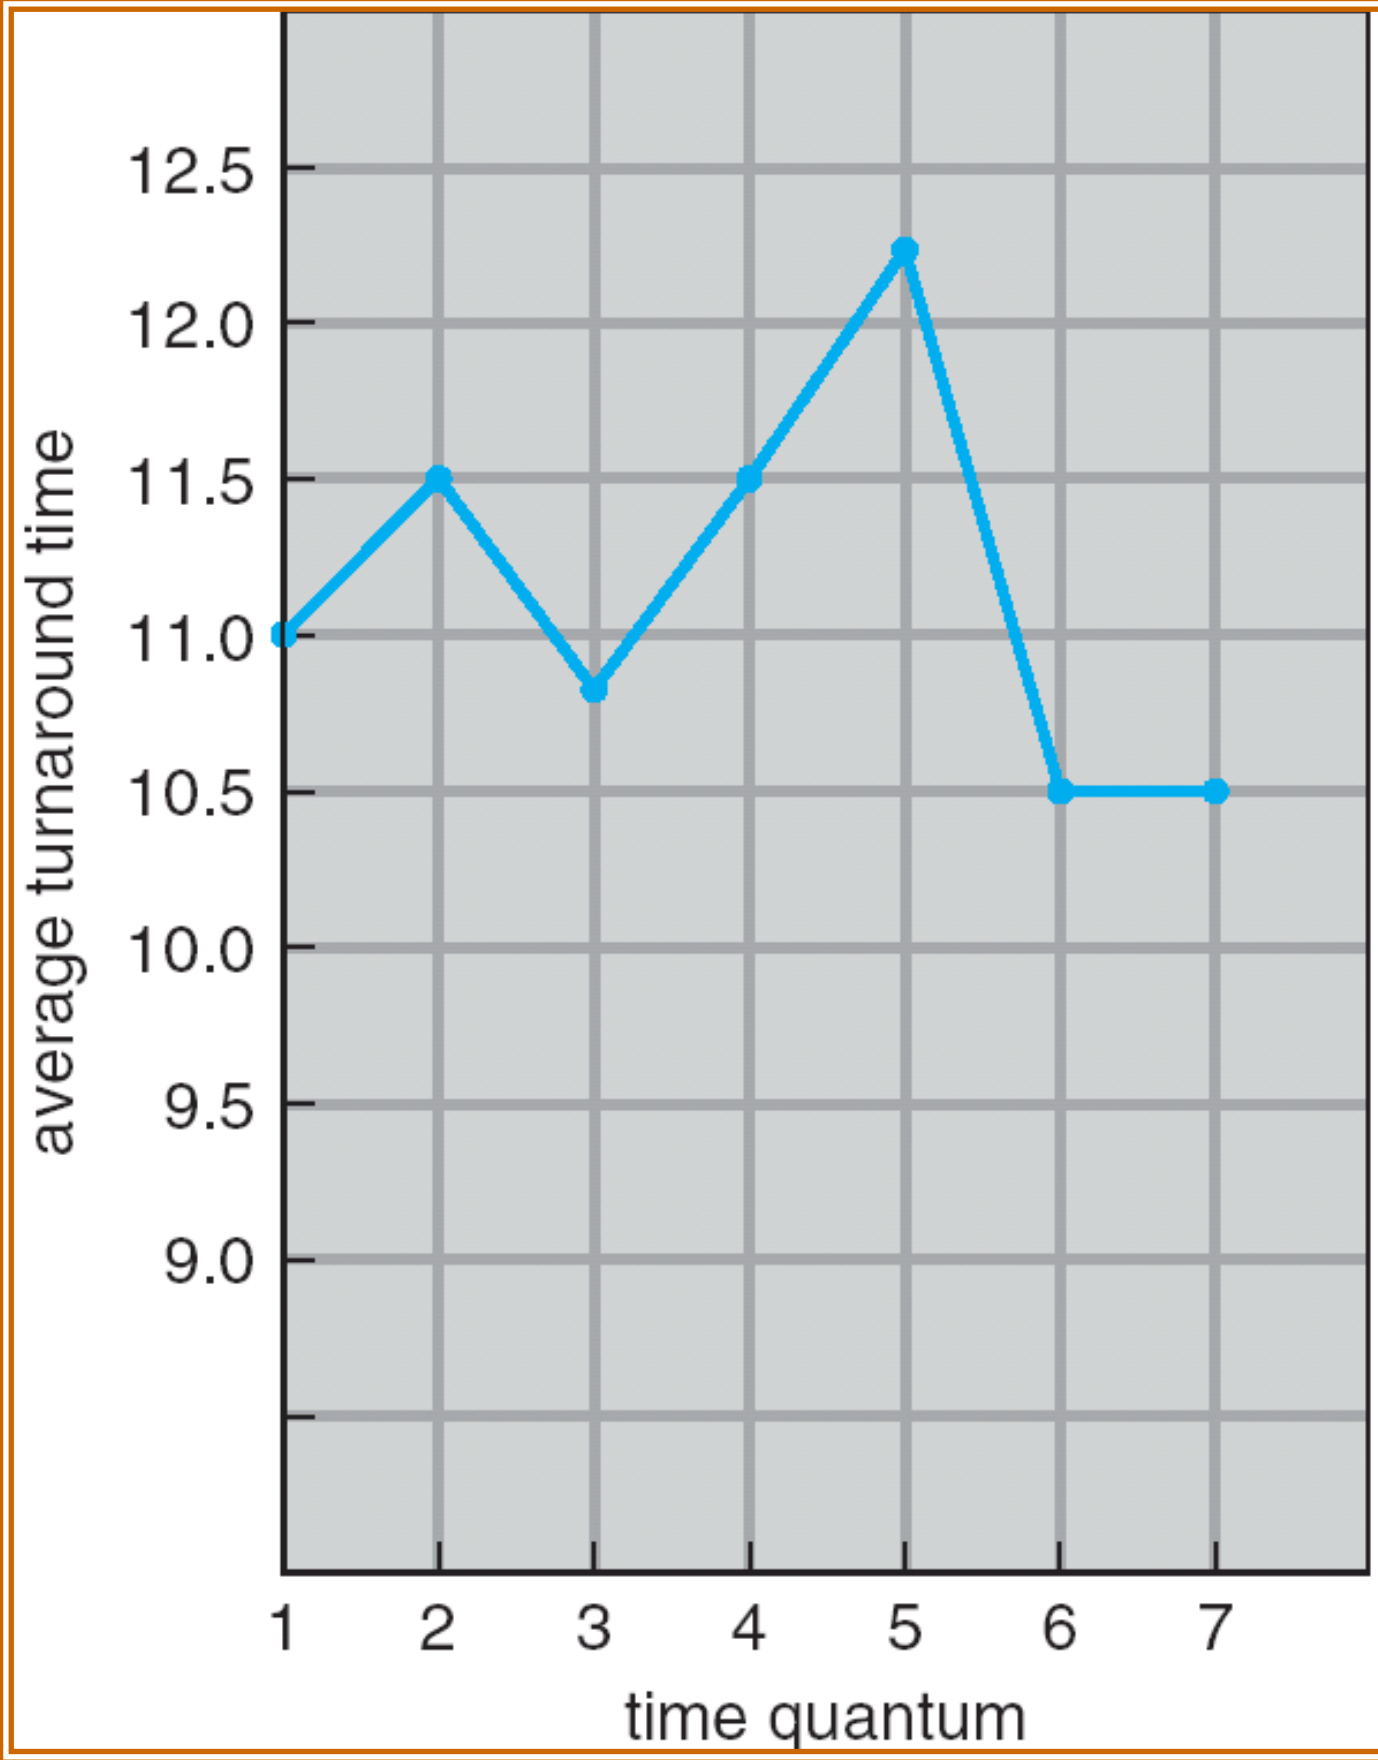

process	time
P_1	6
P_2	3
P_3	1
P_4	7

Multilevel Queue

- Ready queue is partitioned into separate queues:
  foreground (interactive)
  background (batch)
- Each queue has its own scheduling algorithm
  - foreground – RR
  - background – FCFS
- Scheduling must be done between the queues
  - Fixed priority scheduling; (i.e., serve all from foreground then from background). Possibility of starvation.
  - Time slice – each queue gets a certain amount of CPU time which it can schedule amongst its processes; i.e., 80% to foreground in RR
  - 20% to background in FCFS

Multilevel Queue Scheduling

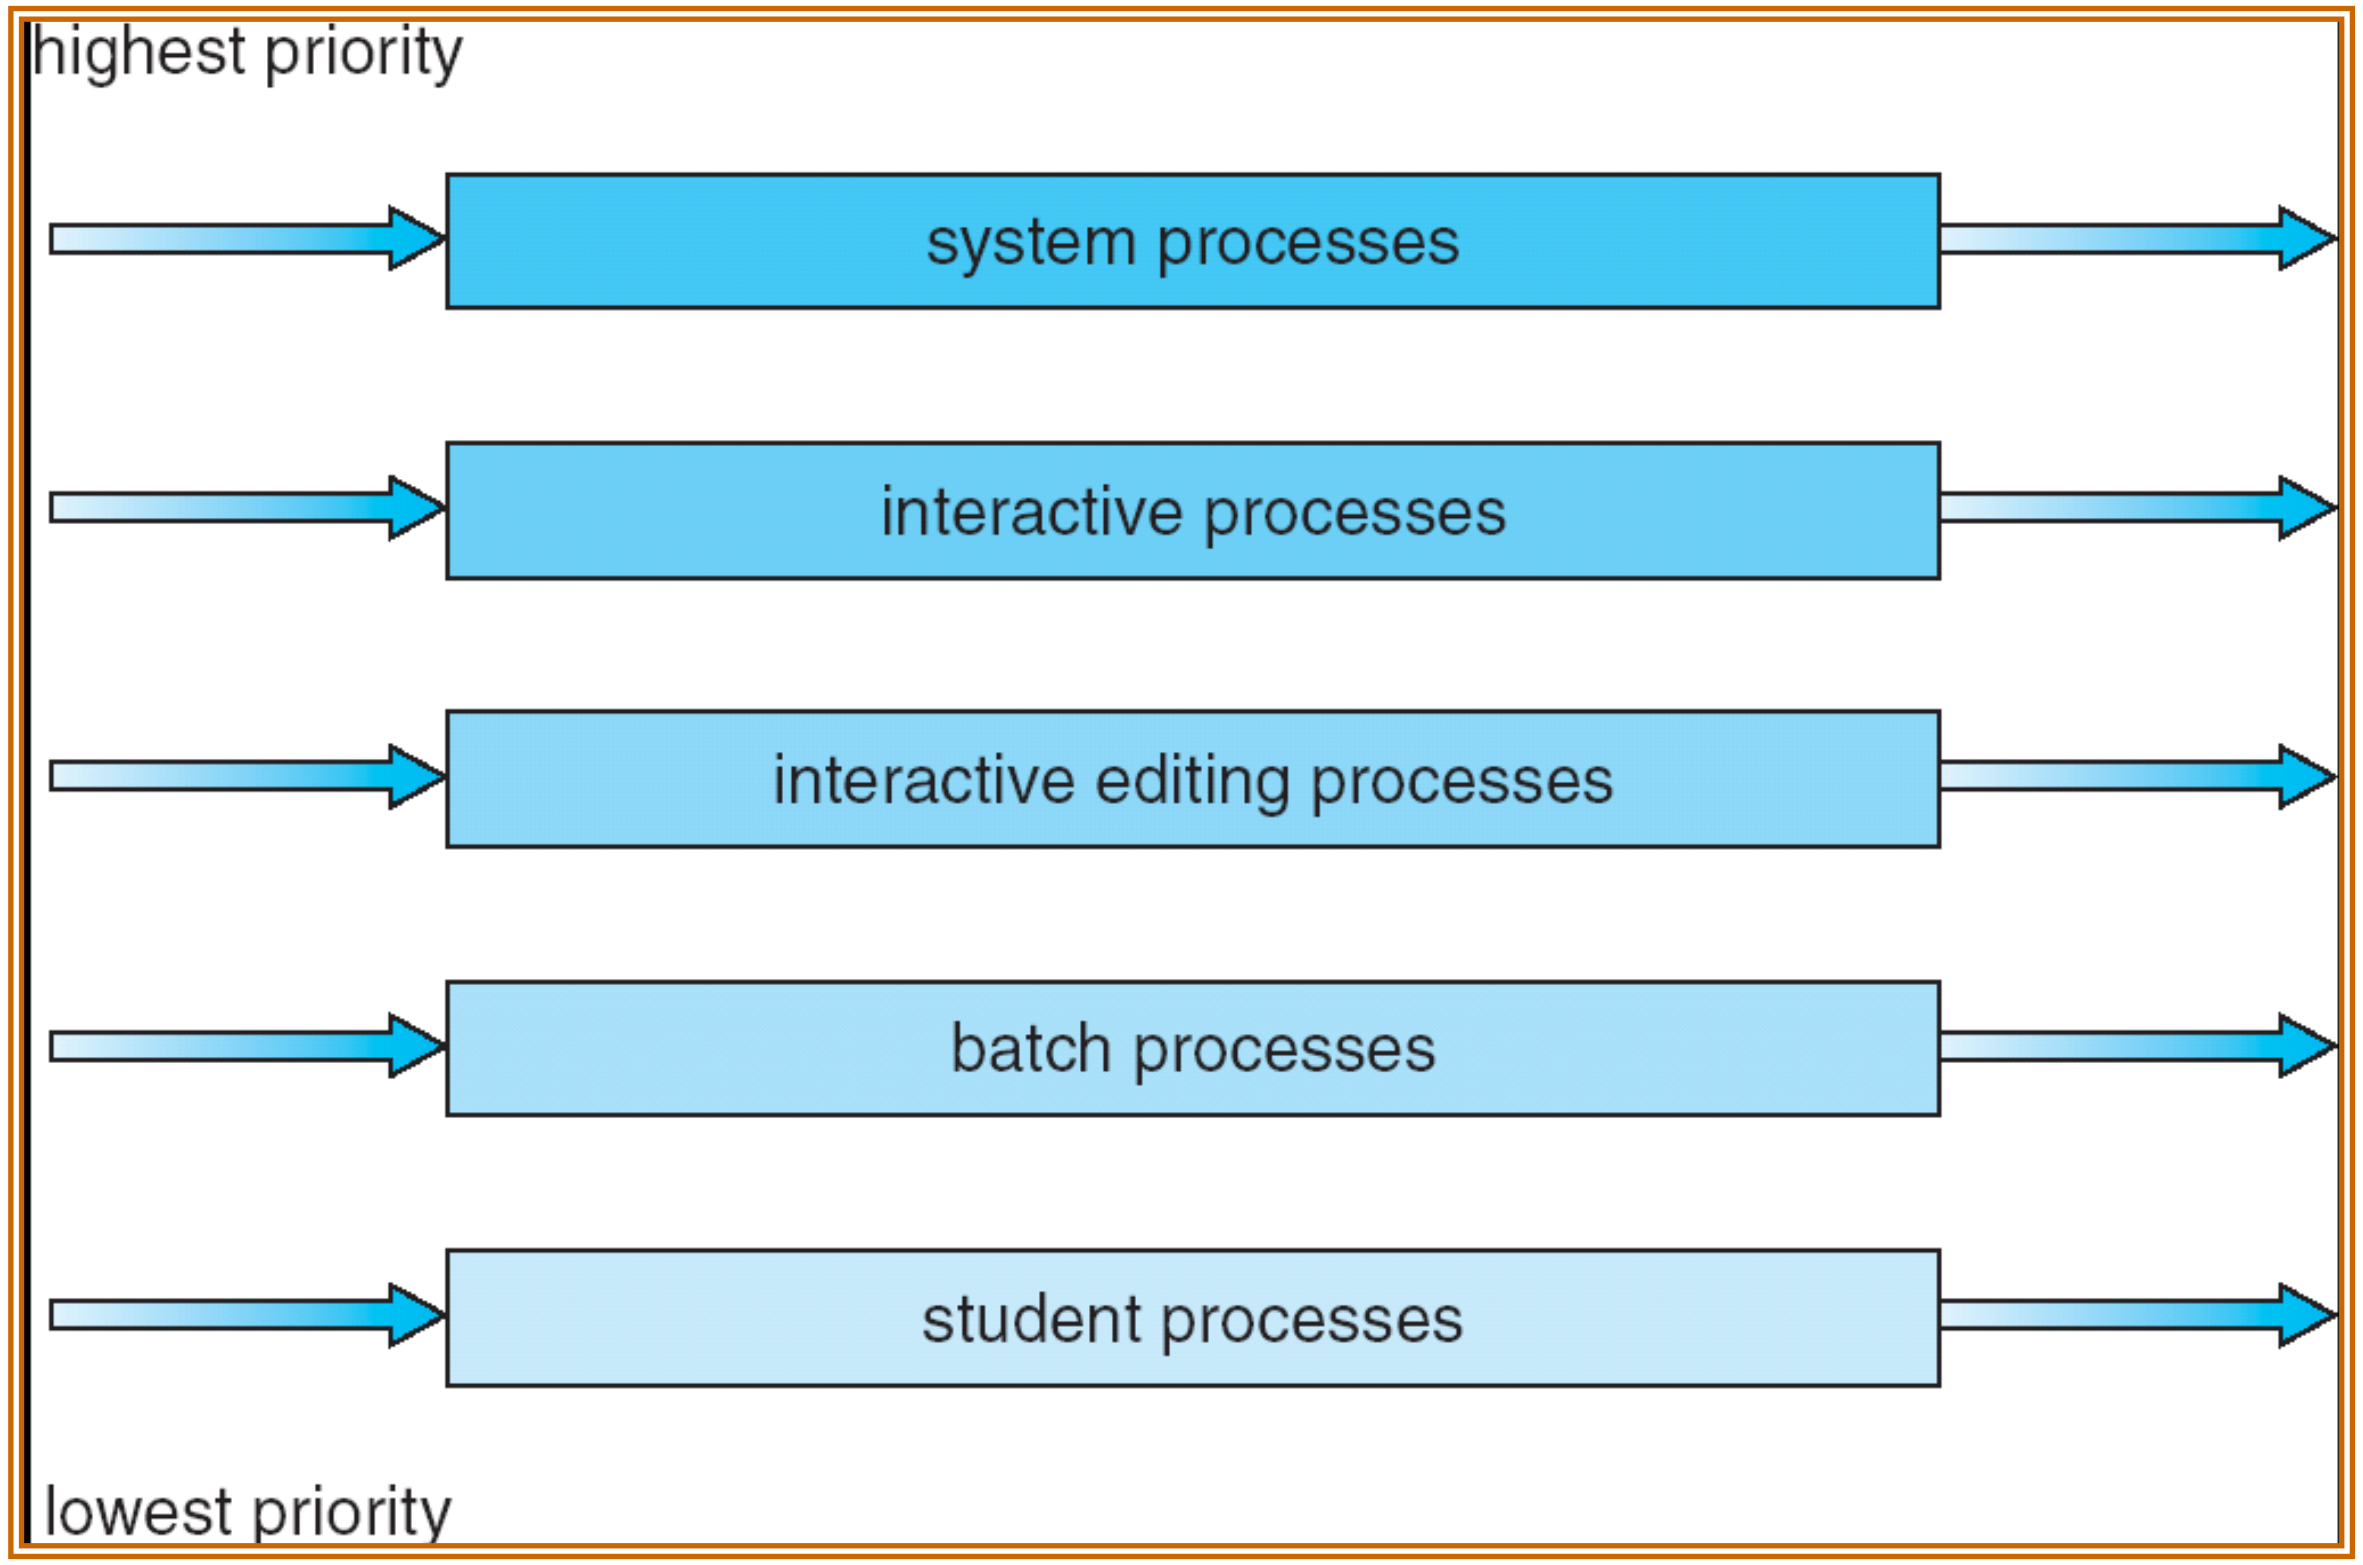

Multilevel Feedback Queue

- A process can move between the various queues; aging can be implemented this way
- Multilevel-feedback-queue scheduler defined by the following parameters:
  - number of queues
  - scheduling algorithms for each queue
  - method used to determine when to upgrade a process
  - method used to determine when to demote a process
  - method used to determine which queue a process will enter when that process needs service

Example of Multilevel Feedback Queue

- Three queues:
  - Q_0 – RR with time quantum 8 milliseconds
  - Q_1 – RR time quantum 16 milliseconds
  - Q_2 – FCFS
- Scheduling
  - A new job enters queue Q_0 which is served FCFS. When it gains CPU, job receives 8 milliseconds. If it does not finish in 8 milliseconds, job is moved to queue Q_1.
  - At Q_1 job is again served FCFS and receives 16 additional milliseconds. If it still does not complete, it is preempted and moved to queue Q_2.

Multilevel Feedback Queues

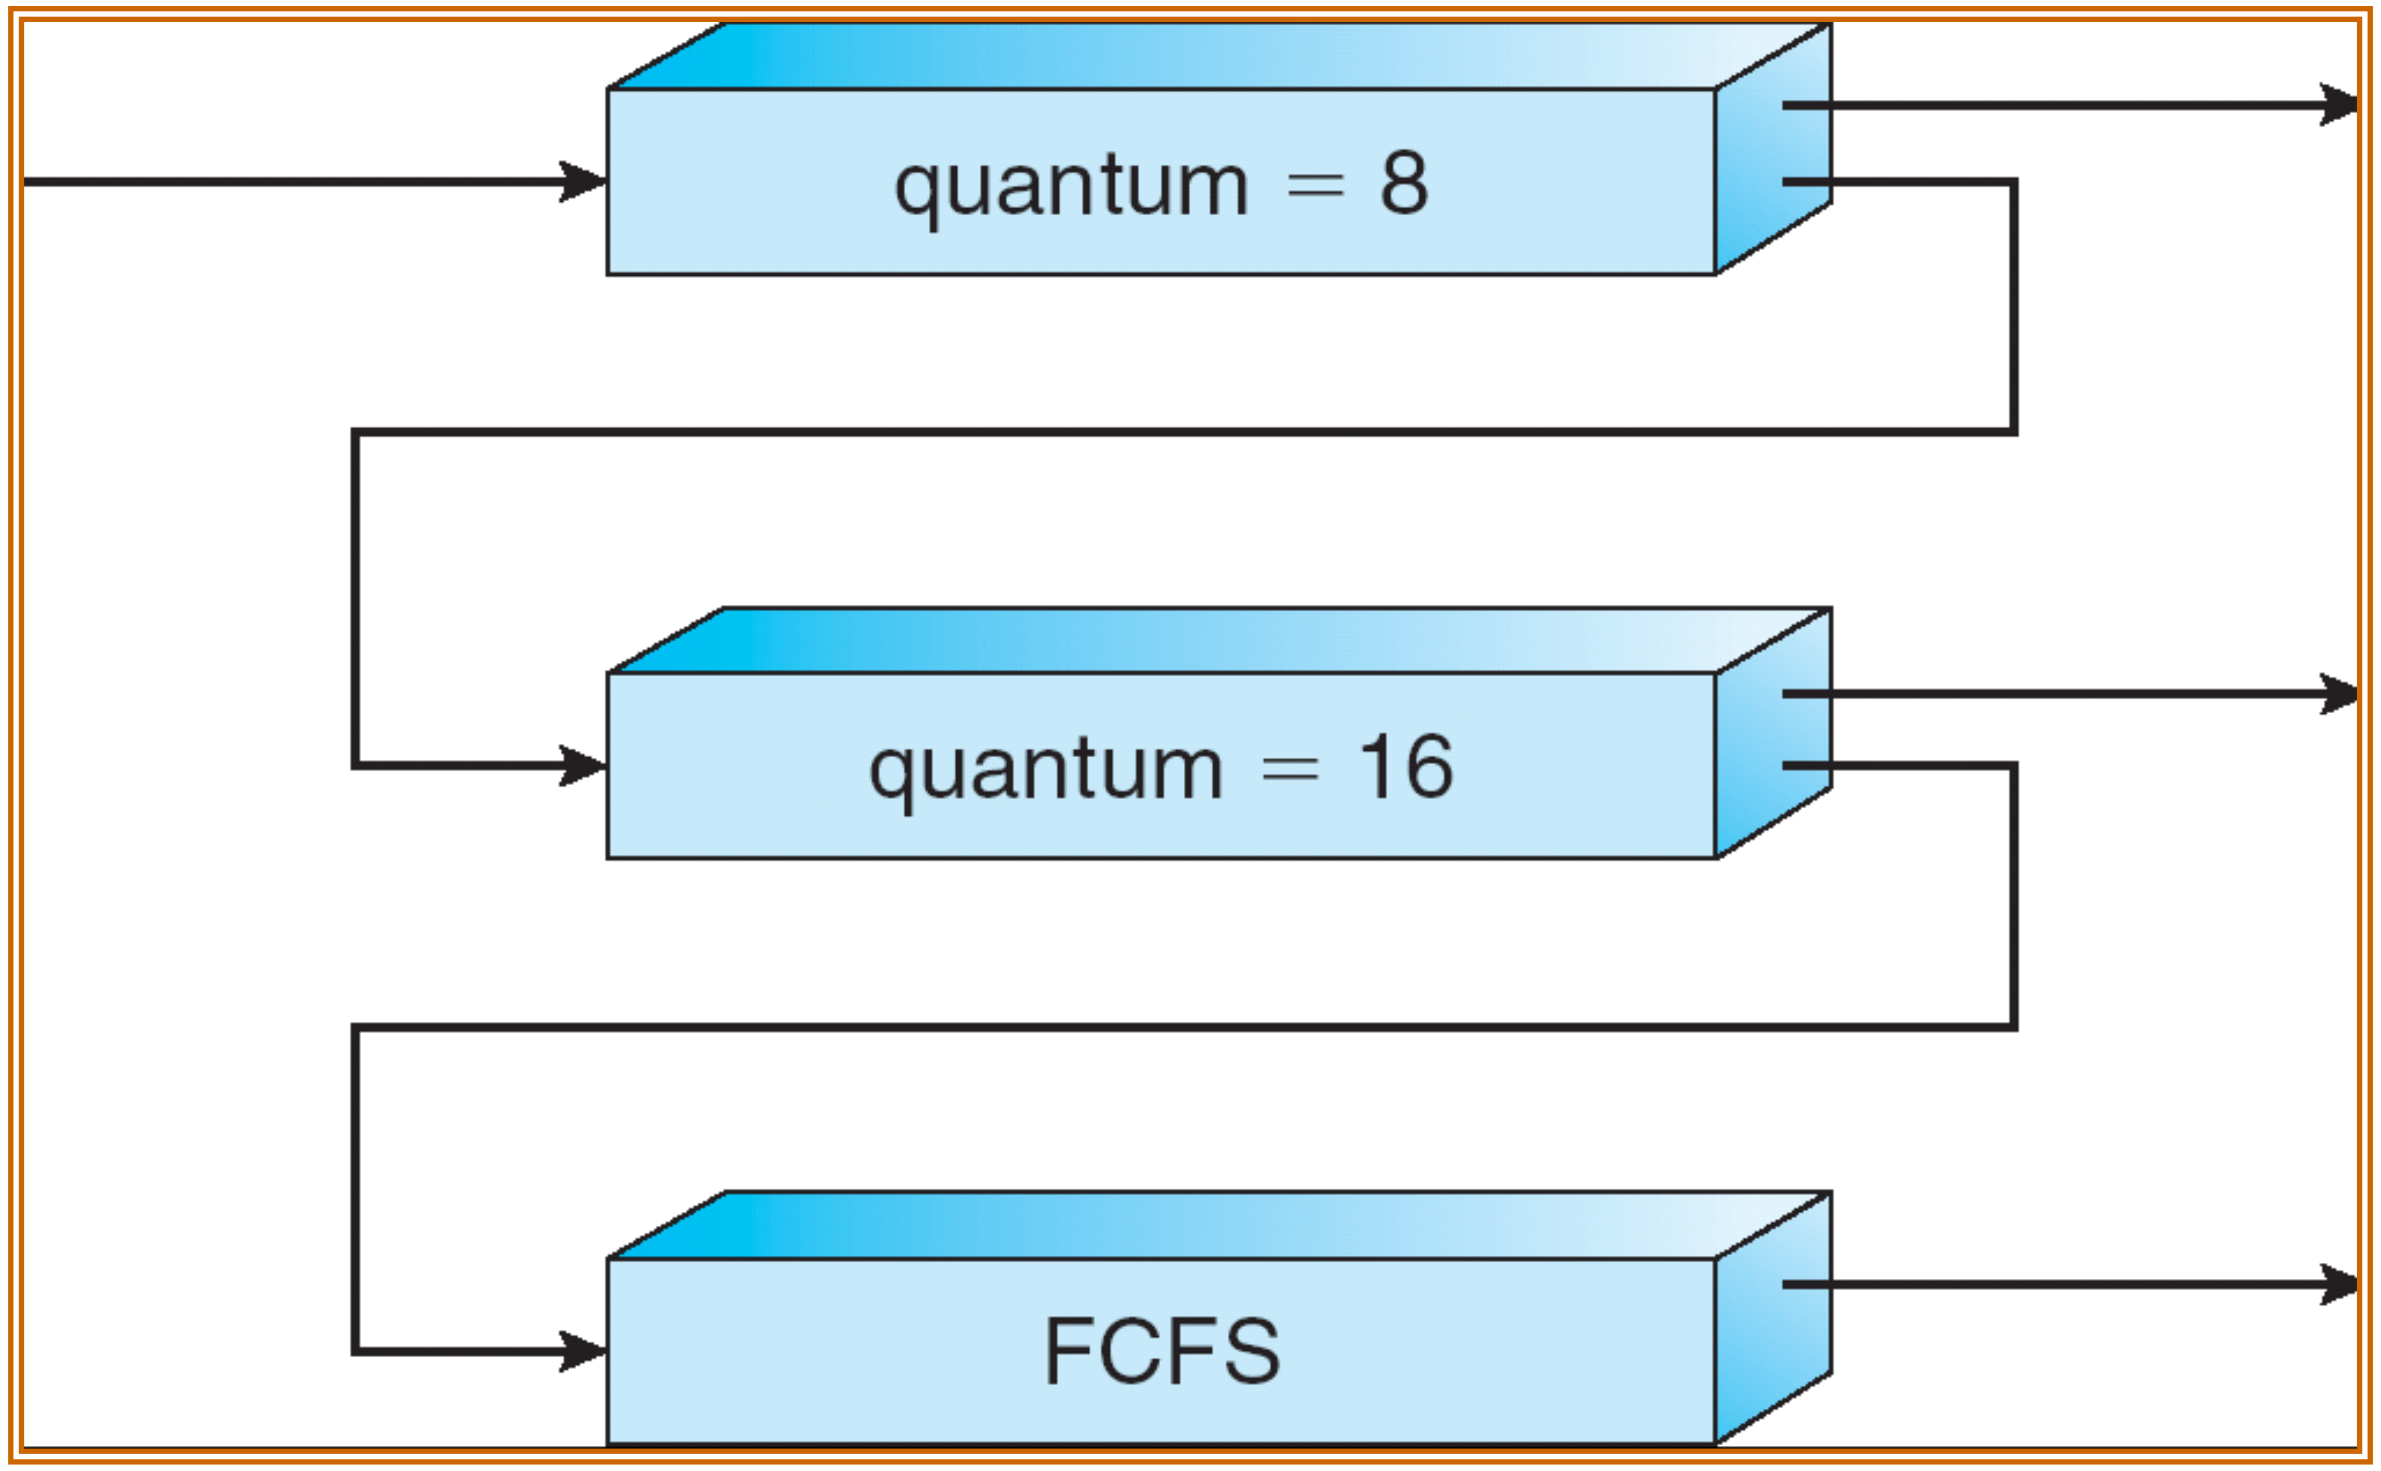

Thread Scheduling

- Distinction between user-level and kernel-level threads
- When threads supported, threads scheduled, not processes
- Many-to-one and many-to-many models, thread library schedules user-level threads to run on LWP
  - Known as **process-contention scope** (**PCS**) since scheduling competition is within the process
  - Typically done via priority set by programmer
- Kernel thread scheduled onto available CPU is **system-contention scope** (**SCS**) – competition among all threads in system

Pthread Scheduling

- API allows specifying either PCS or SCS during thread creation
  - PTHREAD_SCOPE_PROCESS schedules threads using PCS scheduling
  - PTHREAD_SCOPE_SYSTEM schedules threads using SCS scheduling
- Can be limited by OS – Linux and Mac OS X only allow PTHREAD_SCOPE_SYSTEM

Pthread Scheduling API

```
#include <pthread.h>
#include <stdio.h>
#define NUM_THREADS 5
int main(int argc, char *argv[]) {
   int i, scope;
   pthread_t tid[NUM THREADS];
   pthread_attr_t attr;
   /* get the default attributes */
   pthread_attr_init(&attr);
   /* first inquire on the current scope */
   if (pthread_attr_getscope(&attr, &scope) != 0)
      fprintf(stderr, "Unable to get scheduling scope\n");
   else {
      if (scope == PTHREAD_SCOPE_PROCESS)
         printf("PTHREAD_SCOPE_PROCESS");
      else if (scope == PTHREAD_SCOPE_SYSTEM)
         printf("PTHREAD_SCOPE_SYSTEM");
      else
         fprintf(stderr, "Illegal scope value.\n");
   }
```

Pthread Scheduling API

```
    /* set the scheduling algorithm to PCS or SCS */
    pthread_attr_setscope(&attr, PTHREAD_SCOPE_SYSTEM);
    /* create the threads */
    for (i = 0; i < NUM_THREADS; i++)
       pthread_create(&tid[i],&attr,runner,NULL);
    /* now join on each thread */
    for (i = 0; i < NUM_THREADS; i++)
       pthread_join(tid[i], NULL);
}
/* Each thread will begin control in this function */
void *runner(void *param)
{
    /* do some work ... */
    pthread_exit(0);
}
```

Multiple-Processor Scheduling

- CPU scheduling more complex when multiple CPUs are available
- *Homogeneous processors* within a multiprocessor
- *Load sharing*
- *Asymmetric multiprocessing* – only one processor accesses the system data structures, alleviating the need for data sharing
- **Symmetric multiprocessing (SMP)** – each processor is self-scheduling, all processes in common ready queue, or each has its own private queue of ready processes
  - Currently, most common
- **Processor affinity** – process has affinity for processor on which it is currently running
  - **soft affinity**
  - **hard affinity**
  - Variations including **processor sets**

NUMA and CPU Scheduling

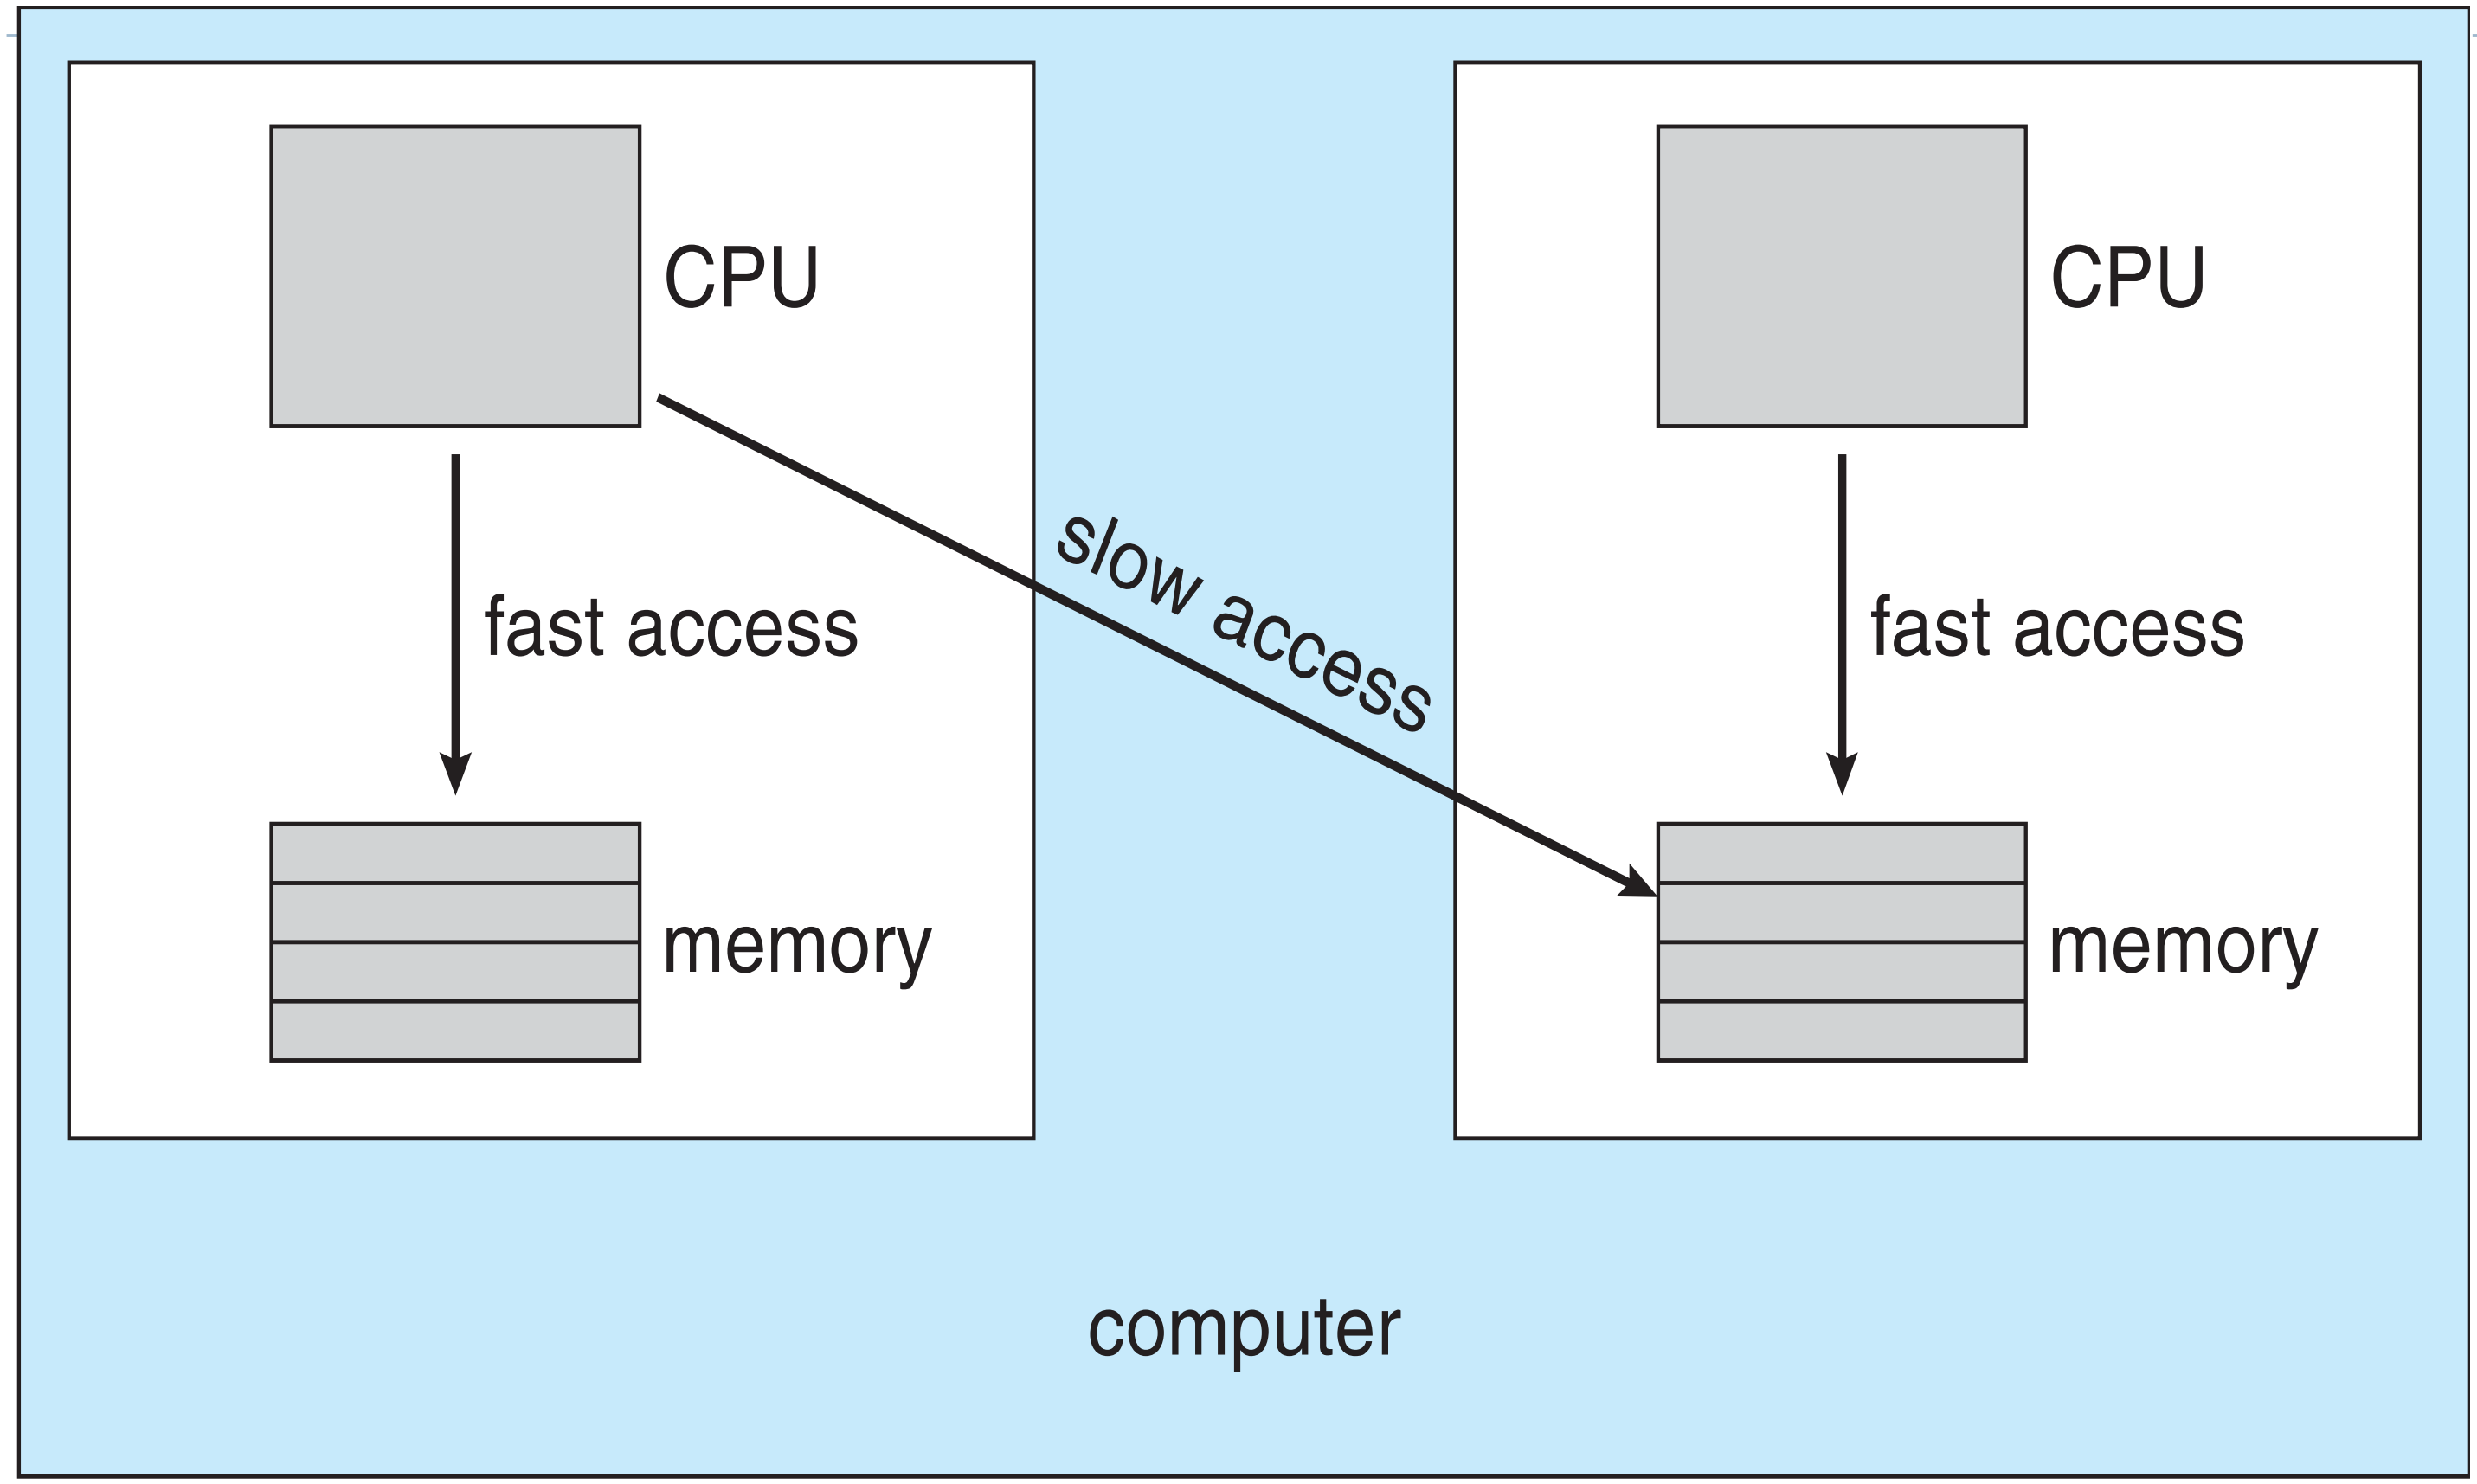

Note that memory-placement algorithms can also consider affinity

Multiple-Processor Scheduling – Load Balancing

- If SMP, need to keep all CPUs loaded for efficiency
- **Load balancing** attempts to keep workload evenly distributed
- **Push migration** – periodic task checks load on each processor, and if found pushes task from overloaded CPU to other CPUs
- **Pull migration** – idle processors pulls waiting task from busy processor

Multicore Processors

- Recent trend to place multiple processor cores on same physical chip
- Faster and consumes less power
- Multiple threads per core also growing
  - Takes advantage of memory stall to make progress on another thread while memory retrieve happens

Multithreaded Multicore System

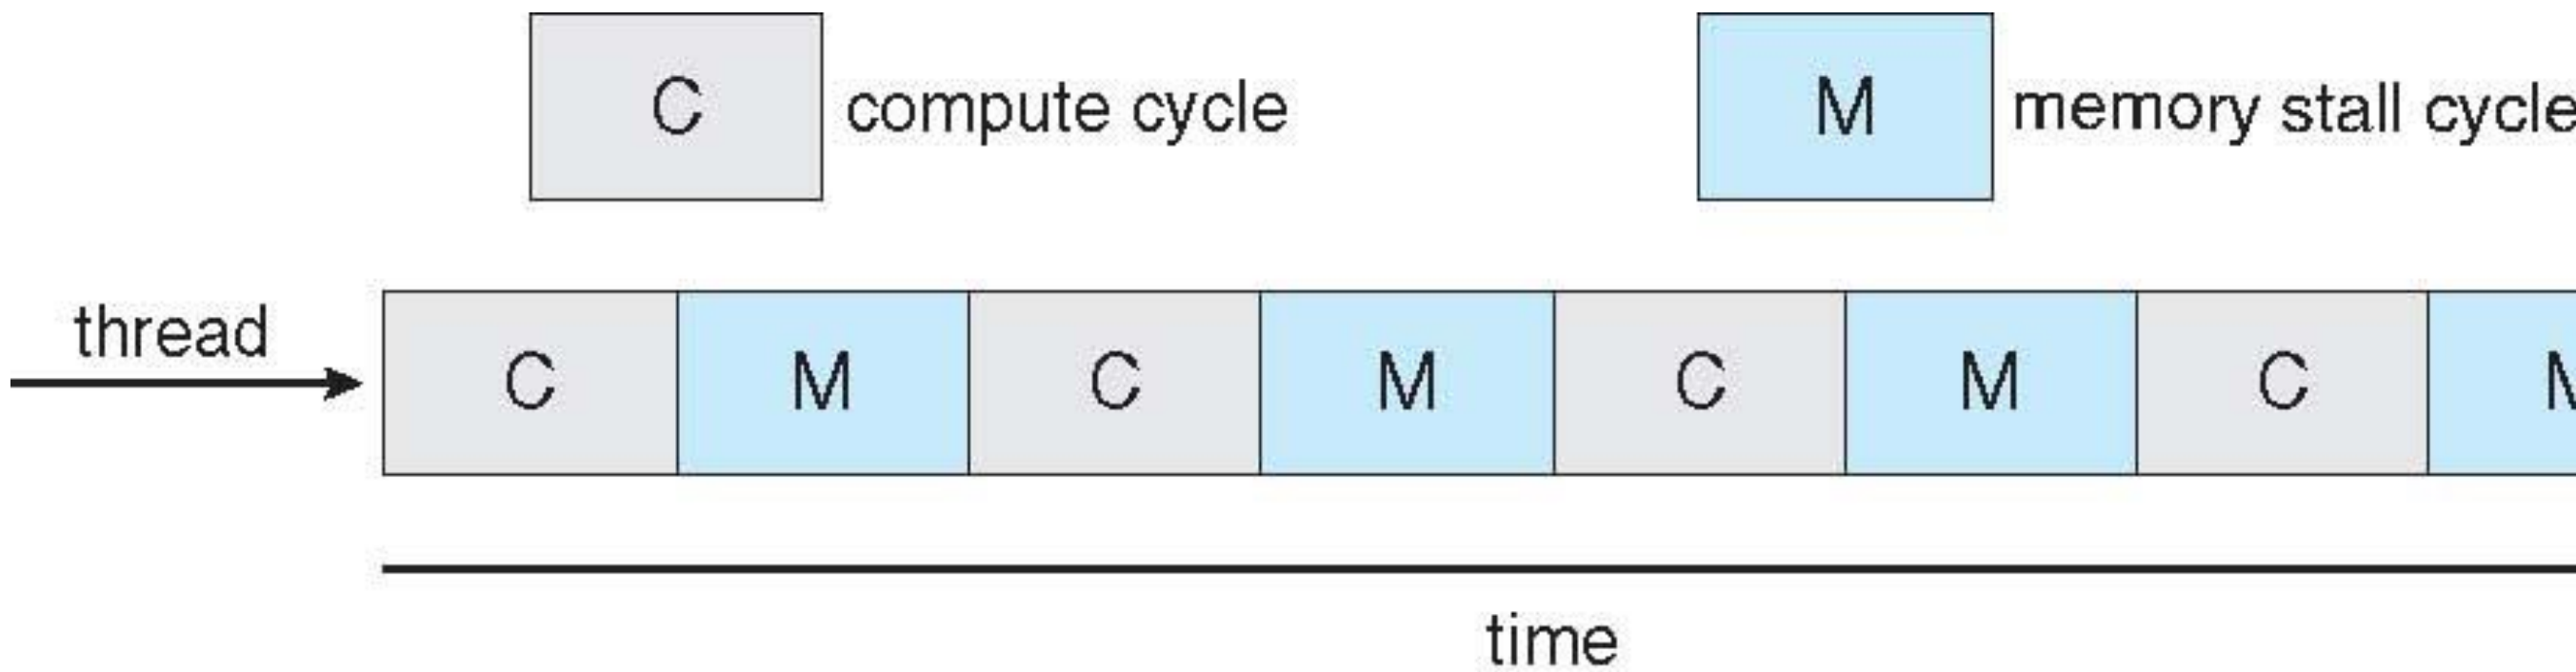

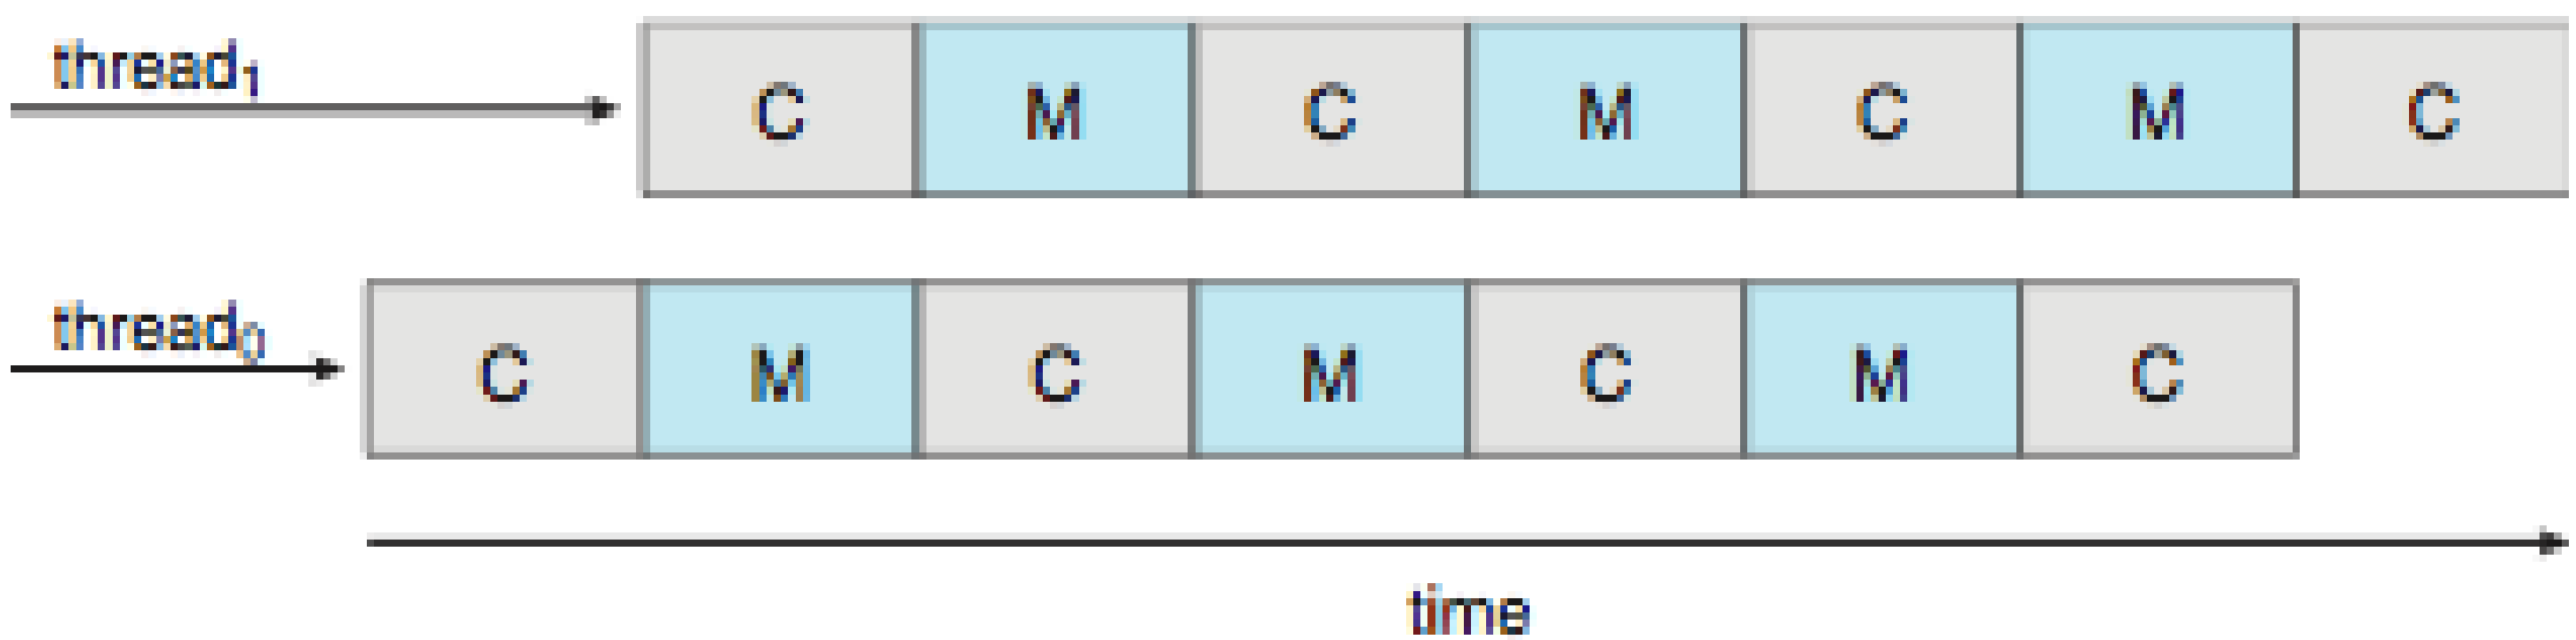

Real-Time CPU Scheduling

- Can present obvious challenges
- **Soft real-time systems** – no guarantee as to when critical real-time process will be scheduled
- **Hard real-time systems** – task must be serviced by its deadline
- Two types of latencies affect performance
  1. Interrupt latency – time from arrival of interrupt to start of routine that services interrupt
  2. Dispatch latency – time for schedule to take current process off CPU and switch to another

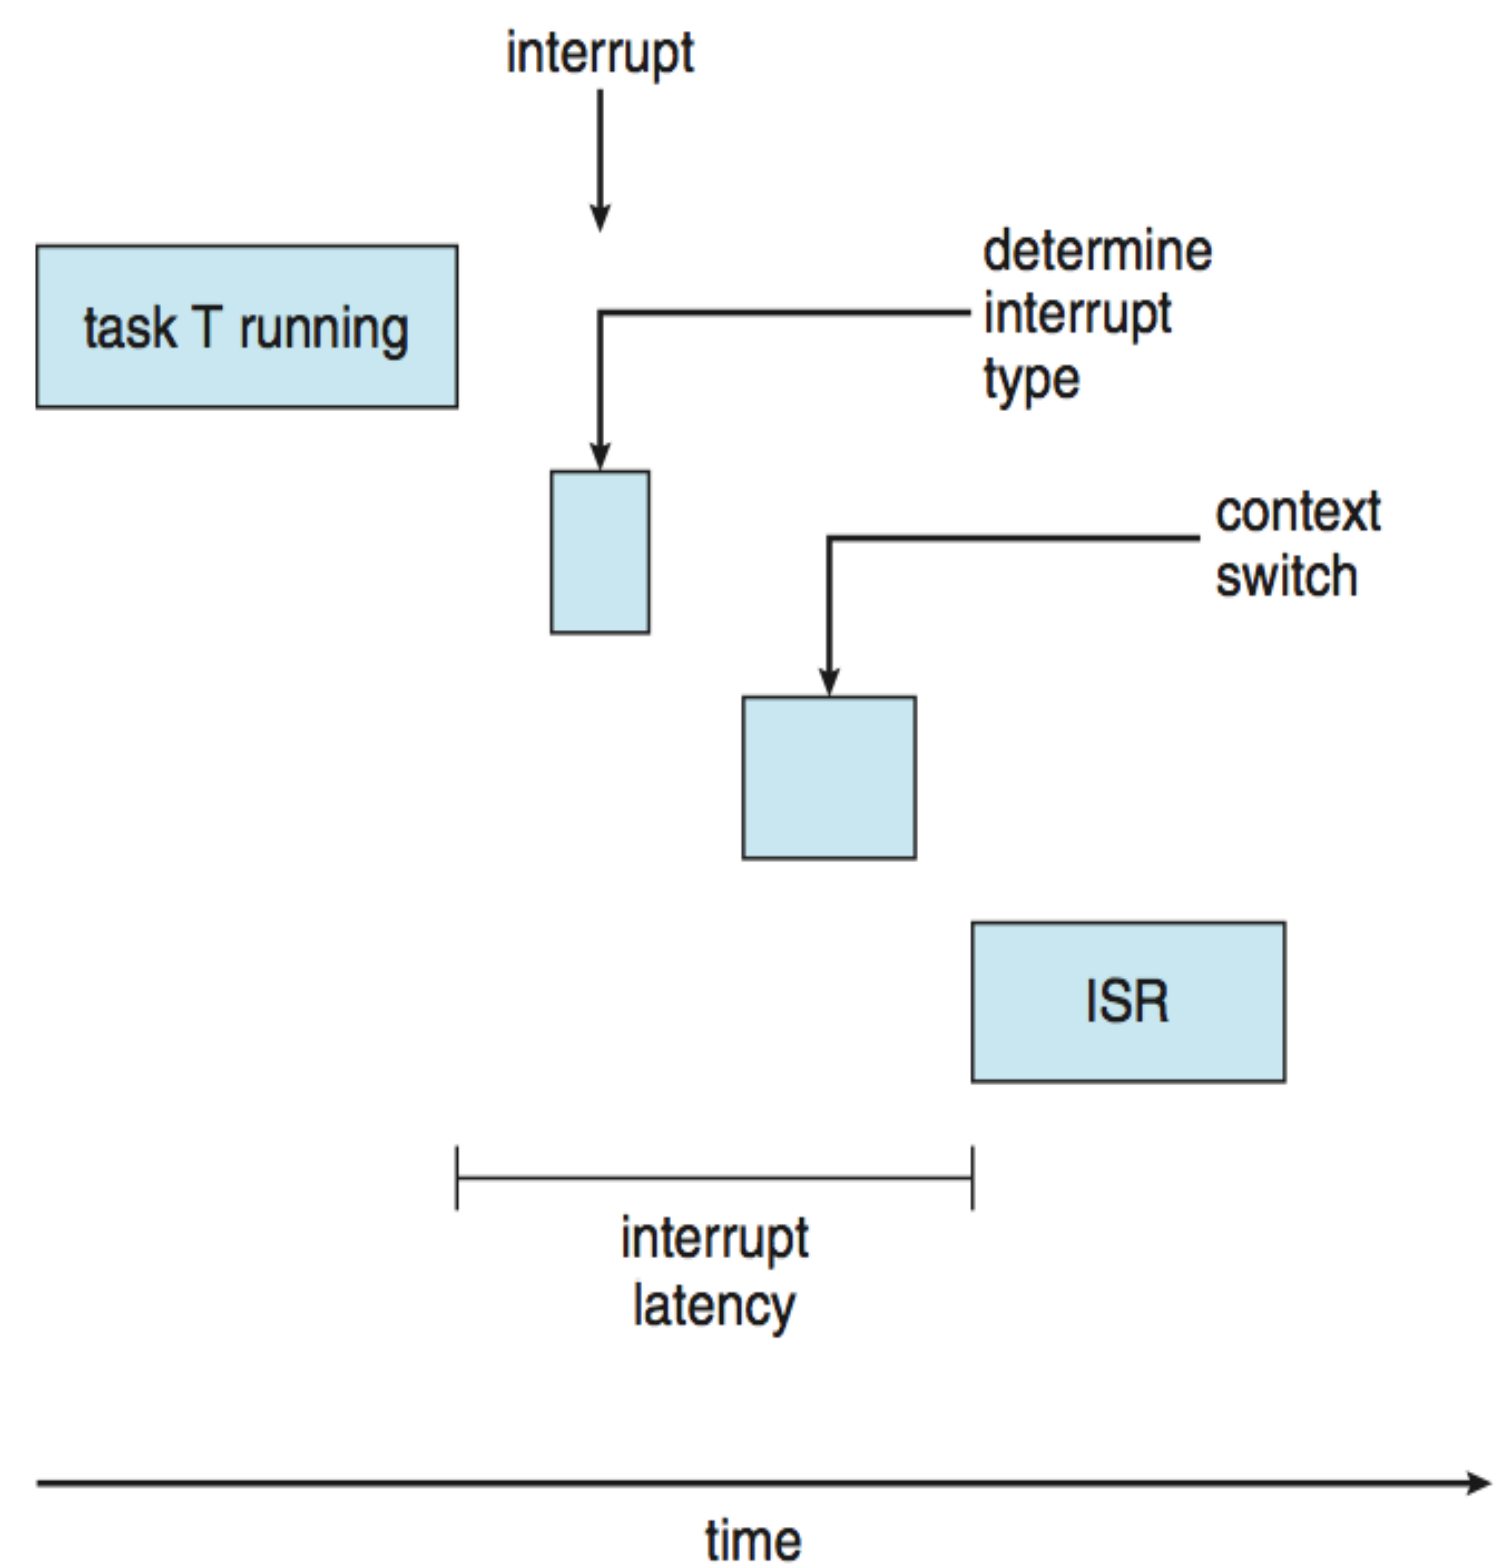

Real-Time CPU Scheduling (Cont.)

- Conflict phase of dispatch latency:
  1. Preemption of any process running in kernel mode
  2. Release by low-priority process of resources needed by high-priority processes

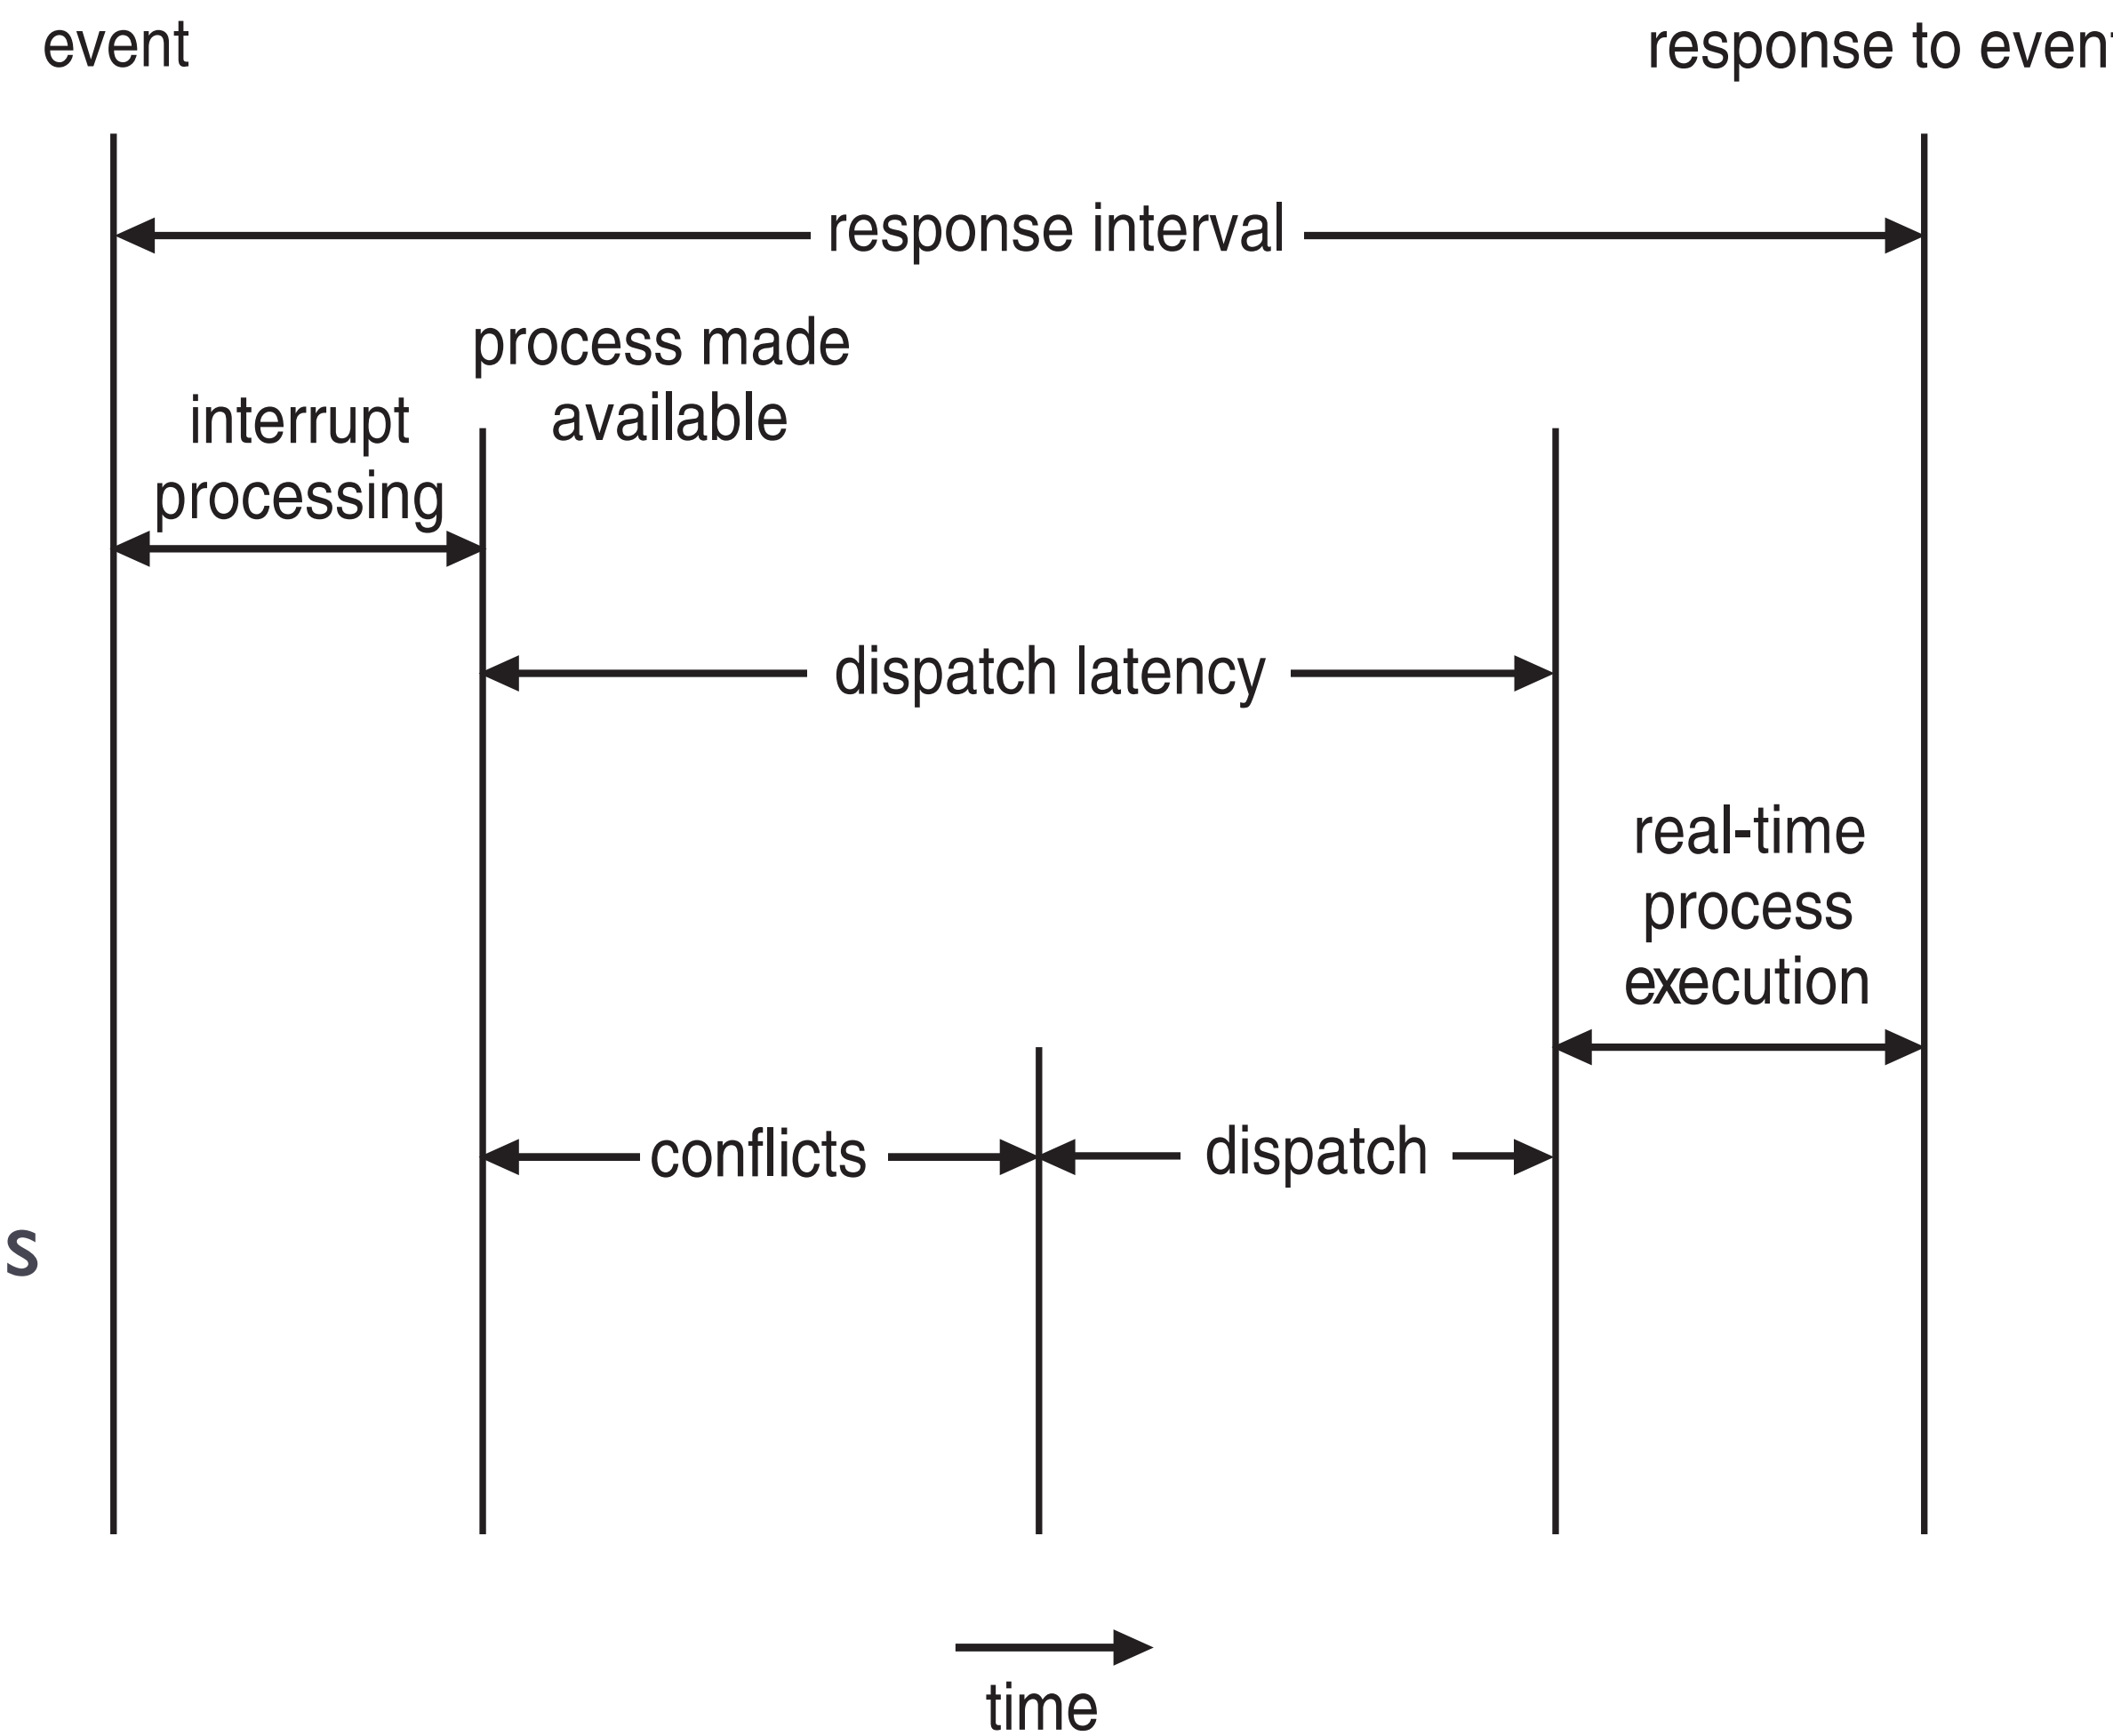

Priority-based Scheduling

- For real-time scheduling, scheduler must support preemptive, priority-based scheduling
  - But only guarantees soft real-time
- For hard real-time must also provide ability to meet deadlines
- Processes have new characteristics: **periodic** ones require CPU at constant intervals
  - Has processing time *t*, deadline *d*, period *p*
  - $0 \leq t \leq d \leq p$
  - **Rate** of periodic task is $1/p$

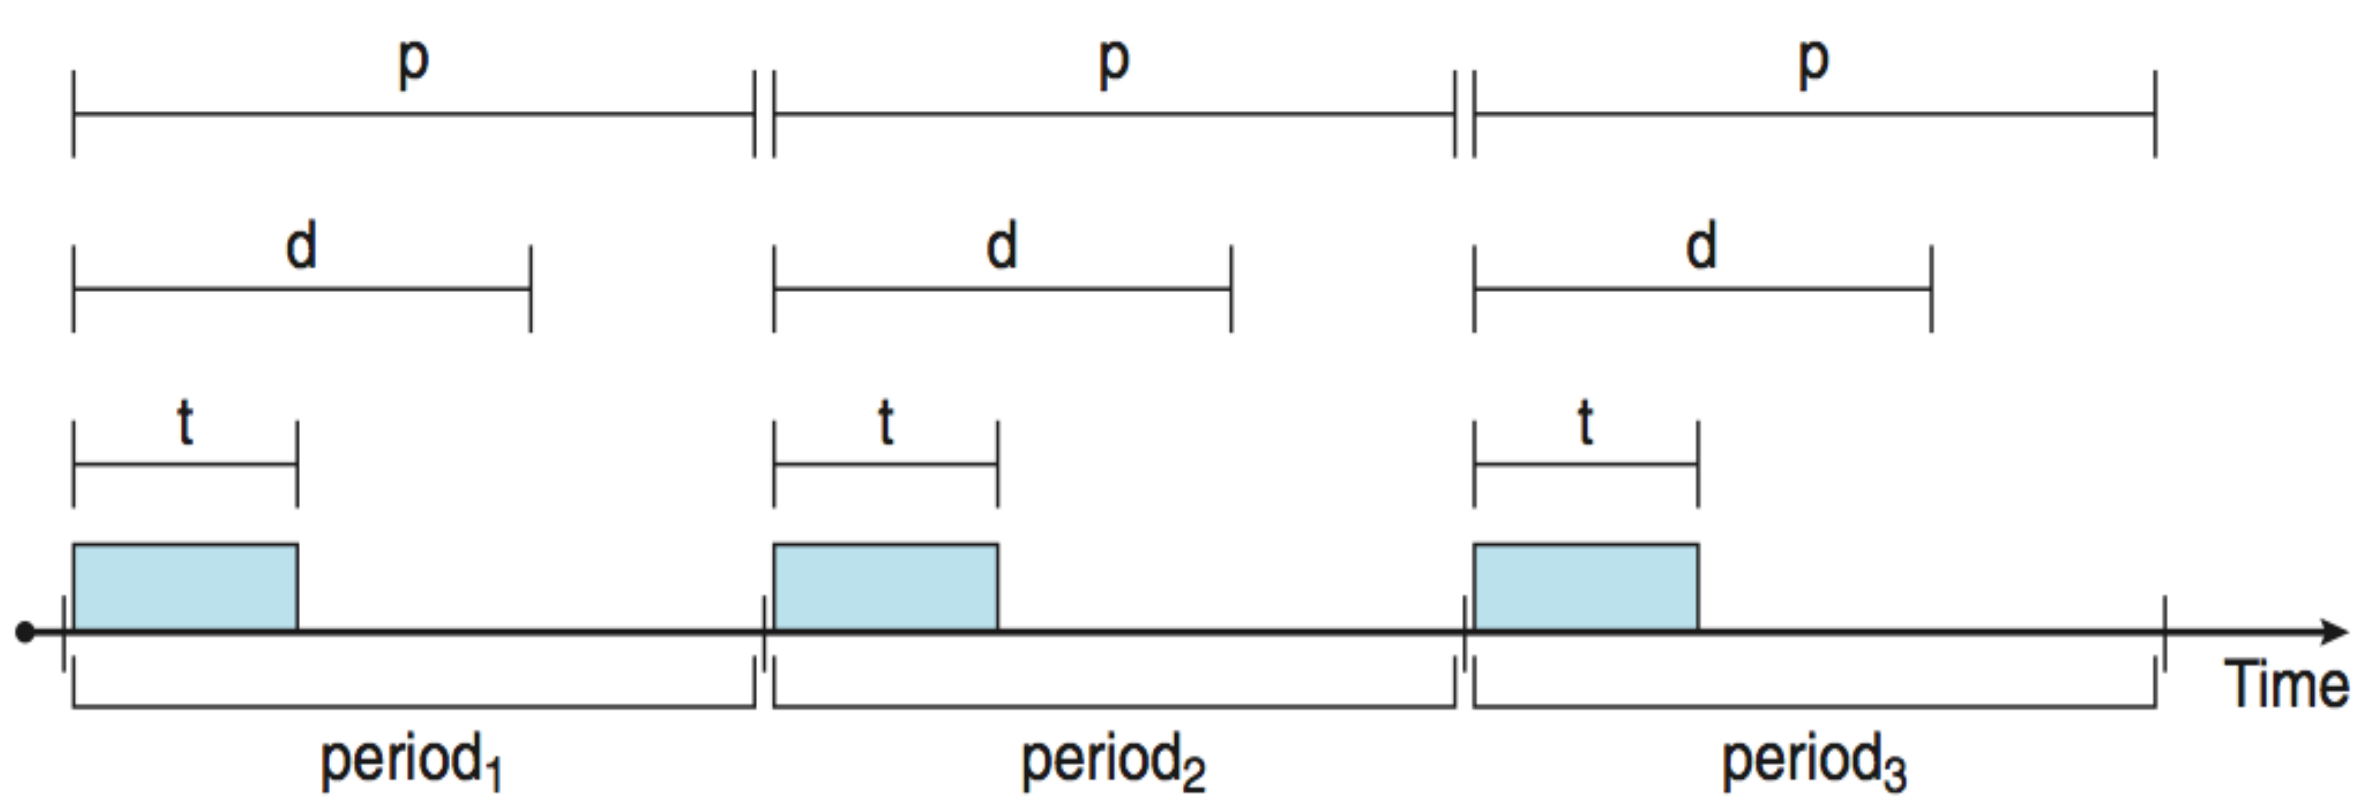

Rate Monotonic Scheduling

- A priority is assigned based on the inverse of its period
- Shorter periods = higher priority;
- Longer periods = lower priority
- 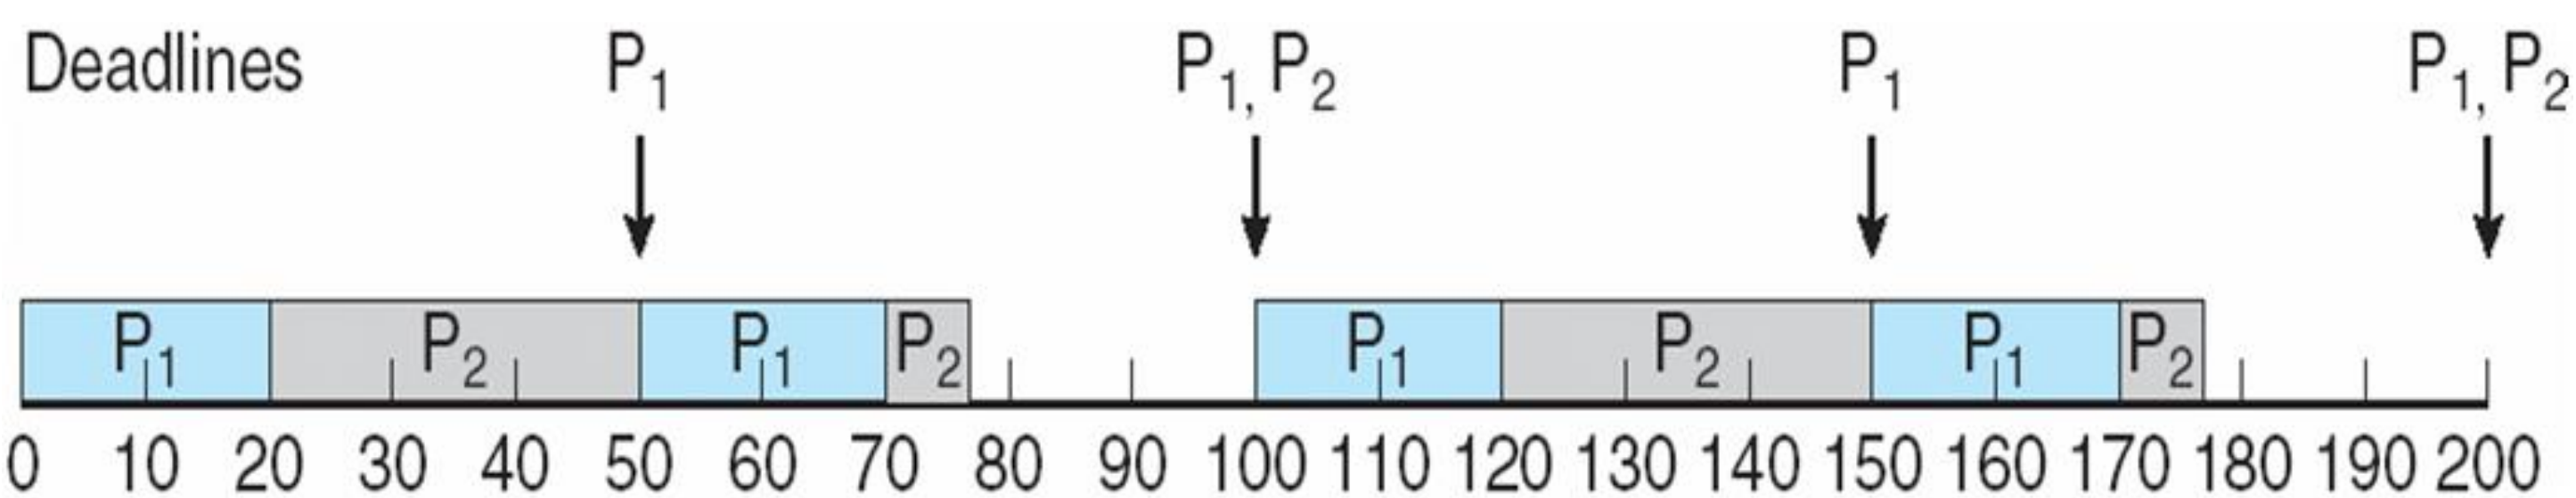

Missed Deadlines with Rate Monotonic Scheduling

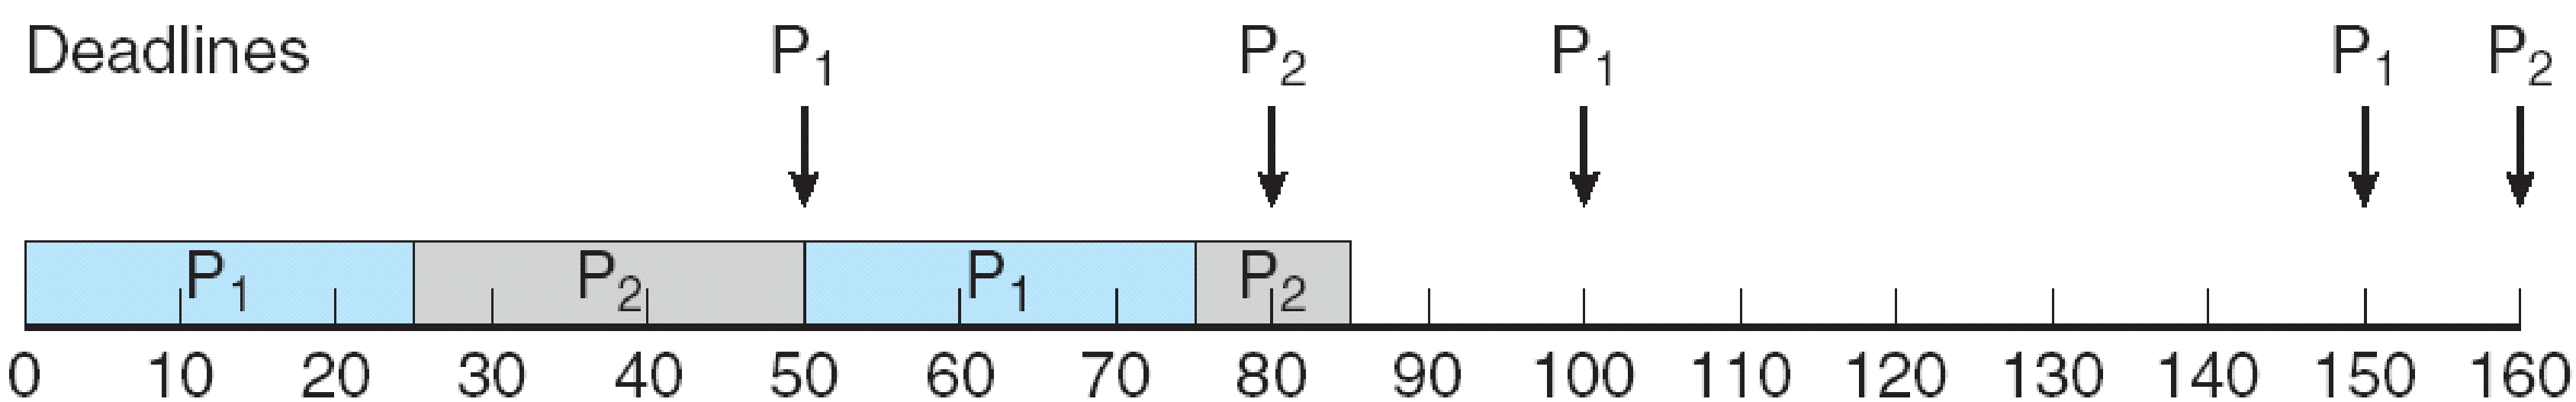

Earliest Deadline First Scheduling (EDF)

- Priorities are assigned according to deadlines:

  the earlier the deadline, the higher the priority;
  the later the deadline, the lower the priority

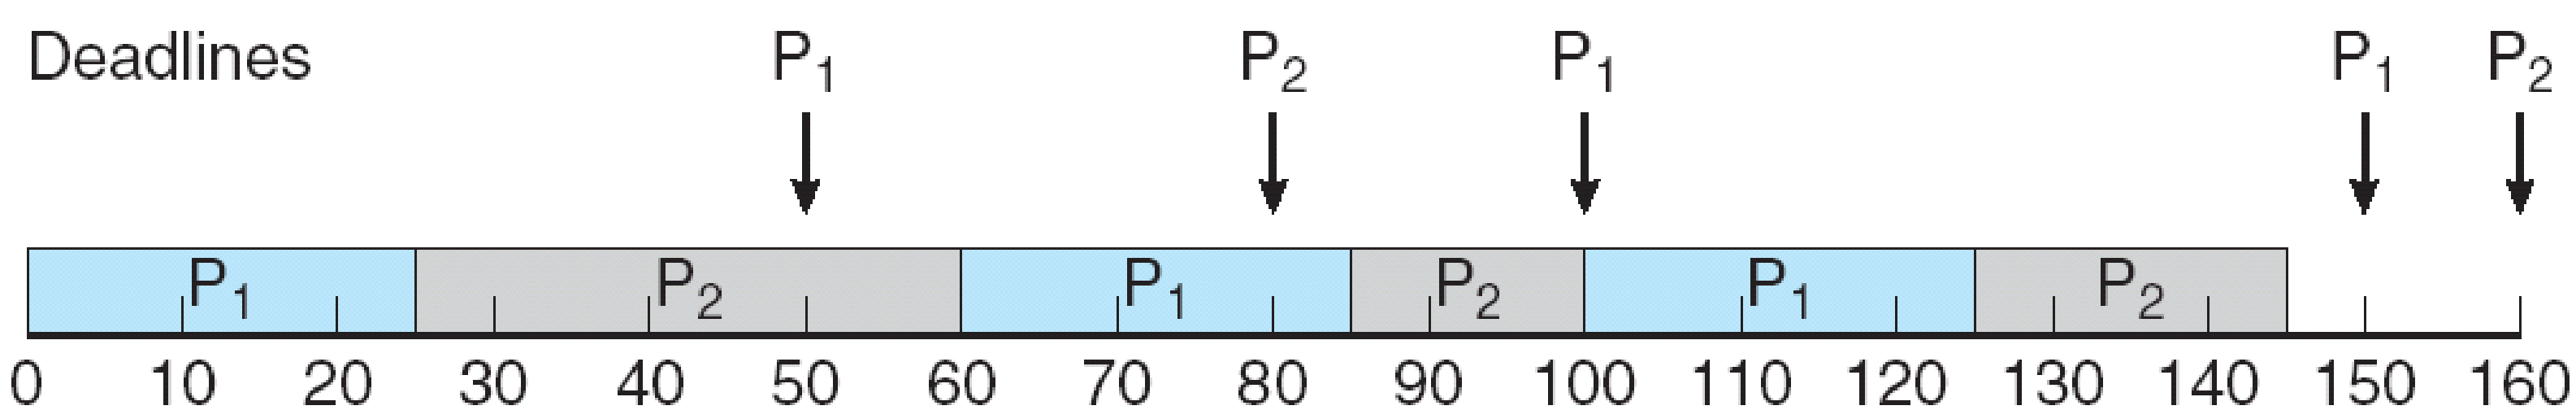

POSIX Real-Time Scheduling

- The POSIX.1b standard
- API provides functions for managing real-time threads
- Defines two scheduling classes for real-time threads:

1. SCHED_FIFO - threads are scheduled using a FCFS strategy with a FIFO queue. There is no time-slicing for threads of equal priority
2. SCHED_RR - similar to SCHED_FIFO except time-slicing occurs for threads of equal priority

- Defines two functions for getting and setting scheduling policy:

1. **`pthread_attr_getsched_policy(pthread_attr_t *attr, int *policy)`**
2. **`pthread_attr_setsched_policy(pthread_attr_t *attr, int policy)`**

POSIX Real-Time Scheduling API

```
#include <pthread.h>
#include <stdio.h>
#define NUM_THREADS 5
int main(int argc, char *argv[])
{
   int i, policy;
   pthread_t_tid[NUM_THREADS];
   pthread_attr_t attr;
   /* get the default attributes */
   pthread_attr_init(&attr);
   /* get the current scheduling policy */
   if (pthread_attr_getschedpolicy(&attr, &policy) != 0)
      fprintf(stderr, "Unable to get policy.\n");
   else {
      if (policy == SCHED_OTHER) printf("SCHED_OTHER\n");
      else if (policy == SCHED_RR) printf("SCHED_RR\n");
      else if (policy == SCHED_FIFO) printf("SCHED_FIFO\n");
   }
```

POSIX Real-Time Scheduling API (Cont.)

```
    /* set the scheduling policy - FIFO, RR, or OTHER */
    if (pthread_attr_setschedpolicy(&attr, SCHED_FIFO) != 0)
       fprintf(stderr, "Unable to set policy.\n");
    /* create the threads */
    for (i = 0; i < NUM_THREADS; i++)
       pthread_create(&tid[i],&attr,runner,NULL);
    /* now join on each thread */
    for (i = 0; i < NUM_THREADS; i++)
       pthread_join(tid[i], NULL);
}

/* Each thread will begin control in this function */
void *runner(void *param)
{
    /* do some work ... */
    pthread_exit(0);
}
```

Virtualization and Scheduling

- Virtualization software schedules multiple guests onto CPU(s)
- Each guest doing its own scheduling
  - Not knowing it doesn't own the CPUs
  - Can result in poor response time
  - Can effect time-of-day clocks in guests
- Can undo good scheduling algorithm efforts of guests

Algorithm Evaluation

- Define the criteria for evaluation
- Deterministic modeling – takes a particular predetermined workload and defines the performance of each algorithm for that workload
- Queueing models
- Simulation
- Implementation

End of Chapter 5

Linux Scheduling Through Version 2.5

- Prior to kernel version 2.5, ran variation of standard UNIX scheduling algorithm
- Version 2.5 moved to constant order $O(1)$ scheduling time
  - Preemptive, priority based
  - Two priority ranges: time-sharing and real-time
  - **Real-time** range from 0 to 99 and **nice** value from 100 to 140
  - Map into global priority with numerically lower values indicating higher priority
  - Higher priority gets larger q
  - Task run-able as long as time left in time slice (**active**)
  - If no time left (**expired**), not run-able until all other tasks use their slices
  - All run-able tasks tracked in per-CPU **runqueue** data structure
    - Two priority arrays (active, expired)
    - Tasks indexed by priority
    - When no more active, arrays are exchanged
  - Worked well, but poor response times for interactive processes

The Relationship Between Priorities and Time-slice length

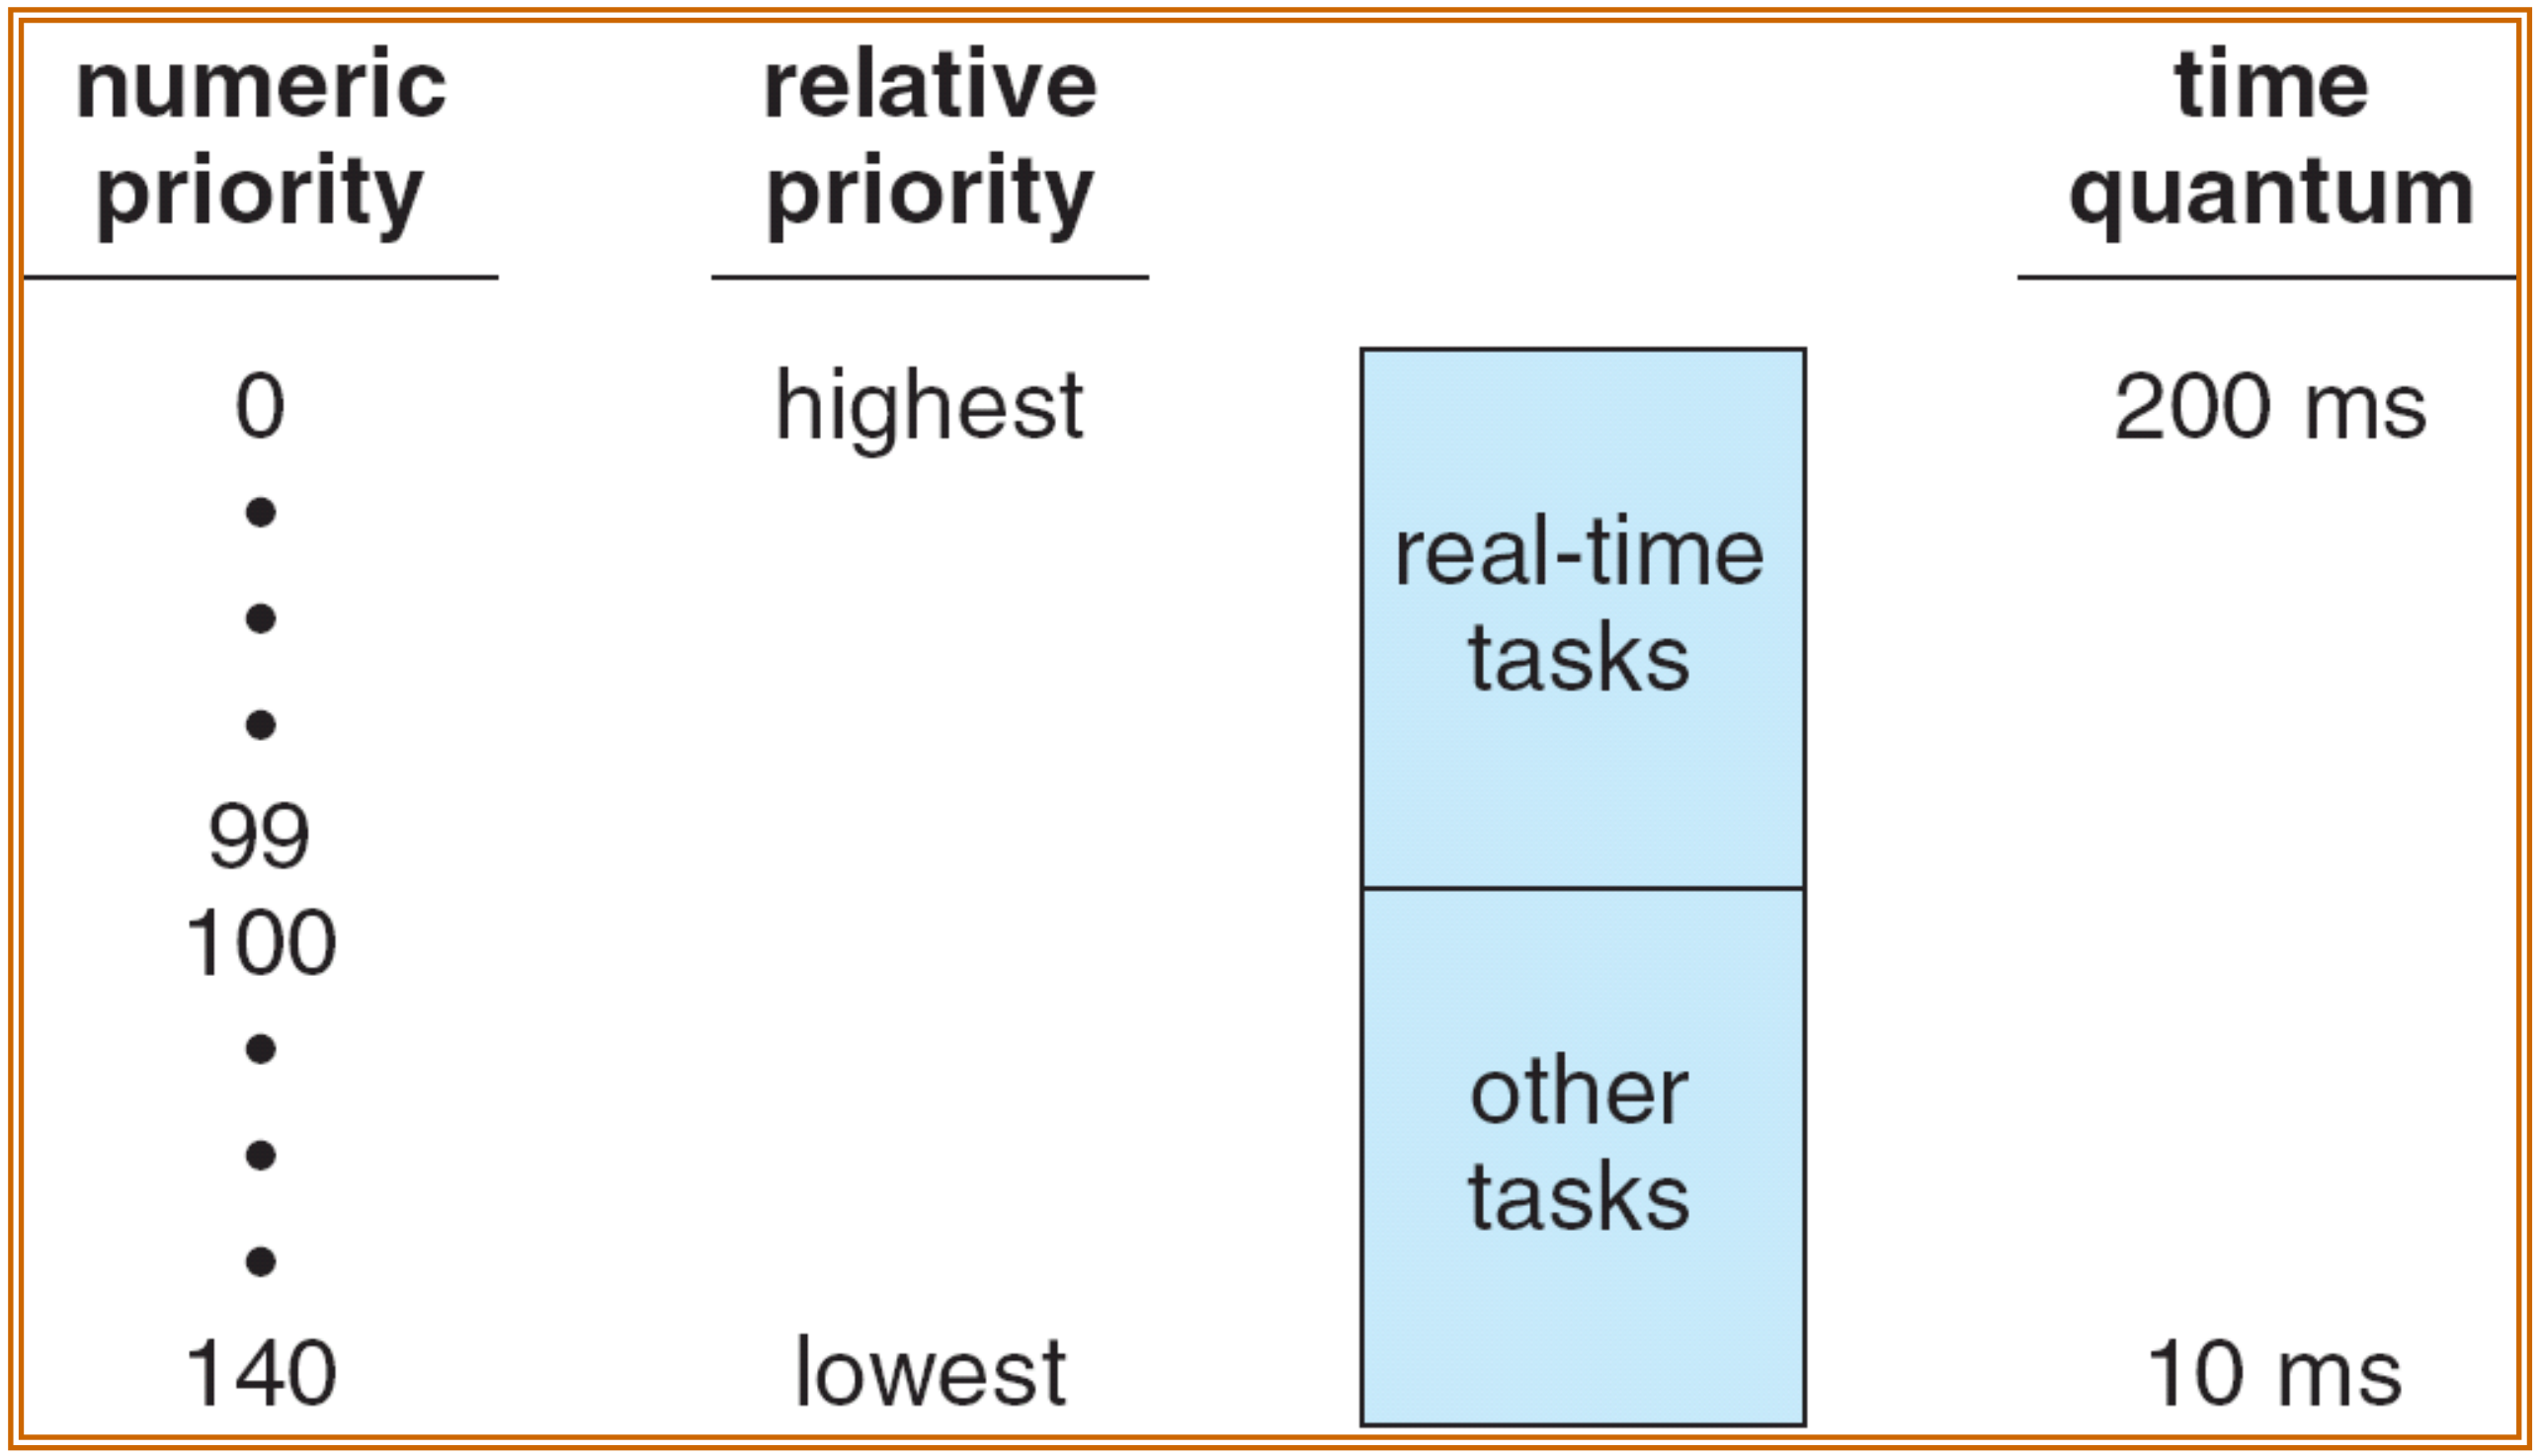

List of Tasks Indexed According to Prorities

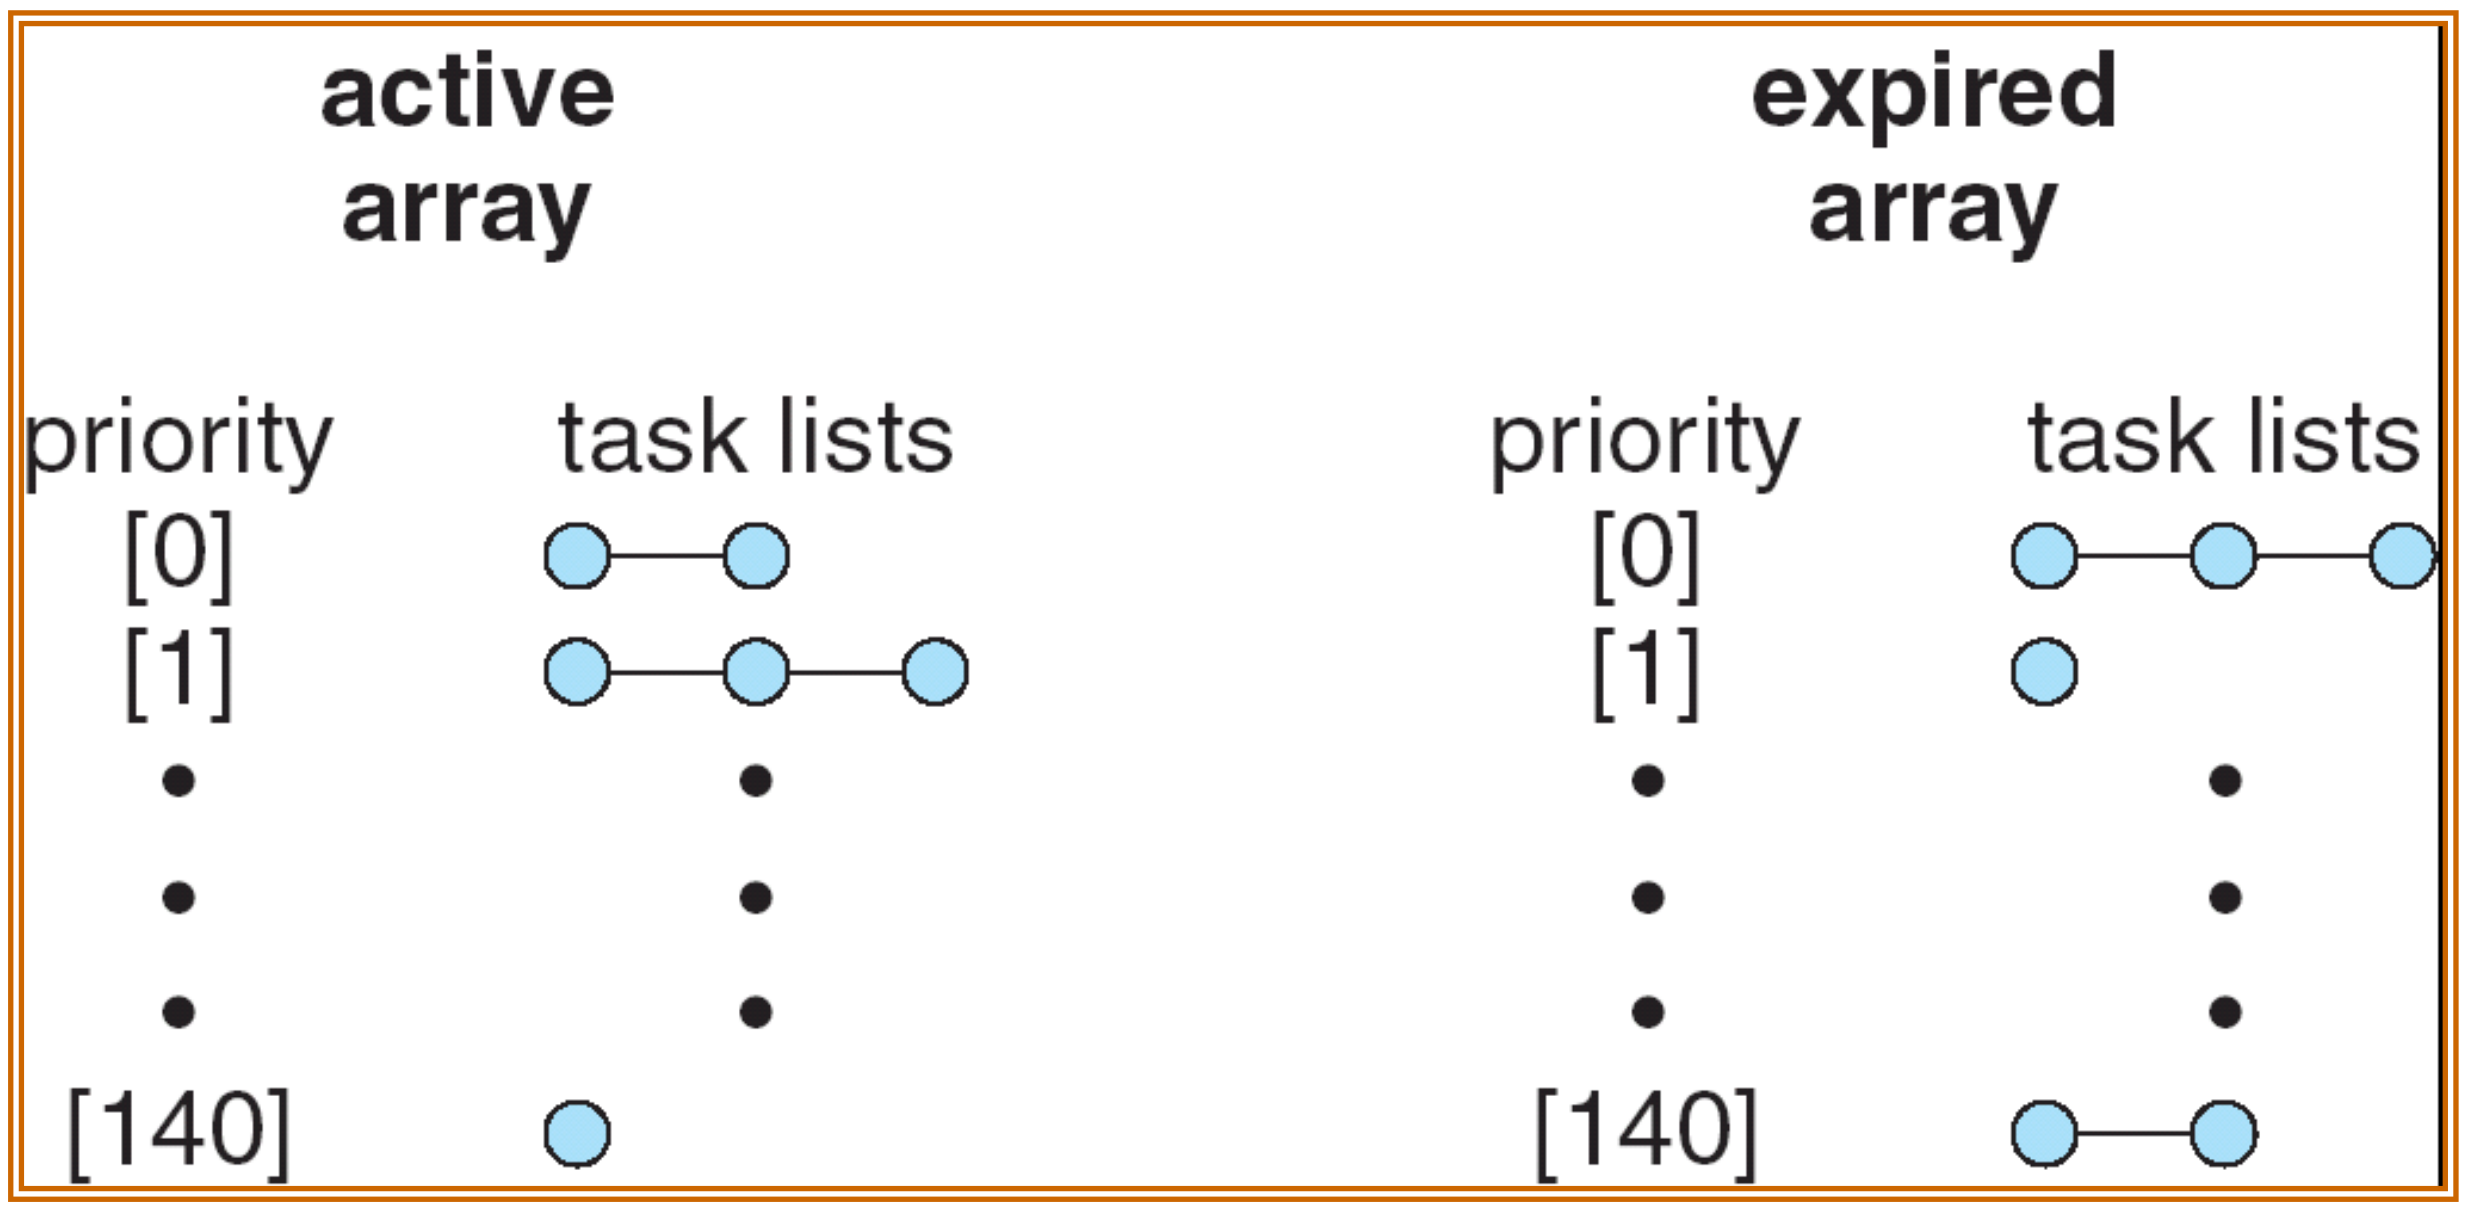

Linux Scheduling in Version 2.6.23 +

- ***Completely Fair Scheduler*** (CFS)
- **Scheduling classes**
  - Each has specific priority
  - Scheduler picks highest priority task in highest scheduling class
  - Rather than quantum based on fixed time allotments, based on proportion of CPU time
  - 2 scheduling classes included, others can be added
    1. default
    2. real-time
- Quantum calculated based on **nice value** from -20 to +19
  - Lower value is higher priority
  - Calculates **target latency** – interval of time during which task should run at least once
  - Target latency can increase if say number of active tasks increases
- CFS scheduler maintains per task **virtual run time** in variable **`vruntime`**
  - Associated with decay factor based on priority of task – lower priority is higher decay rate
  - Normal default priority yields virtual run time = actual run time
- To decide next task to run, scheduler picks task with lowest virtual run time

5.15

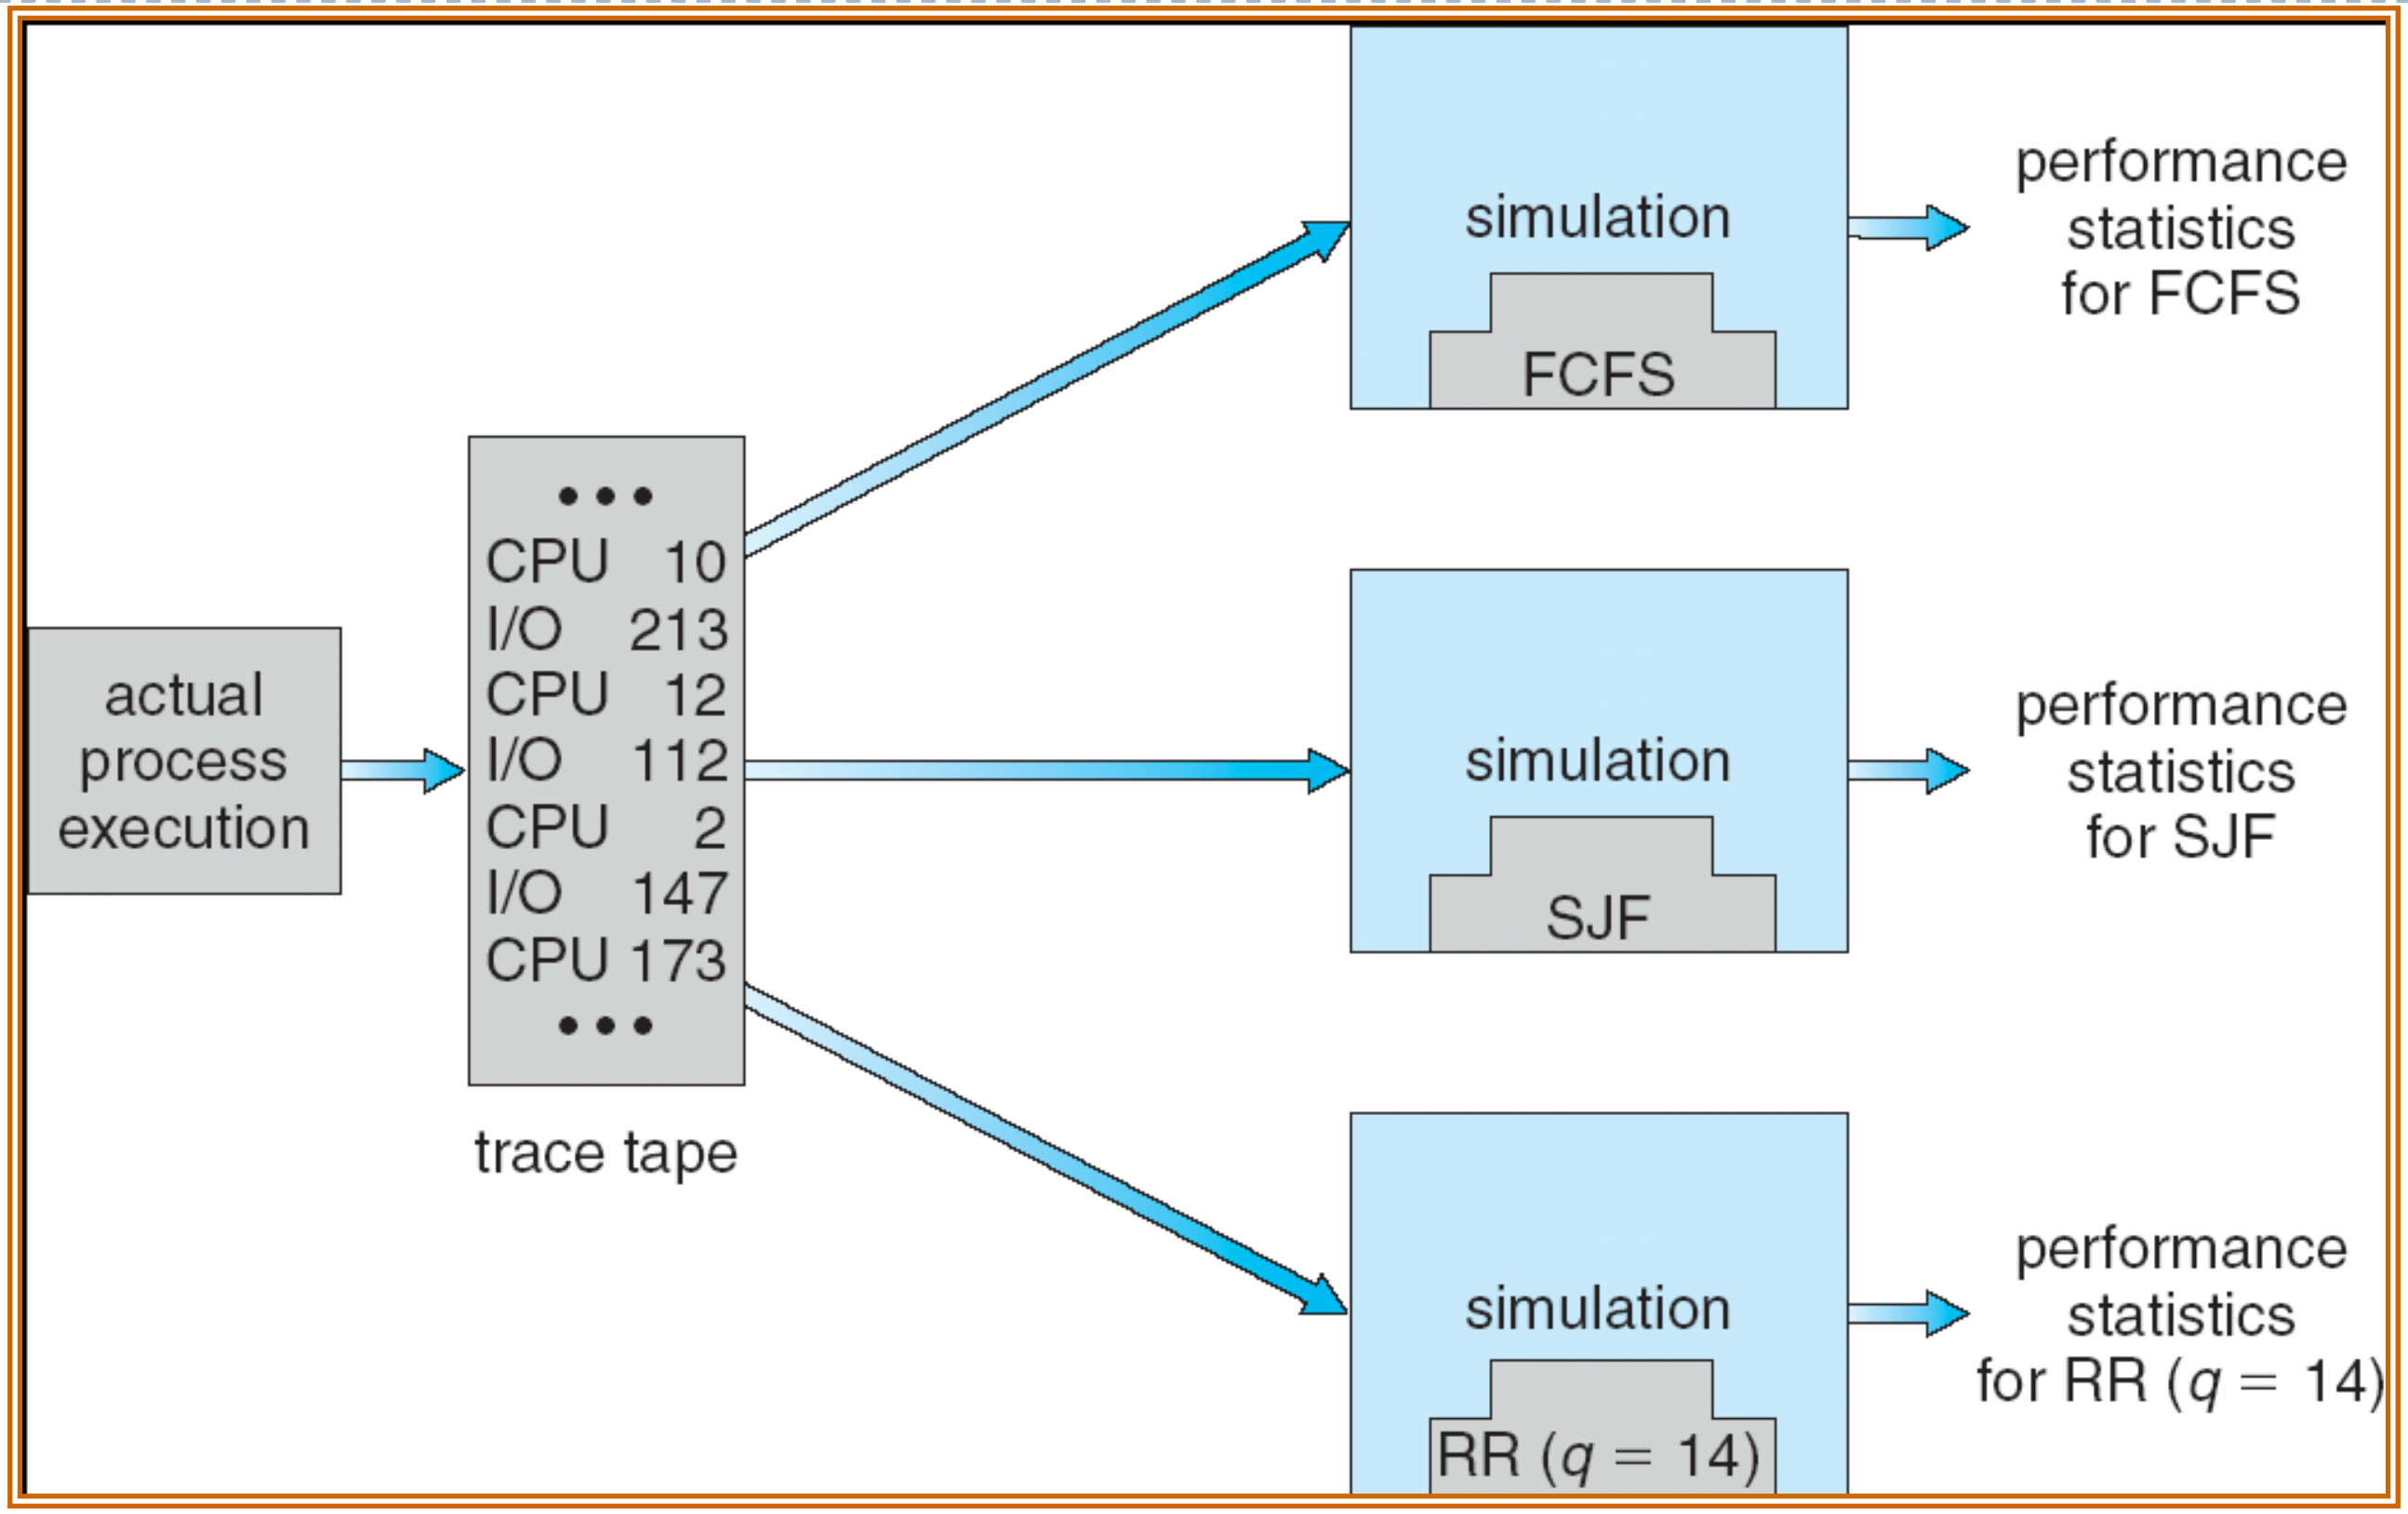

actual process execution
• • •
CPU 10
I/O 213
CPU 12
I/O 112
CPU 2
I/O 147
CPU 173
• • •
trace tape
simulation
FCFS
performance statistics for FCFS
simulation
SJF
performance statistics for SJF
simulation
RR (q = 14)
performance statistics for RR (q = 14)

5.08

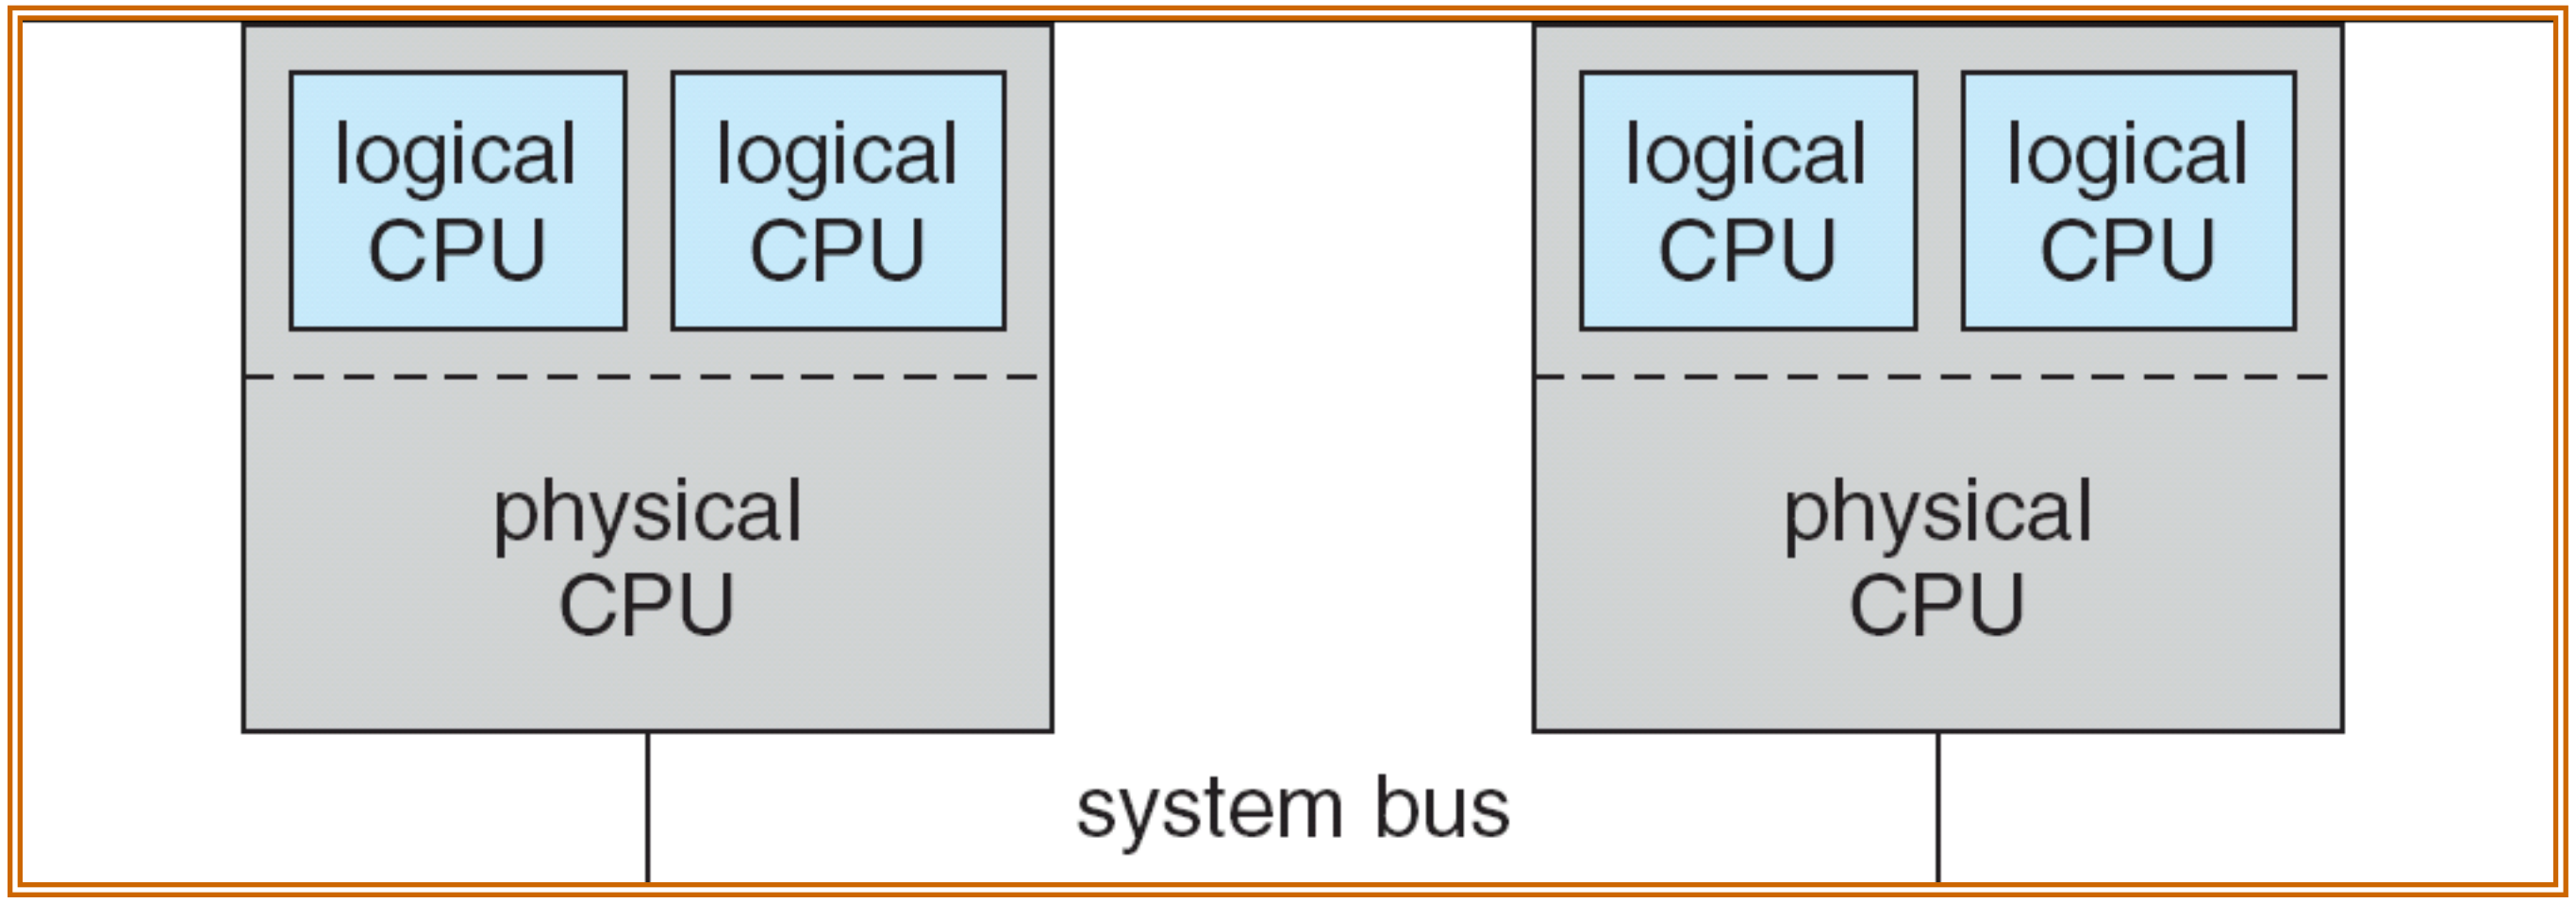
logical CPU
logical CPU
logical CPU
logical CPU
physical CPU
physical CPU
system bus

In-5.7

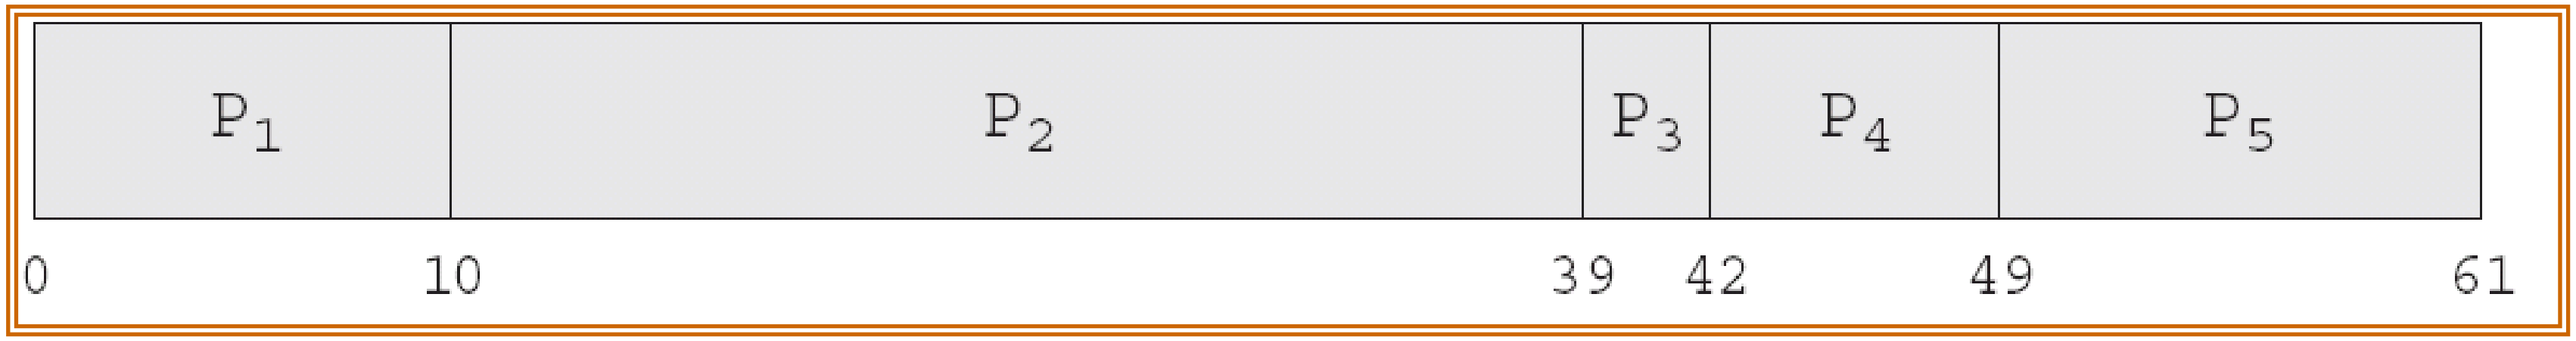

In-5.8

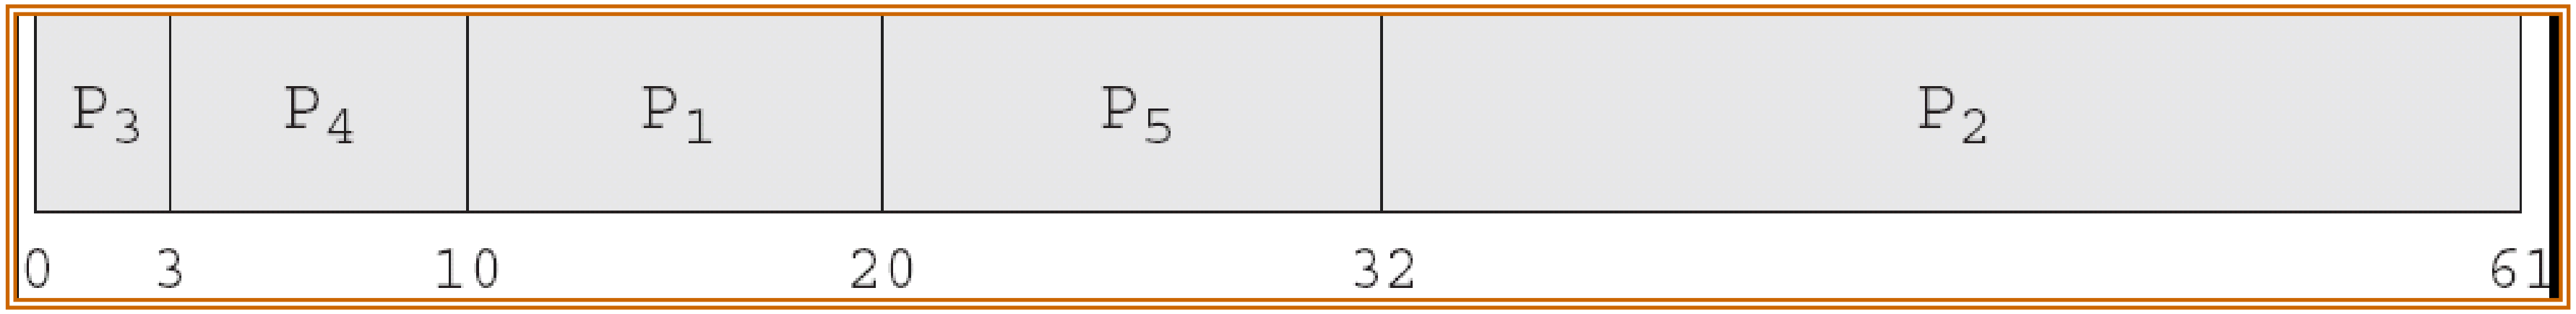

In-5.9

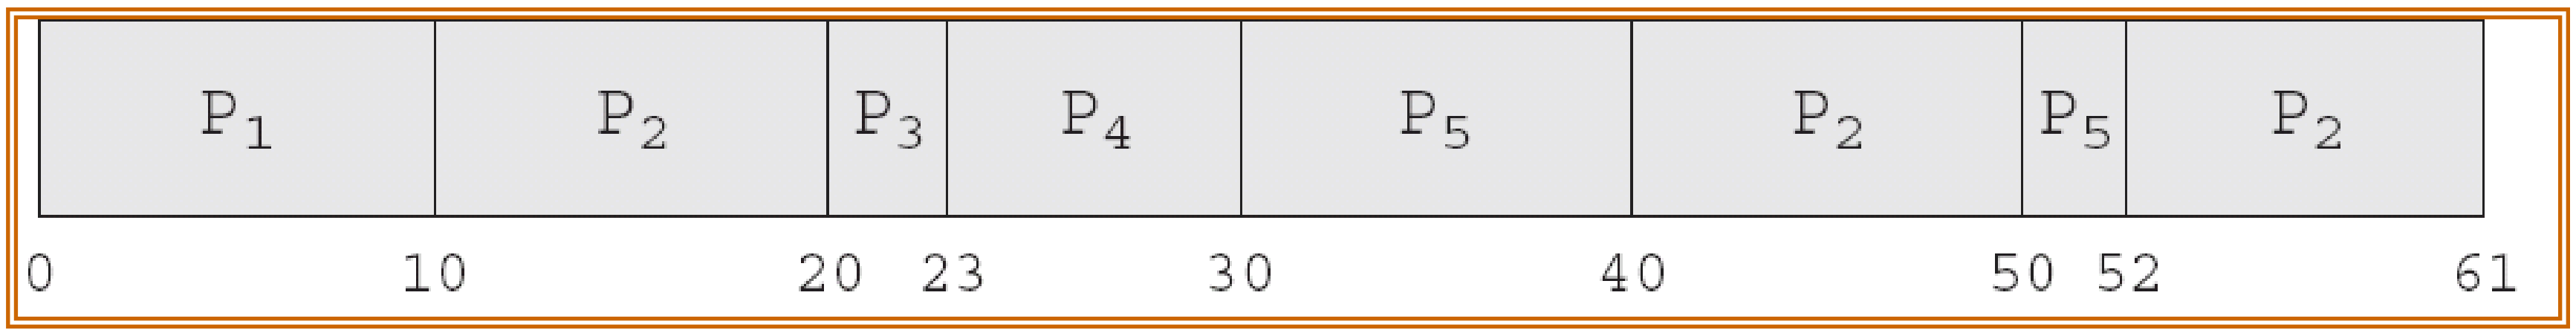

Dispatch Latency

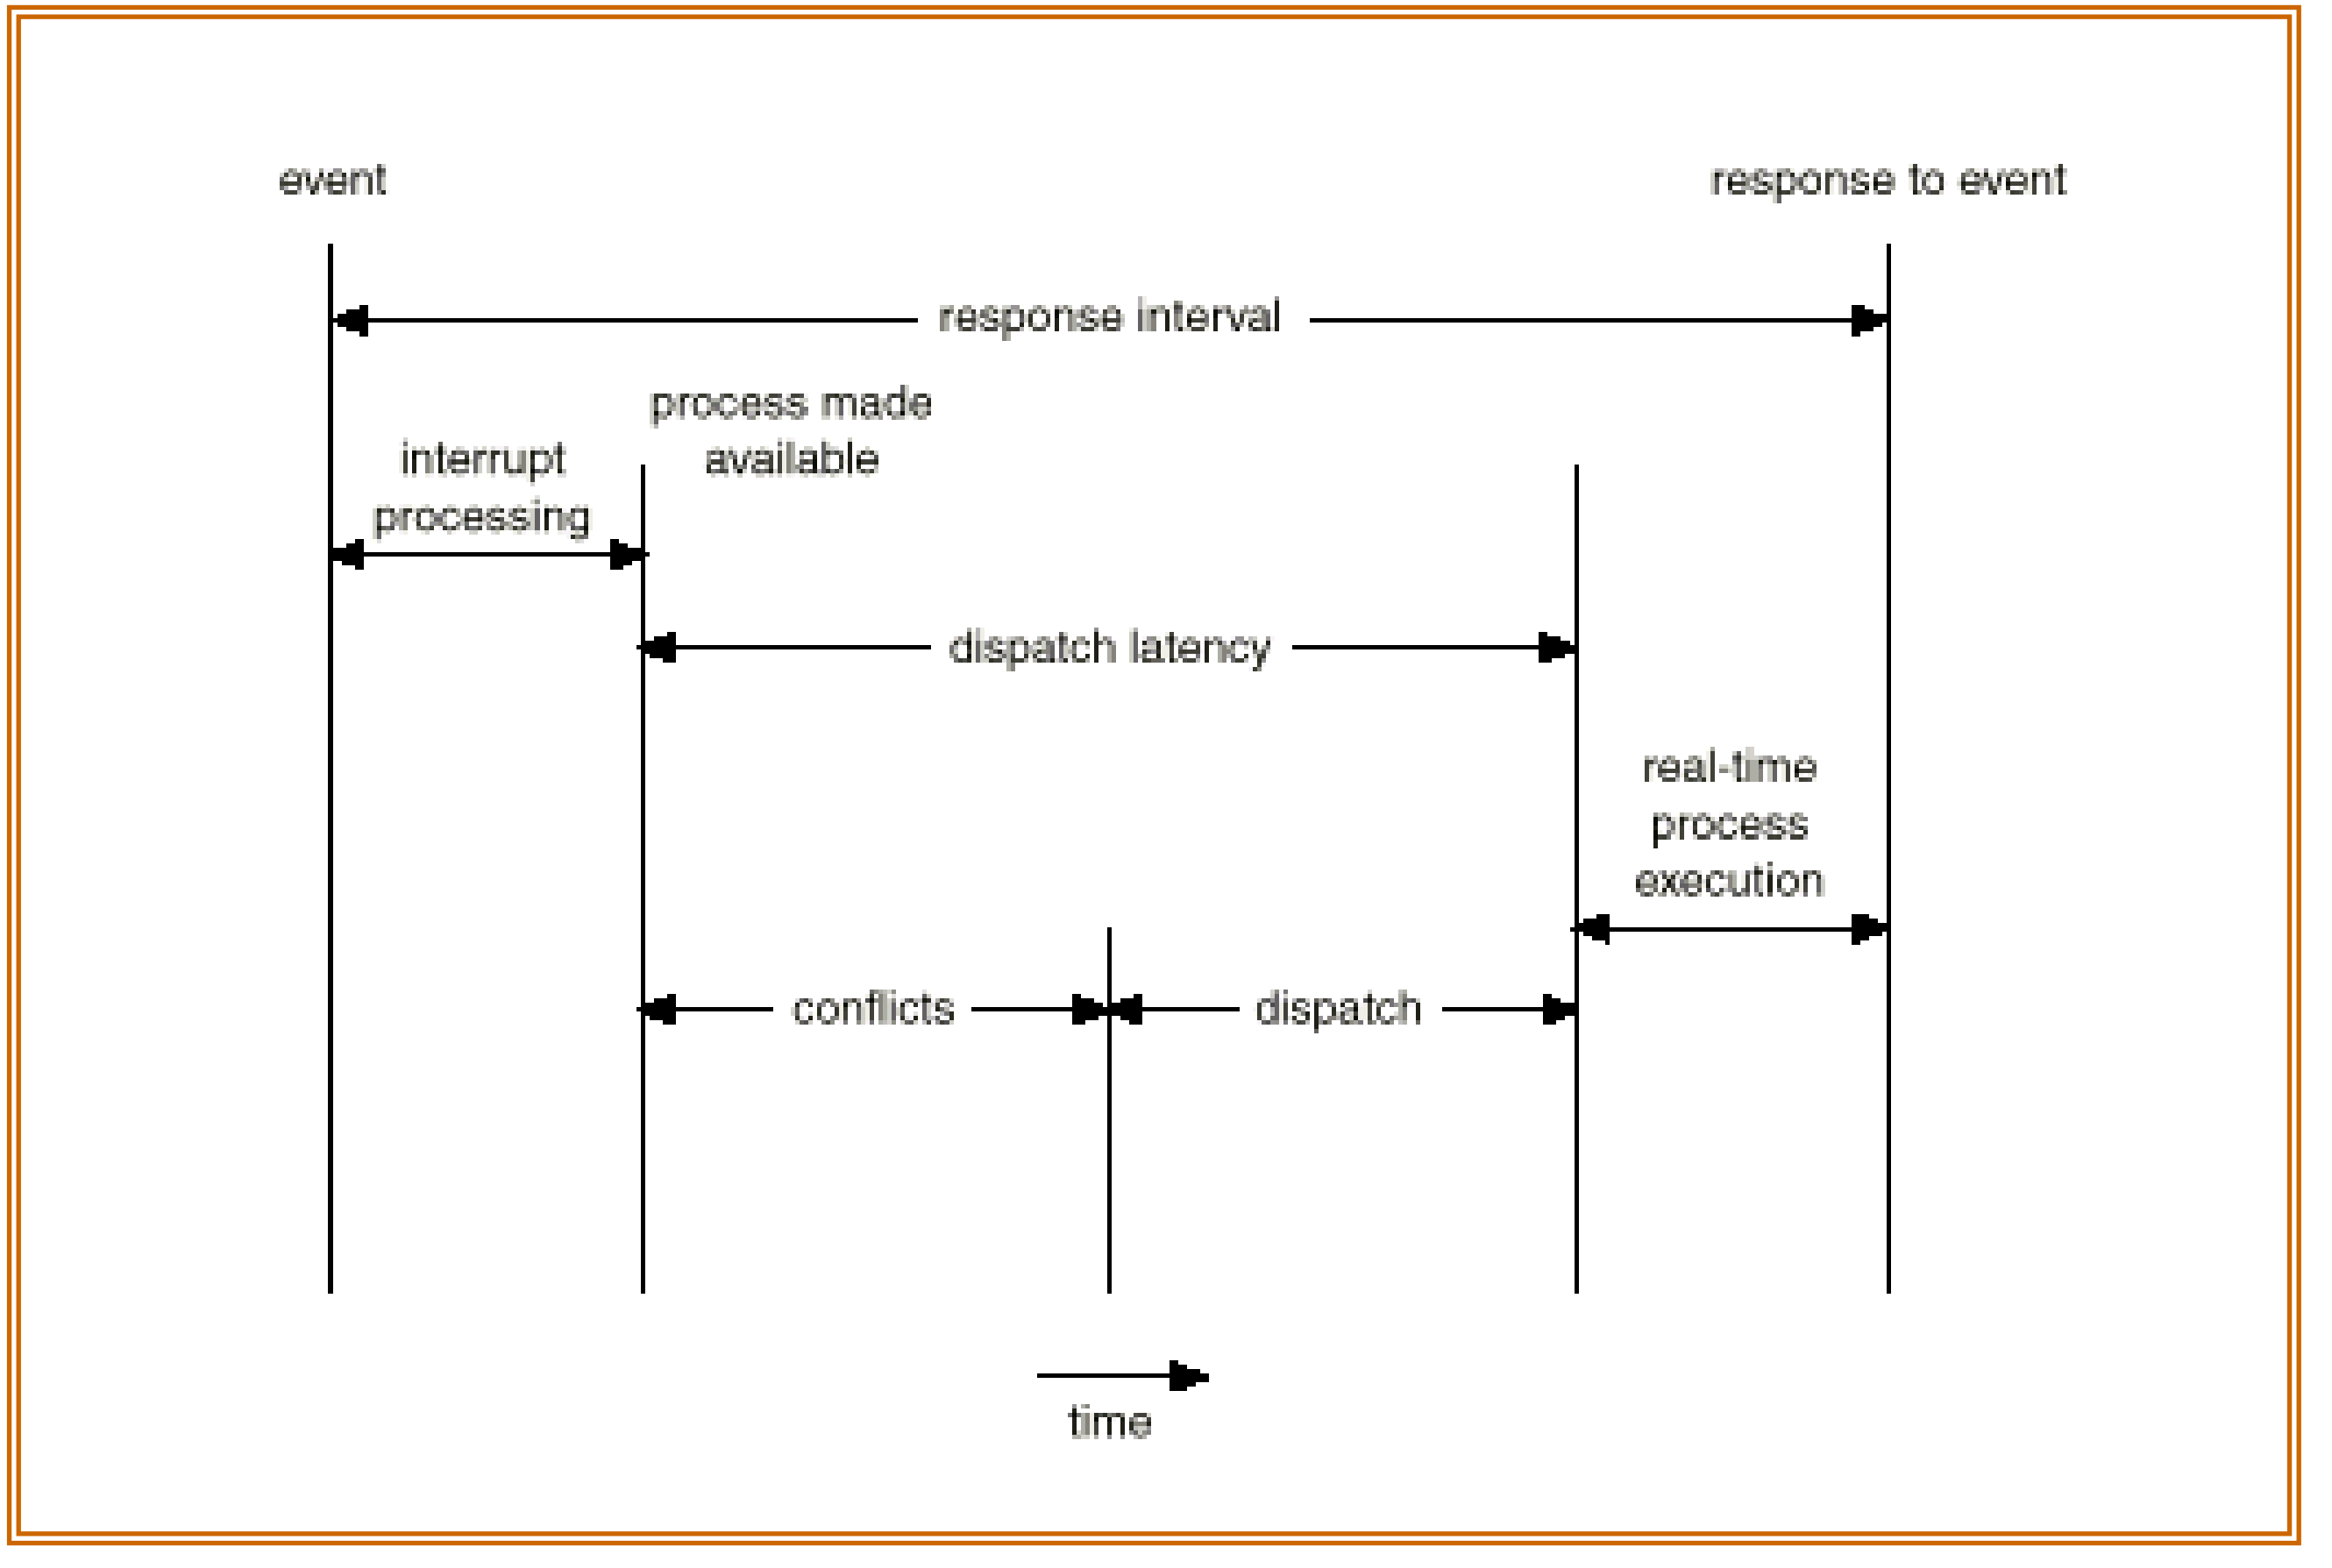

Java Thread Scheduling

- JVM Uses a Preemptive, Priority-Based Scheduling Algorithm

- FIFO Queue is Used if There Are Multiple Threads With the Same Priority

Java Thread Scheduling (cont)

JVM Schedules a Thread to Run When:

1. The Currently Running Thread Exits the Runnable State
2. A Higher Priority Thread Enters the Runnable State

* Note – the JVM Does Not Specify Whether Threads are Time-Sliced or Not

Time-Slicing

Since the JVM Doesn't Ensure Time-Slicing, the yield() Method

May Be Used:

```
while (true) {
        // perform CPU-intensive task
        . . .
        Thread.yield();
}
```

This Yields Control to Another Thread of Equal Priority

Thread Priorities

Priority	**Comment**
Thread.MIN_PRIORITY	Minimum Thread Priority
Thread.MAX_PRIORITY	Maximum Thread Priority
Thread.NORM_PRIORITY	Default Thread Priority

Priorities May Be Set Using setPriority() method:

```
setPriority(Thread.NORM_PRIORITY + 2);
```