source: NVIDIA GPU Teaching Kit

IF3230 Sistem Paralel dan Terdistribusi CUDA

Achmad Imam Kistijantoro (imam@informatika.org)
Judhi Santoso (judhi@staff.stei.itb.ac.id)
Anggrahita Bayu Sasmita (angga@staff.stei.itb.ac.id)

Februari 2022

Informatika – STEI – ITB

Objective

- To learn to effectively use the CUDA memory types in a parallel program
  - Importance of memory access efficiency
  - Registers, shared memory, global memory
  - Scope and lifetime

Review: Image Blur Kernel.

```
// Get the average of the surrounding 2xBLUR_SIZE x 2xBLUR_SIZE box
for(int blurRow = -BLUR_SIZE; blurRow < BLUR_SIZE+1; ++blurRow) {
  for(int blurCol = -BLUR_SIZE; blurCol < BLUR_SIZE+1; ++blurCol) {

    int curRow = Row + blurRow;
    int curCol = Col + blurCol;
    // Verify we have a valid image pixel
    if(curRow > -1 && curRow < h && curCol > -1 && curCol < w) {
      pixVal += in[curRow * w + curCol];
      pixels++; // Keep track of number of pixels in the accumulated total
    }
  }
}

// Write our new pixel value out
out[Row * w + Col] = (unsigned char)(pixVal / pixels);
```

How about performance on a GPU

- All threads access global memory for their input matrix elements
  - One memory accesses (4 bytes) per floating-point addition
  - 4B/s of memory bandwidth/FLOPS
- Assume a GPU with
  - Peak floating-point rate 1,500 GFLOPS with 200 GB/s DRAM bandwidth
  - 4*1,500 = 6,000 GB/s required to achieve peak FLOPS rating
  - The 200 GB/s memory bandwidth limits the execution at 50 GFLOPS

- This limits the execution rate to 3.3% (50/1500) of the peak floating-point execution rate of the device!

- Need to drastically cut down memory accesses to get close to the1,500 GFLOPS

Example – Matrix Multiplication

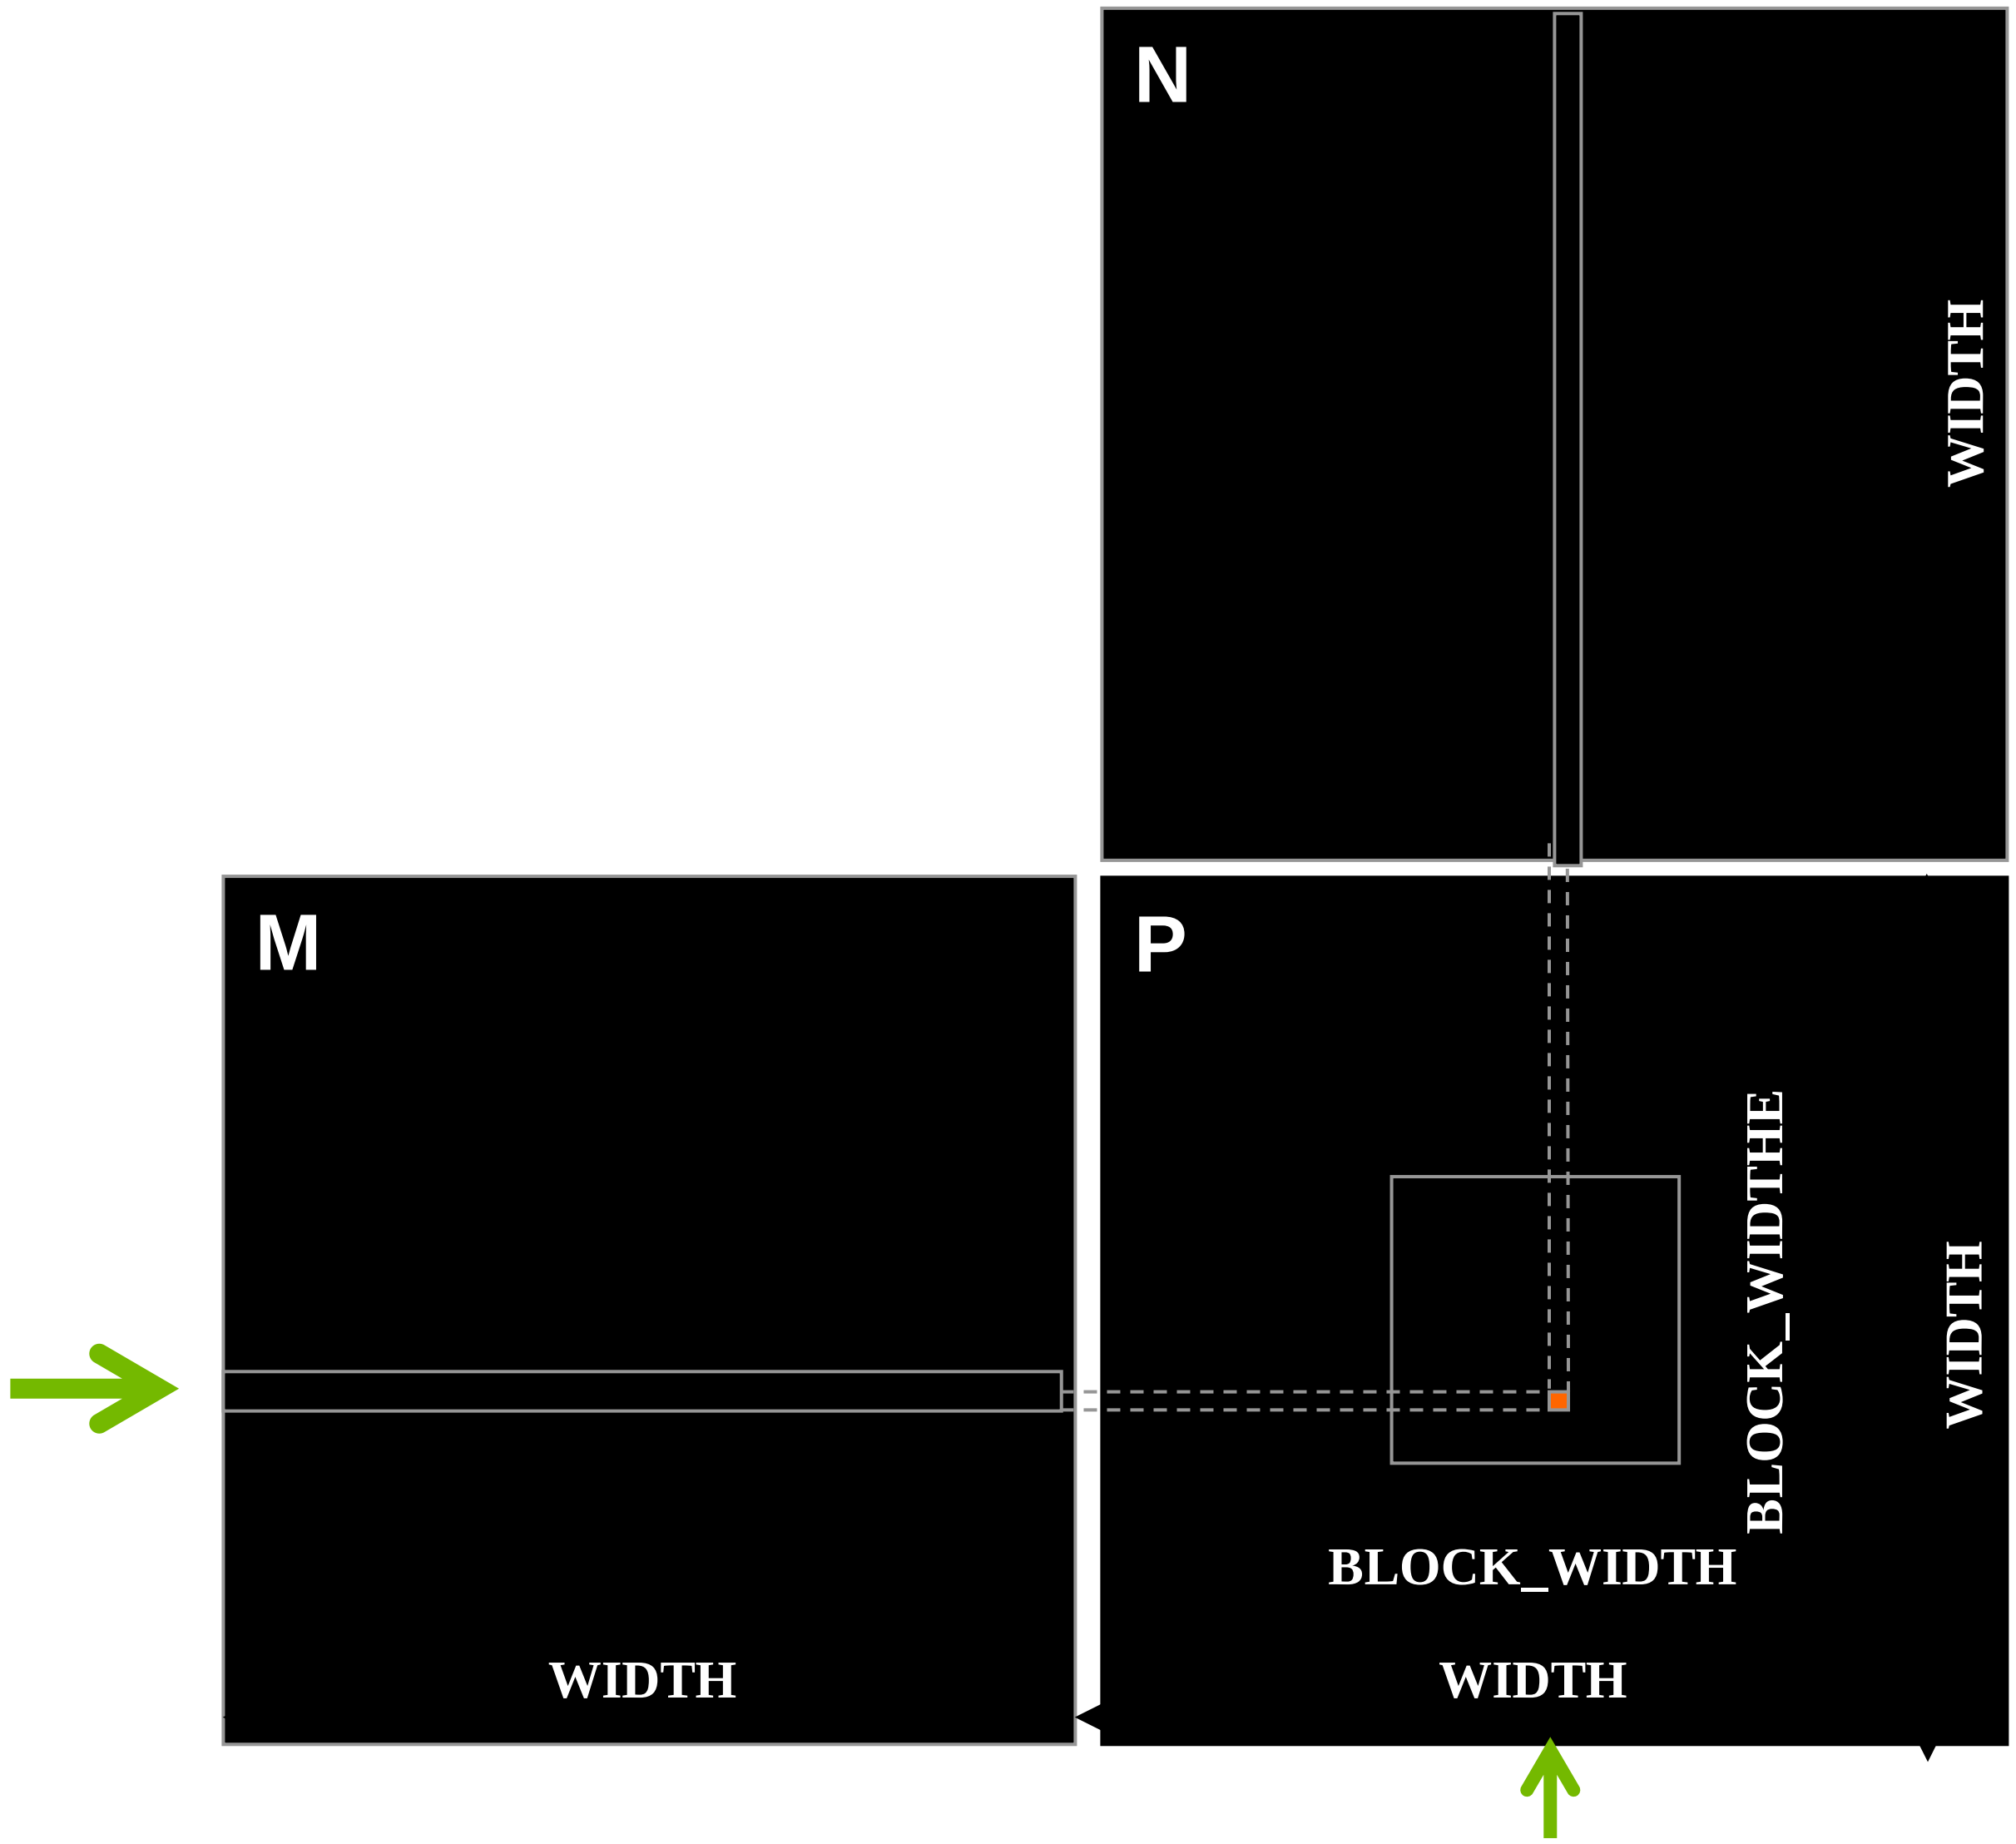

A Basic Matrix Multiplication

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, int Width) {
  // Calculate the row index of the P element and M
  int Row = blockIdx.y*blockDim.y+threadIdx.y;

  // Calculate the column index of P and N
  int Col = blockIdx.x*blockDim.x+threadIdx.x;

  if ((Row < Width) && (Col < Width)) {
    float Pvalue = 0;
    // each thread computes one element of the block sub-matrix
    for (int k = 0; k < Width; ++k) {
      Pvalue += M[Row*Width+k]*N[k*Width+Col];
    }
    P[Row*Width+Col] = Pvalue;
  }

}
```

Example – Matrix Multiplication

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, int Width) {

  // Calculate the row index of the P element and M
  int Row = blockIdx.y*blockDim.y+threadIdx.y;

  // Calculate the column index of P and N
  int Col = blockIdx.x*blockDim.x+threadIdx.x;

  if ((Row < Width) && (Col < Width)) {
    float Pvalue = 0;
    // each thread computes one element of the block sub-matrix
    for (int k = 0; k < Width; ++k) {
      Pvalue += M[Row*Width+k]*N[k*Width+Col];
    }
    P[Row*Width+Col] = Pvalue;
  }

}
```

A Toy Example: Thread to P Data Mapping

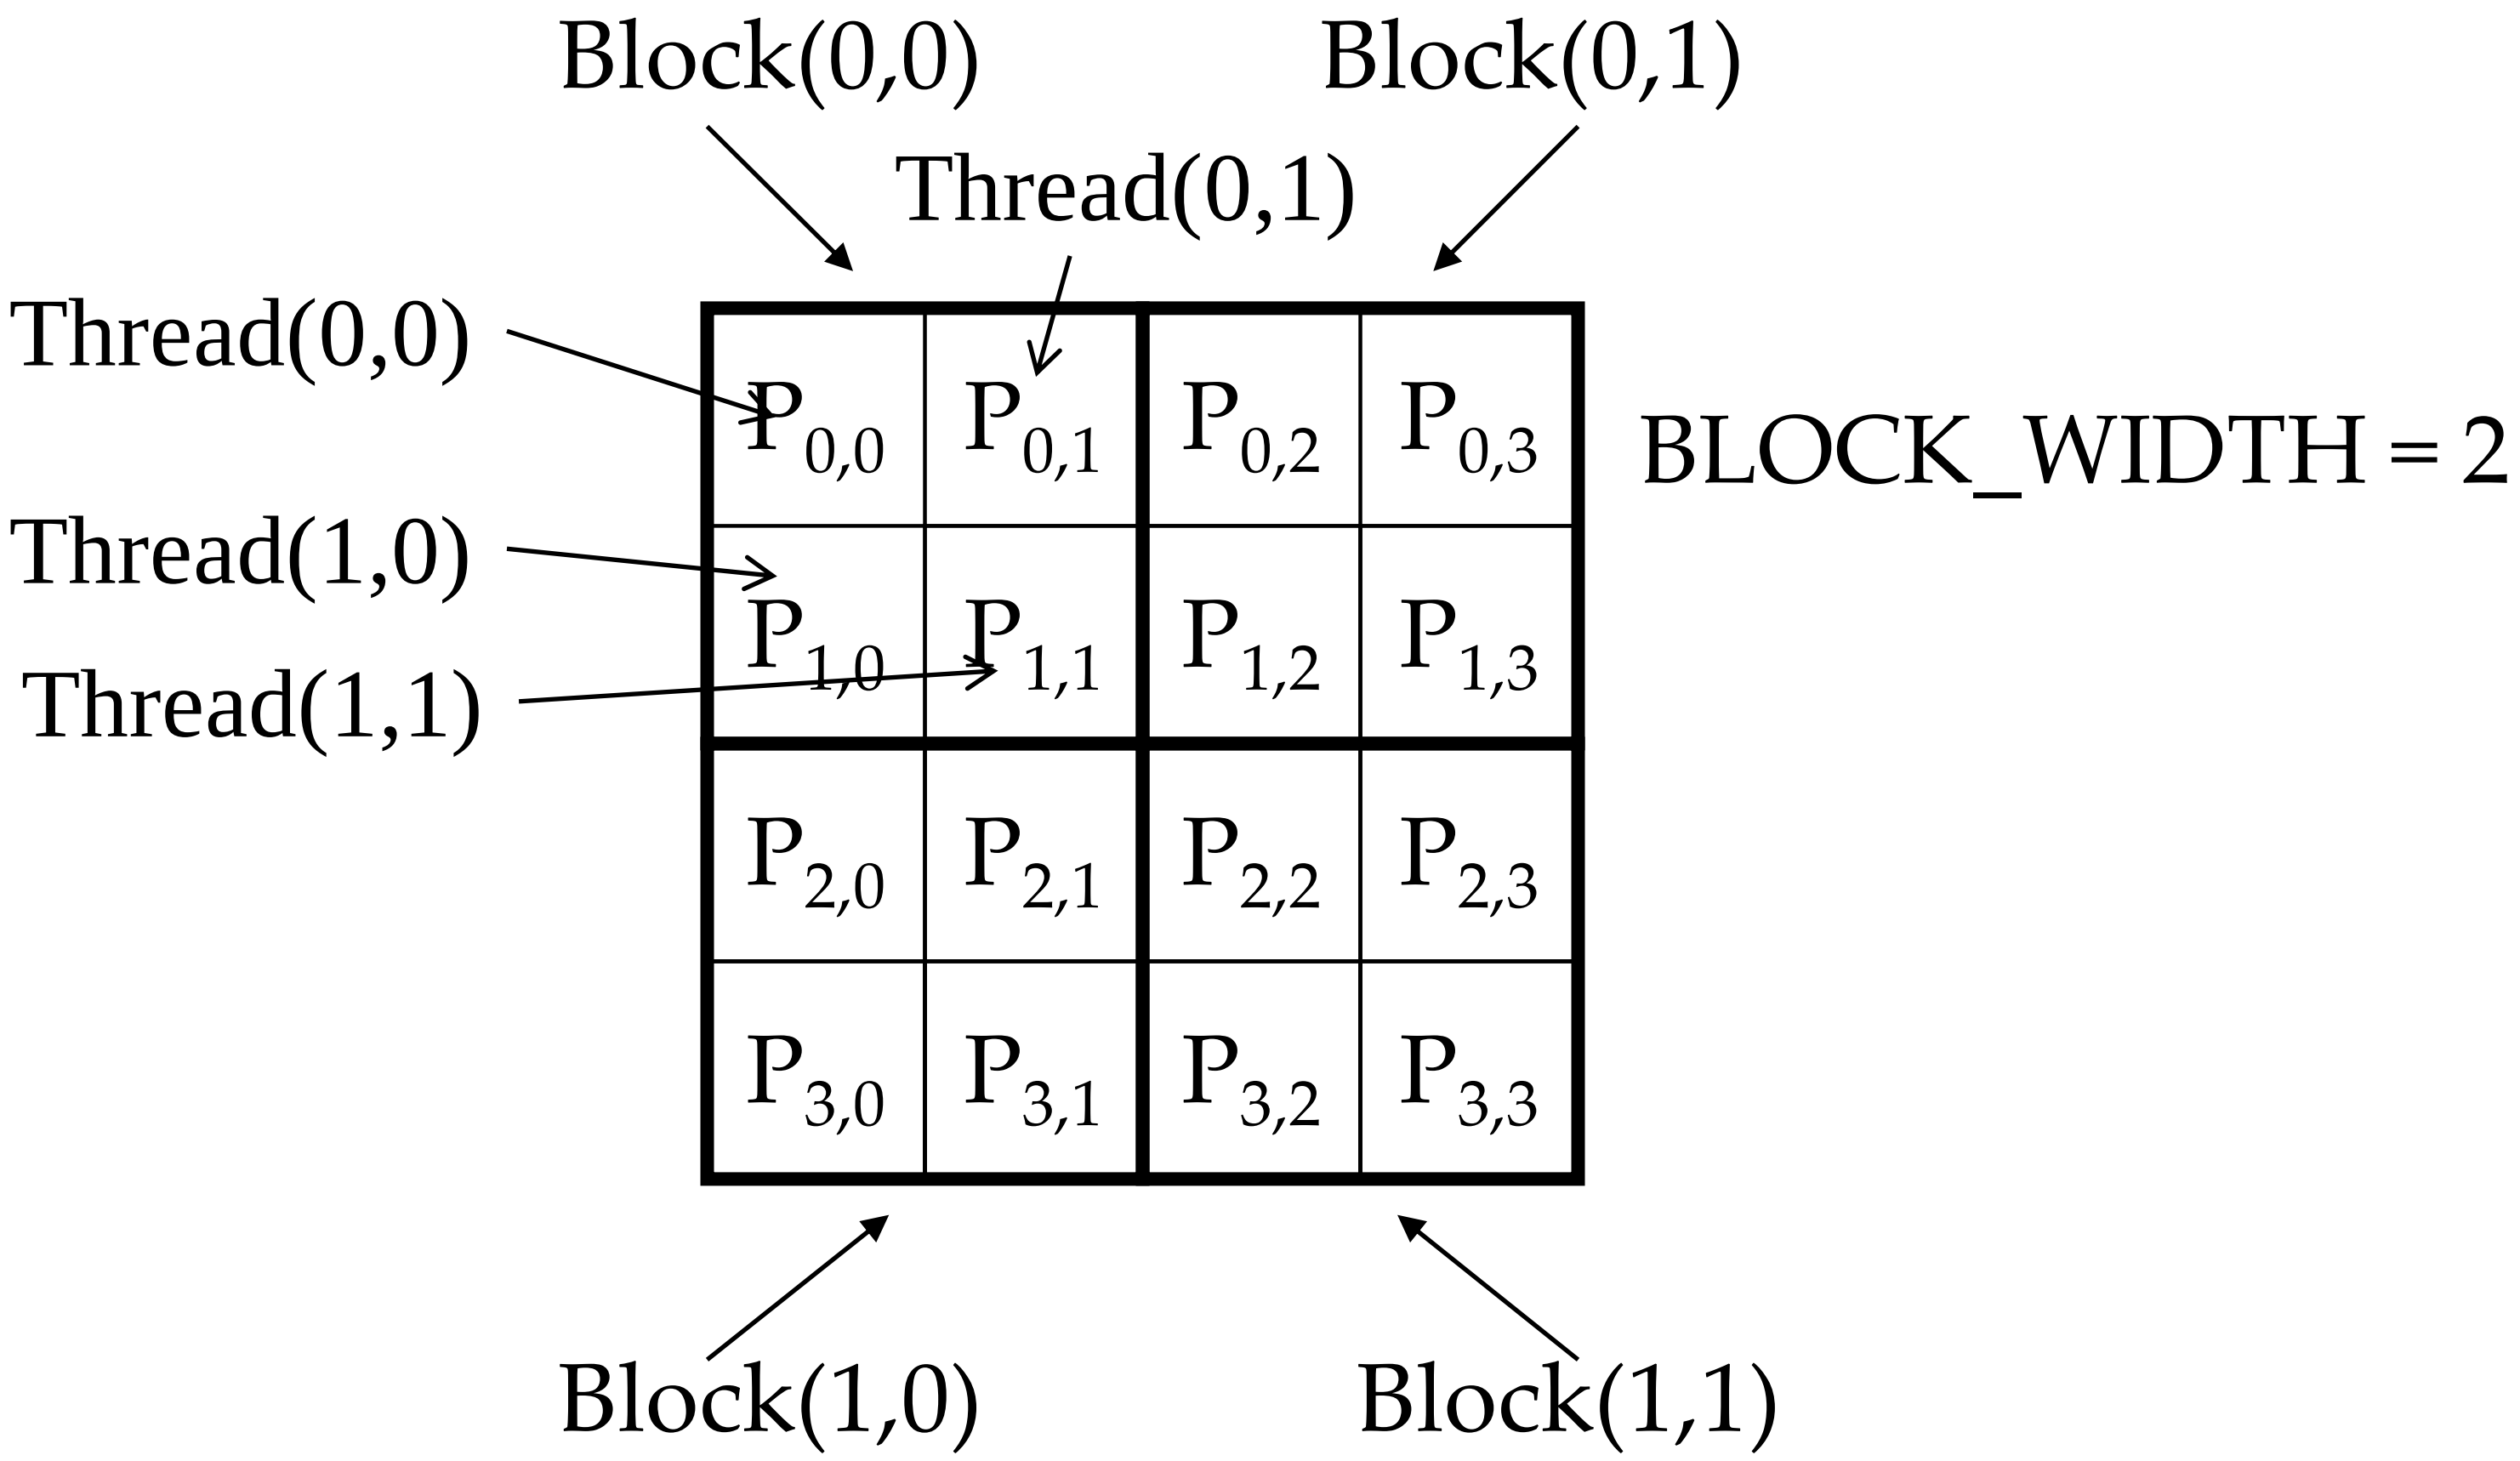

Calculation of $P_{0,0}$ and $P_{0,1}$

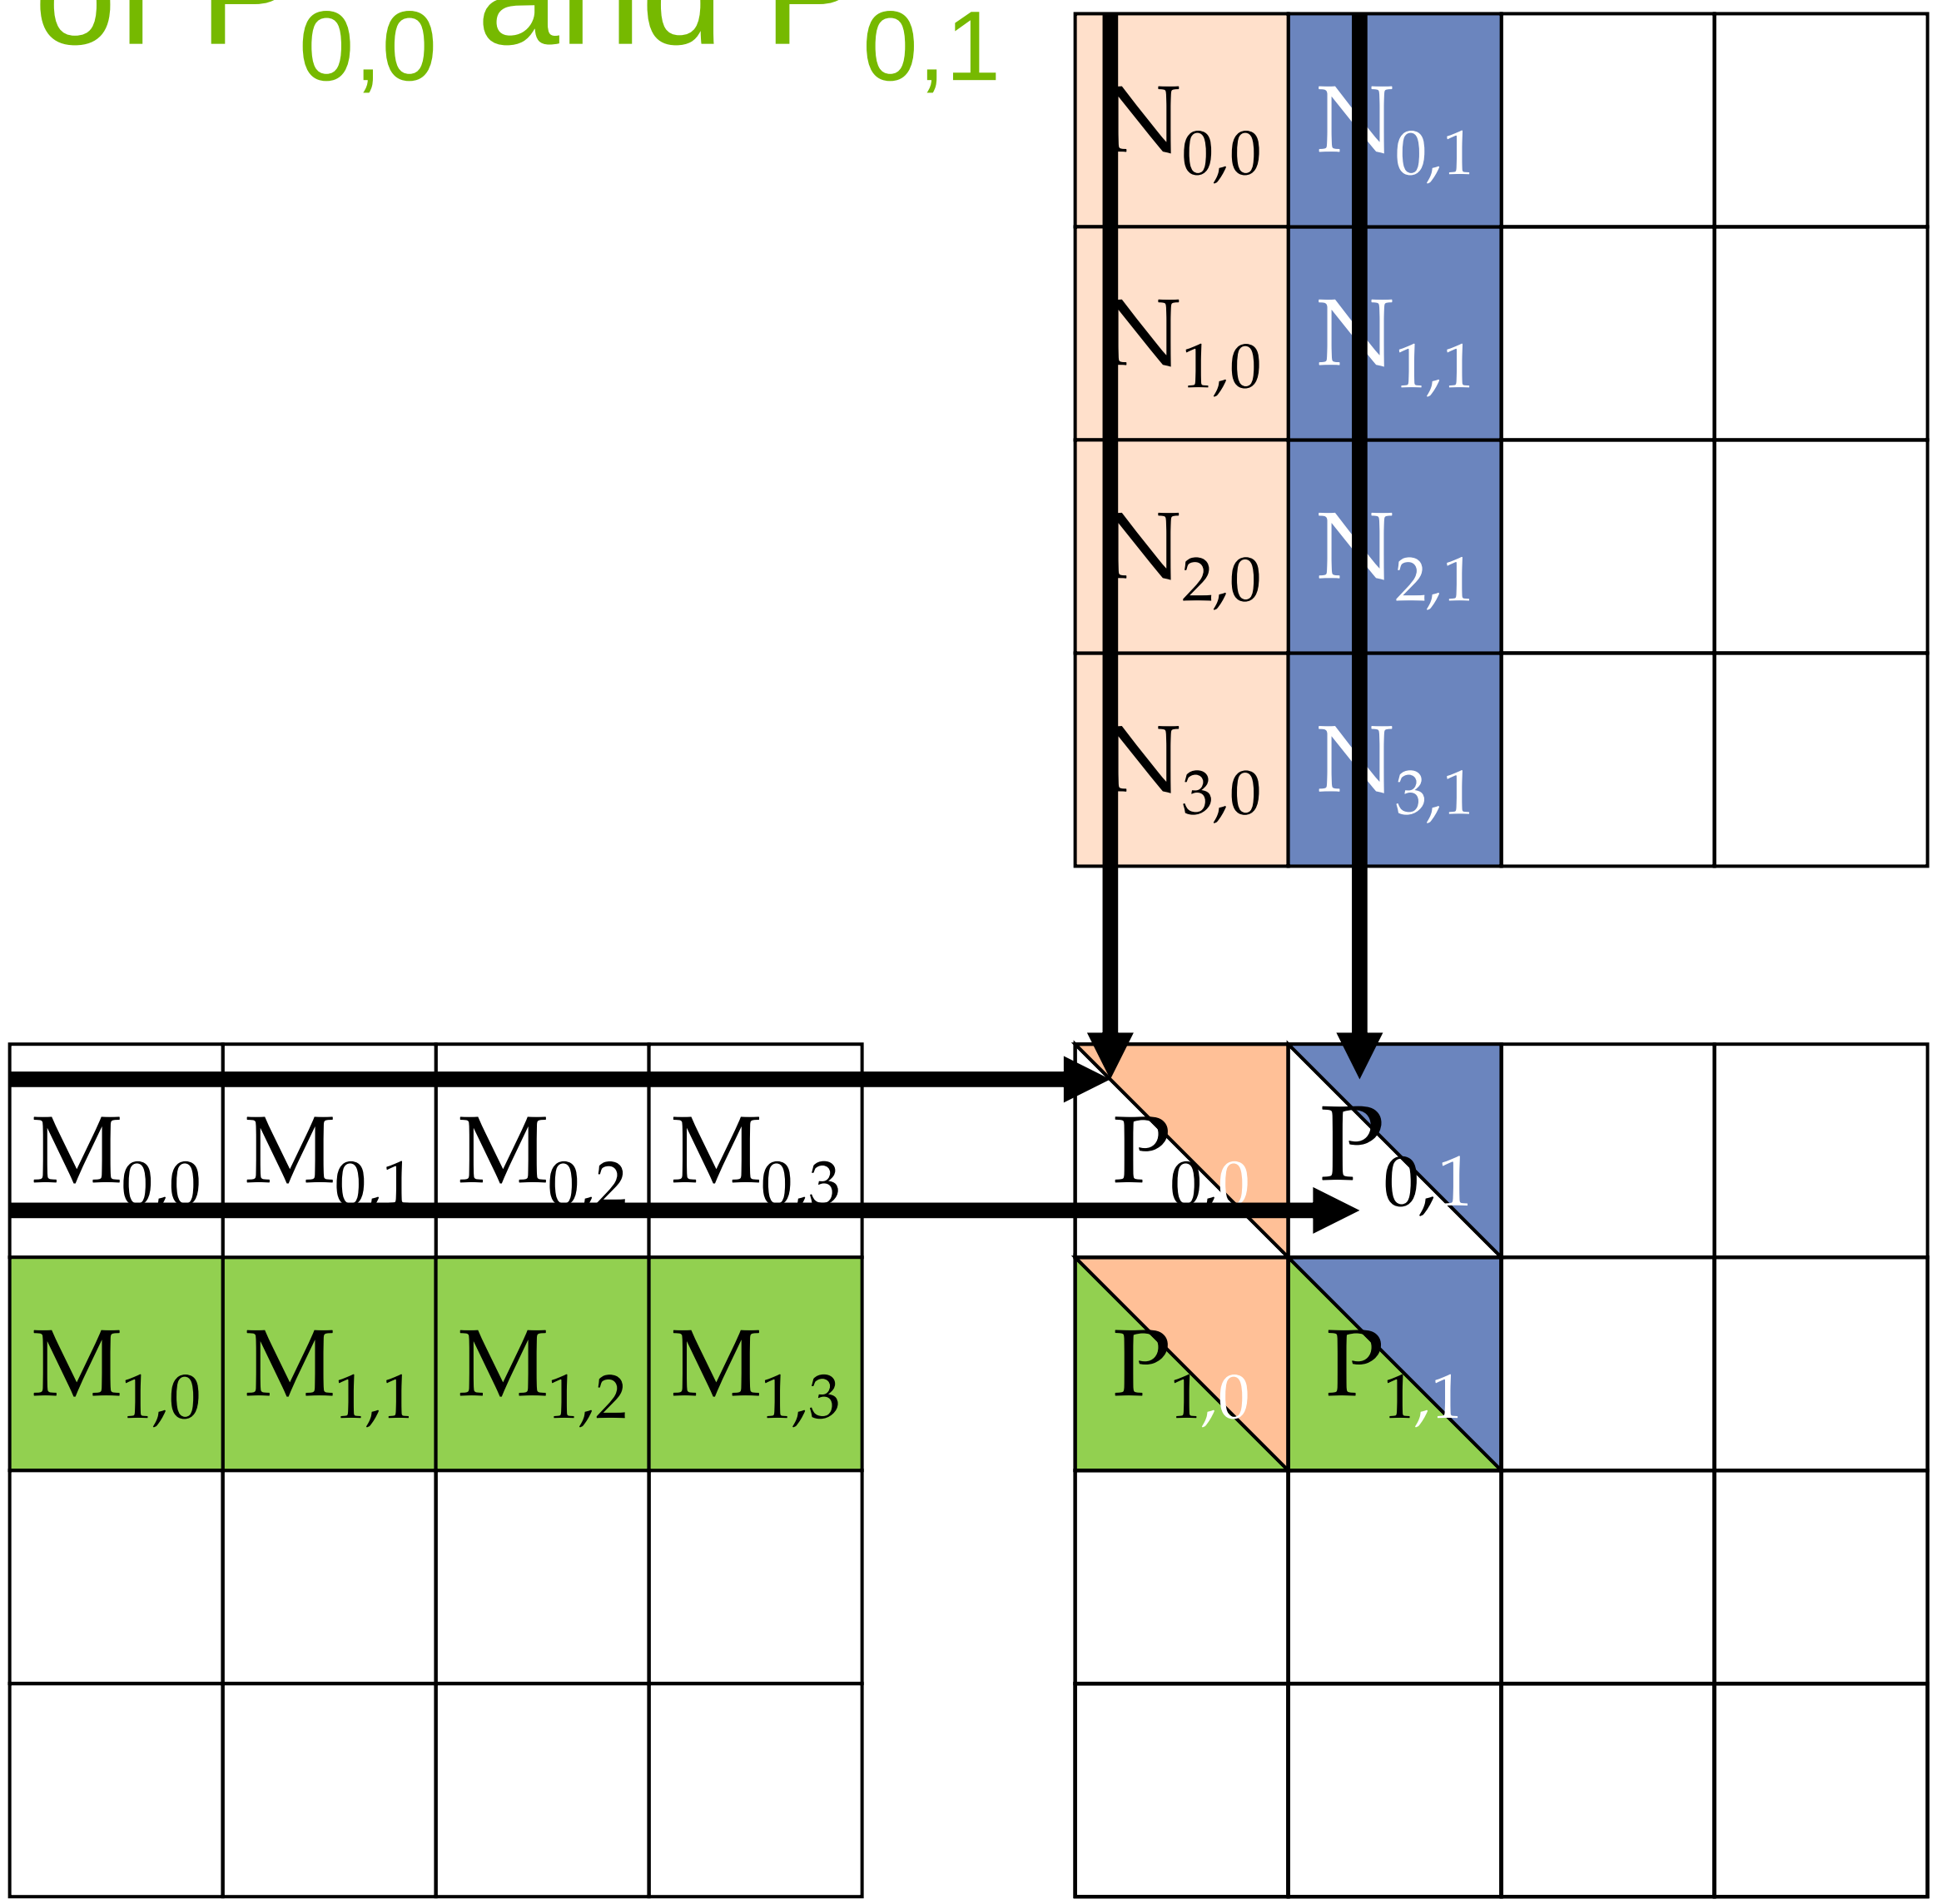

Memory and Registers in the Von-Neumann Model

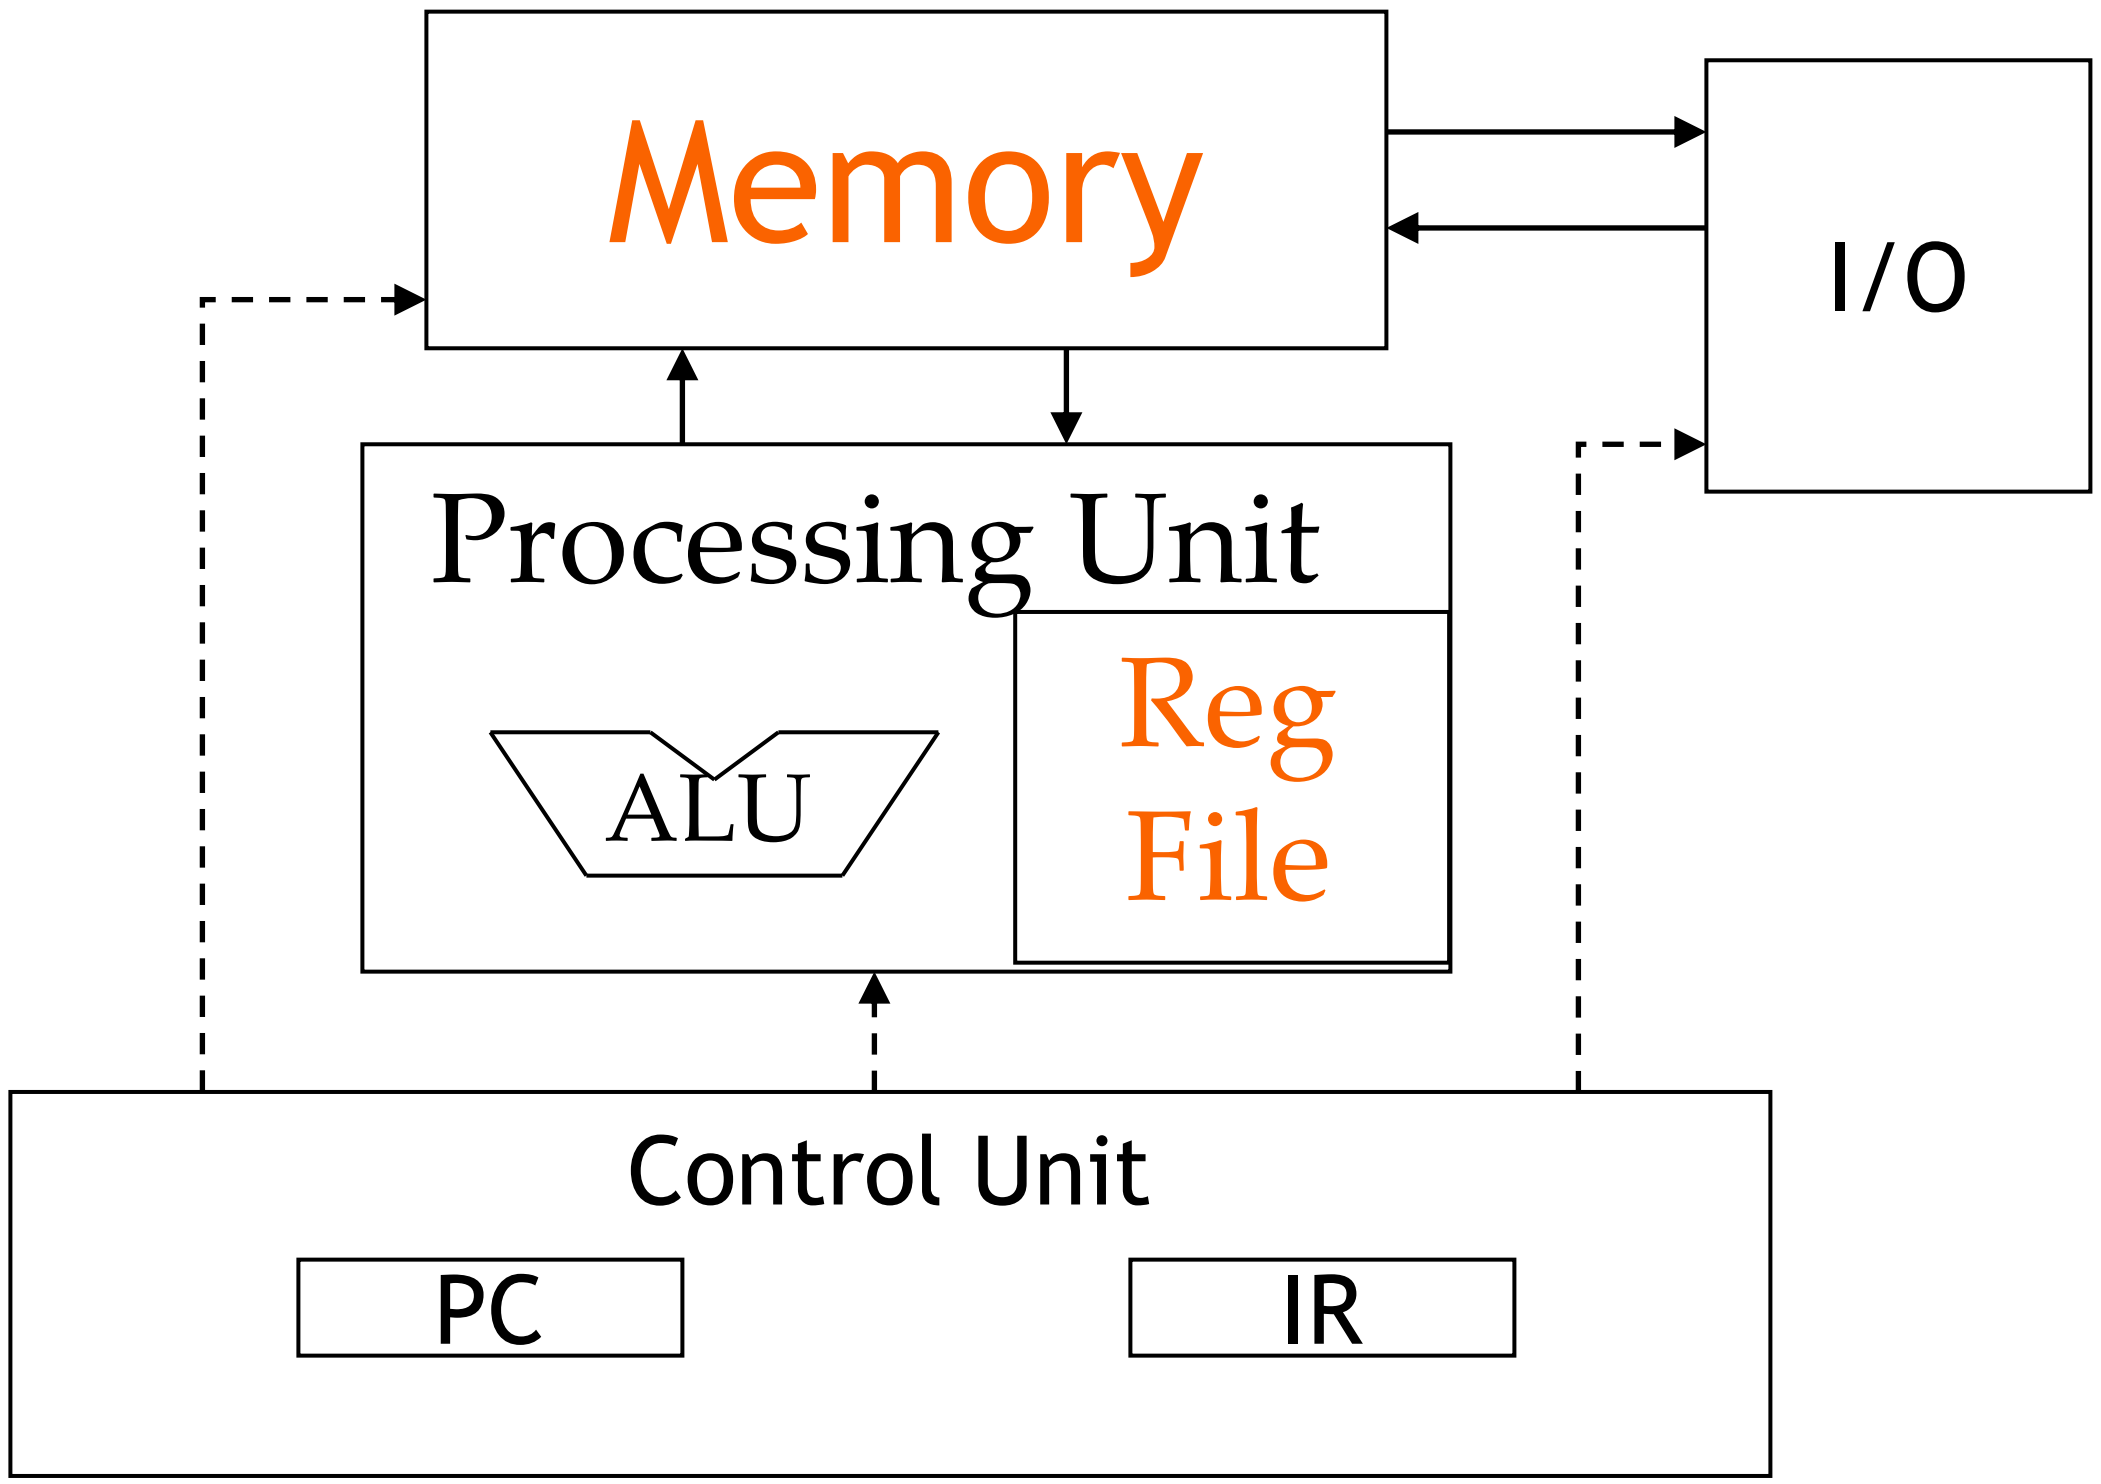

Programmer View of CUDA Memories

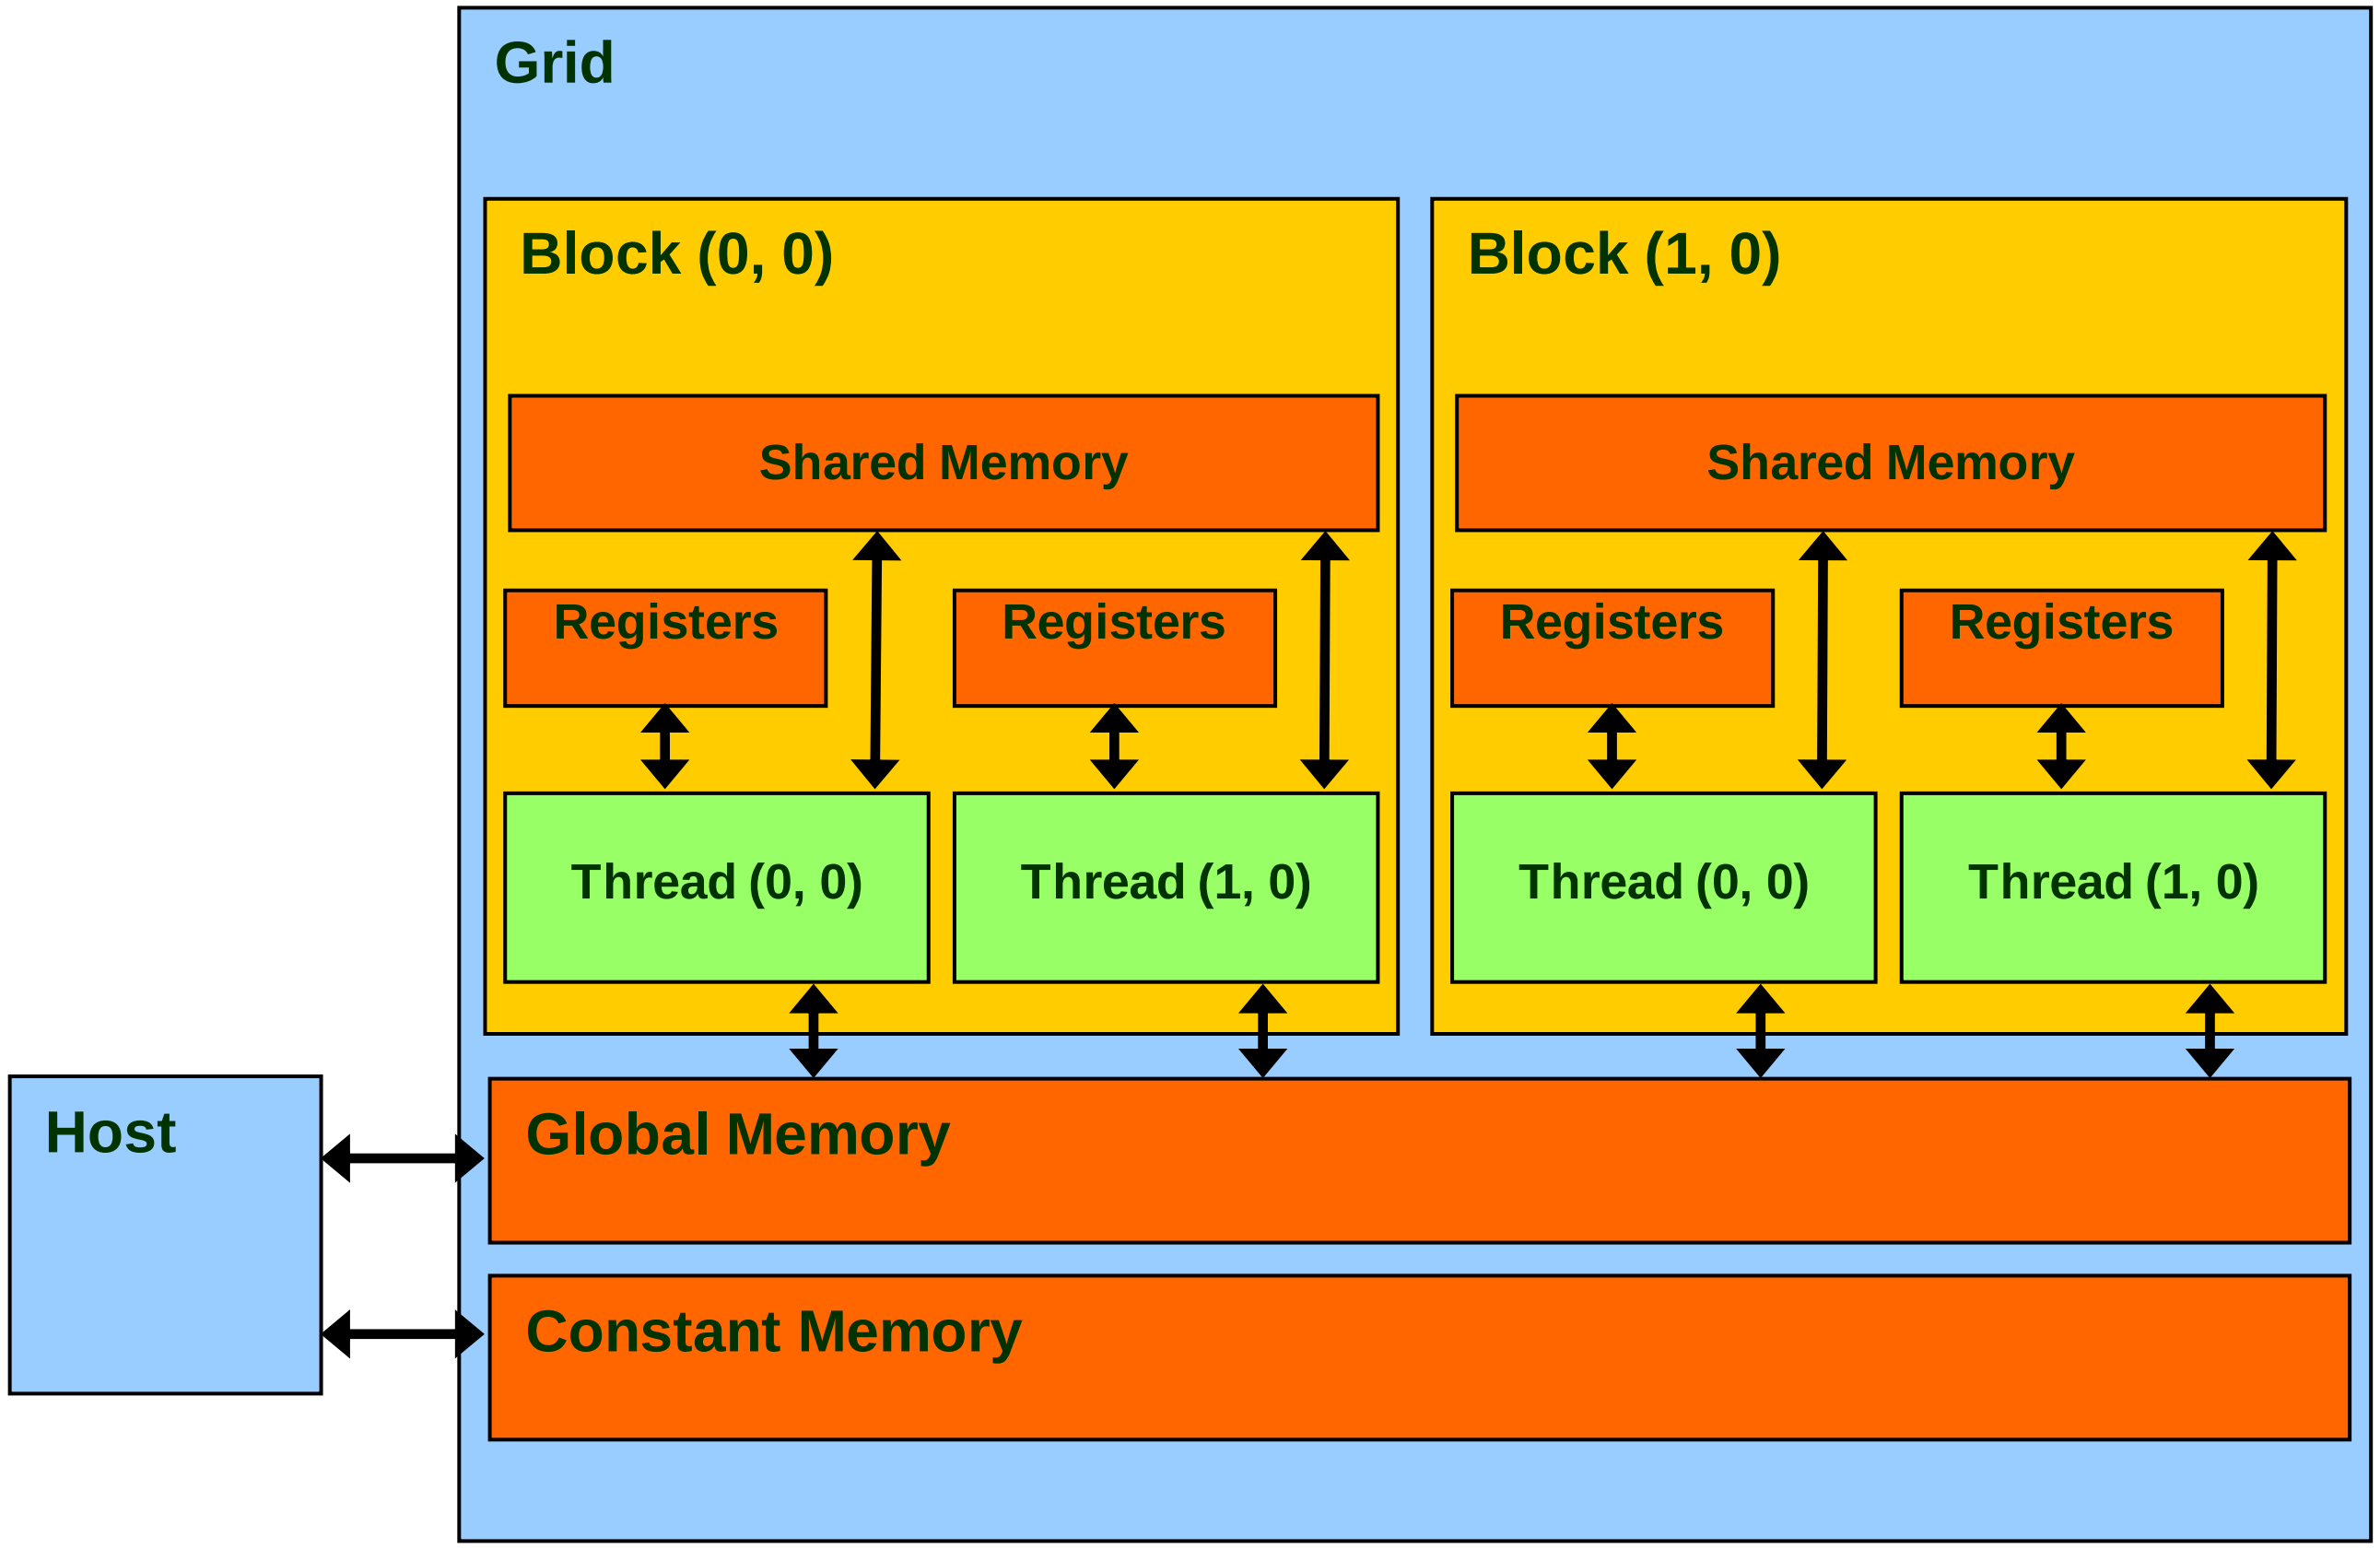

Declaring CUDA Variables

Variable declaration	Memory	Scope	Lifetime
int LocalVar;	register	thread	thread
__device__ __shared__ int SharedVar;	shared	block	block
__device__ int GlobalVar;	global	grid	application
__device__ __constant__ int ConstantVar;	constant	grid	application

- **`__device__`** is optional when used with **`__shared__`**, or **`__constant__`**
- Automatic variables reside in a register
  - Except per-thread arrays that reside in global memory

Example:
Shared Memory Variable Declaration

```
void blurKernel(unsigned char * in, unsigned char * out, int w, int h)
{
   __shared__ float ds_in[TILE_WIDTH][TILE_WIDTH];

  …
}
```

Where to Declare Variables?

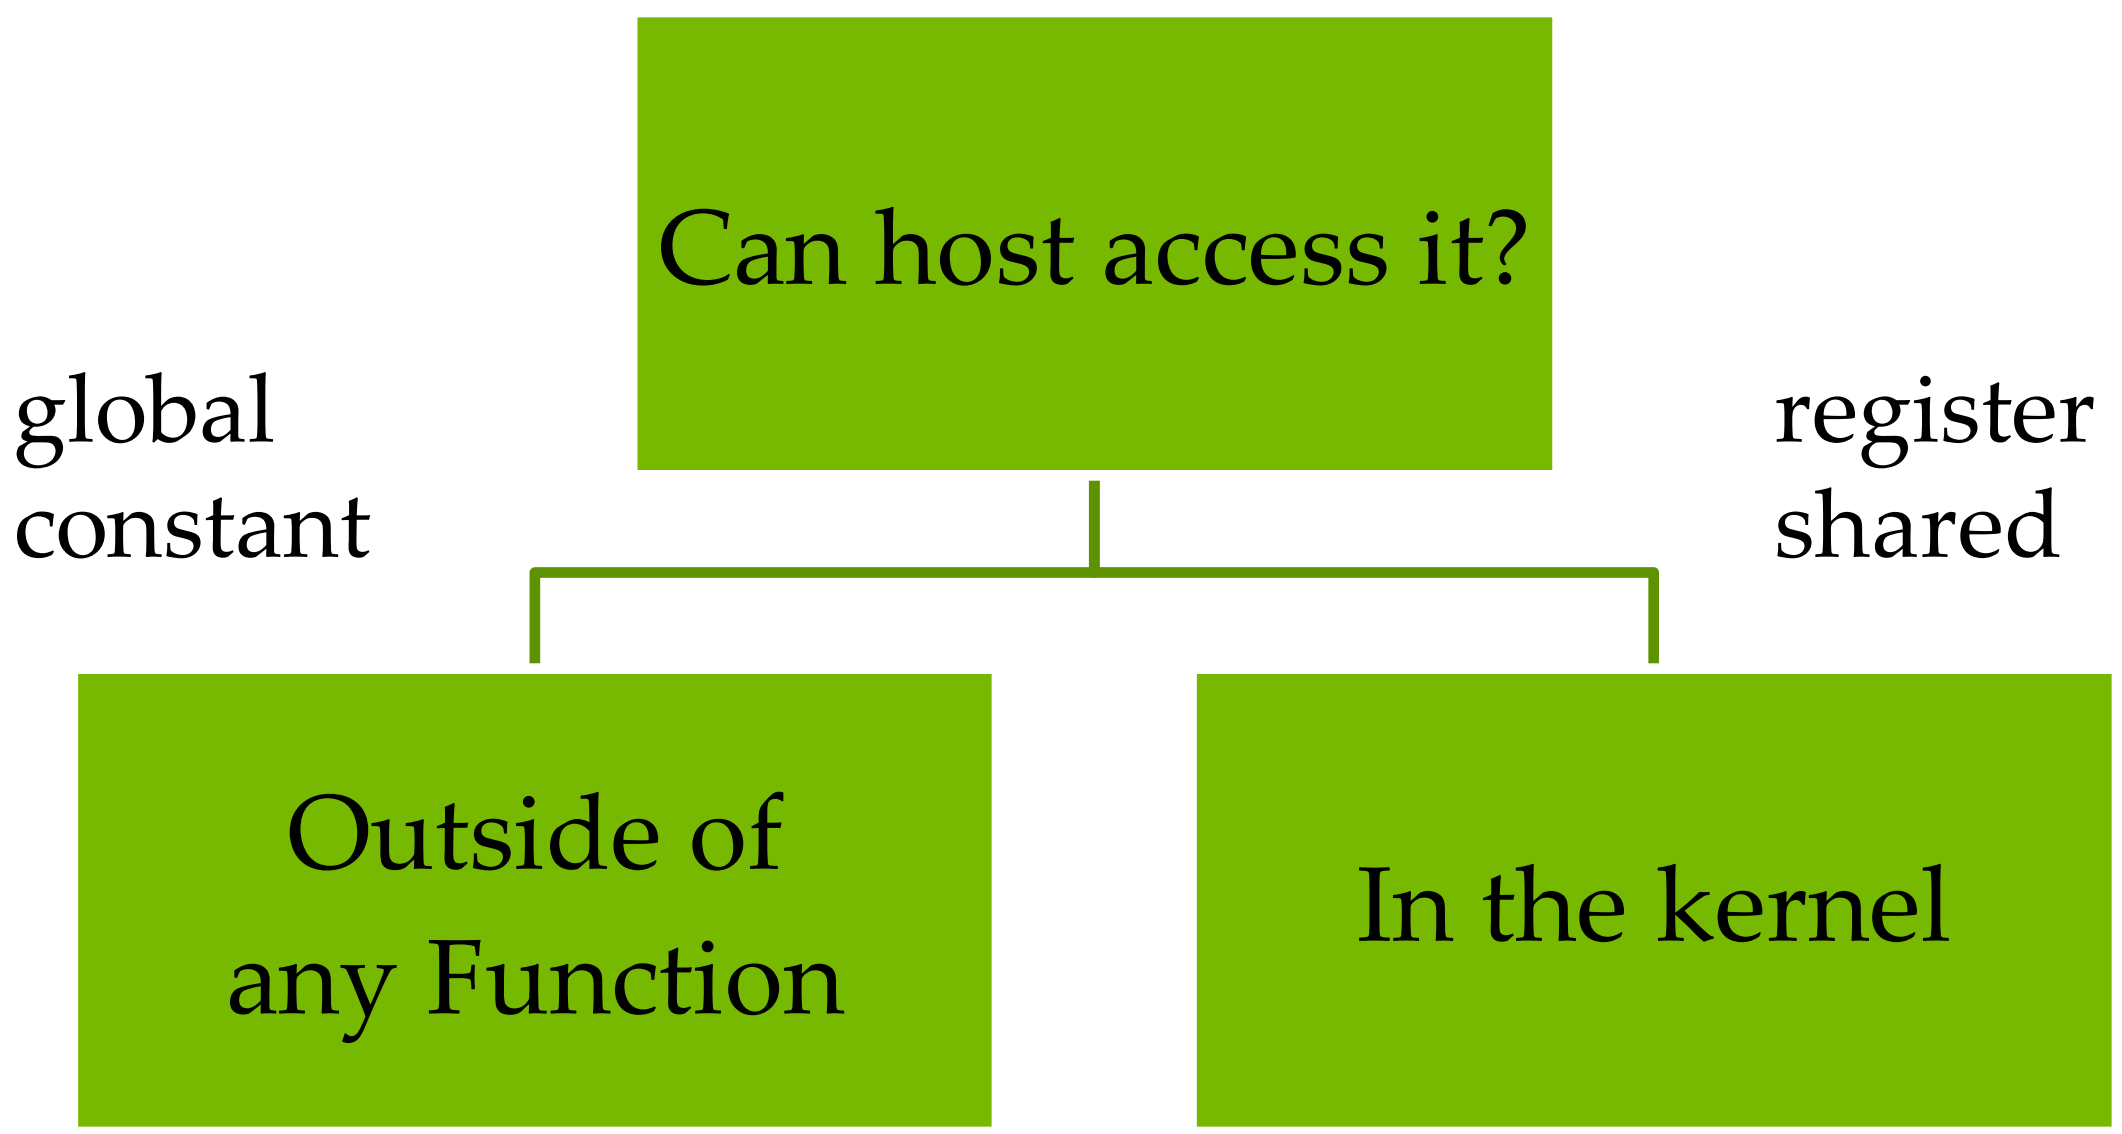

Shared Memory in CUDA

- A special type of memory whose contents are explicitly defined and used in the kernel source code
  - One in each SM
  - Accessed at much higher speed (in both latency and throughput) than global memory
  - Scope of access and sharing - thread blocks
  - Lifetime – thread block, contents will disappear after the corresponding thread finishes terminates execution
  - Accessed by memory load/store instructions
  - A form of scratchpad memory in computer architecture

Hardware View of CUDA Memories

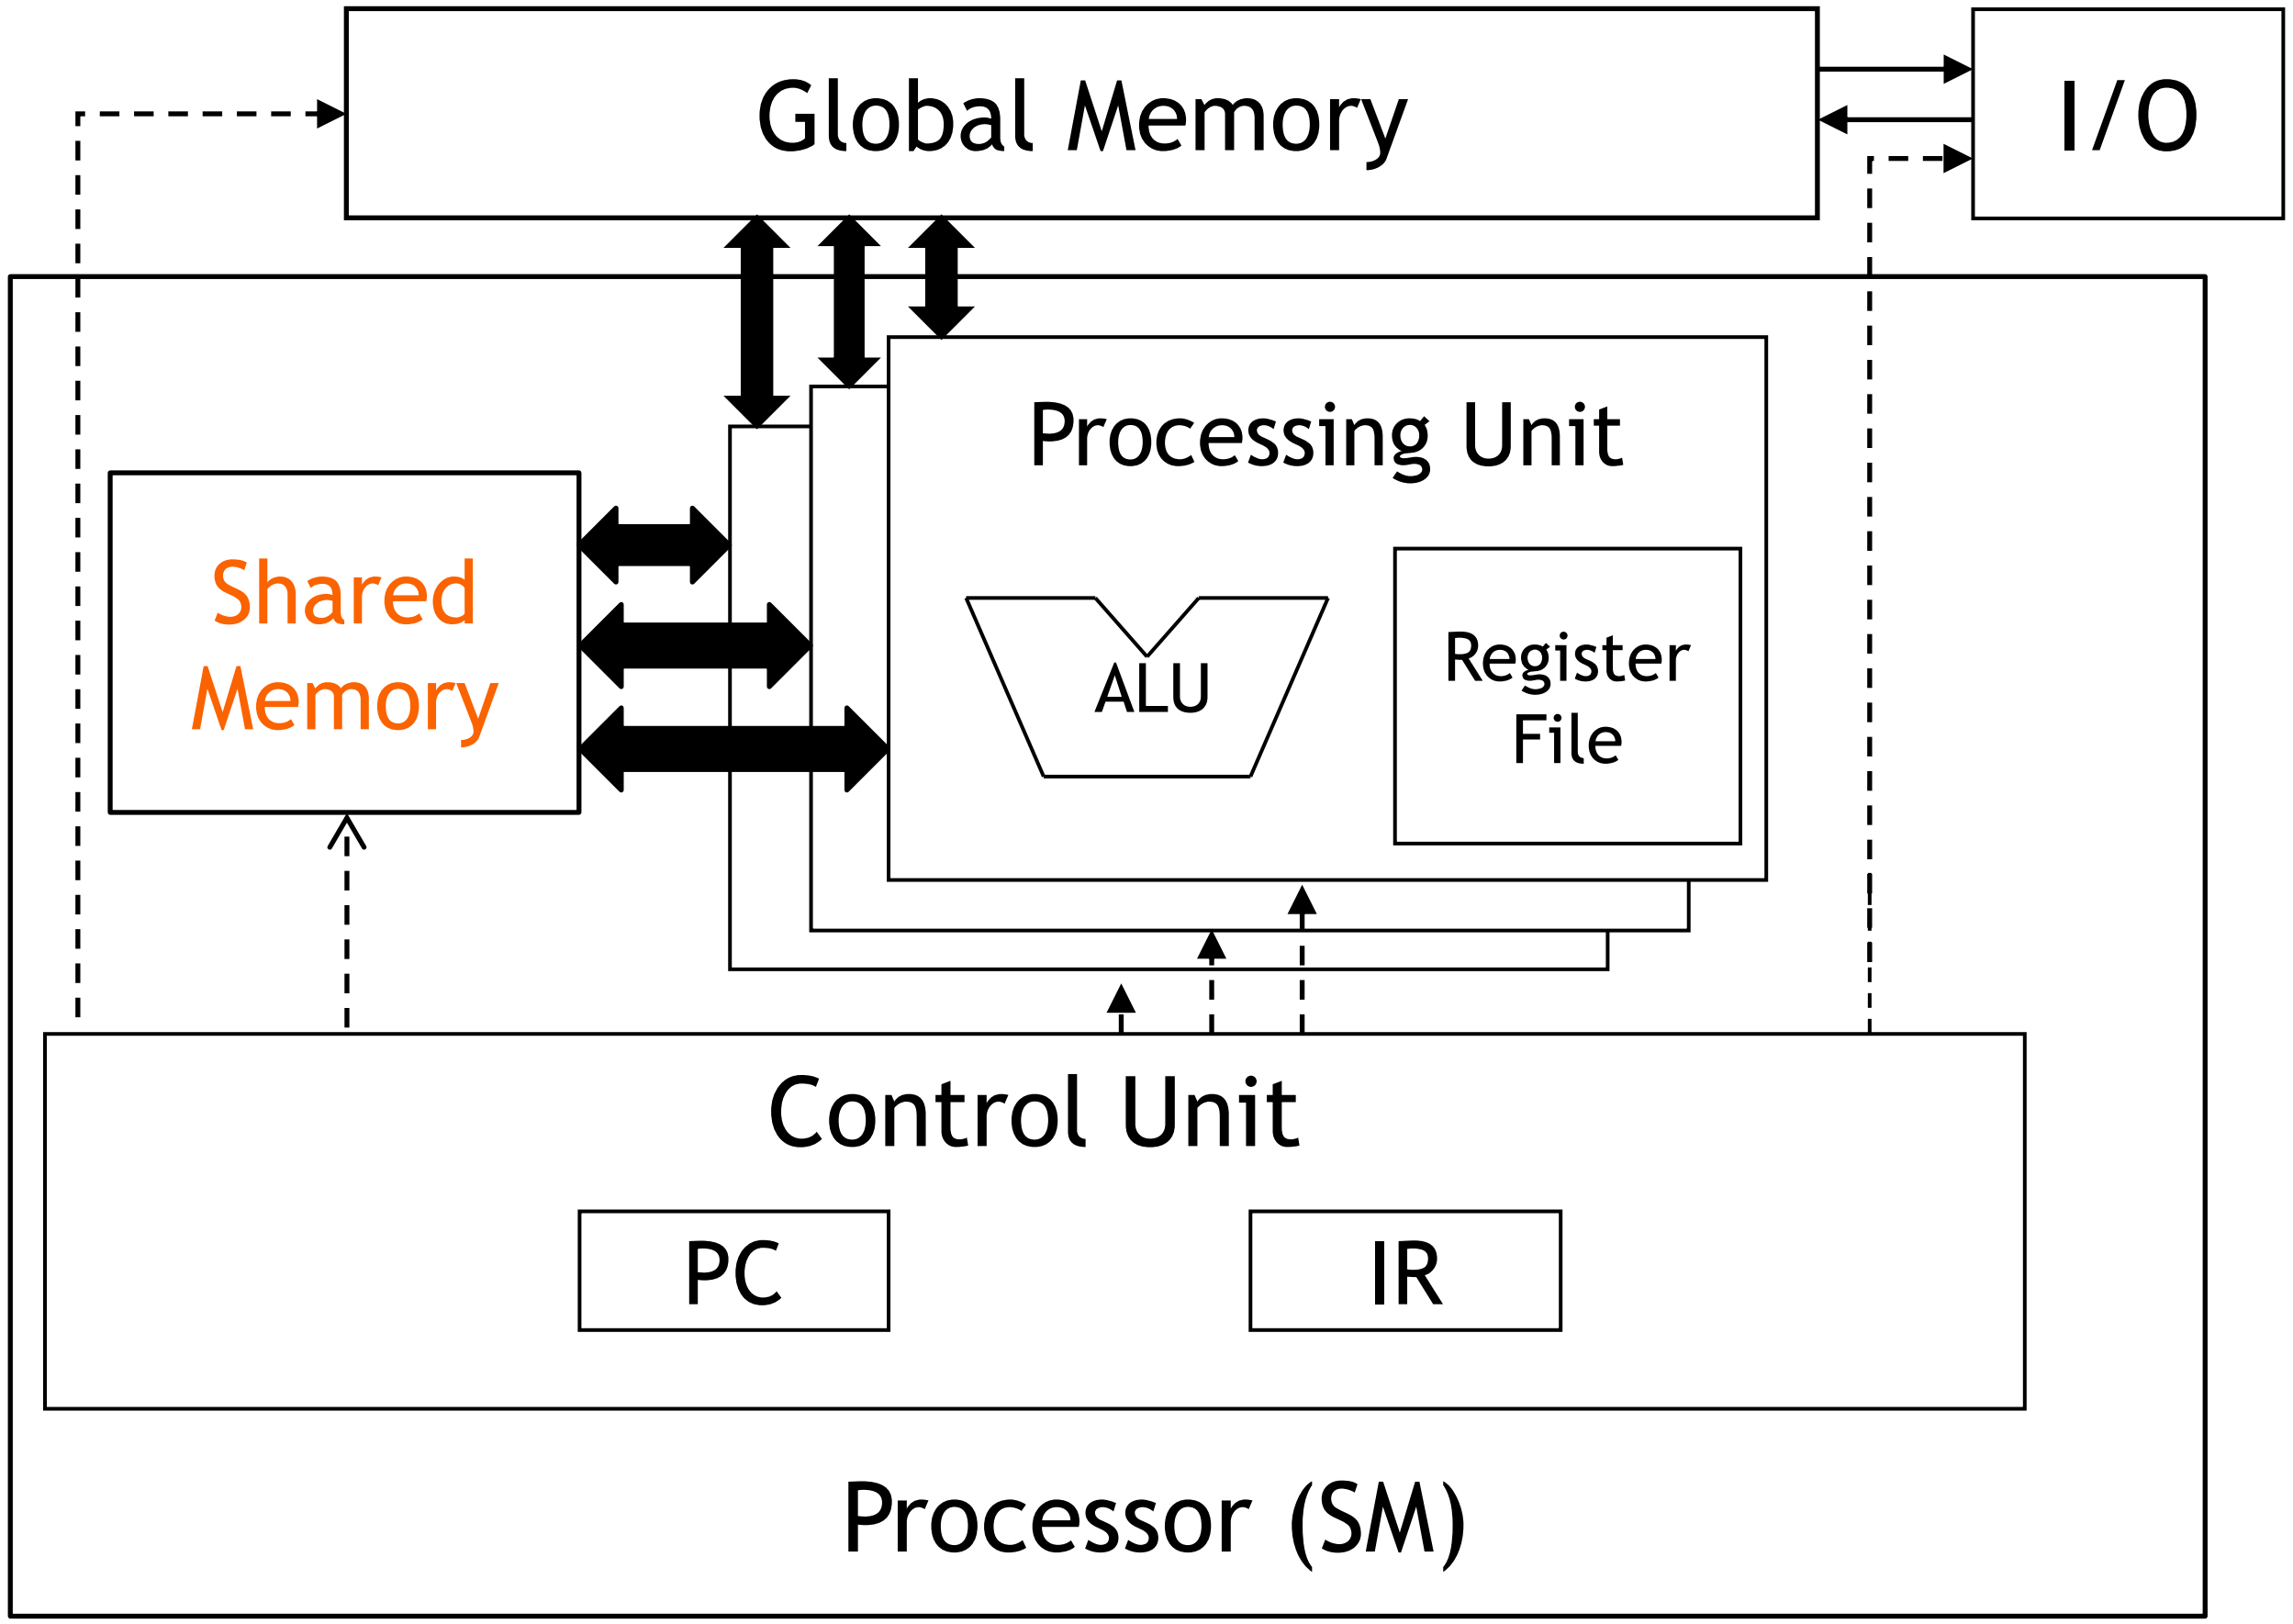

Objective

- To understand the motivation and ideas for tiled parallel algorithms
  - Reducing the limiting effect of memory bandwidth on parallel kernel performance
  - Tiled algorithms and barrier synchronization

Global Memory Access Pattern of the Basic Matrix Multiplication Kernel

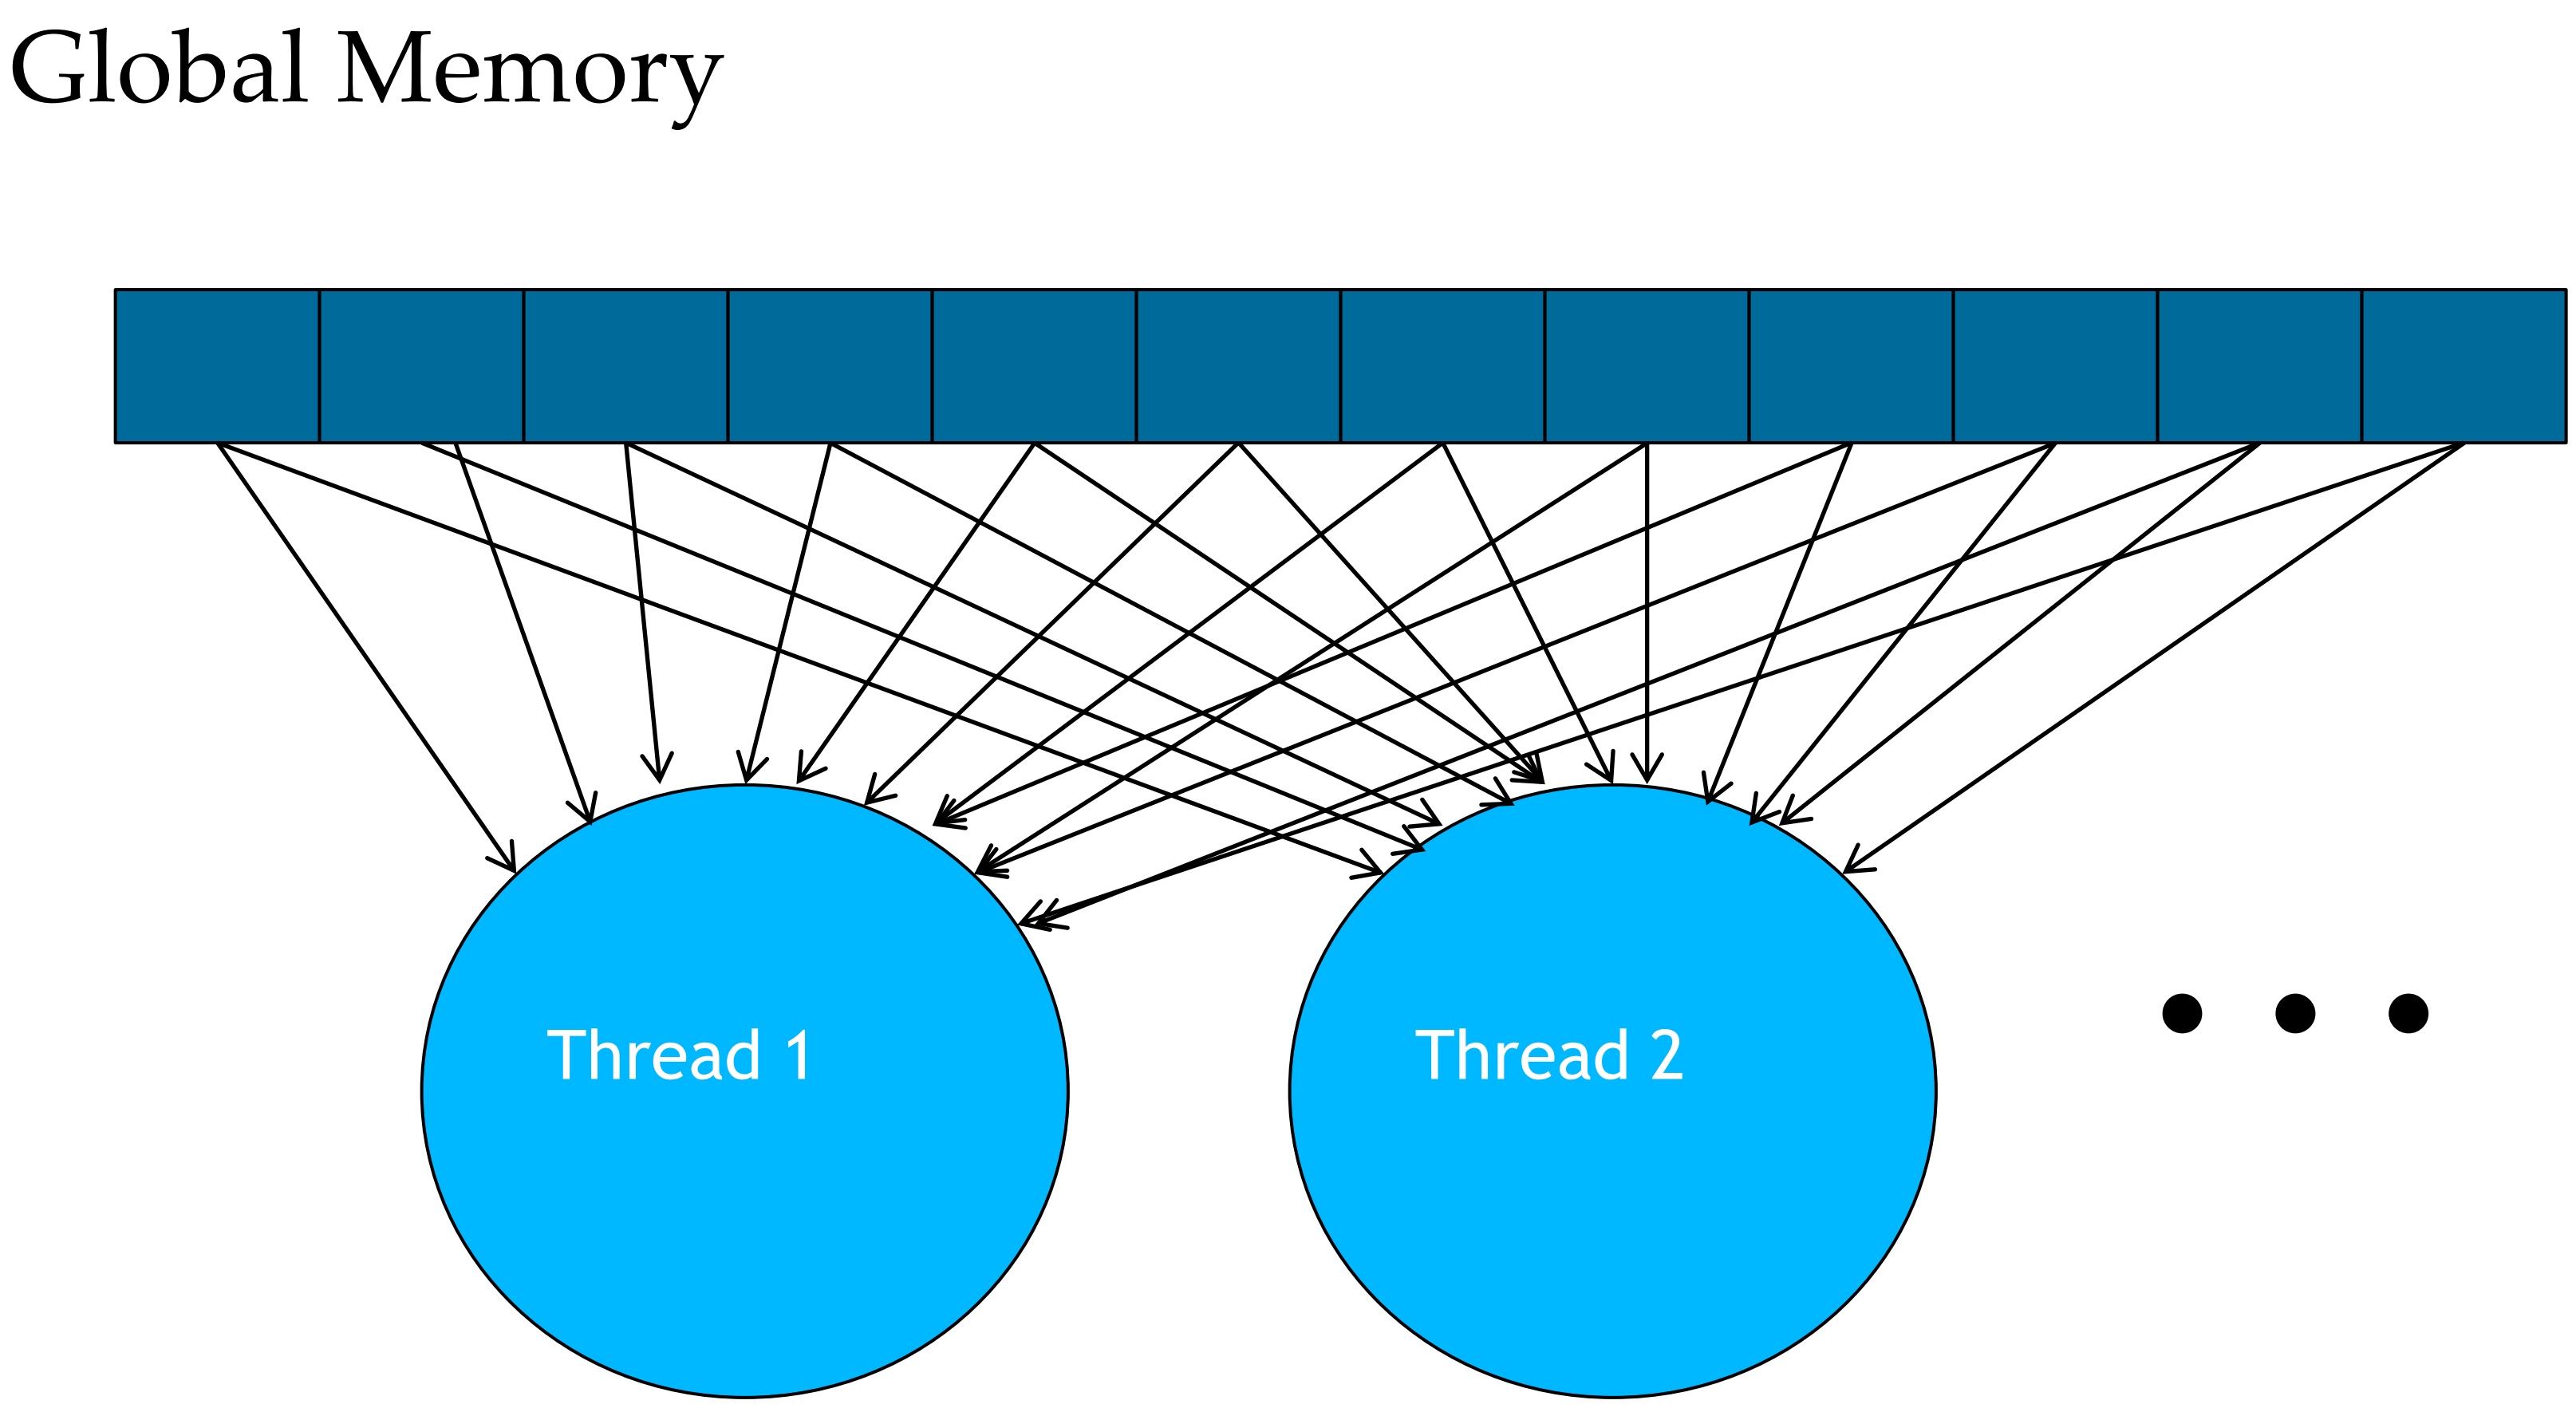

Tiling/Blocking - Basic Idea

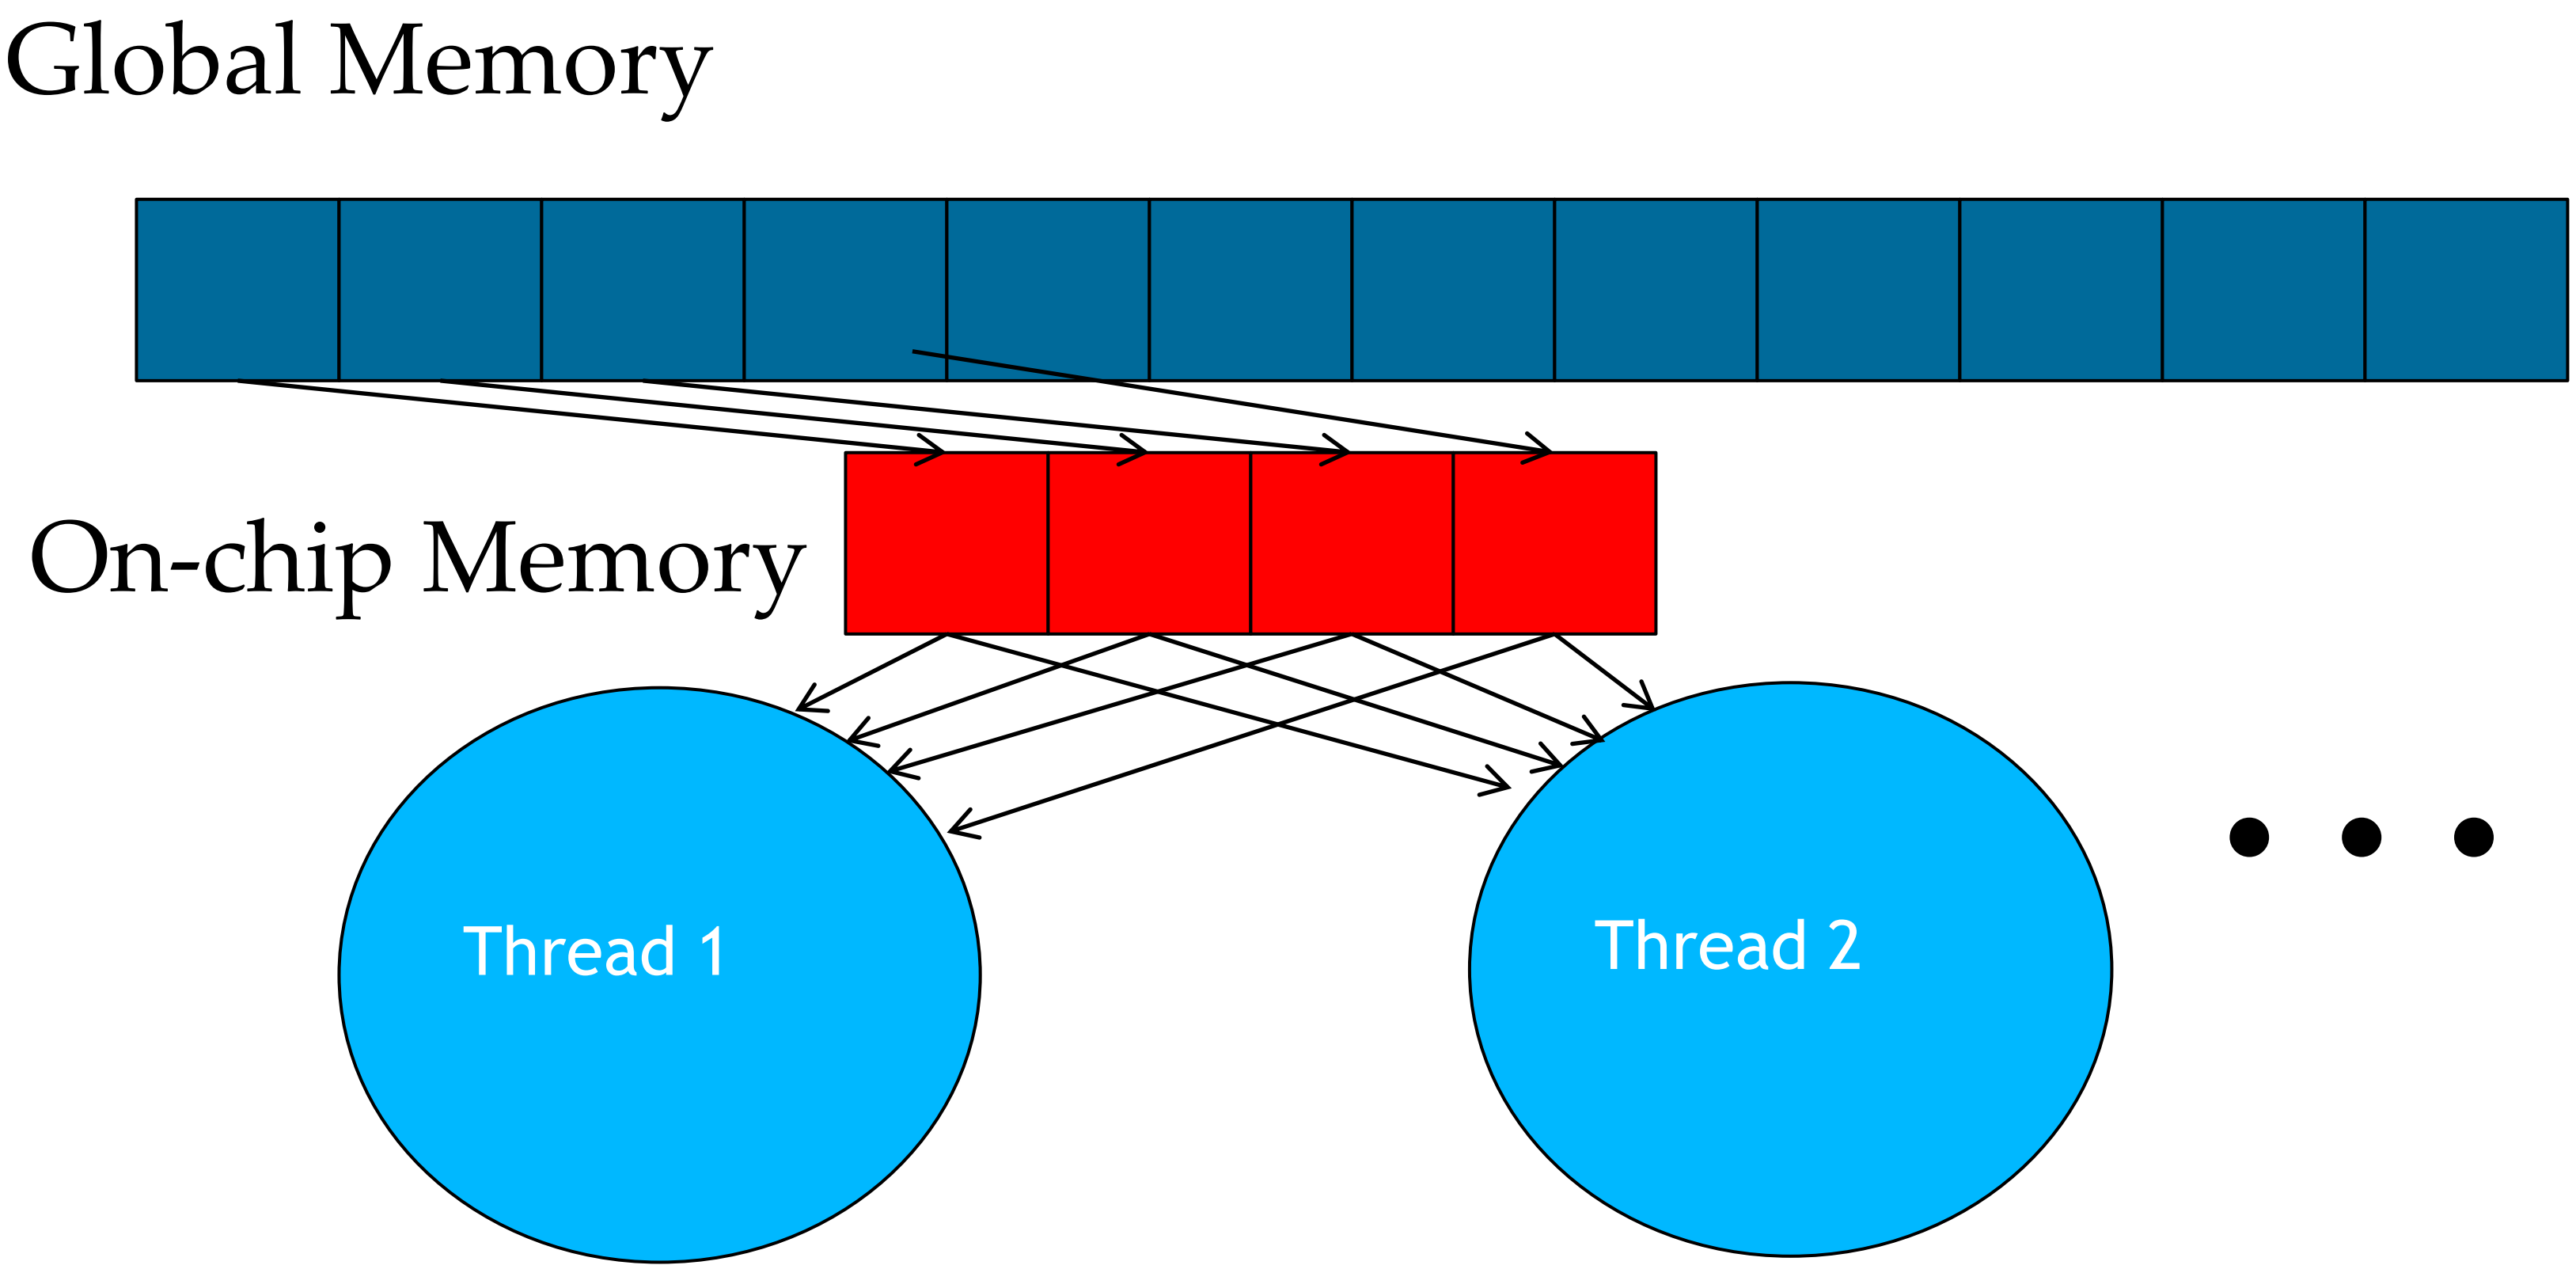

Divide the global memory content into tiles

Focus the computation of threads on one or a small number of tiles at each point in time

Tiling/Blocking - Basic Idea

Global Memory

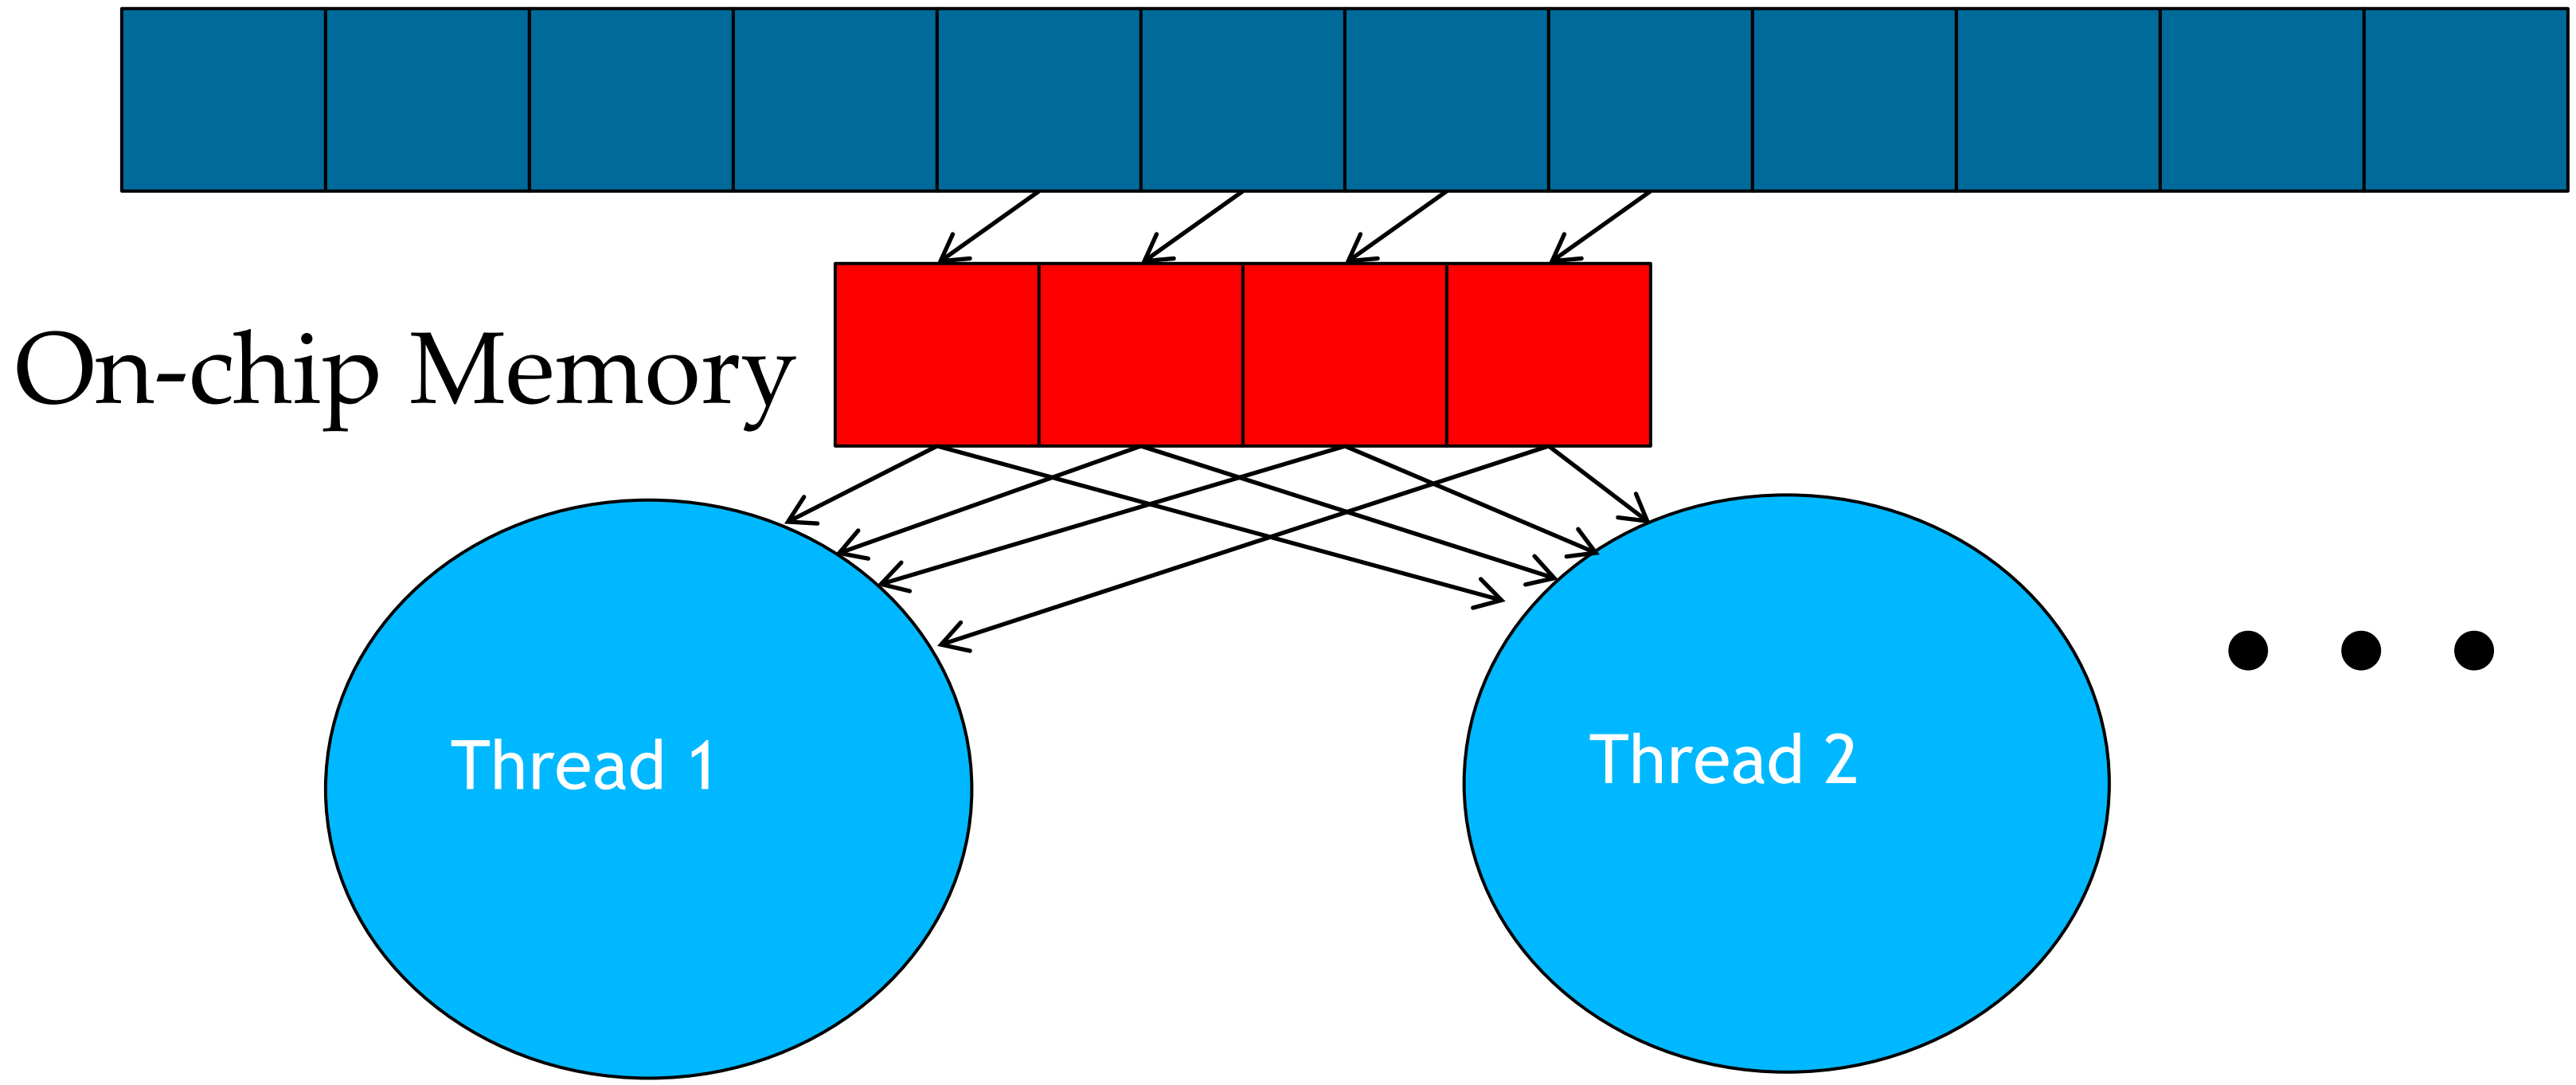

Basic Concept of Tiling

- In a congested traffic system, significant reduction of vehicles can greatly improve the delay seen by all vehicles
  - Carpooling for commuters
  - Tiling for global memory accesses
    - drivers = threads accessing their memory data operands
    - cars = memory access requests

Some Computations are More Challenging to Tile

- Some carpools may be easier than others
  - Car pool participants need to have similar work schedule
  - Some vehicles may be more suitable for carpooling
- Similar challenges exist in tiling

Carpools need synchronization.

– Good: when people have similar schedule

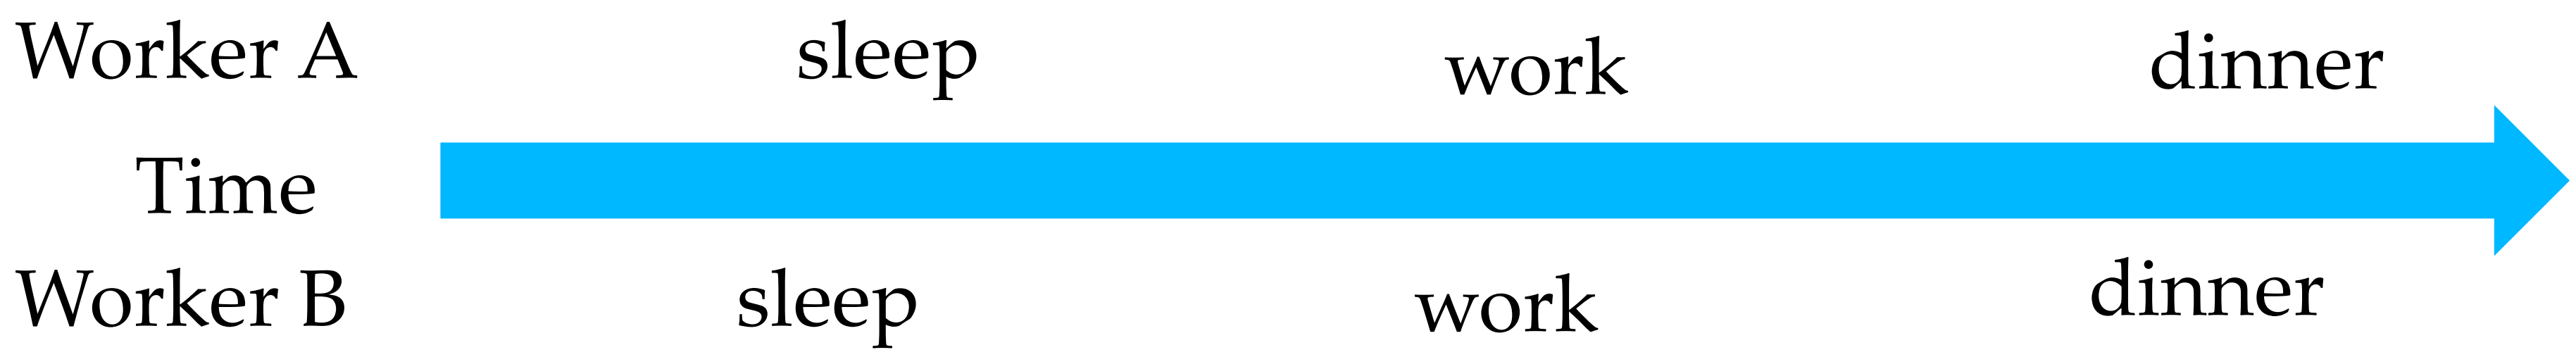

Carpools need synchronization.

– Bad: when people have very different schedule

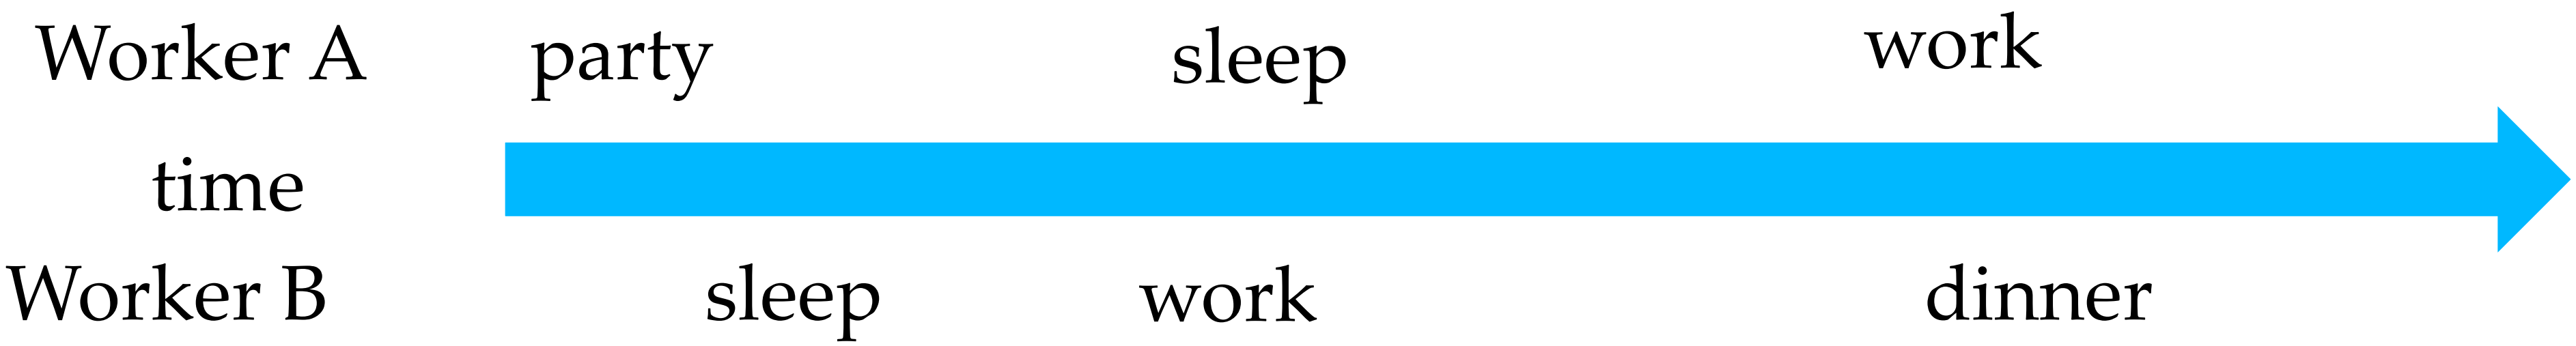

Same with Tiling

– Good: when threads have similar access timing

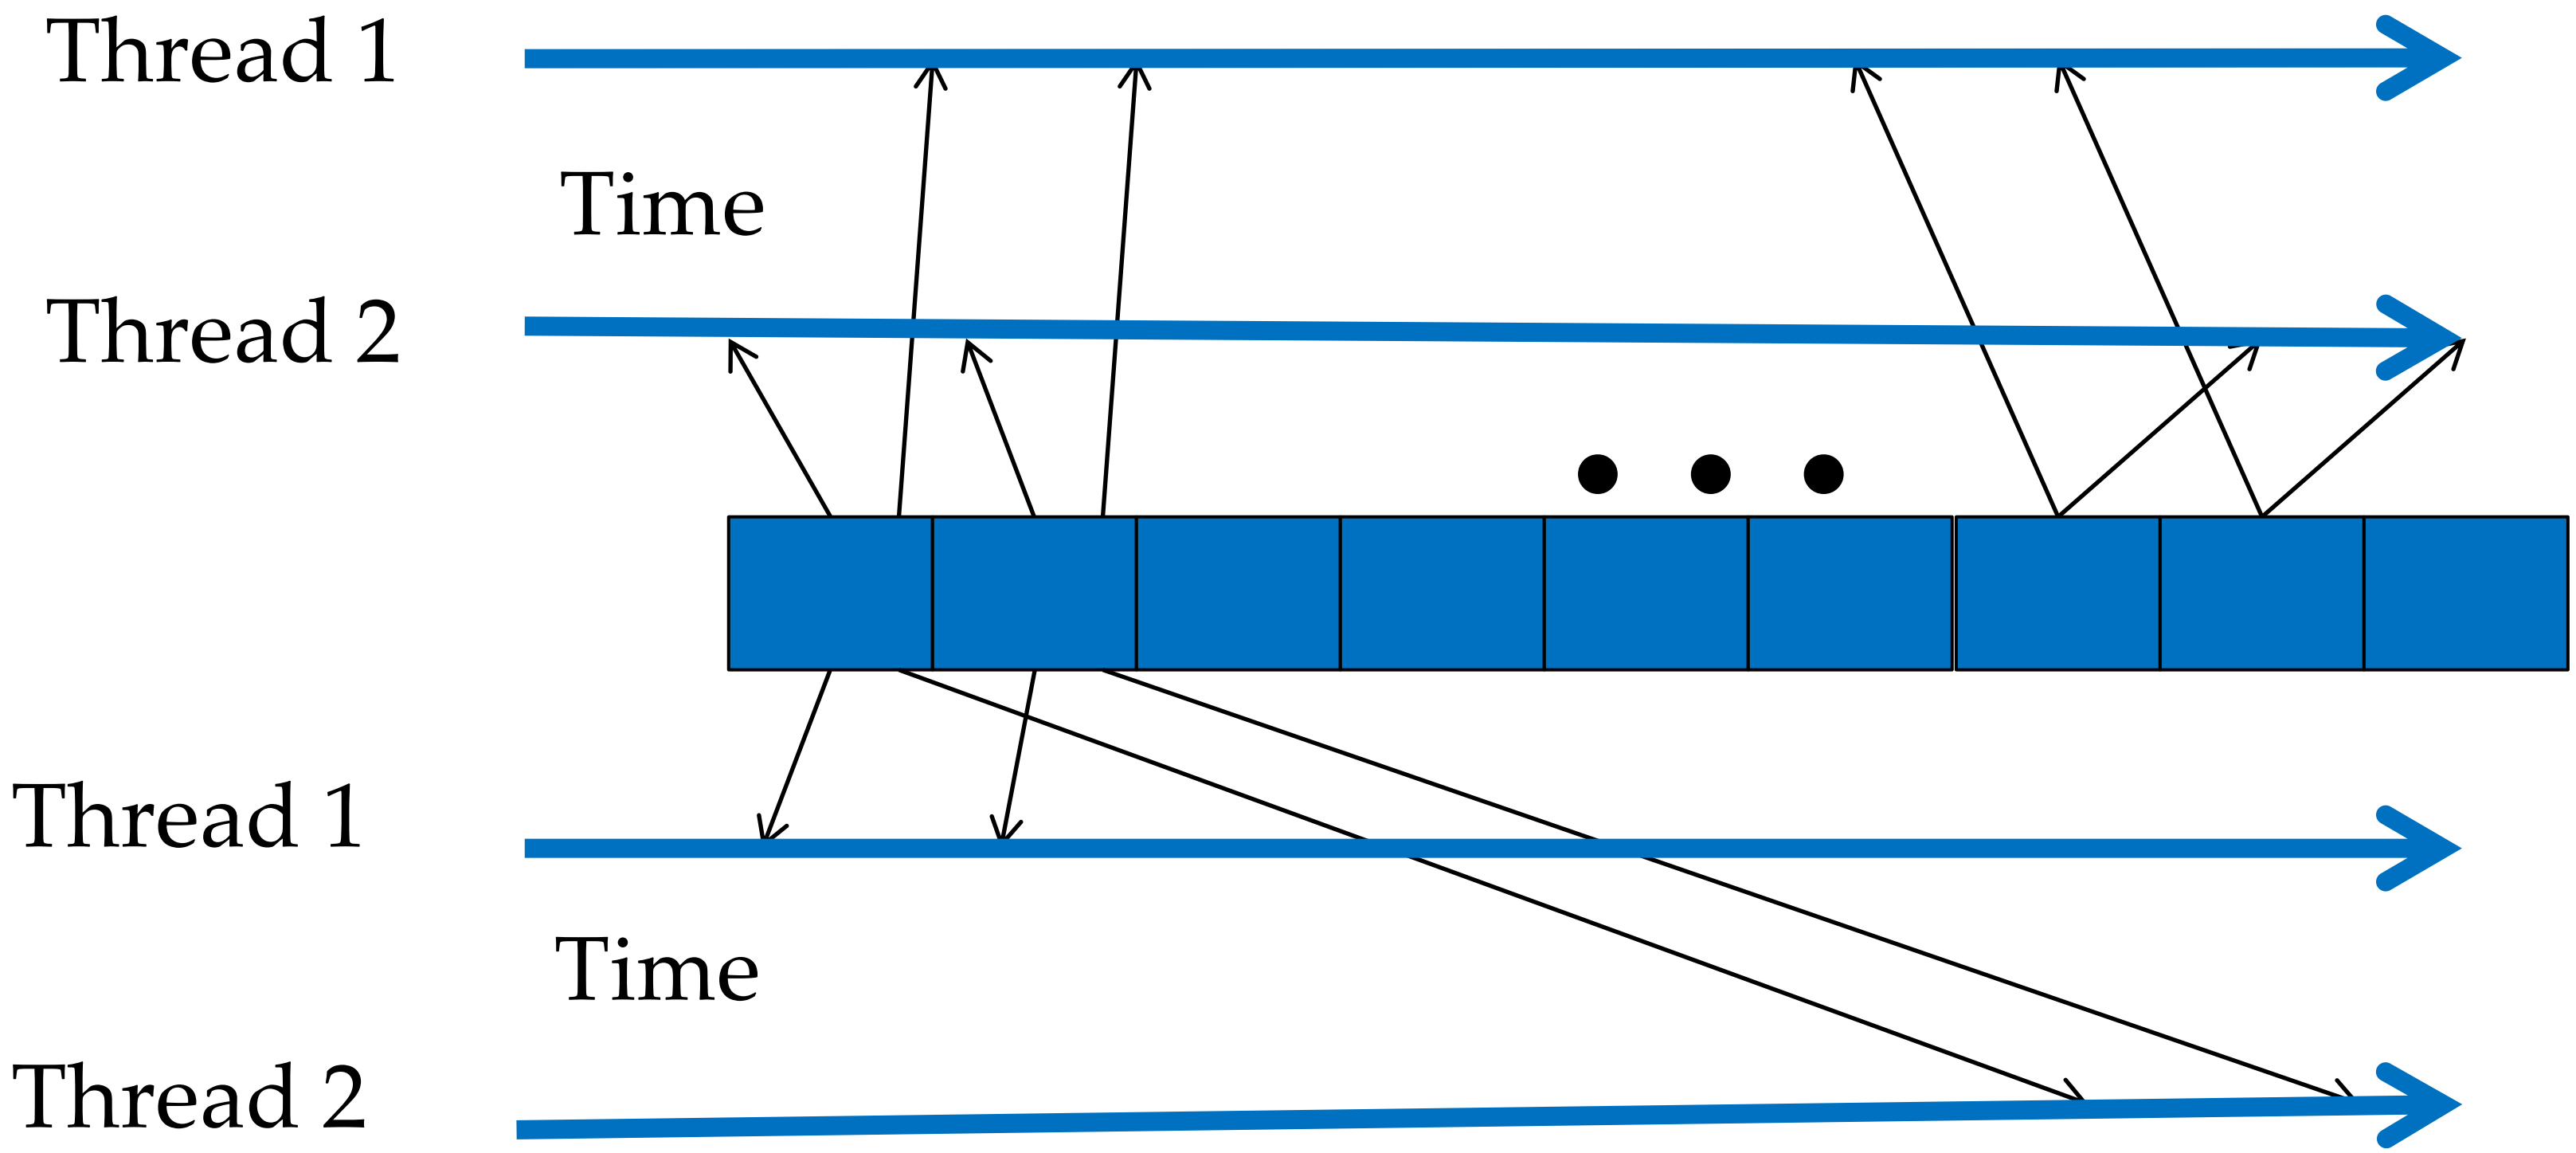

– Bad: when threads have very different timing

Barrier Synchronization for Tiling

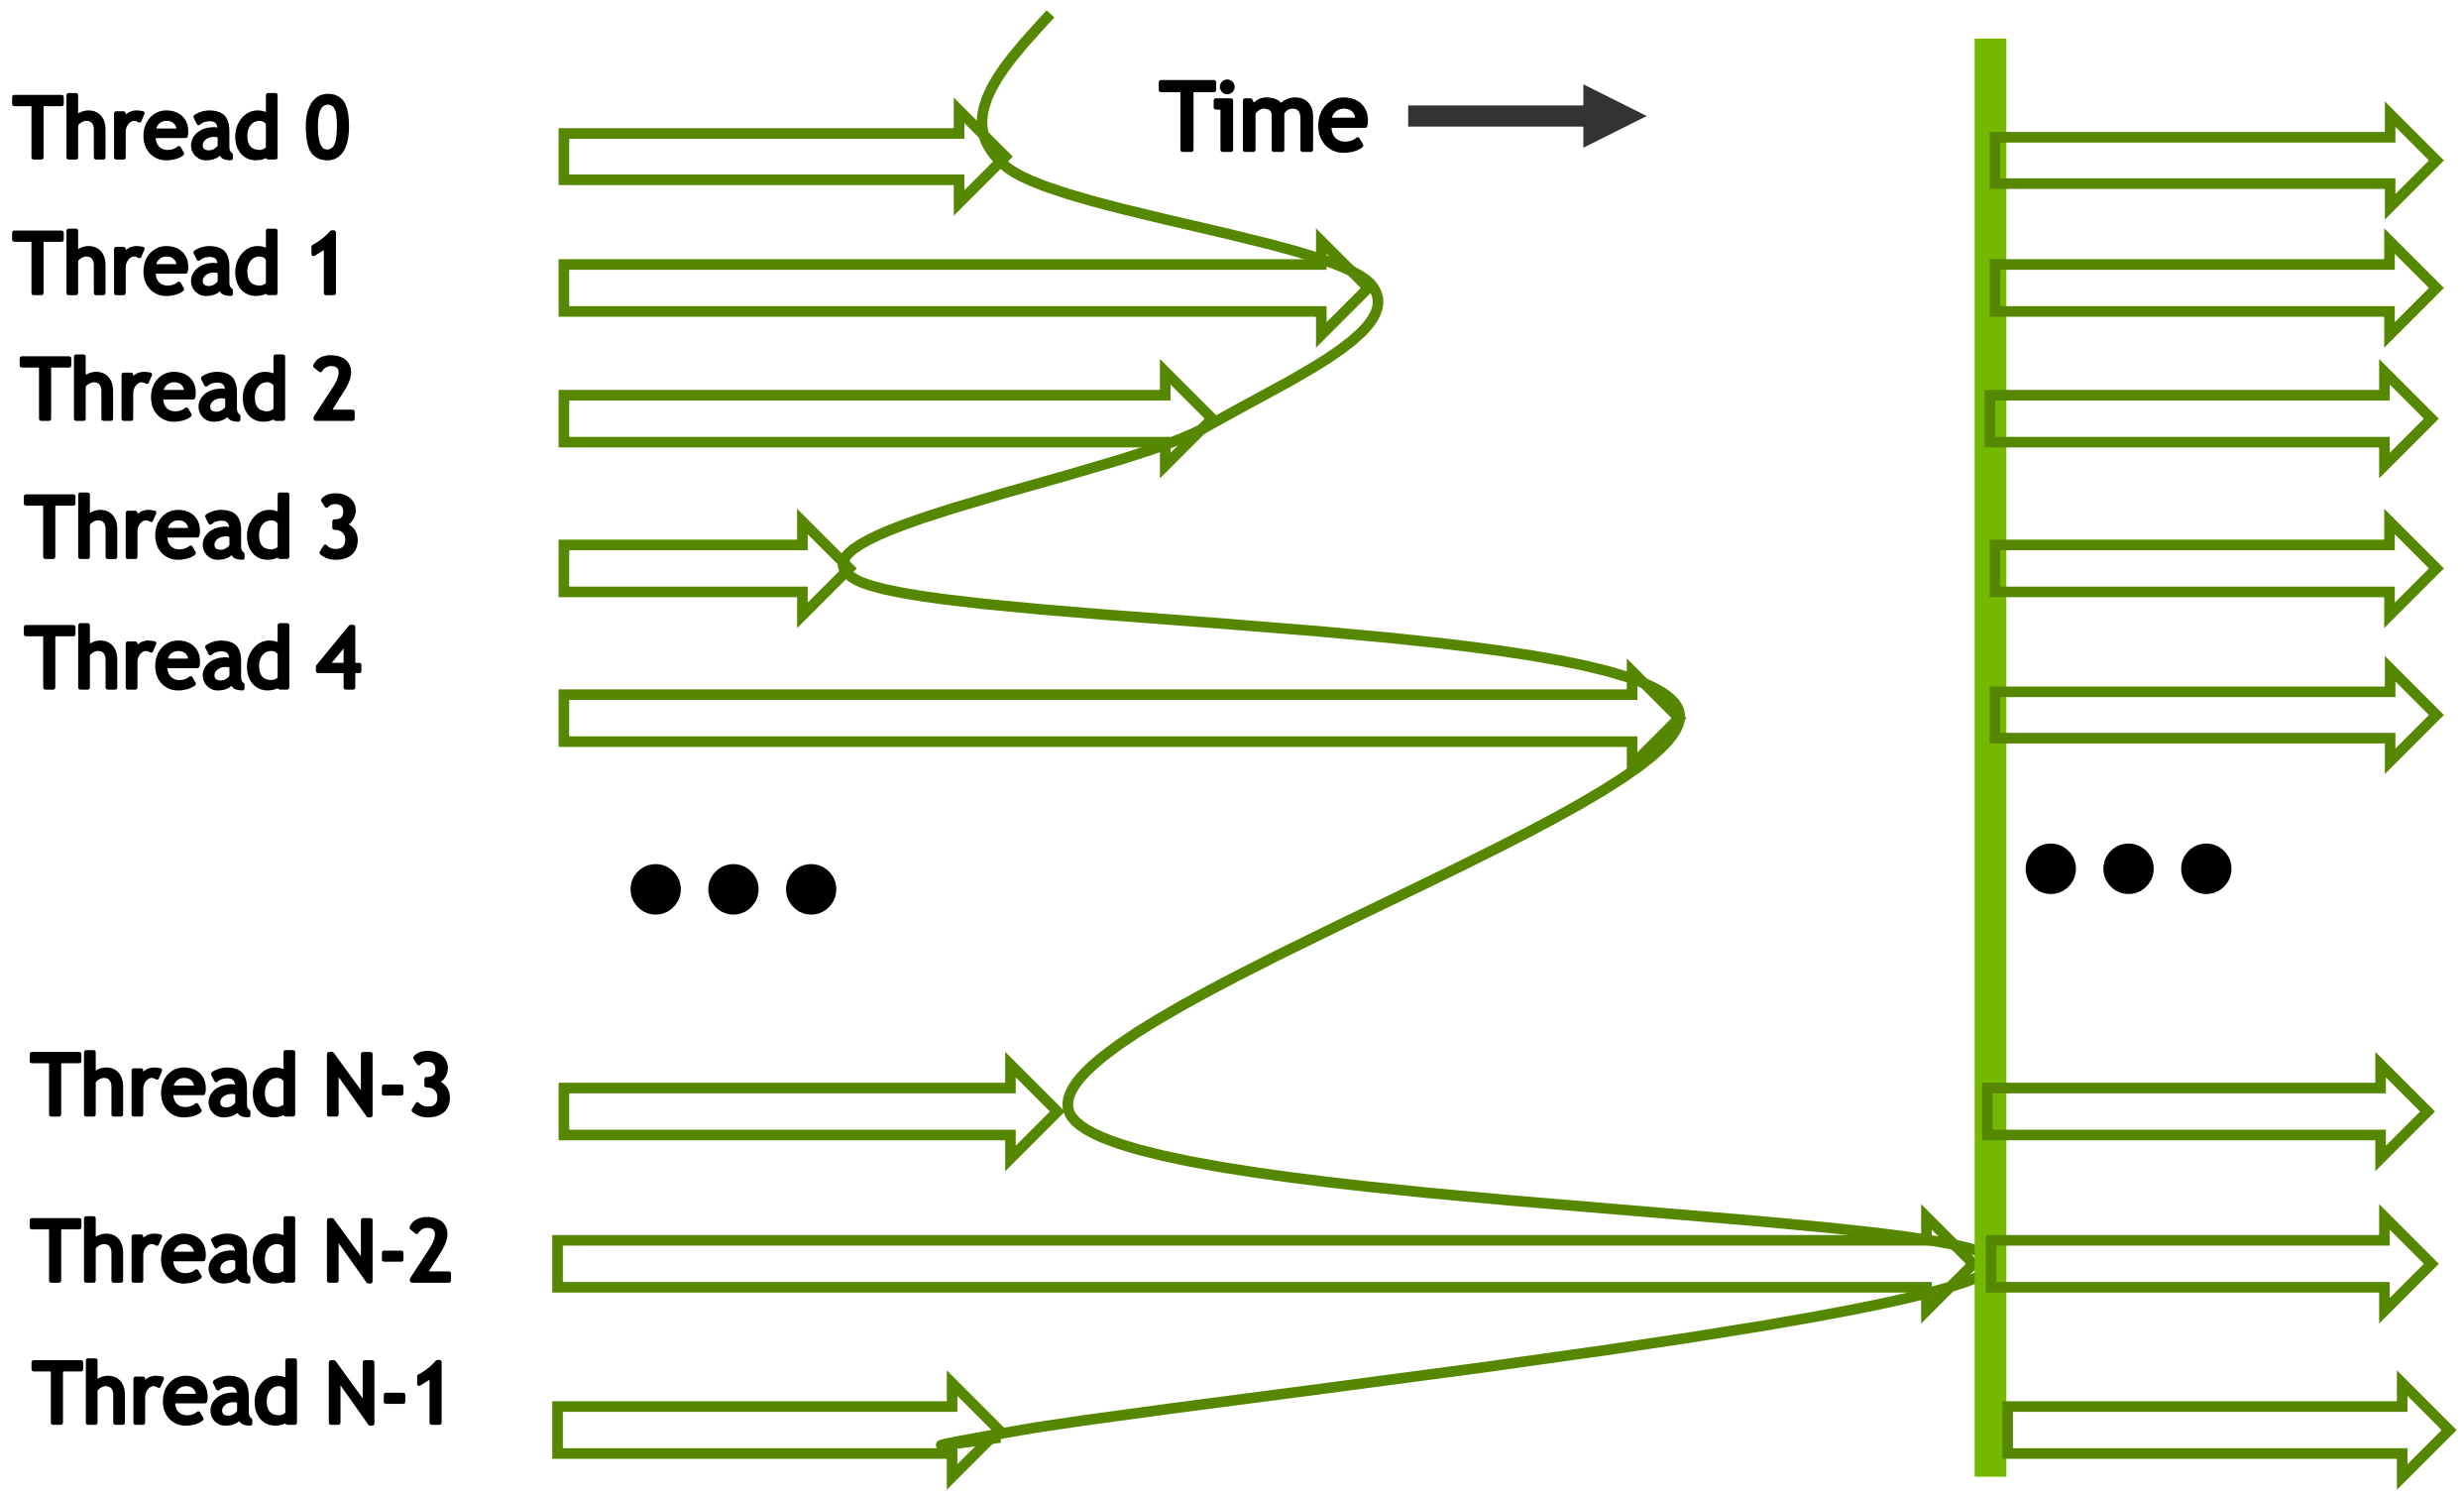

Outline of Tiling Technique

- Identify a tile of global memory contents that are accessed by multiple threads
- Load the tile from global memory into on-chip memory
- Use barrier synchronization to make sure that all threads are ready to start the phase
- Have the multiple threads to access their data from the on-chip memory
- Use barrier synchronization to make sure that all threads have completed the current phase
- Move on to the next tile

Objective

- To understand the design of a tiled parallel algorithm for matrix multiplication
  - Loading a tile
  - Phased execution
  - Barrier Synchronization

Matrix Multiplication

- Data access pattern
  - Each thread - a row of M and a column of N
  - Each thread block – a strip of M and a strip of N

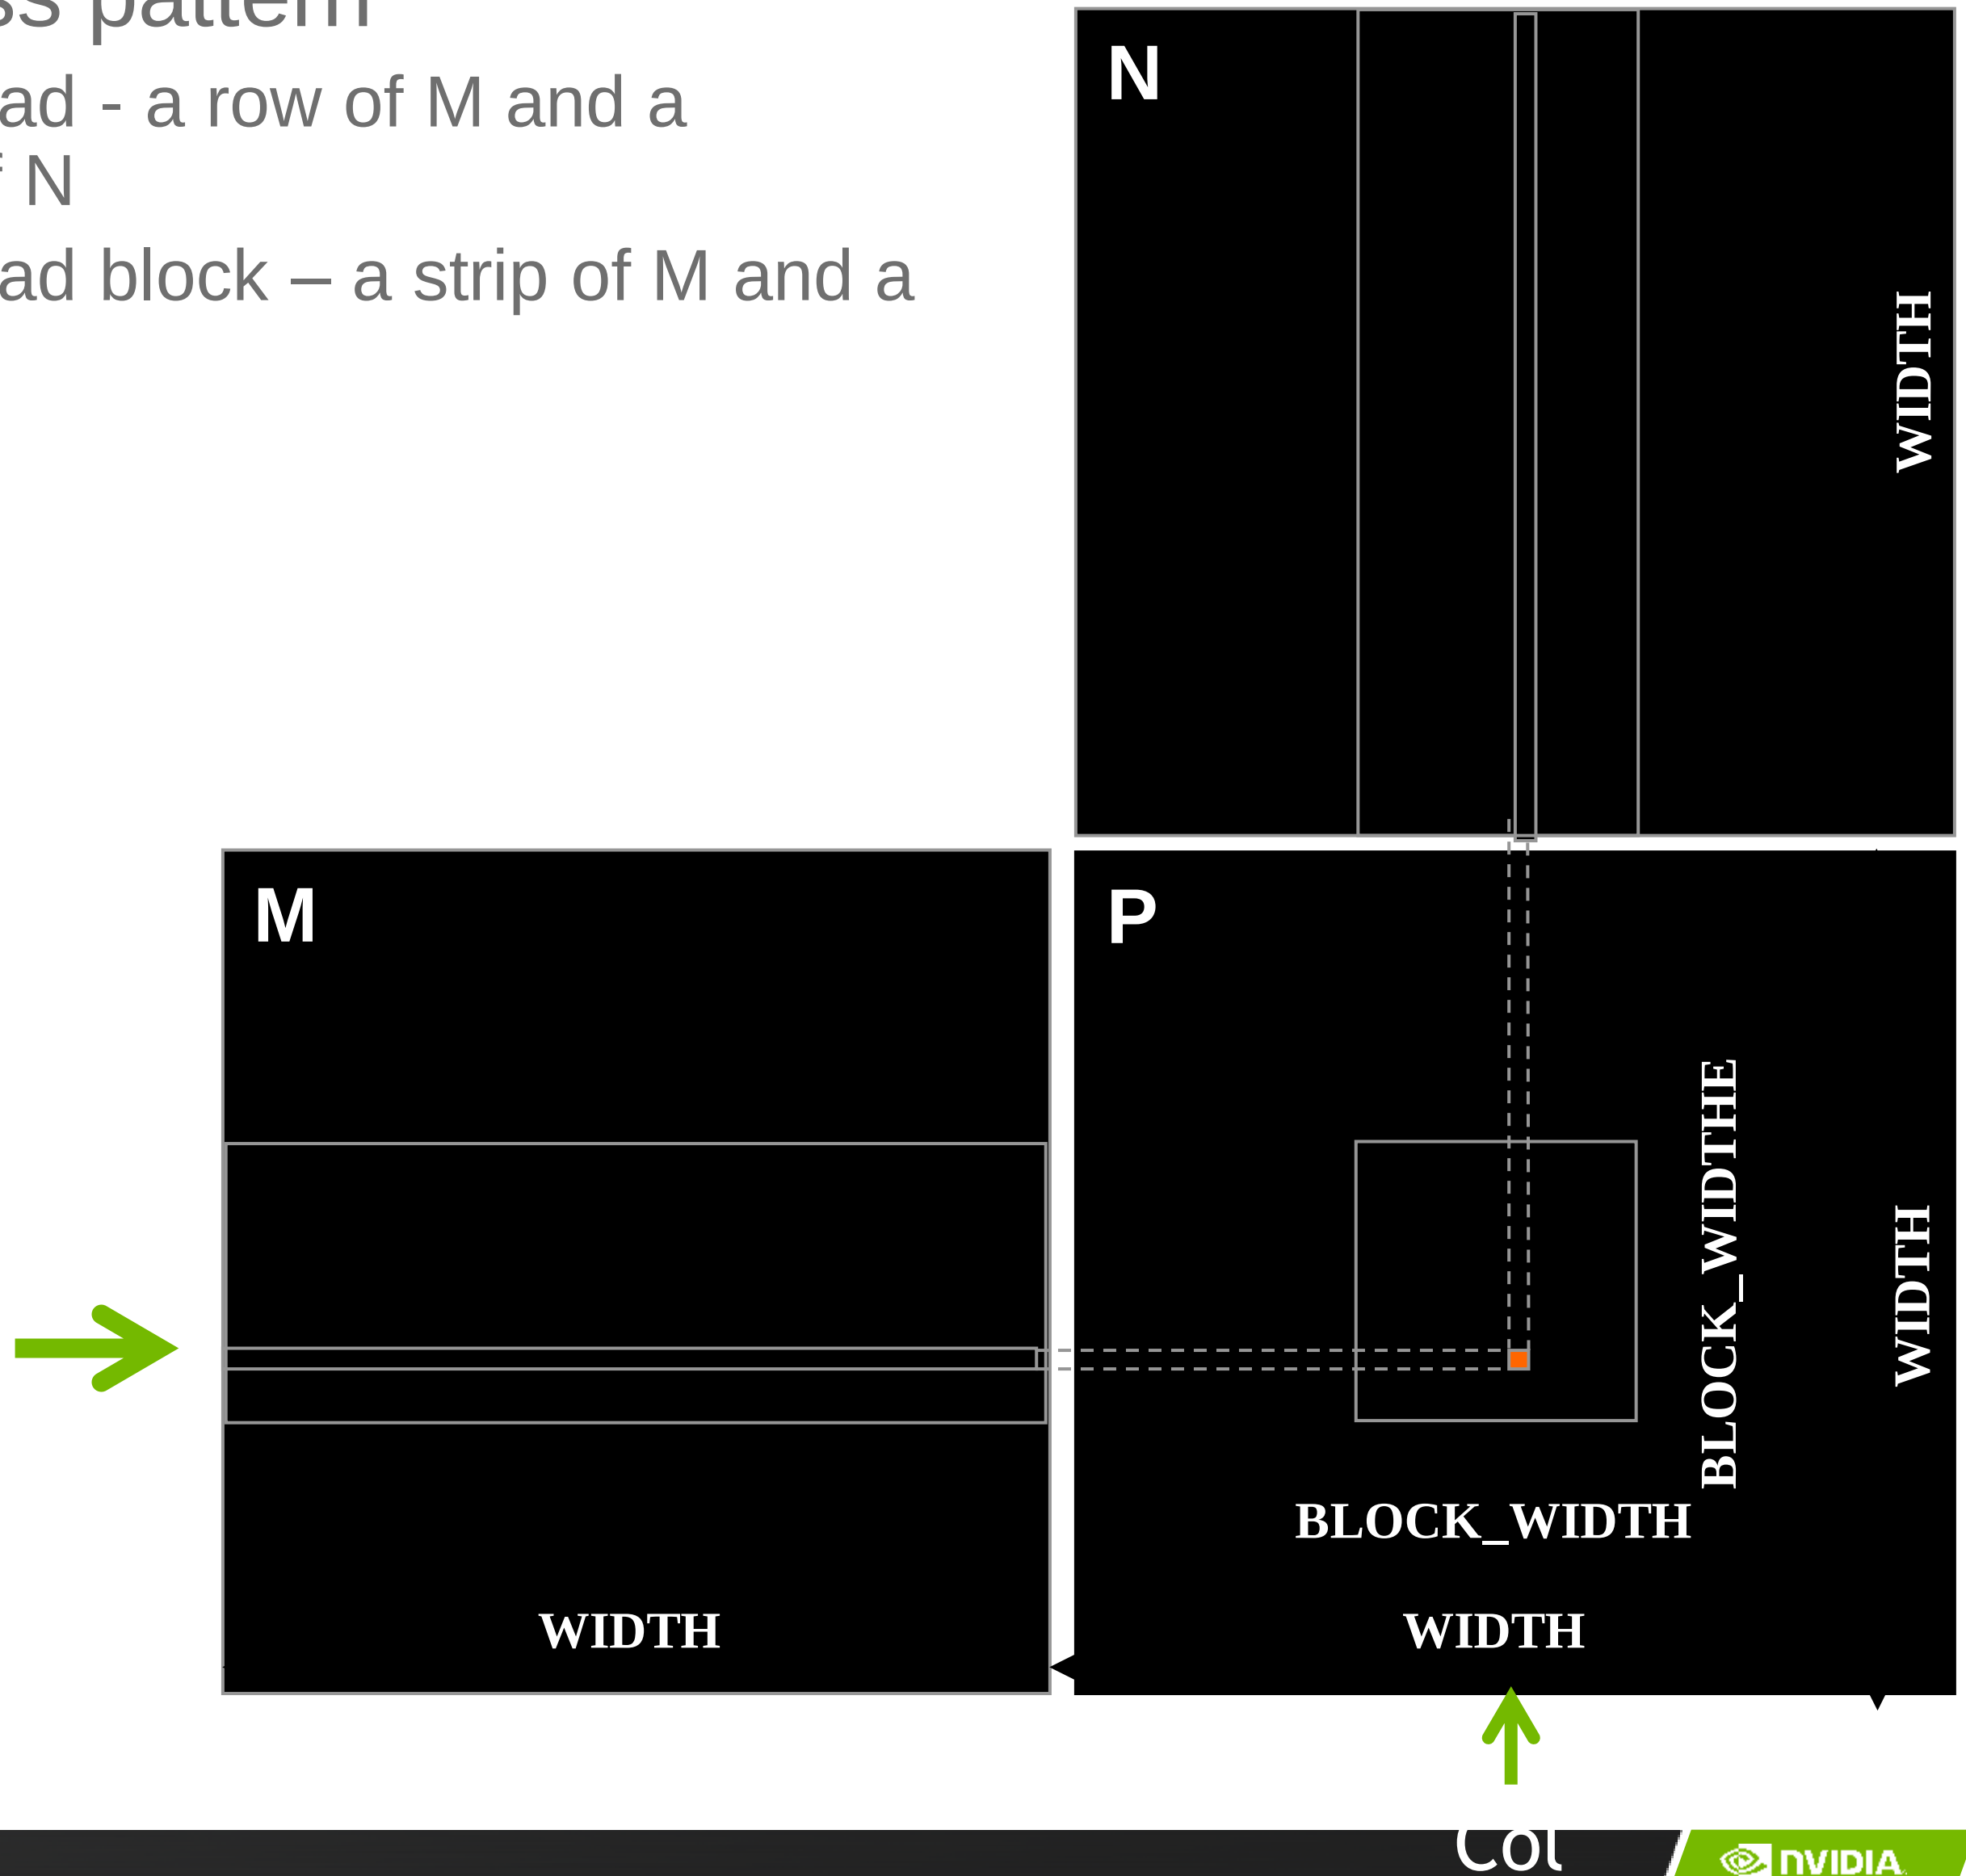

Tiled Matrix Multiplication

- Break up the execution of each thread into phases
- so that the data accesses by the thread block in each phase are focused on one tile of M and one tile of N
- The tile is of BLOCK_SIZE elements in each dimension

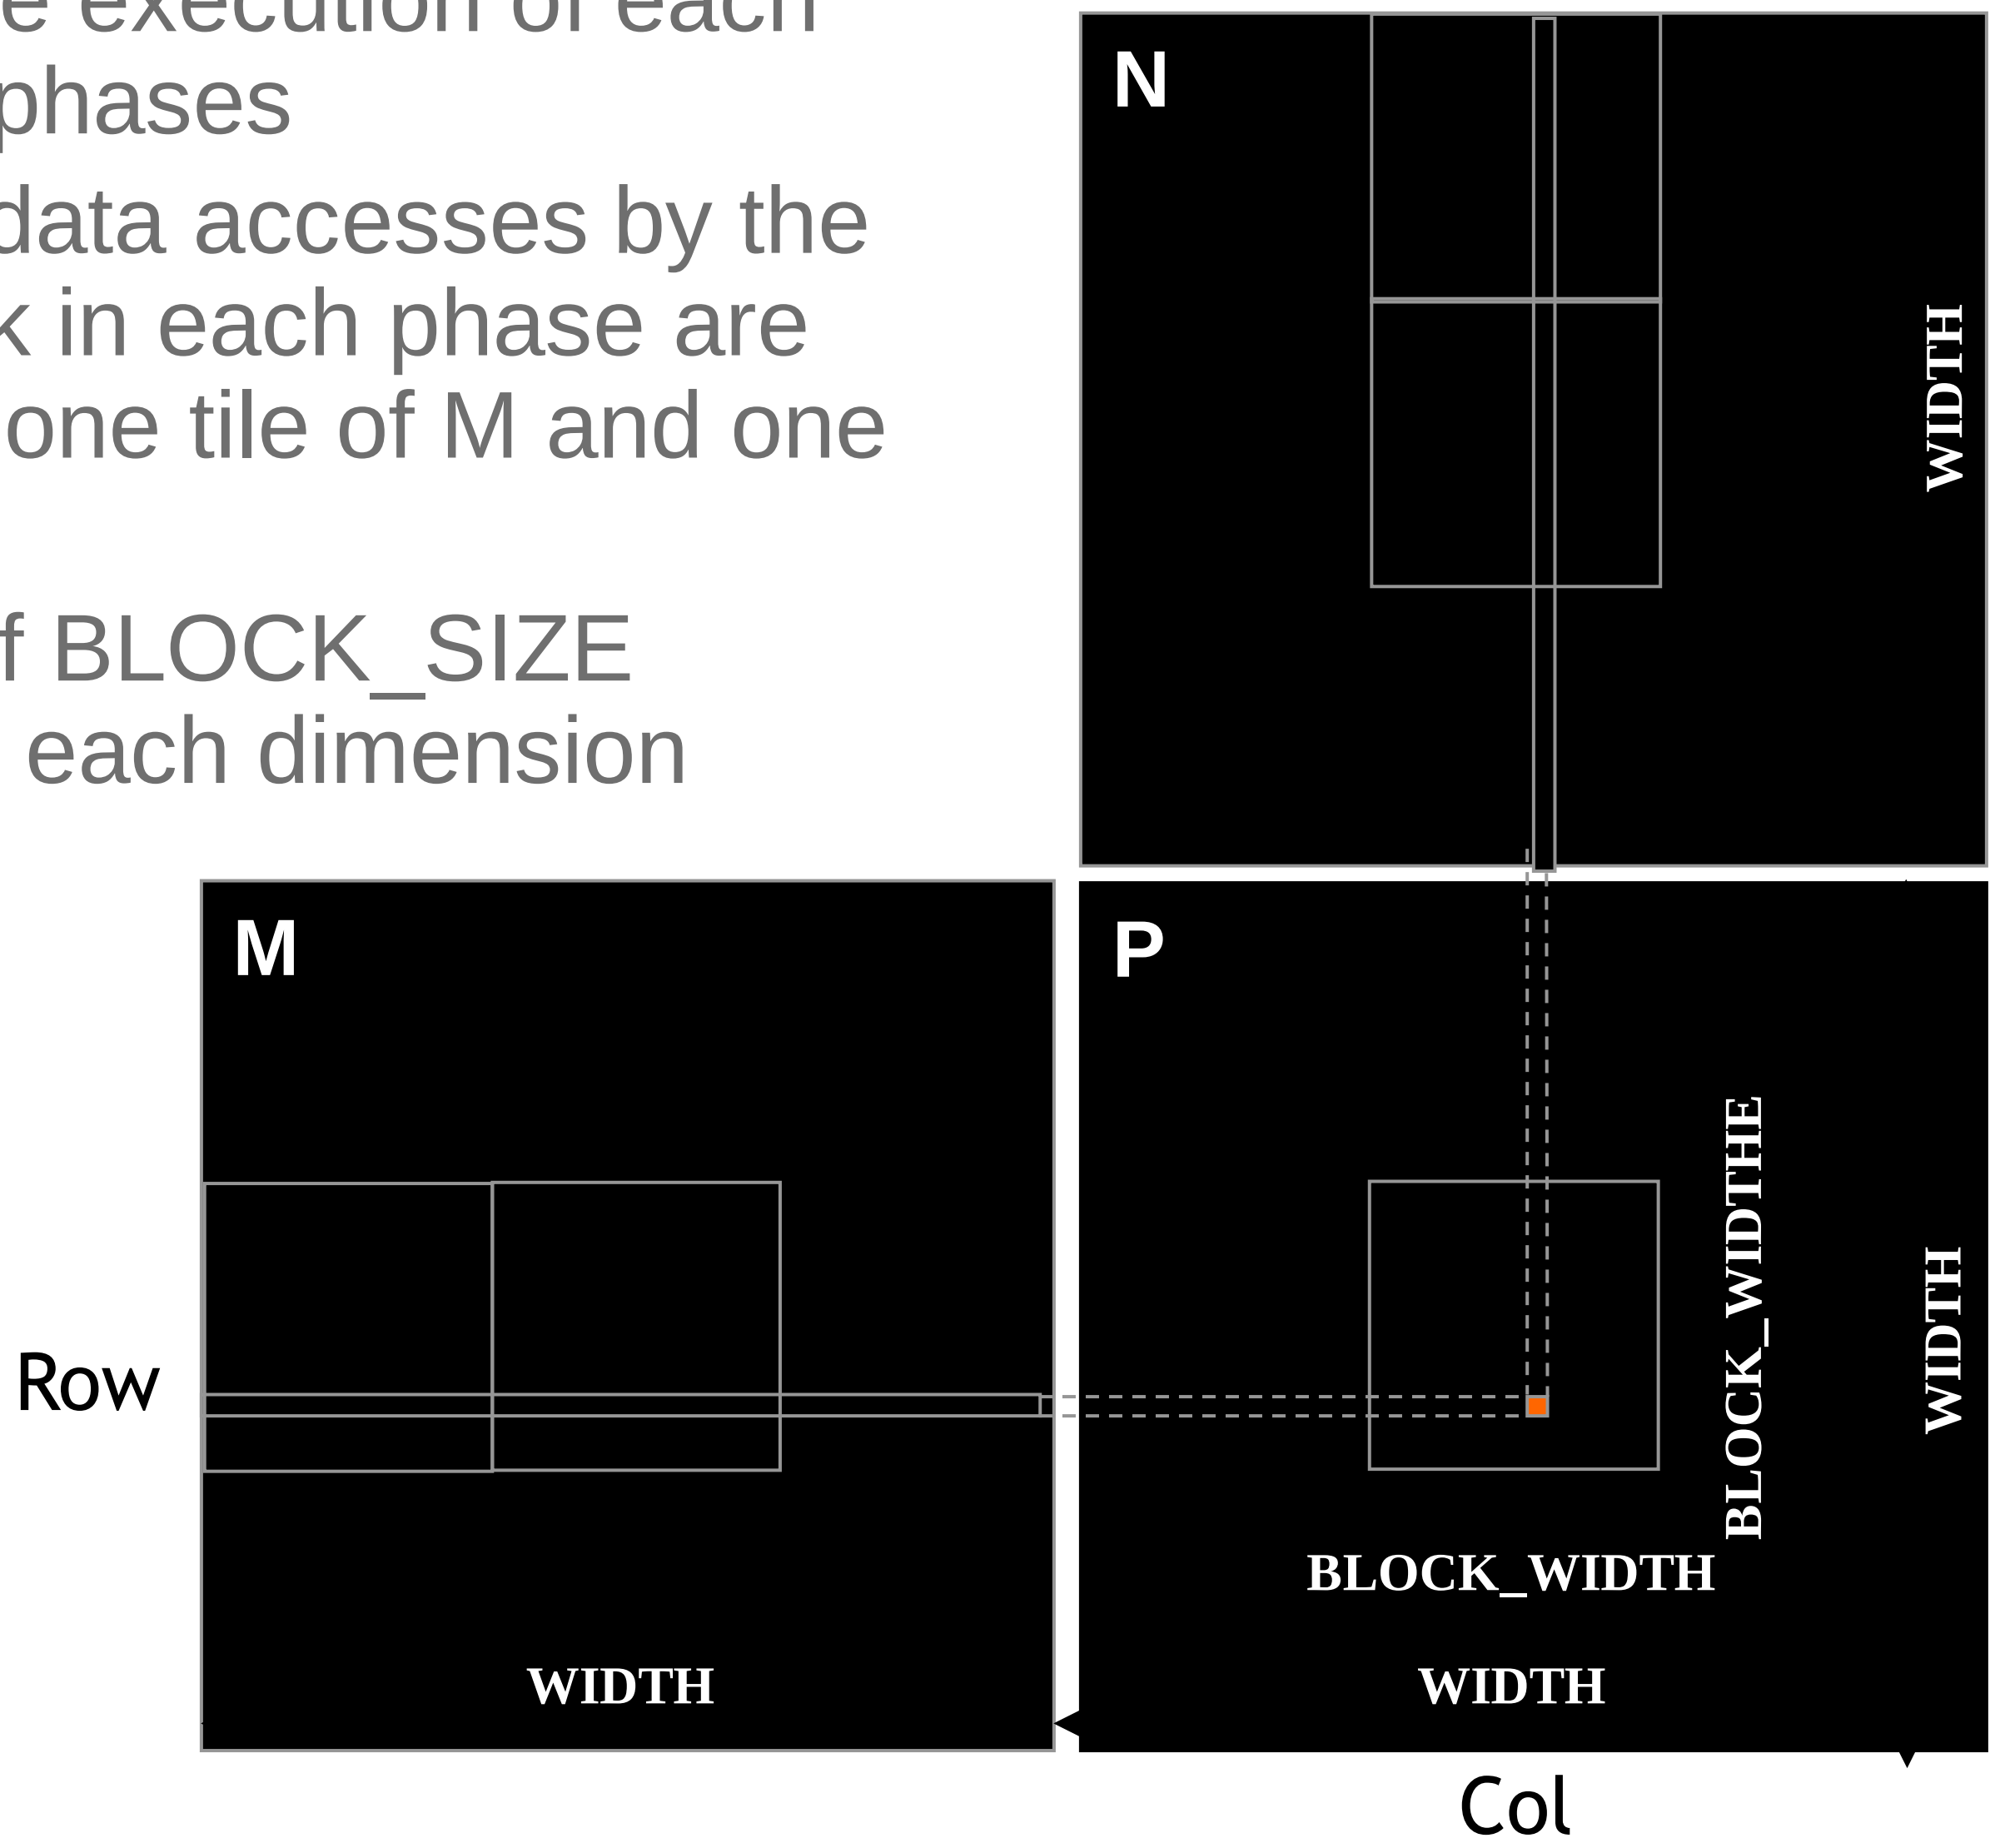

Loading a Tile

- All threads in a block participate
  - Each thread loads one M element and one N element in tiled code

Phase 0 Load for Block (0,0)

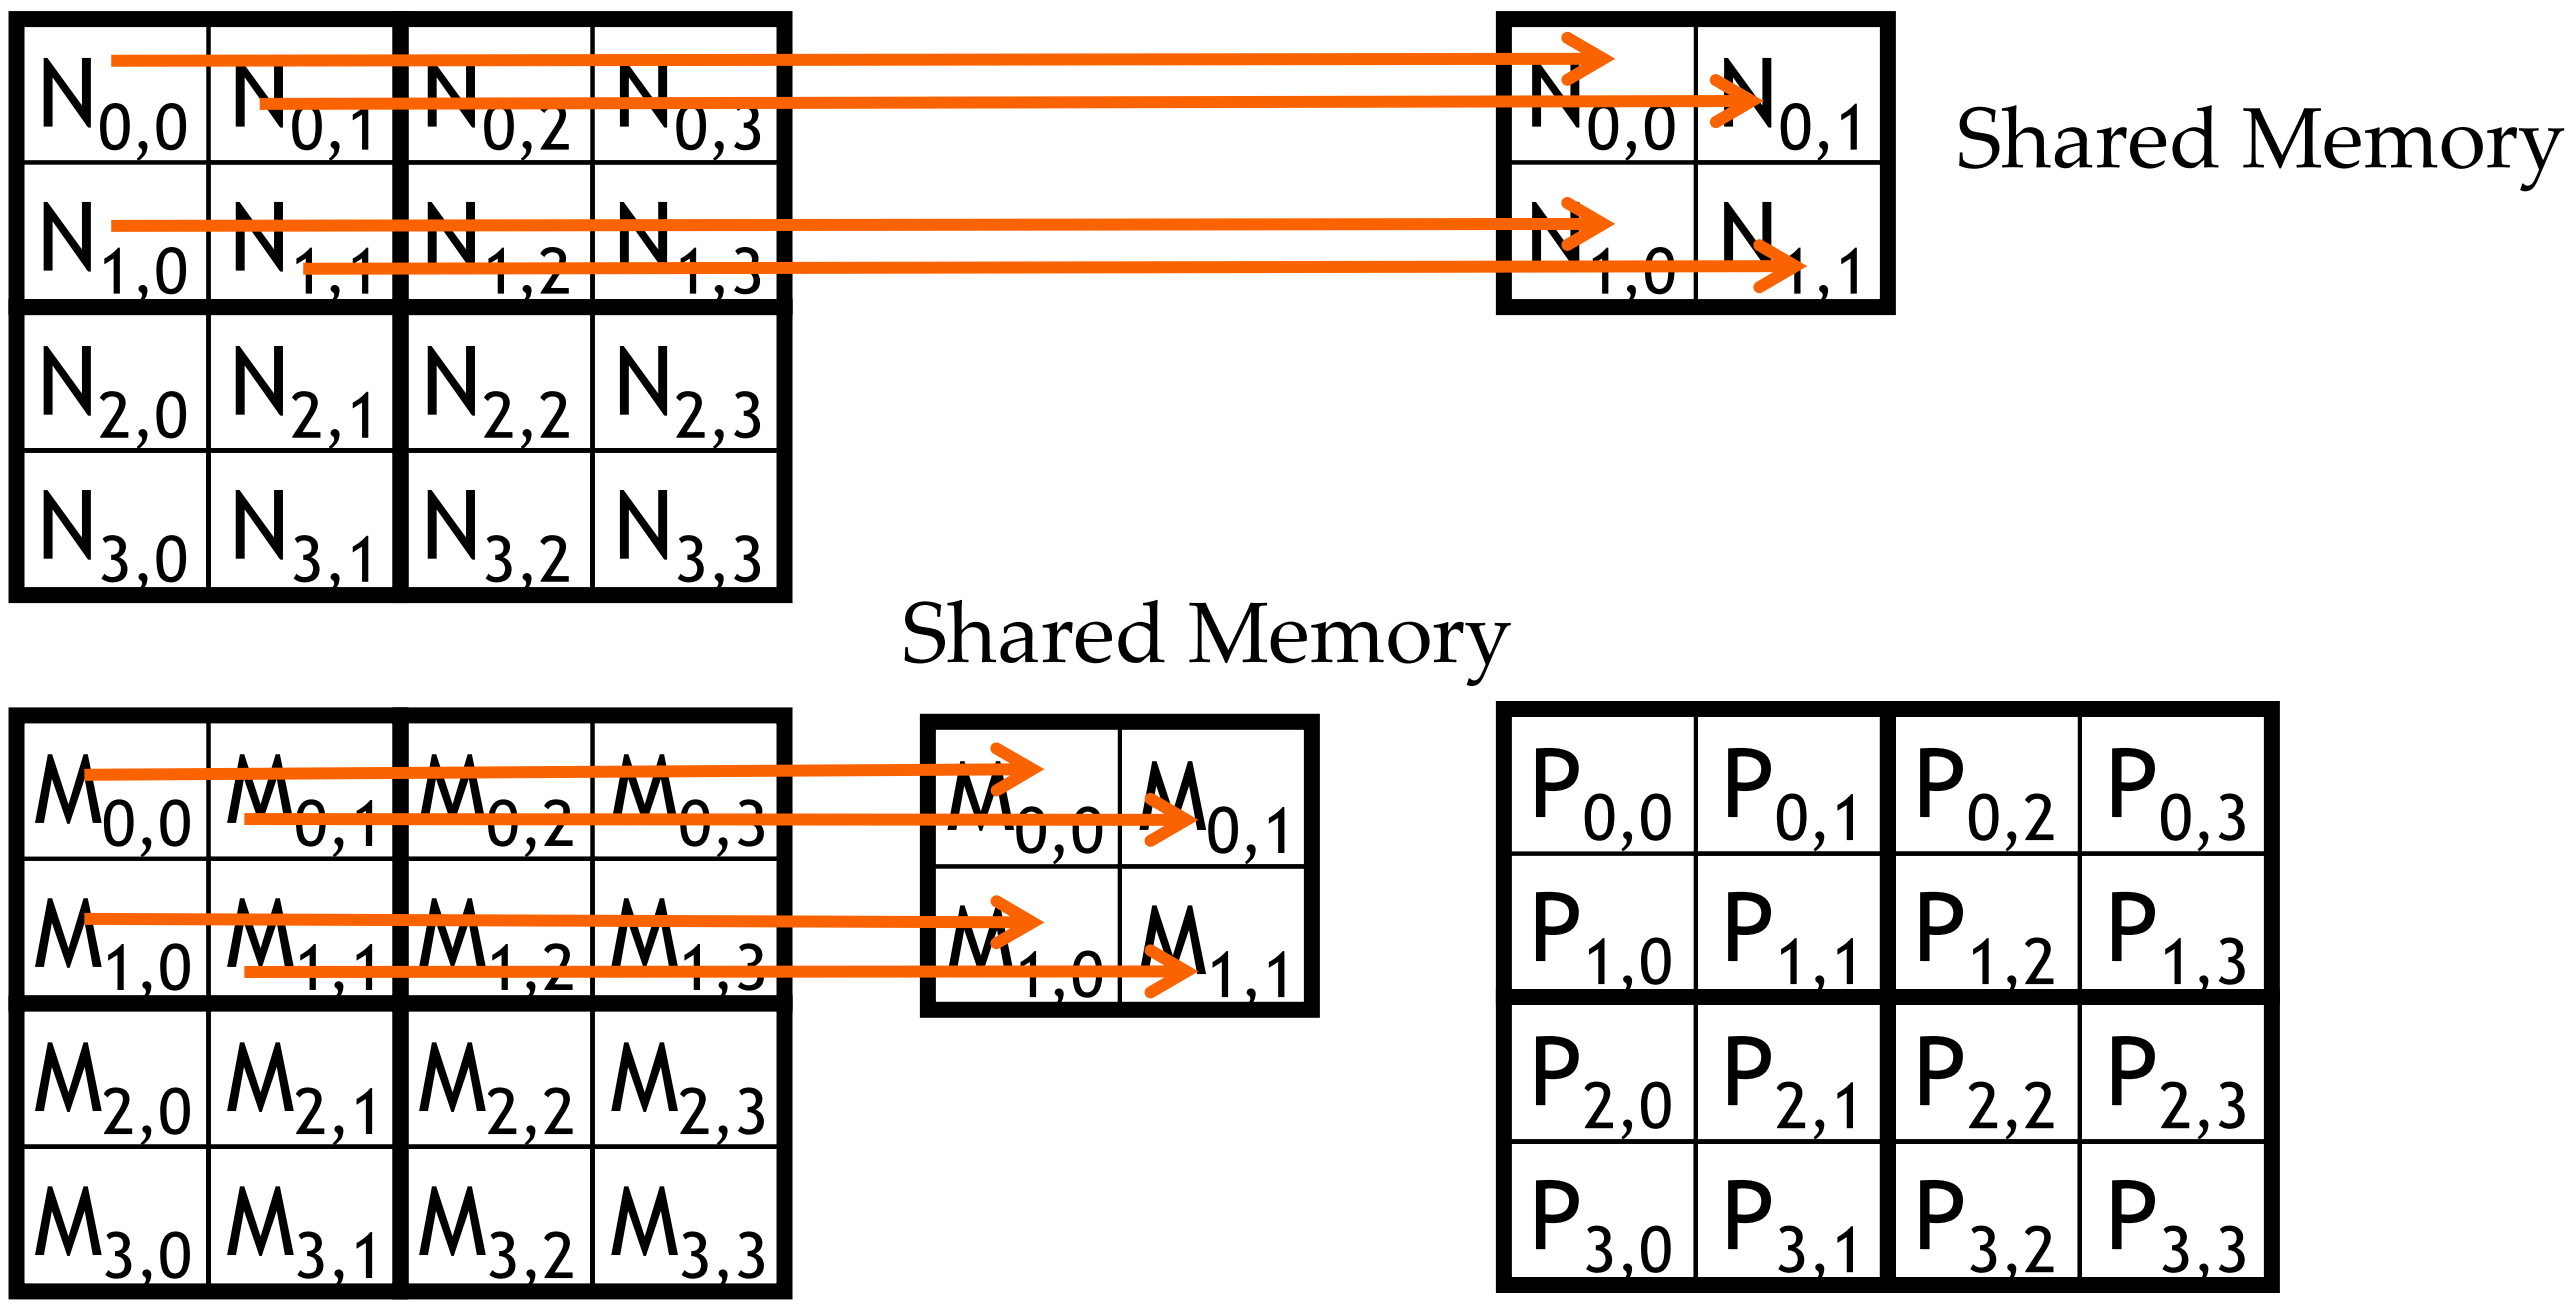

Phase 0 Use for Block (0,0) (iteration 0)

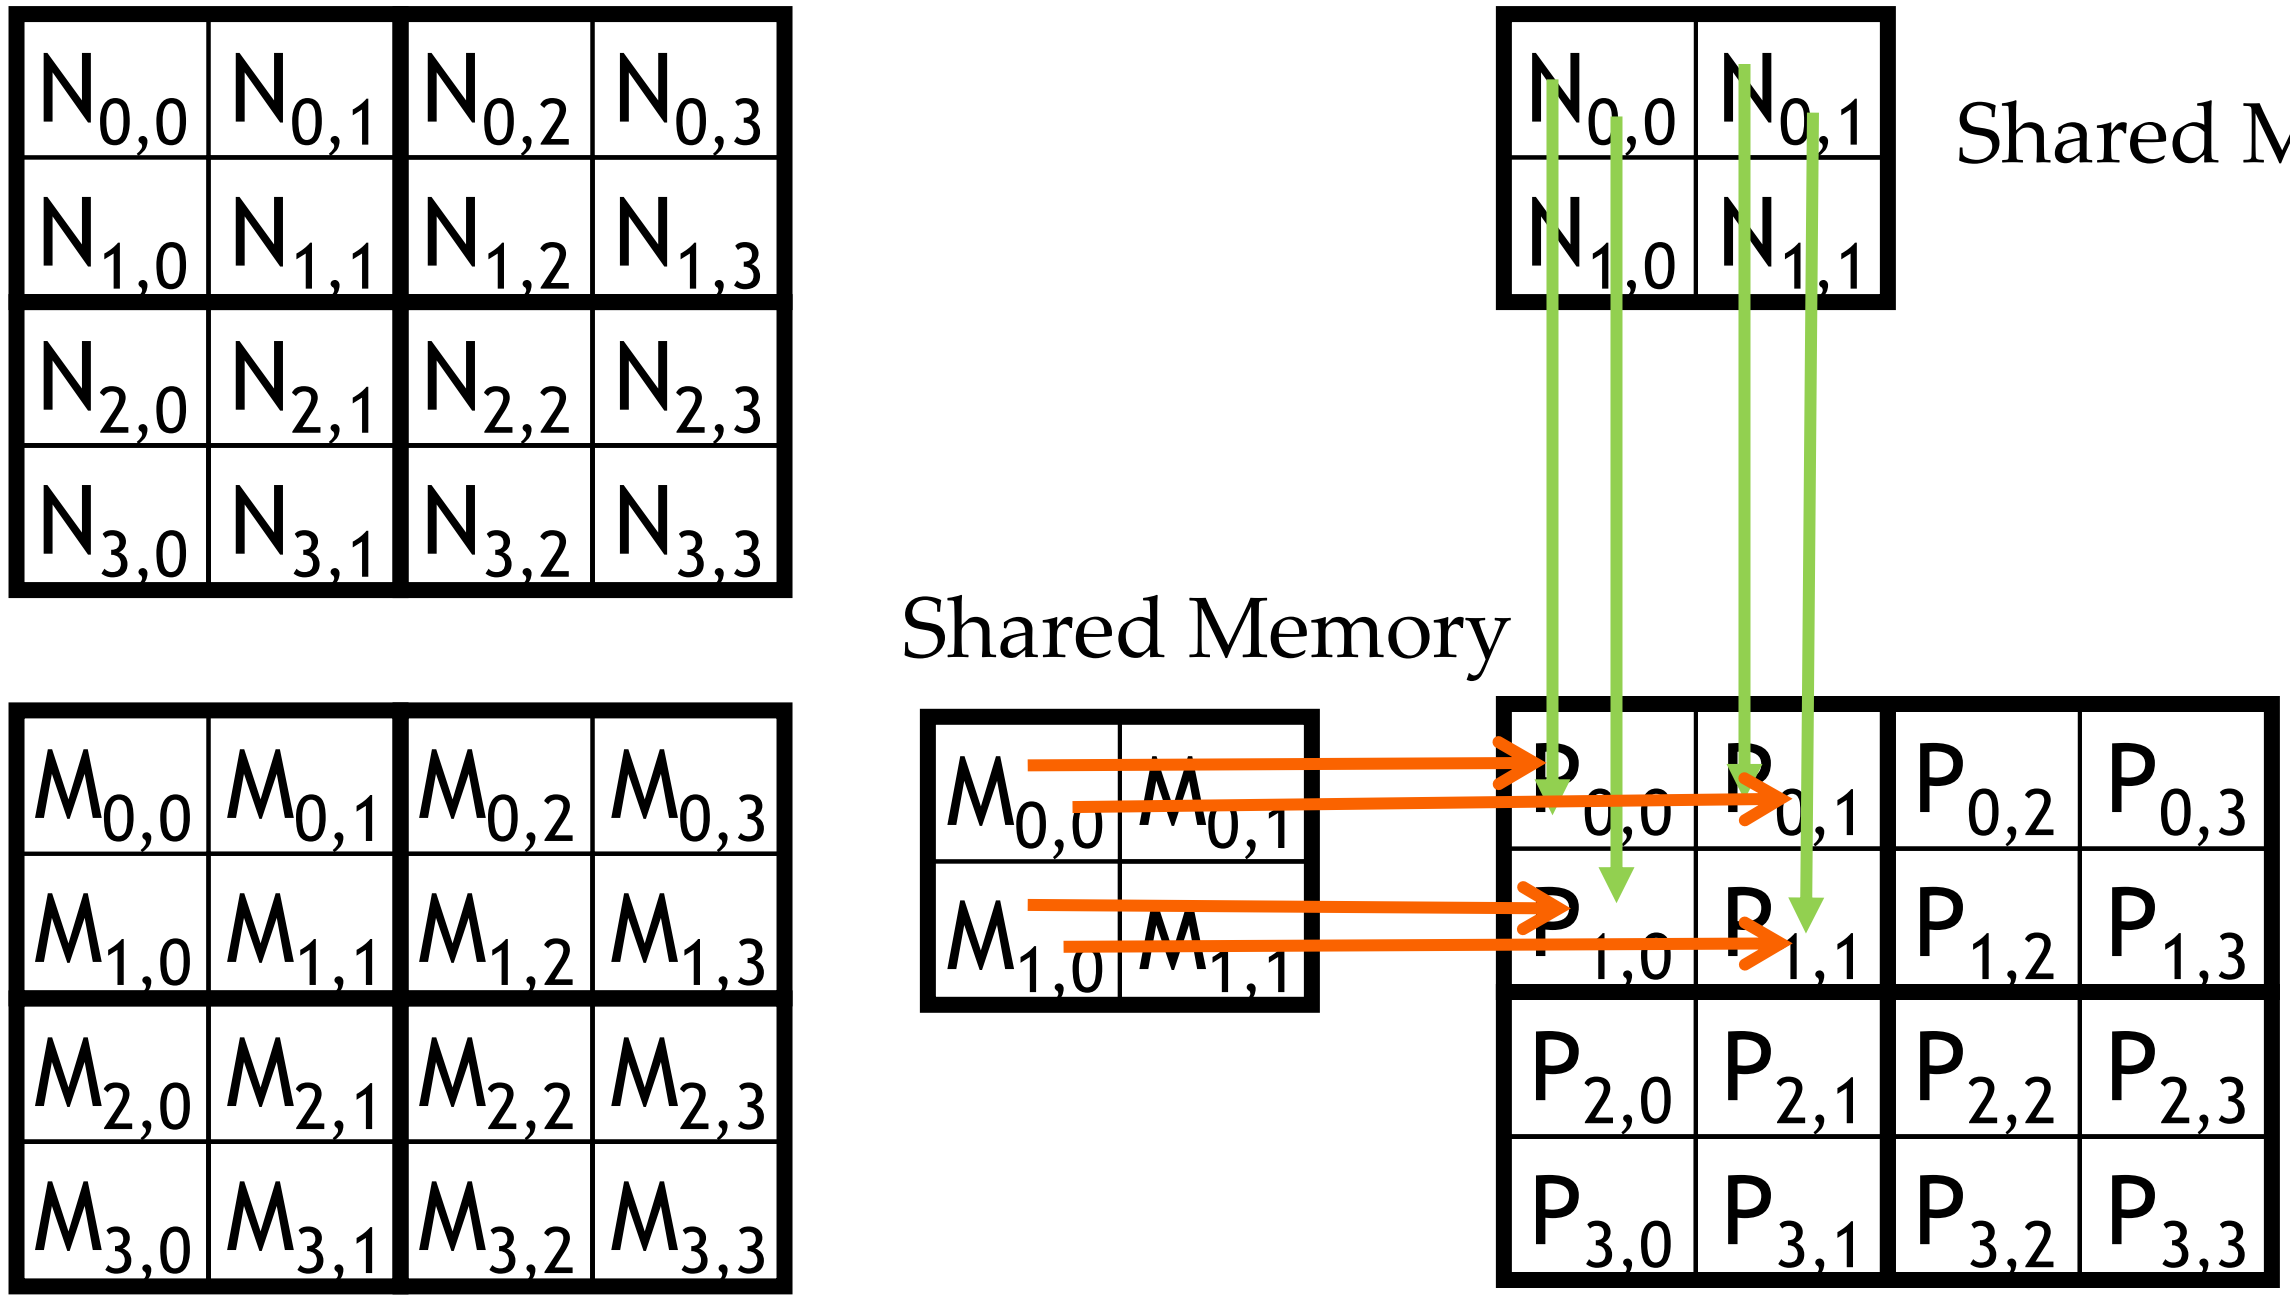

Phase 0 Use for Block (0,0) (iteration 1)

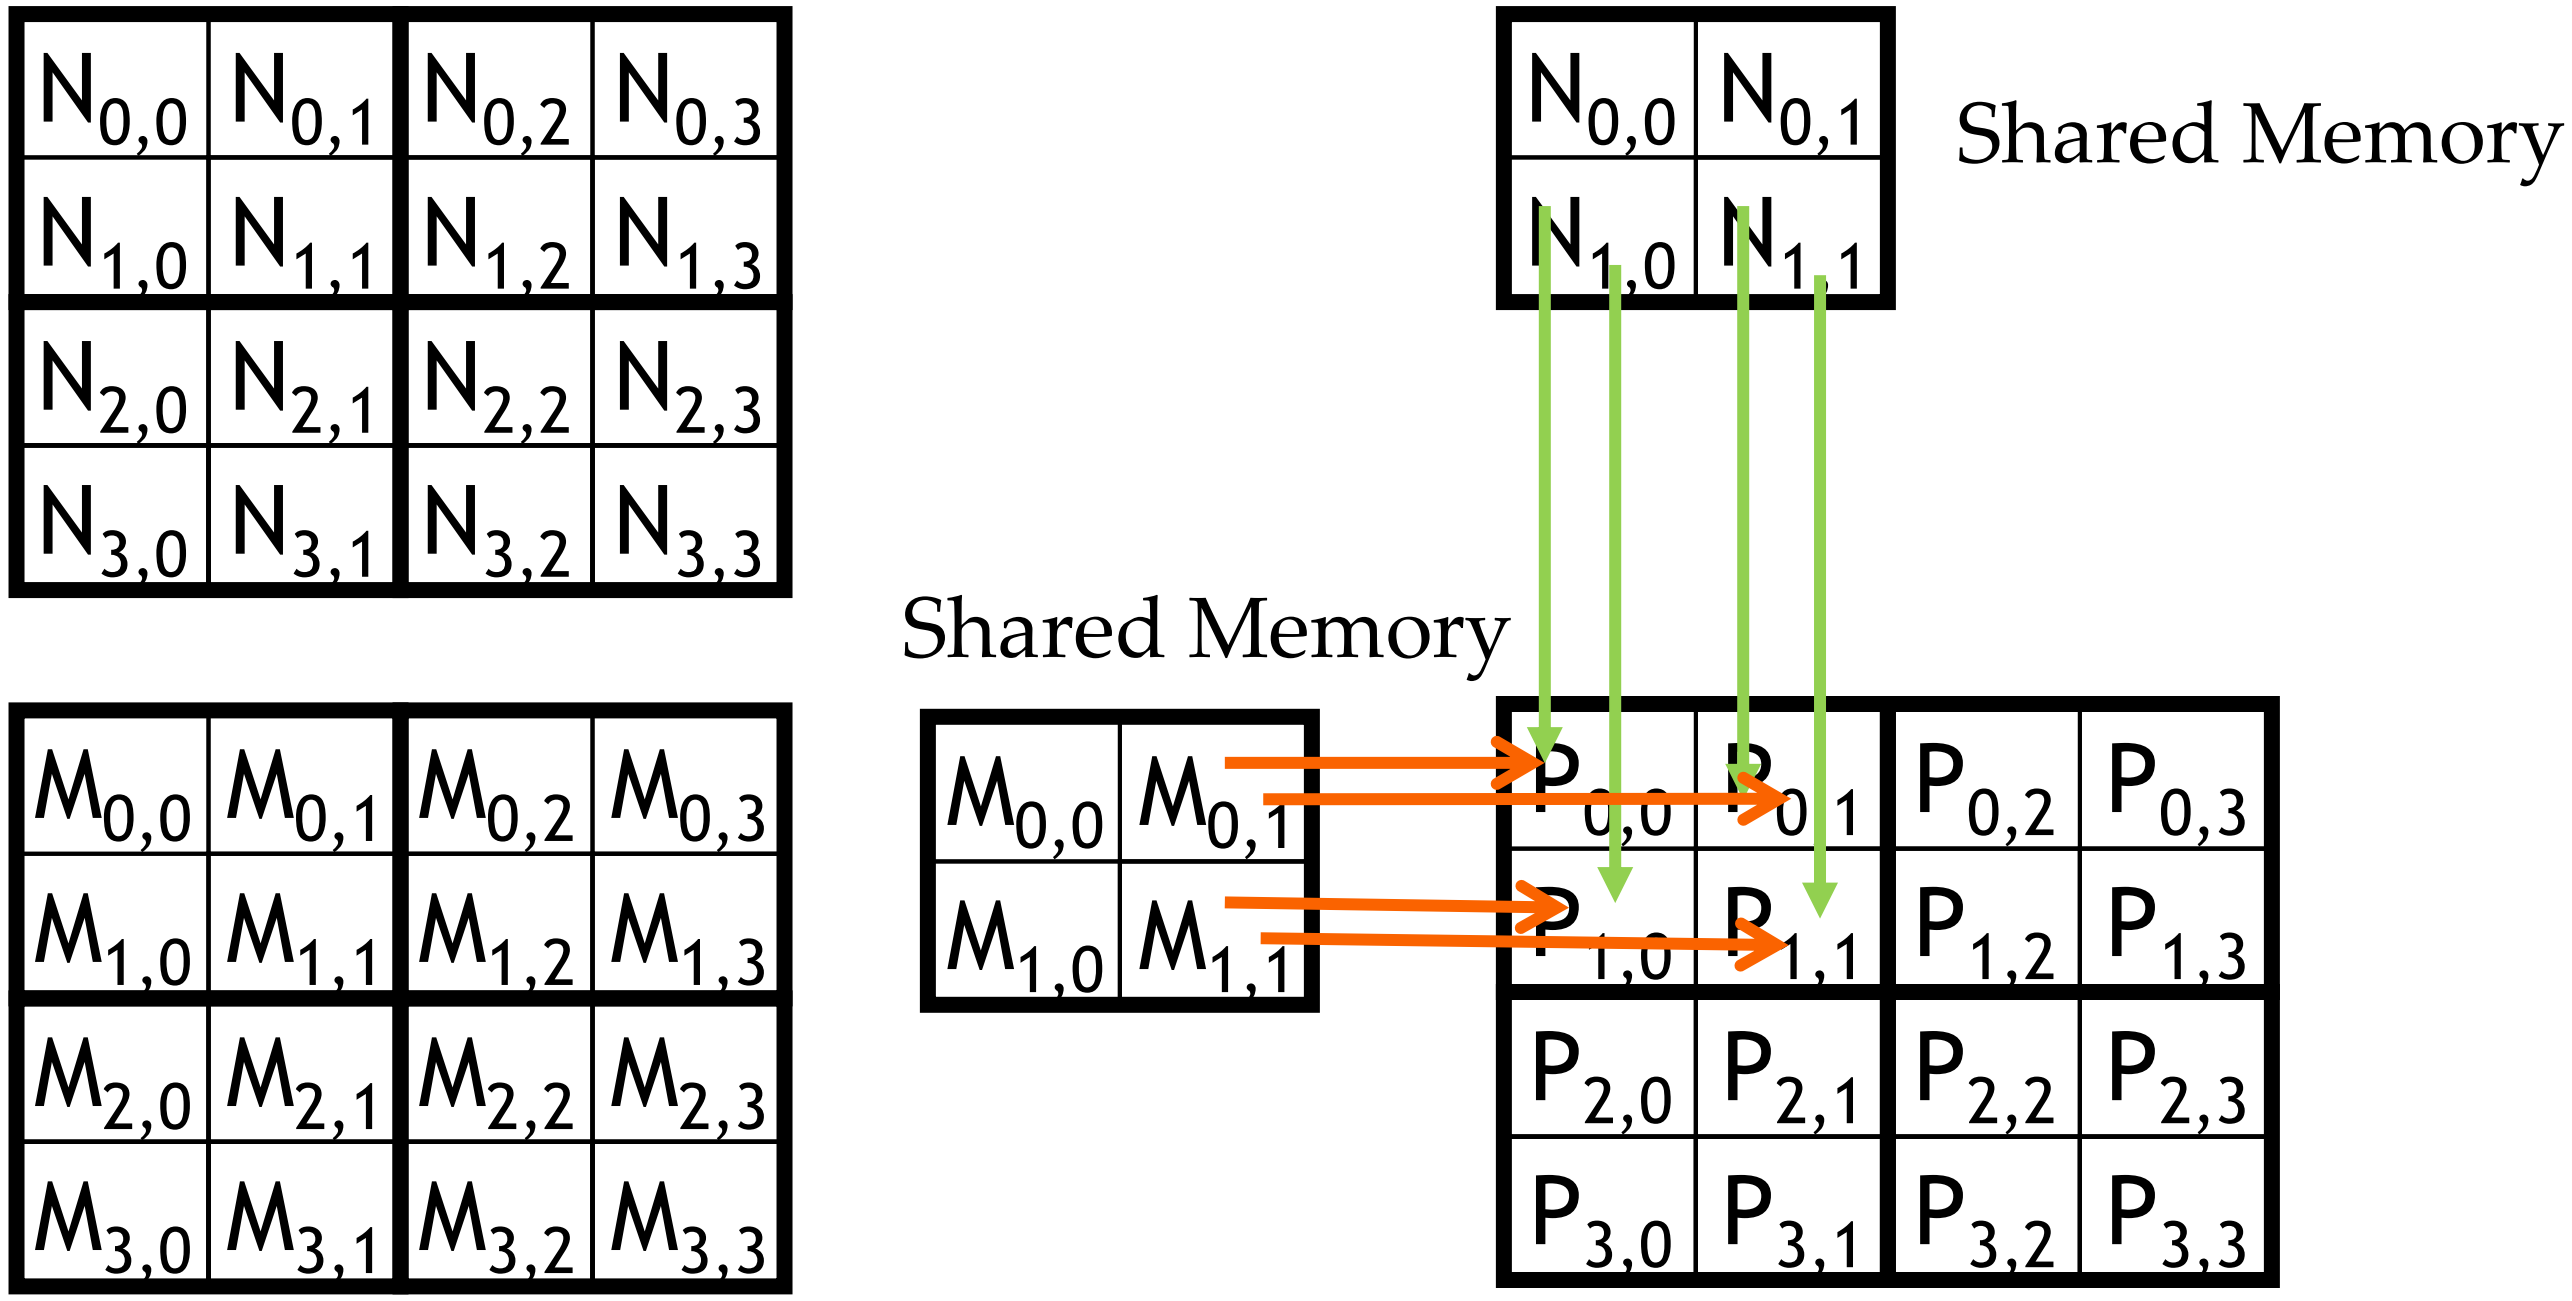

Phase 1 Load for Block (0,0)

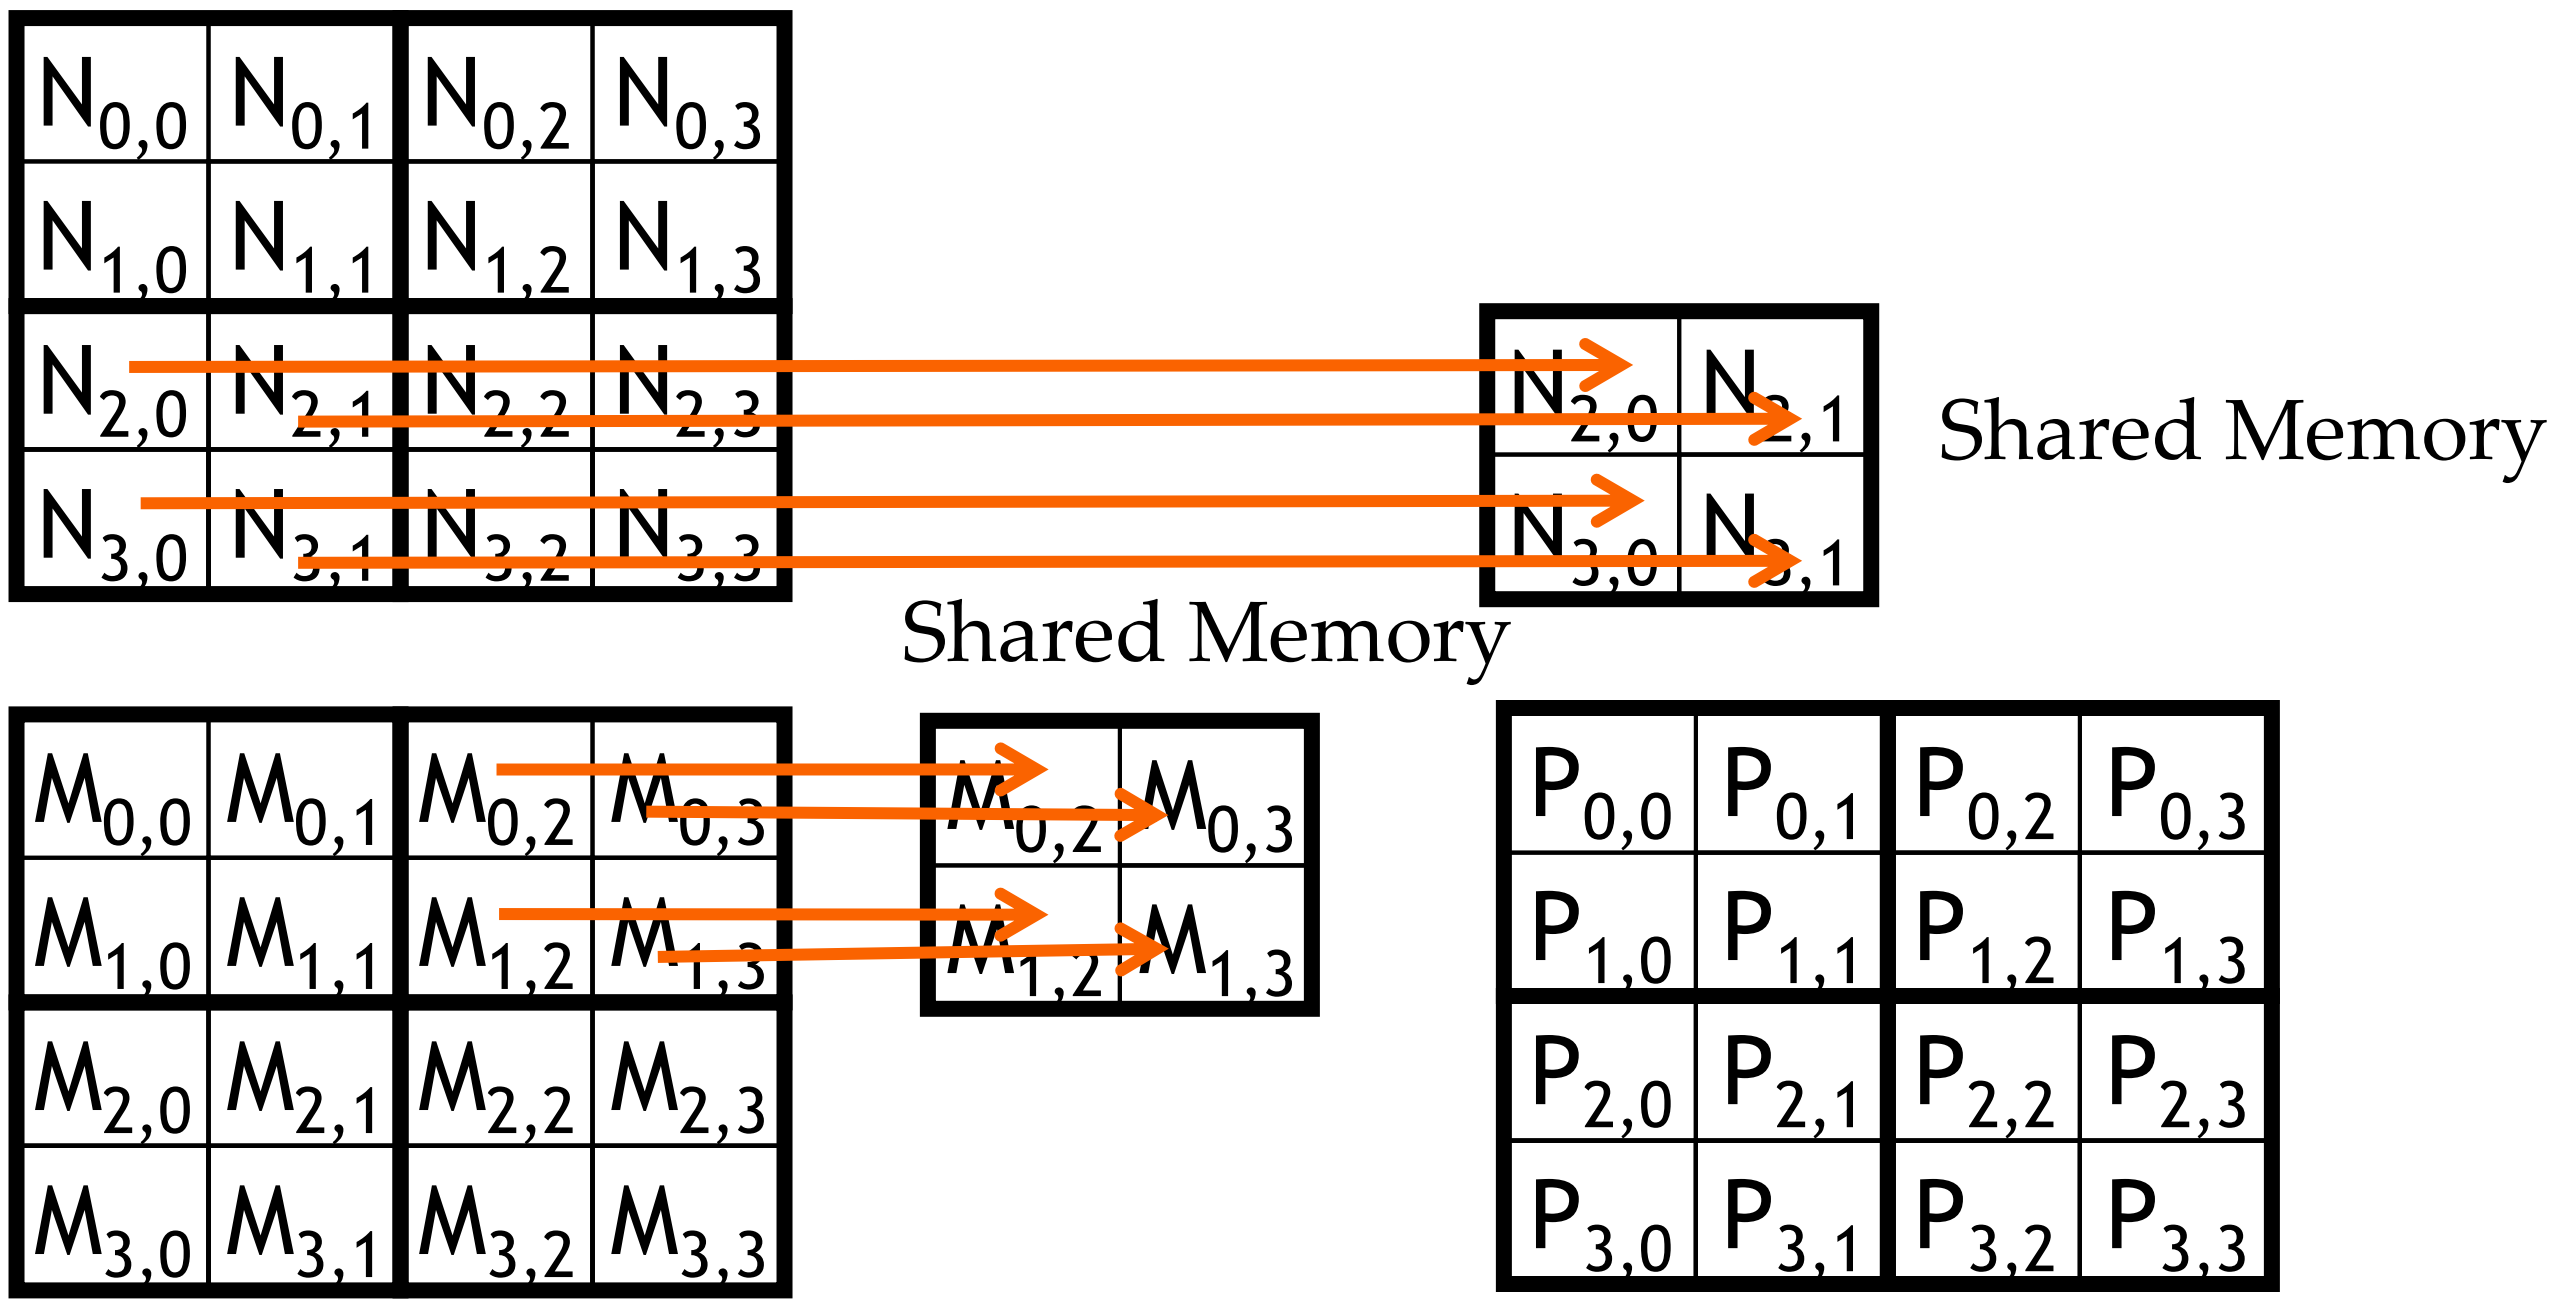

Phase 1 Use for Block (0,0) (iteration 0)

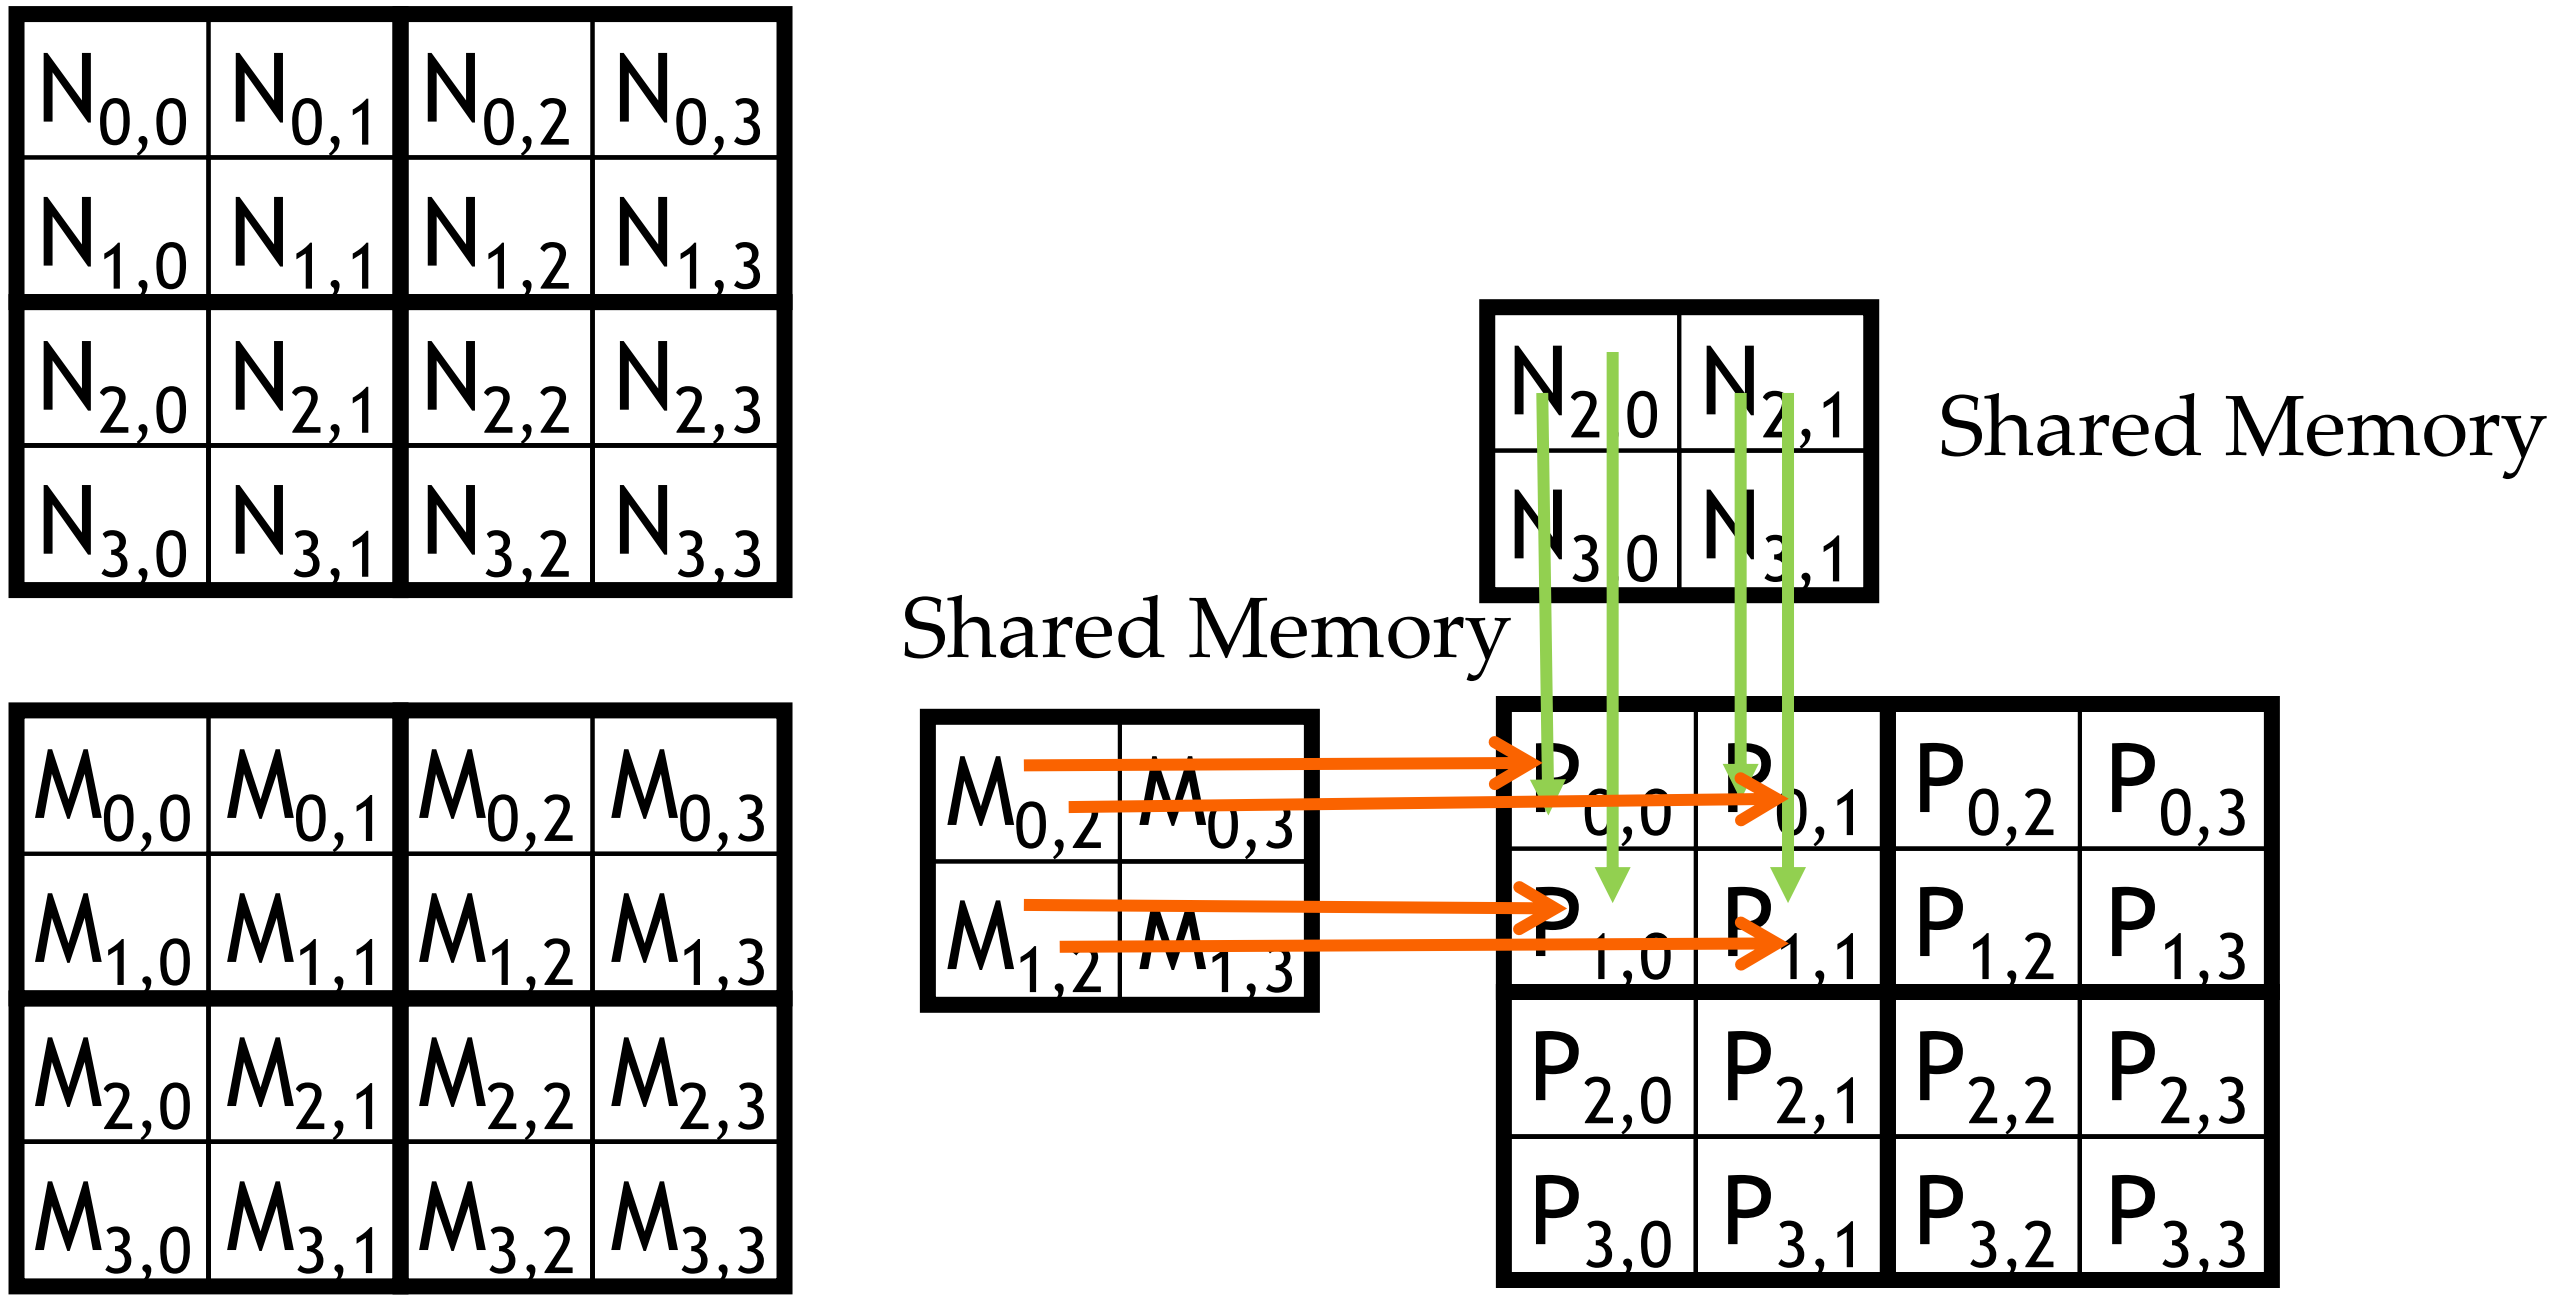

Phase 1 Use for Block (0,0) (iteration 1)

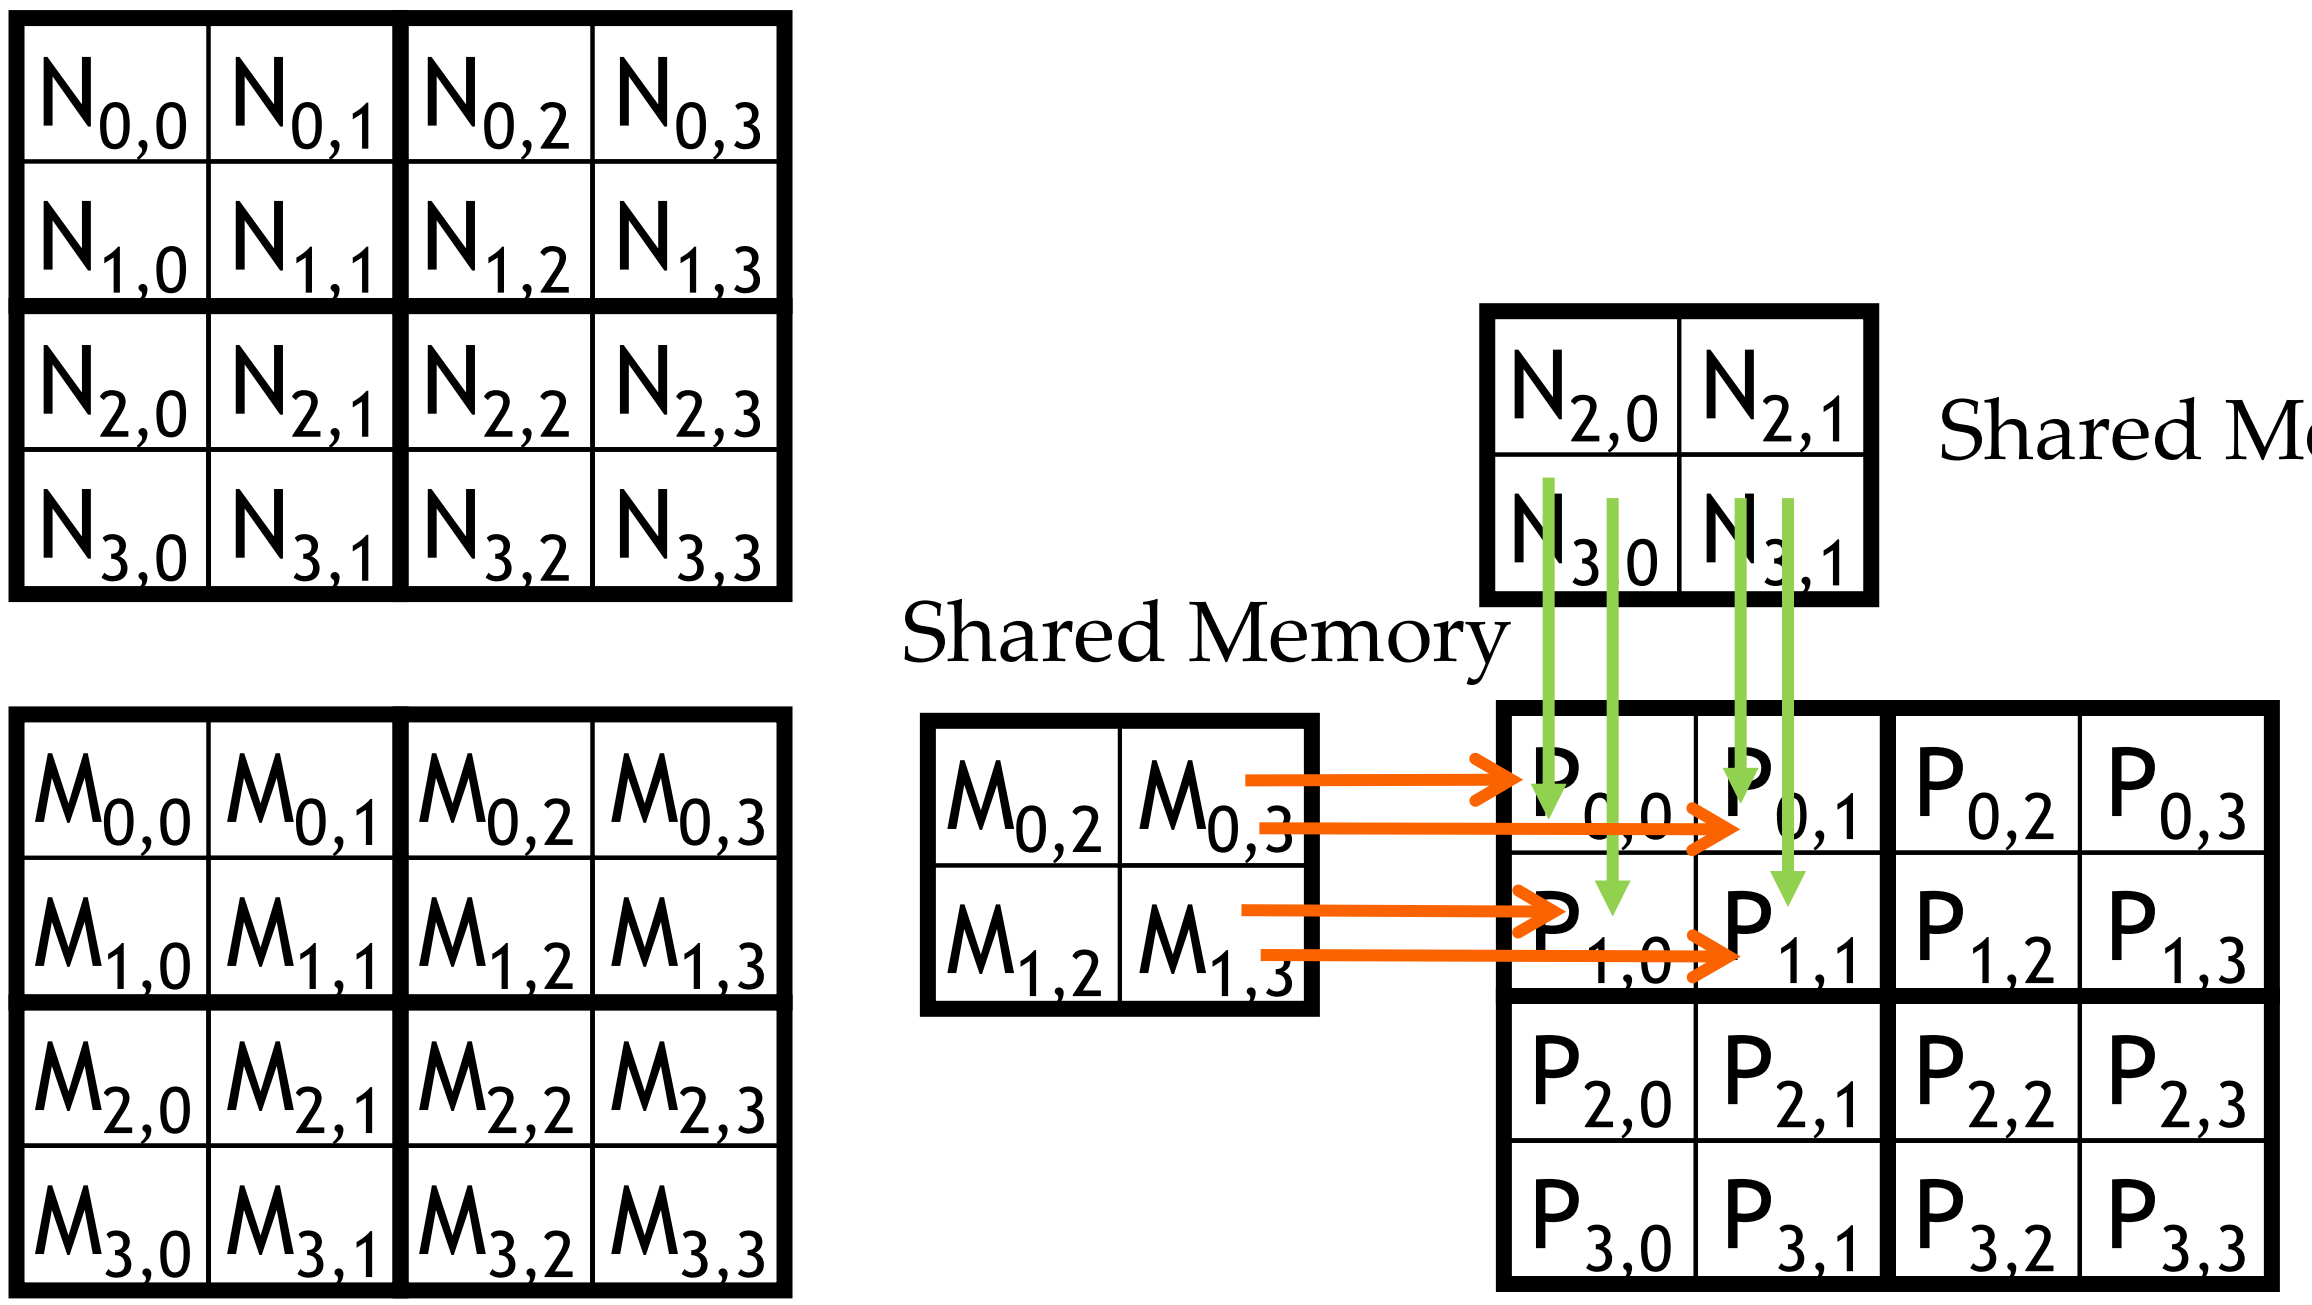

Execution Phases of Toy Example

	Phase 0			Phase 1		
$thread_{0,0}$	$\mathbf{M_{0,0}}$ ↓ $Mds_{0,0}$	$\mathbf{N_{0,0}}$ ↓ $Nds_{0,0}$	$PValue_{0,0}$ += $Mds_{0,0}*Nds_{0,0}$ + $Mds_{0,1}*Nds_{1,0}$	$\mathbf{M_{0,2}}$ ↓ $Mds_{0,0}$	$\mathbf{N_{2,0}}$ ↓ $Nds_{0,0}$	$PValue_{0,0}$ += $Mds_{0,0}*Nds_{0,0}$ + $Mds_{0,1}*Nds_{1,0}$
$thread_{0,1}$	$\mathbf{M_{0,1}}$ ↓ $Mds_{0,1}$	$\mathbf{N_{0,1}}$ ↓ $Nds_{1,0}$	$PValue_{0,1}$ += $Mds_{0,0}*Nds_{0,1}$ + $Mds_{0,1}*Nds_{1,1}$	$\mathbf{M_{0,3}}$ ↓ $Mds_{0,1}$	$\mathbf{N_{2,1}}$ ↓ $Nds_{0,1}$	$PValue_{0,1}$ += $Mds_{0,0}*Nds_{0,1}$ + $Mds_{0,1}*Nds_{1,1}$
$thread_{1,0}$	$\mathbf{M_{1,0}}$ ↓ $Mds_{1,0}$	$\mathbf{N_{1,0}}$ ↓ $Nds_{1,0}$	$PValue_{1,0}$ += $Mds_{1,0}*Nds_{0,0}$ + $Mds_{1,1}*Nds_{1,0}$	$\mathbf{M_{1,2}}$ ↓ $Mds_{1,0}$	$\mathbf{N_{3,0}}$ ↓ $Nds_{1,0}$	$PValue_{1,0}$ += $Mds_{1,0}*Nds_{0,0}$ + $Mds_{1,1}*Nds_{1,0}$
$thread_{1,1}$	$\mathbf{M_{1,1}}$ ↓ $Mds_{1,1}$	$\mathbf{N_{1,1}}$ ↓ $Nds_{1,1}$	$PValue_{1,1}$ += $Mds_{1,0}*Nds_{0,1}$ + $Mds_{1,1}*Nds_{1,1}$	$\mathbf{M_{1,3}}$ ↓ $Mds_{1,1}$	$\mathbf{N_{3,1}}$ ↓ $Nds_{1,1}$	$PValue_{1,1}$ += $Mds_{1,0}*Nds_{0,1}$ + $Mds_{1,1}*Nds_{1,1}$

time →

Execution Phases of Toy Example (cont.)

	Phase 0			Phase 1		
$thread_{0,0}$	$\mathbf{M_{0,0}}$ ↓ $Mds_{0,0}$	$\mathbf{N_{0,0}}$ ↓ $Nds_{0,0}$	$PValue_{0,0}$ += $Mds_{0,0}$*$Nds_{0,0}$ + $Mds_{0,1}$*$Nds_{1,0}$	$\mathbf{M_{0,2}}$ ↓ $Mds_{0,0}$	$\mathbf{N_{2,0}}$ ↓ $Nds_{0,0}$	$PValue_{0,0}$ += $Mds_{0,0}$*$Nds_{0,0}$ + $Mds_{0,1}$*$Nds_{1,0}$
$thread_{0,1}$	$\mathbf{M_{0,1}}$ ↓ $Mds_{0,1}$	$\mathbf{N_{0,1}}$ ↓ $Nds_{1,0}$	$PValue_{0,1}$ += $Mds_{0,0}$*$Nds_{0,1}$ + $Mds_{0,1}$*$Nds_{1,1}$	$\mathbf{M_{0,3}}$ ↓ $Mds_{0,1}$	$\mathbf{N_{2,1}}$ ↓ $Nds_{0,1}$	$PValue_{0,1}$ += $Mds_{0,0}$*$Nds_{0,1}$ + $Mds_{0,1}$*$Nds_{1,1}$
$thread_{1,0}$	$\mathbf{M_{1,0}}$ ↓ $Mds_{1,0}$	$\mathbf{N_{1,0}}$ ↓ $Nds_{1,0}$	$PValue_{1,0}$ += $Mds_{1,0}$*$Nds_{0,0}$ + $Mds_{1,1}$*$Nds_{1,0}$	$\mathbf{M_{1,2}}$ ↓ $Mds_{1,0}$	$\mathbf{N_{3,0}}$ ↓ $Nds_{1,0}$	$PValue_{1,0}$ += $Mds_{1,0}$*$Nds_{0,0}$ + $Mds_{1,1}$*$Nds_{1,0}$
$thread_{1,1}$	$\mathbf{M_{1,1}}$ ↓ $Mds_{1,1}$	$\mathbf{N_{1,1}}$ ↓ $Nds_{1,1}$	$PValue_{1,1}$ += $Mds_{1,0}$*$Nds_{0,1}$ + $Mds_{1,1}$*$Nds_{1,1}$	$\mathbf{M_{1,3}}$ ↓ $Mds_{1,1}$	$\mathbf{N_{3,1}}$ ↓ $Nds_{1,1}$	$PValue_{1,1}$ += $Mds_{1,0}$*$Nds_{0,1}$ + $Mds_{1,1}$*$Nds_{1,1}$

time →

Shared memory allows each value to be accessed by multiple threads

Barrier Synchronization

- Synchronize all threads in a block
  - __syncthreads()

- All threads in the same block must reach the __syncthreads() before any of the them can move on

- Best used to coordinate the phased execution tiled algorithms
  - To ensure that all elements of a tile are loaded at the beginning of a phase
  - To ensure that all elements of a tile are consumed at the end of a phase

Objective

- To learn to write a tiled matrix-multiplication kernel
  - Loading and using tiles for matrix multiplication
  - Barrier synchronization, shared memory
  - Resource Considerations
  - Assume that Width is a multiple of tile size for simplicity

Loading Input Tile 0 of M (Phase 0)

– Have each thread load an M element and an N element at the same relative position as its P element.

```
int Row = by * blockDim.y + ty;
int Col =   bx * blockDim.x + tx;
```

2D indexing for accessing Tile 0:

M[Row][tx]

N[ty][Col]

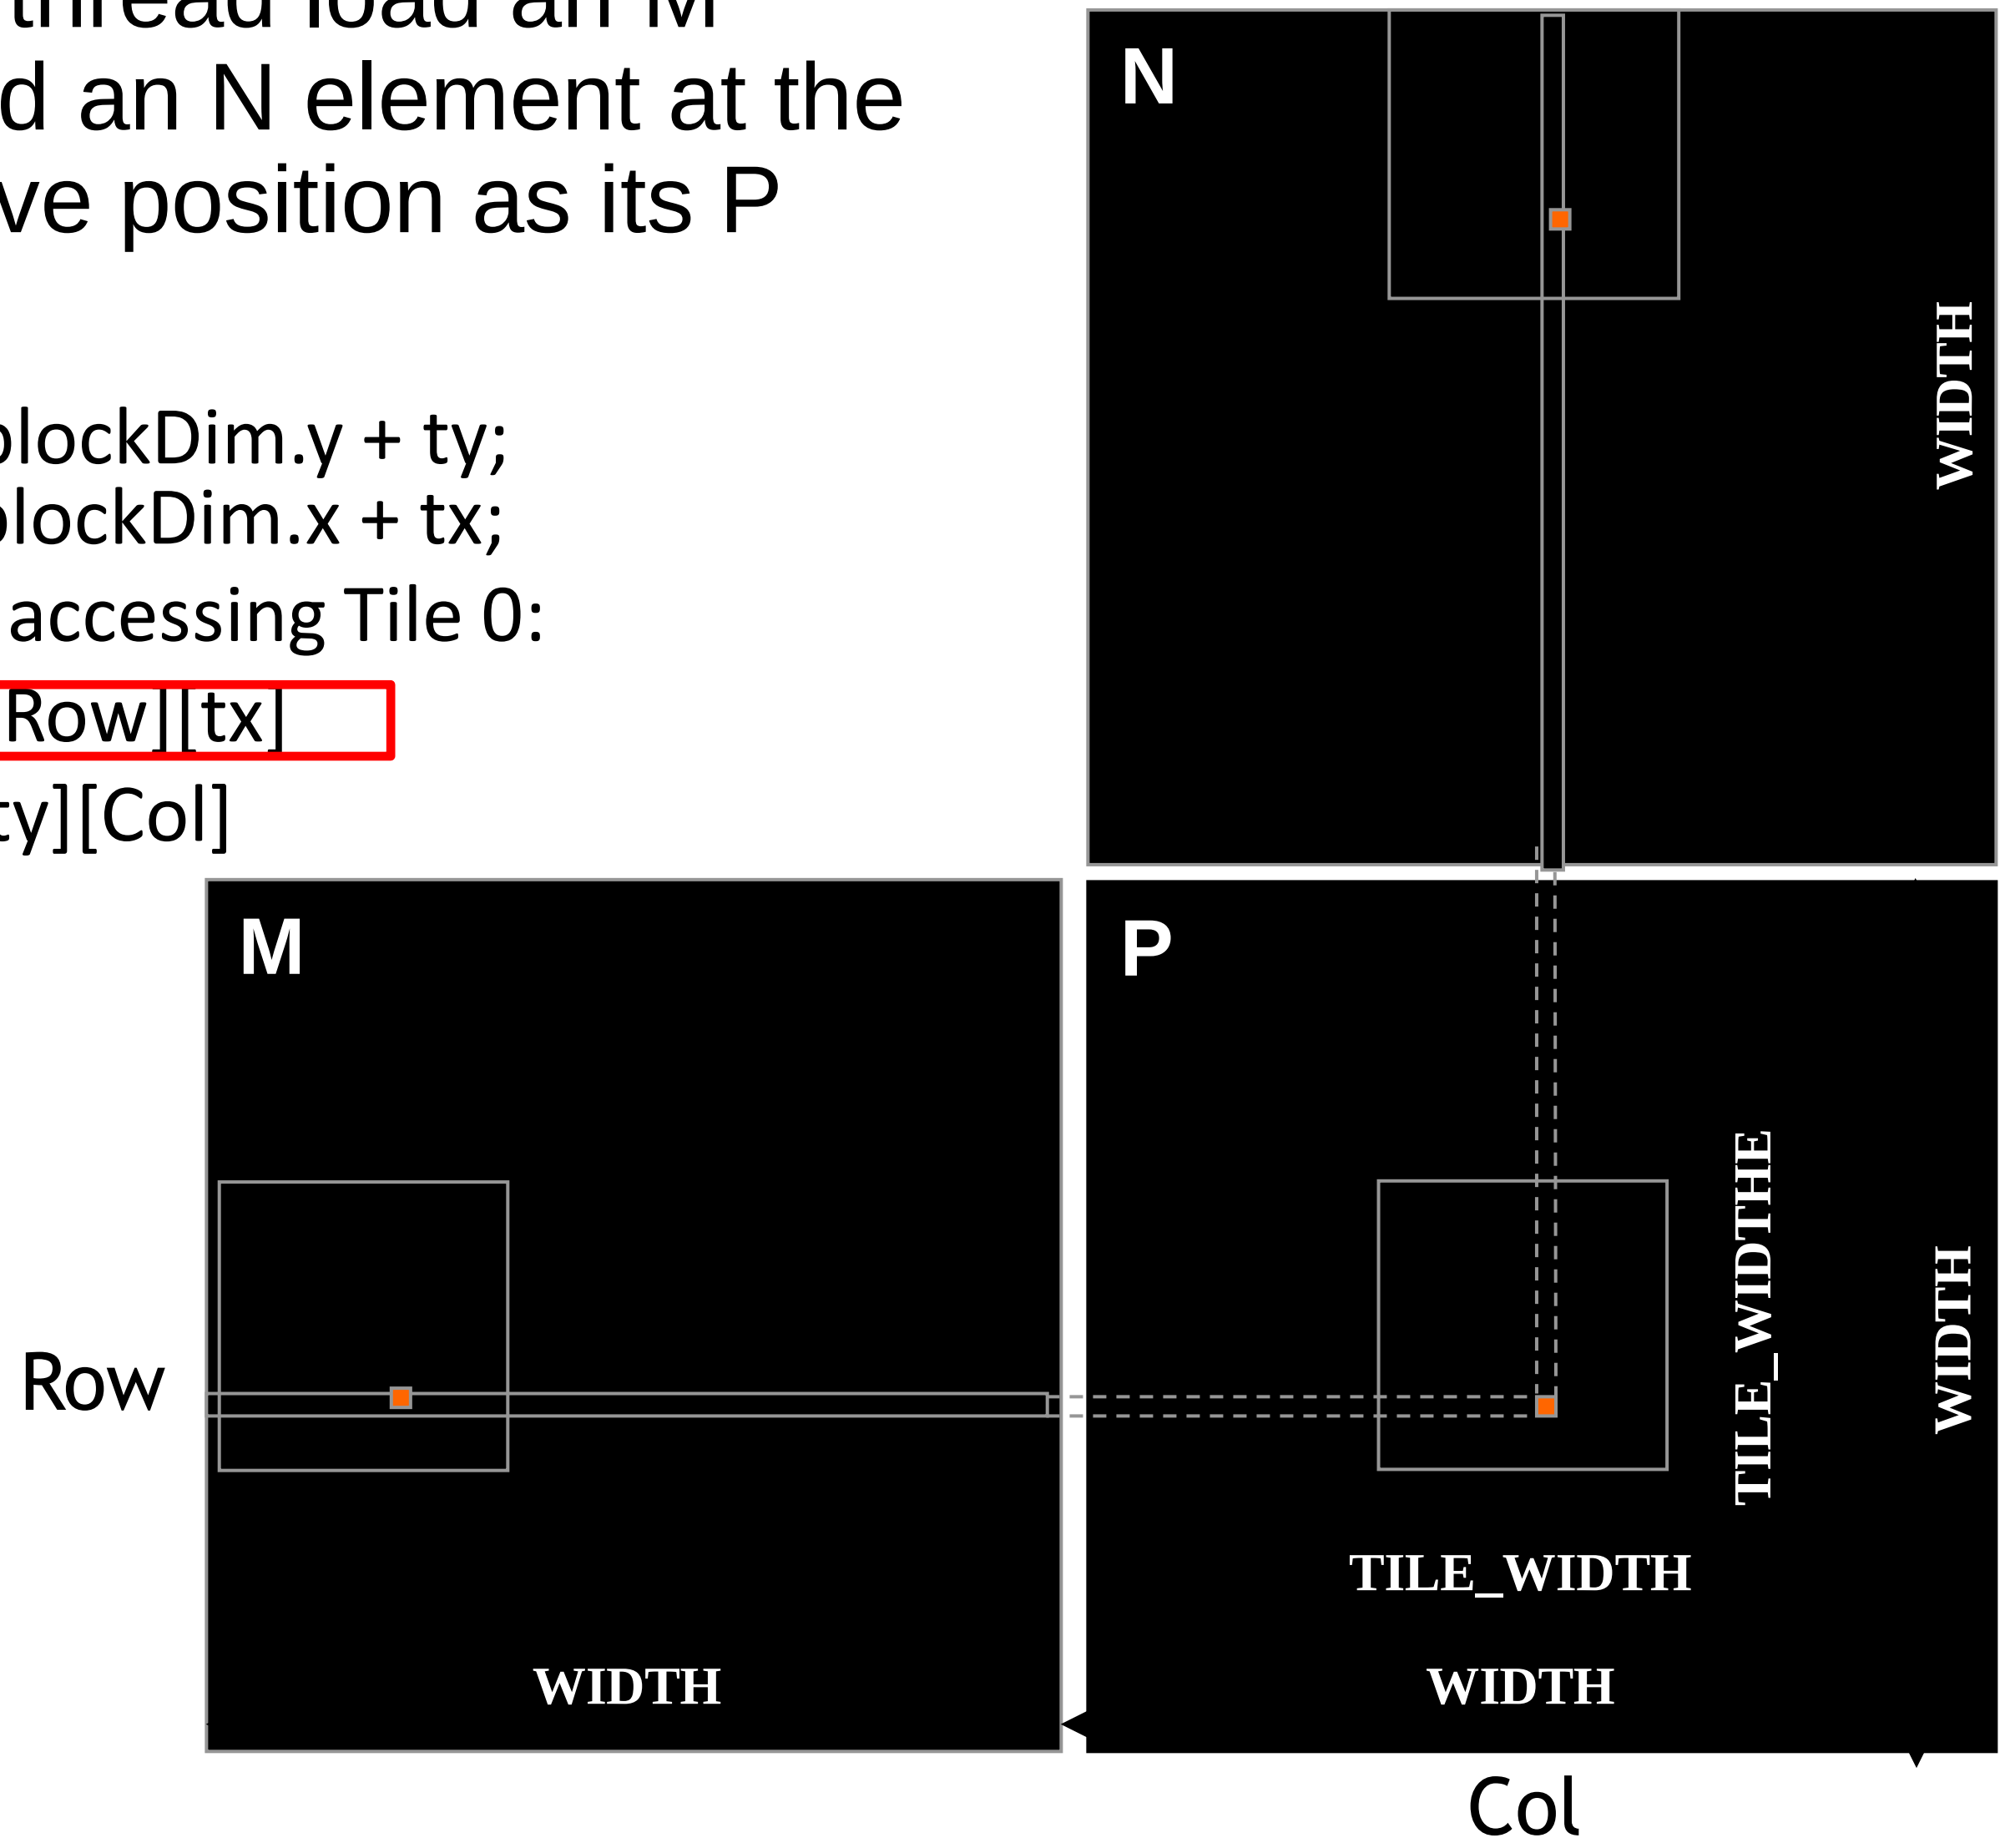

Loading Input Tile 0 of N (Phase 0)

– Have each thread load an M element and an N element at the same relative position as its P element.

int Row = by * blockDim.y + ty;
int Col =   bx * blockDim.x + tx;

2D indexing for accessing Tile 0:

M[Row][tx]

$\boxed{\text{N[ty][Col]}}$

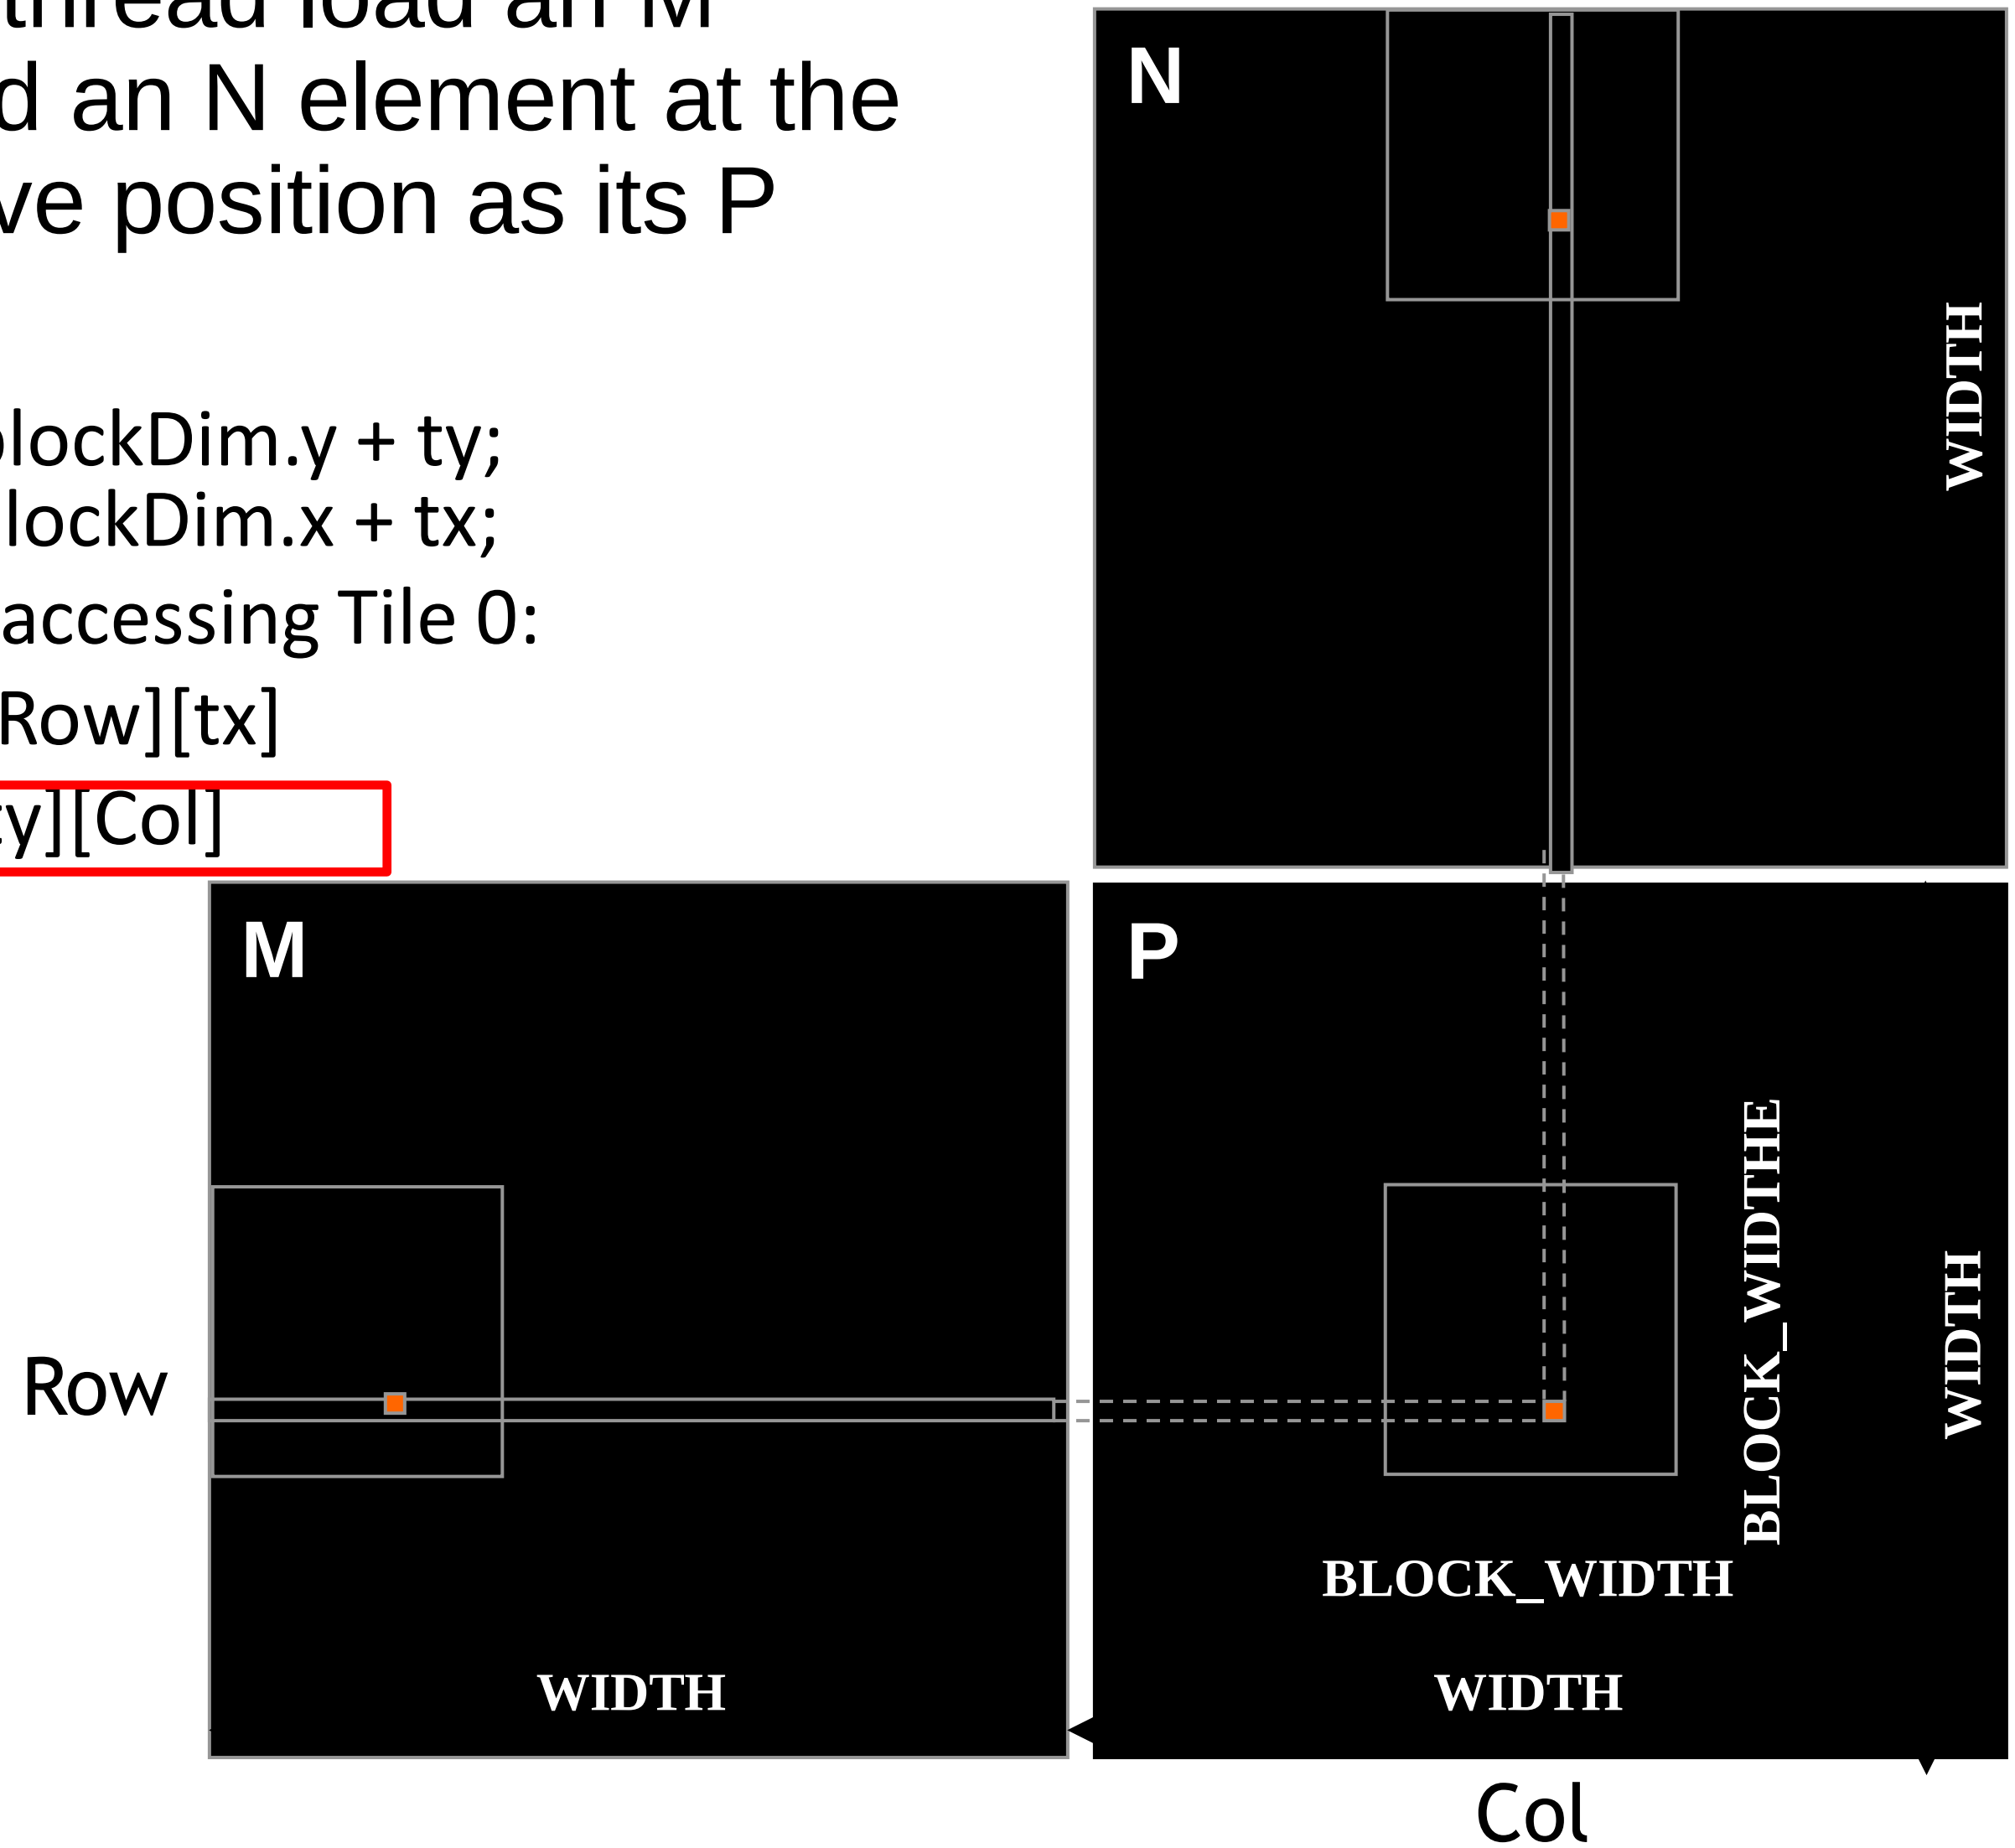

Loading Input Tile 1 of M (Phase 1)

2D indexing for accessing Tile 1:

$\boxed{\text{M[Row][1*TILE\_WIDTH + tx]}}$

N[1*TILE*WIDTH + ty][Col]

Loading Input Tile 1 of N (Phase 1)

2D indexing for accessing Tile 1:

M[Row][1*TILE_WIDTH + tx]

N[1*TILE*WIDTH + ty][Col]

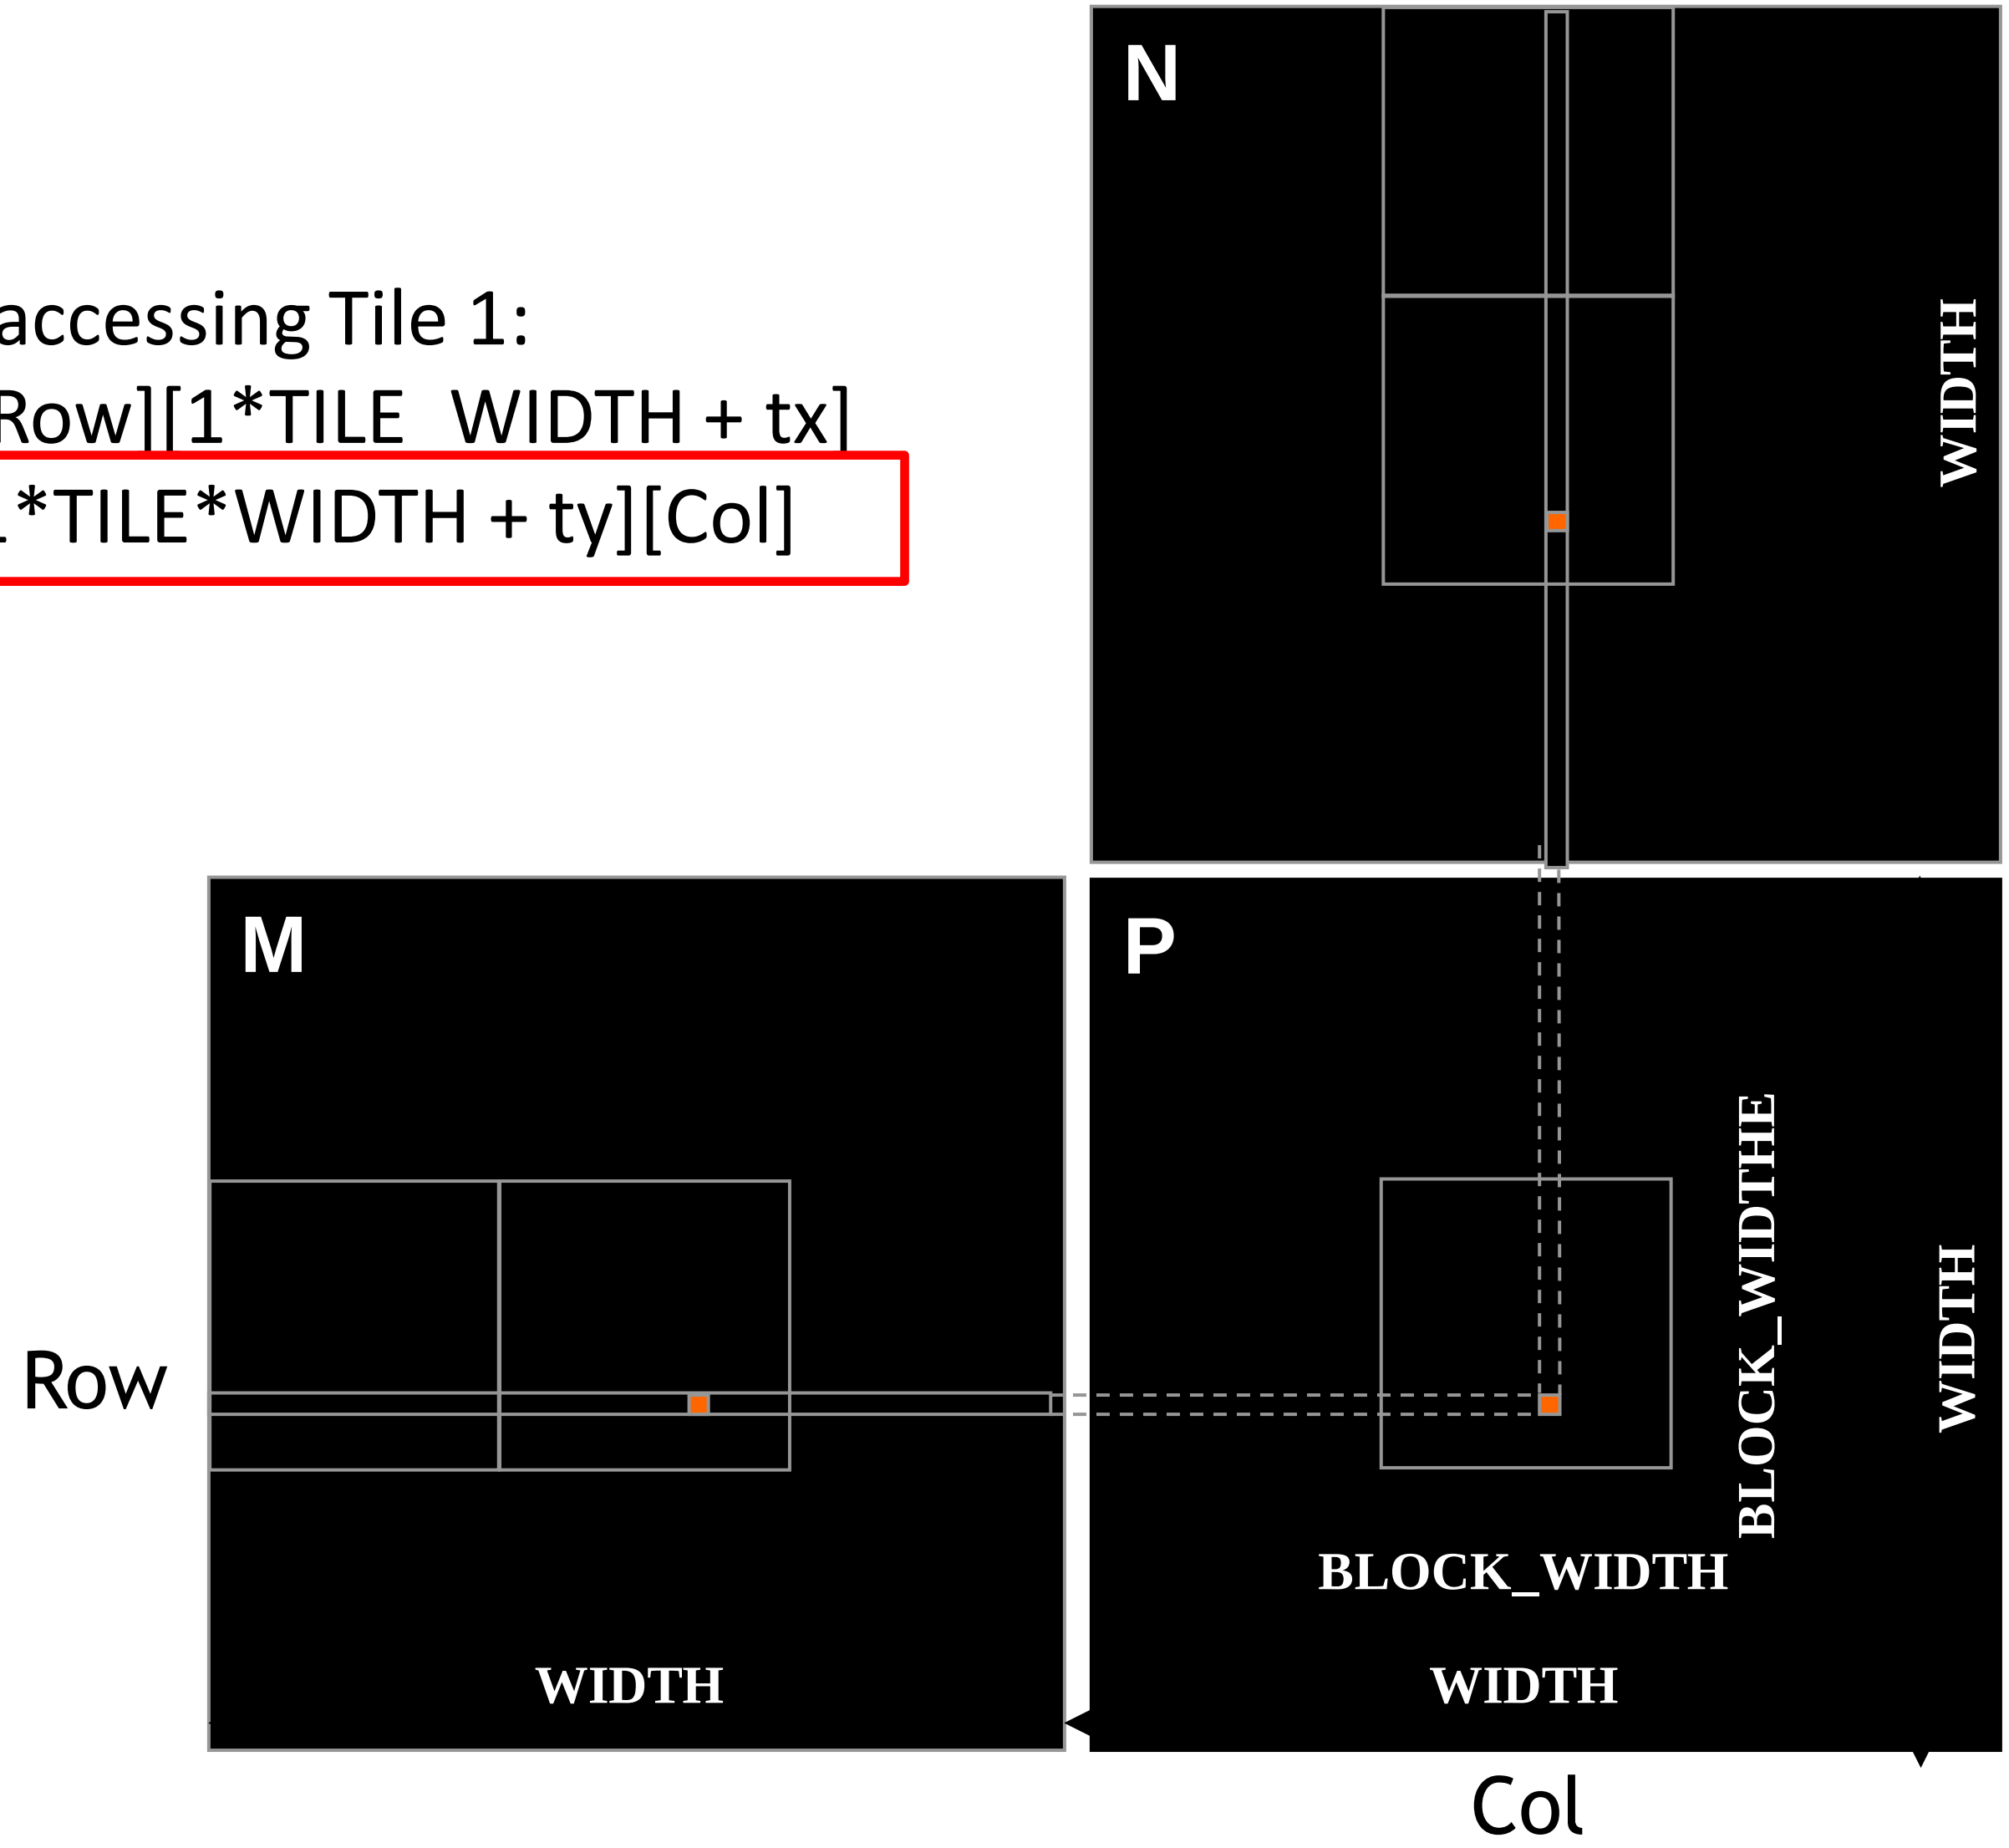

M and N are dynamically allocated - use 1D indexing

M[Row][p*TILE_WIDTH+tx]

⇨ M[Row*Width + p*TILE_WIDTH + tx]

N[p*TILE_WIDTH+ty][Col]

⇨ N[(p*TILE_WIDTH+ty)*Width + Col]

where p is the sequence number of the current phase

Tiled Matrix Multiplication Kernel

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, Int Width)
{
  __shared__ float ds_M[TILE_WIDTH][TILE_WIDTH];
  __shared__ float ds_N[TILE_WIDTH][TILE_WIDTH];

  int bx = blockIdx.x;  int by = blockIdx.y;
  int tx = threadIdx.x; int ty = threadIdx.y;

  int Row = by * blockDim.y + ty;
  int Col = bx * blockDim.x + tx;
  float Pvalue = 0;

 // Loop over the M and N tiles required to compute the P element
 for (int p = 0; p < n/TILE_WIDTH; ++p) {
    // Collaborative loading of M and N tiles into shared memory
    ds_M[ty][tx] = M[Row*Width + p*TILE_WIDTH+tx];
    ds_N[ty][tx] = N[(t*TILE_WIDTH+ty)*Width + Col];
    __syncthreads();

    for (int i = 0; i < TILE_WIDTH; ++i)Pvalue += ds_M[ty][i] * ds_N[i][tx];
    __synchthreads();
  }
  P[Row*Width+Col] = Pvalue;
}
```

Tiled Matrix Multiplication Kernel

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, Int Width)
{
  __shared__ float ds_M[TILE_WIDTH][TILE_WIDTH];
  __shared__ float ds_N[TILE_WIDTH][TILE_WIDTH];

  int bx = blockIdx.x;  int by = blockIdx.y;
  int tx = threadIdx.x; int ty = threadIdx.y;

  int Row = by * blockDim.y + ty;
  int Col = bx * blockDim.x + tx;
  float Pvalue = 0;

 // Loop over the M and N tiles required to compute the P element
 for (int p = 0; p < n/TILE_WIDTH; ++p) {
    // Collaborative loading of M and N tiles into shared memory
    ds_M[ty][tx] = M[Row*Width + p*TILE_WIDTH+tx];
    ds_N[ty][tx] = N[(t*TILE_WIDTH+ty)*Width + Col];
    __syncthreads();

    for (int i = 0; i < TILE_WIDTH; ++i)Pvalue += ds_M[ty][i] * ds_N[i][tx];
    __synchthreads();
  }
  P[Row*Width+Col] = Pvalue;
}
```

Tiled Matrix Multiplication Kernel

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, Int Width)
{
  __shared__ float ds_M[TILE_WIDTH][TILE_WIDTH];
  __shared__ float ds_N[TILE_WIDTH][TILE_WIDTH];

  int bx = blockIdx.x;  int by = blockIdx.y;
  int tx = threadIdx.x; int ty = threadIdx.y;

  int Row = by * blockDim.y + ty;
  int Col = bx * blockDim.x + tx;
  float Pvalue = 0;

 // Loop over the M and N tiles required to compute the P element
 for (int p = 0; p < n/TILE_WIDTH; ++p) {
    // Collaborative loading of M and N tiles into shared memory
    ds_M[ty][tx] = M[Row*Width + p*TILE_WIDTH+tx];
    ds_N[ty][tx] = N[(t*TILE_WIDTH+ty)*Width + Col];
    __syncthreads();

    for (int i = 0; i < TILE_WIDTH; ++i)Pvalue += ds_M[ty][i] * ds_N[i][tx];
    __synchthreads();
  }
  P[Row*Width+Col] = Pvalue;
}
```

Tile (Thread Block) Size Considerations

- Each thread block should have many threads
  - TILE_WIDTH of 16 gives 16*16 = 256 threads
  - TILE_WIDTH of 32 gives 32*32 = 1024 threads

- For 16, in each phase, each block performs 2*256 = 512 float loads from global memory for 256 * (2*16) = 8,192 mul/add operations. (16 floating-point operations for each memory load)

- For 32, in each phase, each block performs 2*1024 = 2048 float loads from global memory for 1024 * (2*32) = 65,536 mul/add operations. (32 floating-point operation for each memory load)

Shared Memory and Threading

- For an SM with 16KB shared memory
  - Shared memory size is implementation dependent!
  - For TILE_WIDTH = 16, each thread block uses 2*256*4B = 2KB of shared memory.
  - For 16KB shared memory, one can potentially have up to 8 thread blocks executing
    - This allows up to 8*512 = 4,096 pending loads. (2 per thread, 256 threads per block)
  - The next TILE_WIDTH 32 would lead to 2*32*32*4 Byte= 8K Byte shared memory usage per thread block, allowing 2 thread blocks active at the same time
    - However, in a GPU where the thread count is limited to 1536 threads per SM, the number of blocks per SM is reduced to one!
- Each __synchthread() can reduce the number of active threads for a block
  - More thread blocks can be advantageous

Objective

- To learn to handle arbitrary matrix sizes in tiled matrix multiplication
  - Boundary condition checking
  - Regularizing tile contents
  - Rectangular matrices

Handling Matrix of Arbitrary Size

- The tiled matrix multiplication kernel we presented so far can handle only square matrices whose dimensions (Width) are multiples of the tile width (TILE_WIDTH)
  - However, real applications need to handle arbitrary sized matrices.
  - One could pad (add elements to) the rows and columns into multiples of the tile size, but would have significant space and data transfer time overhead.
- We will take a different approach.

Phase 1 Loads for Block (0,0) for a 3x3 Example

Threads (1,0) and (1,1) need special treatment in loading N tile

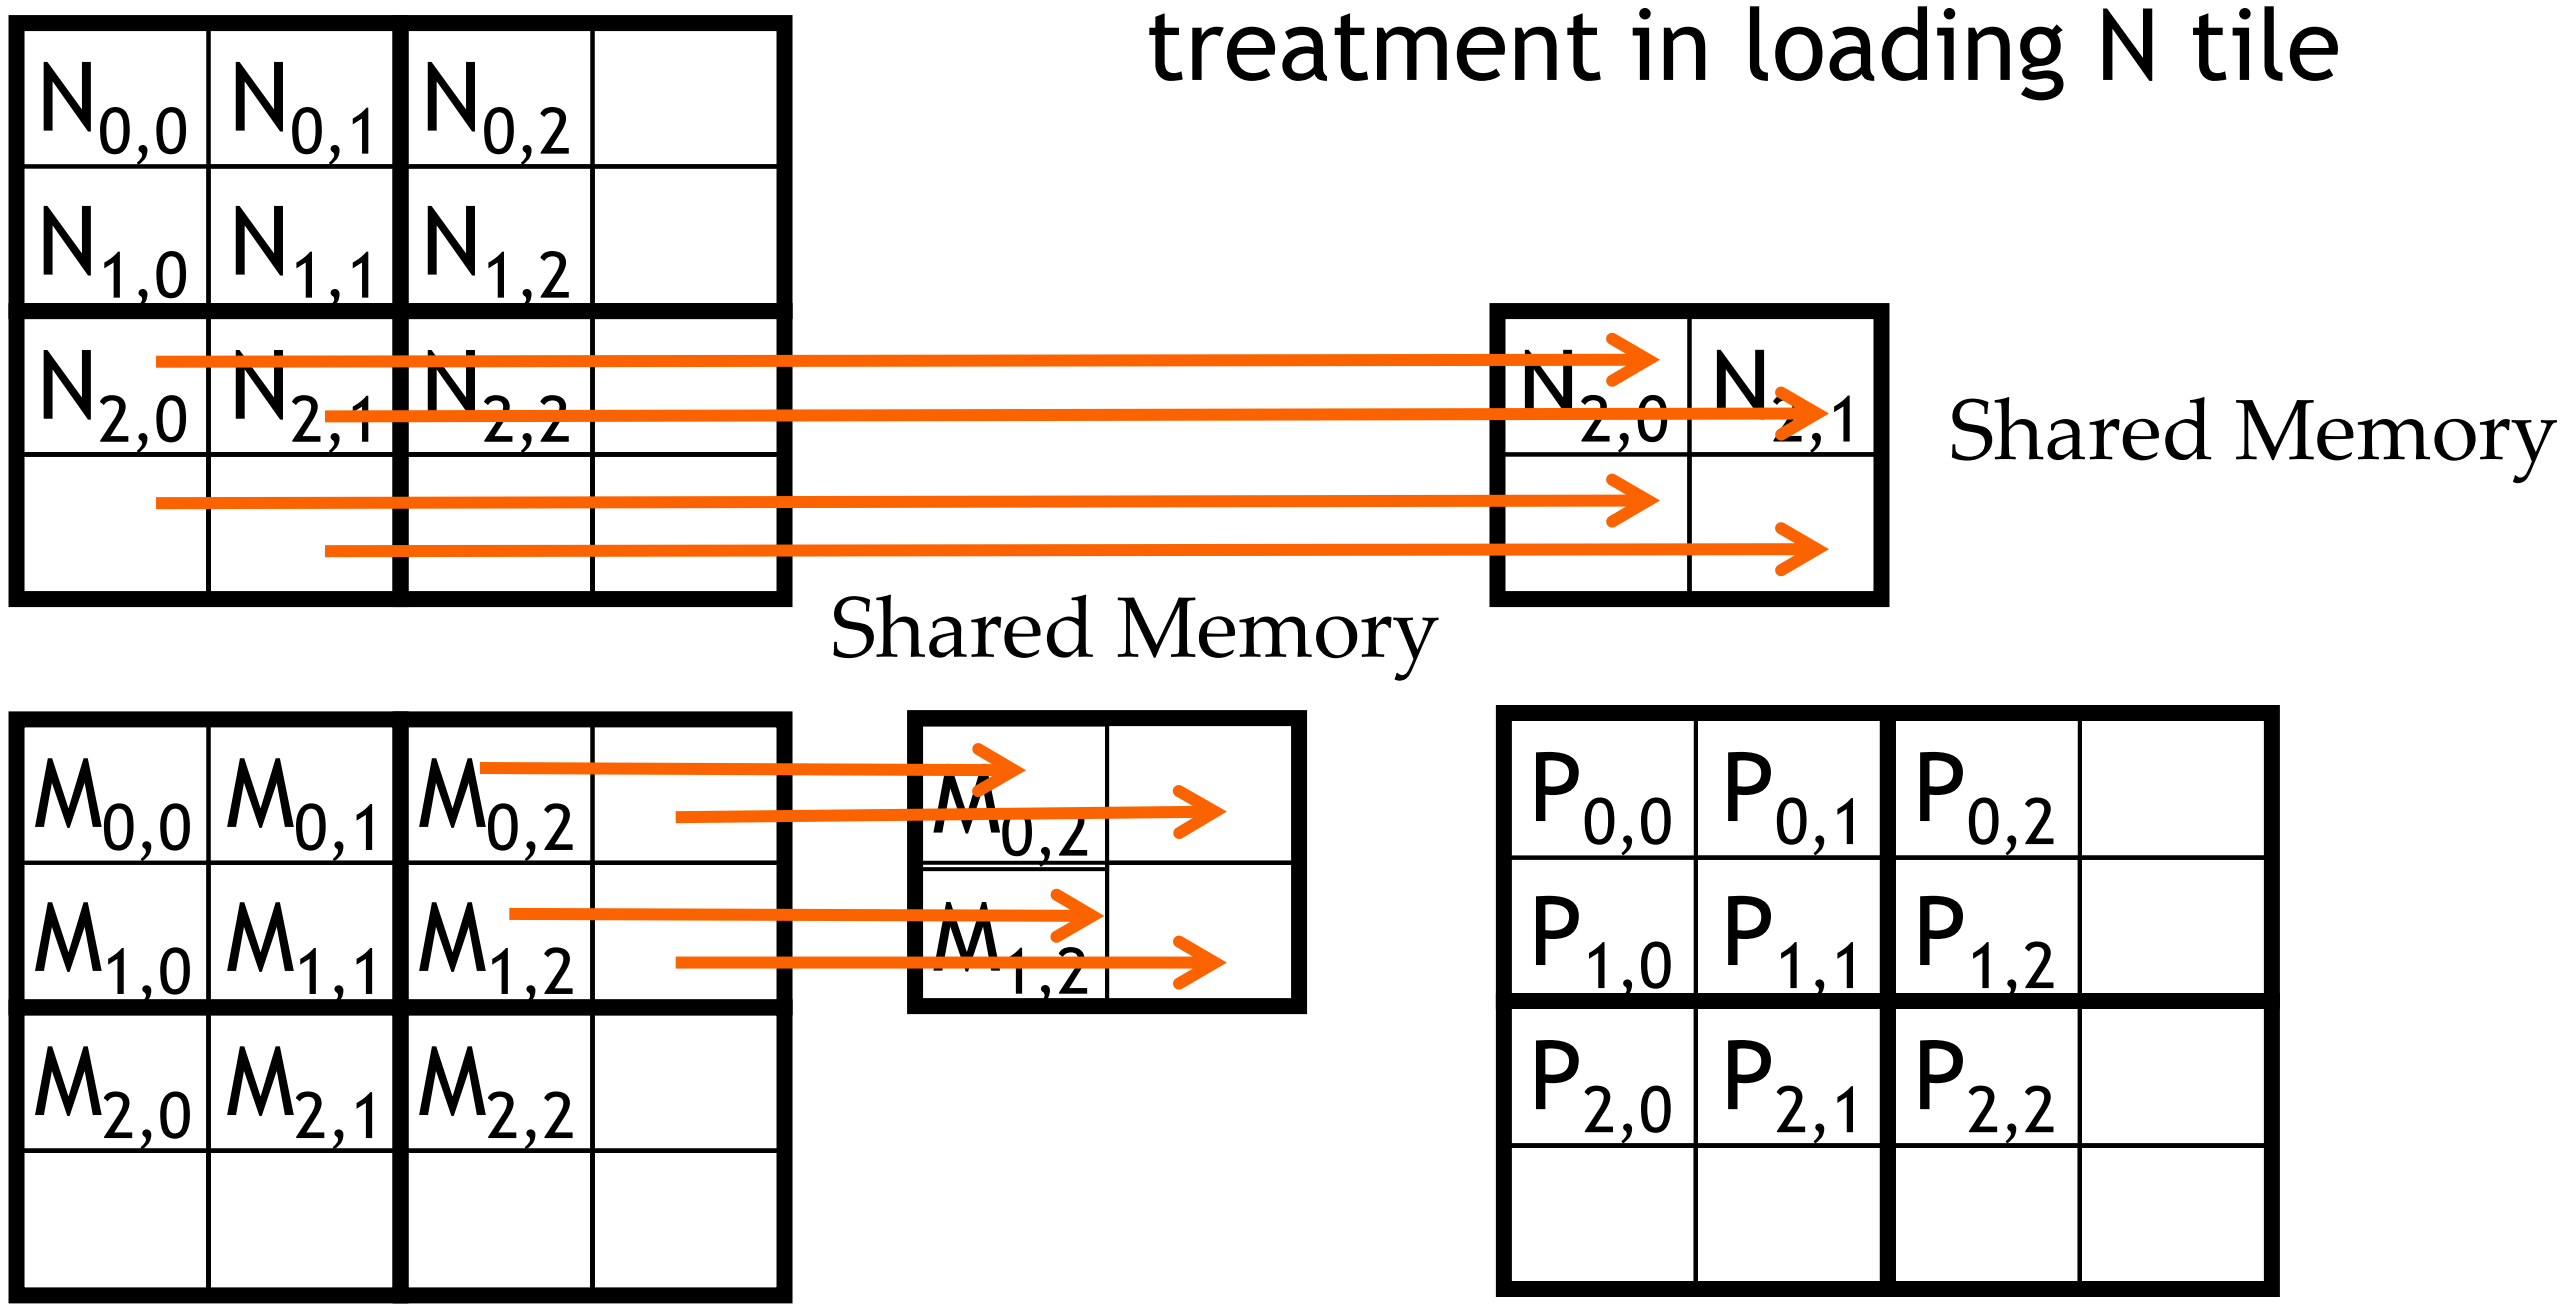

Threads (0,1) and (1,1) need special treatment in loading M tile

Phase 1 Use for Block (0,0) (iteration 0)

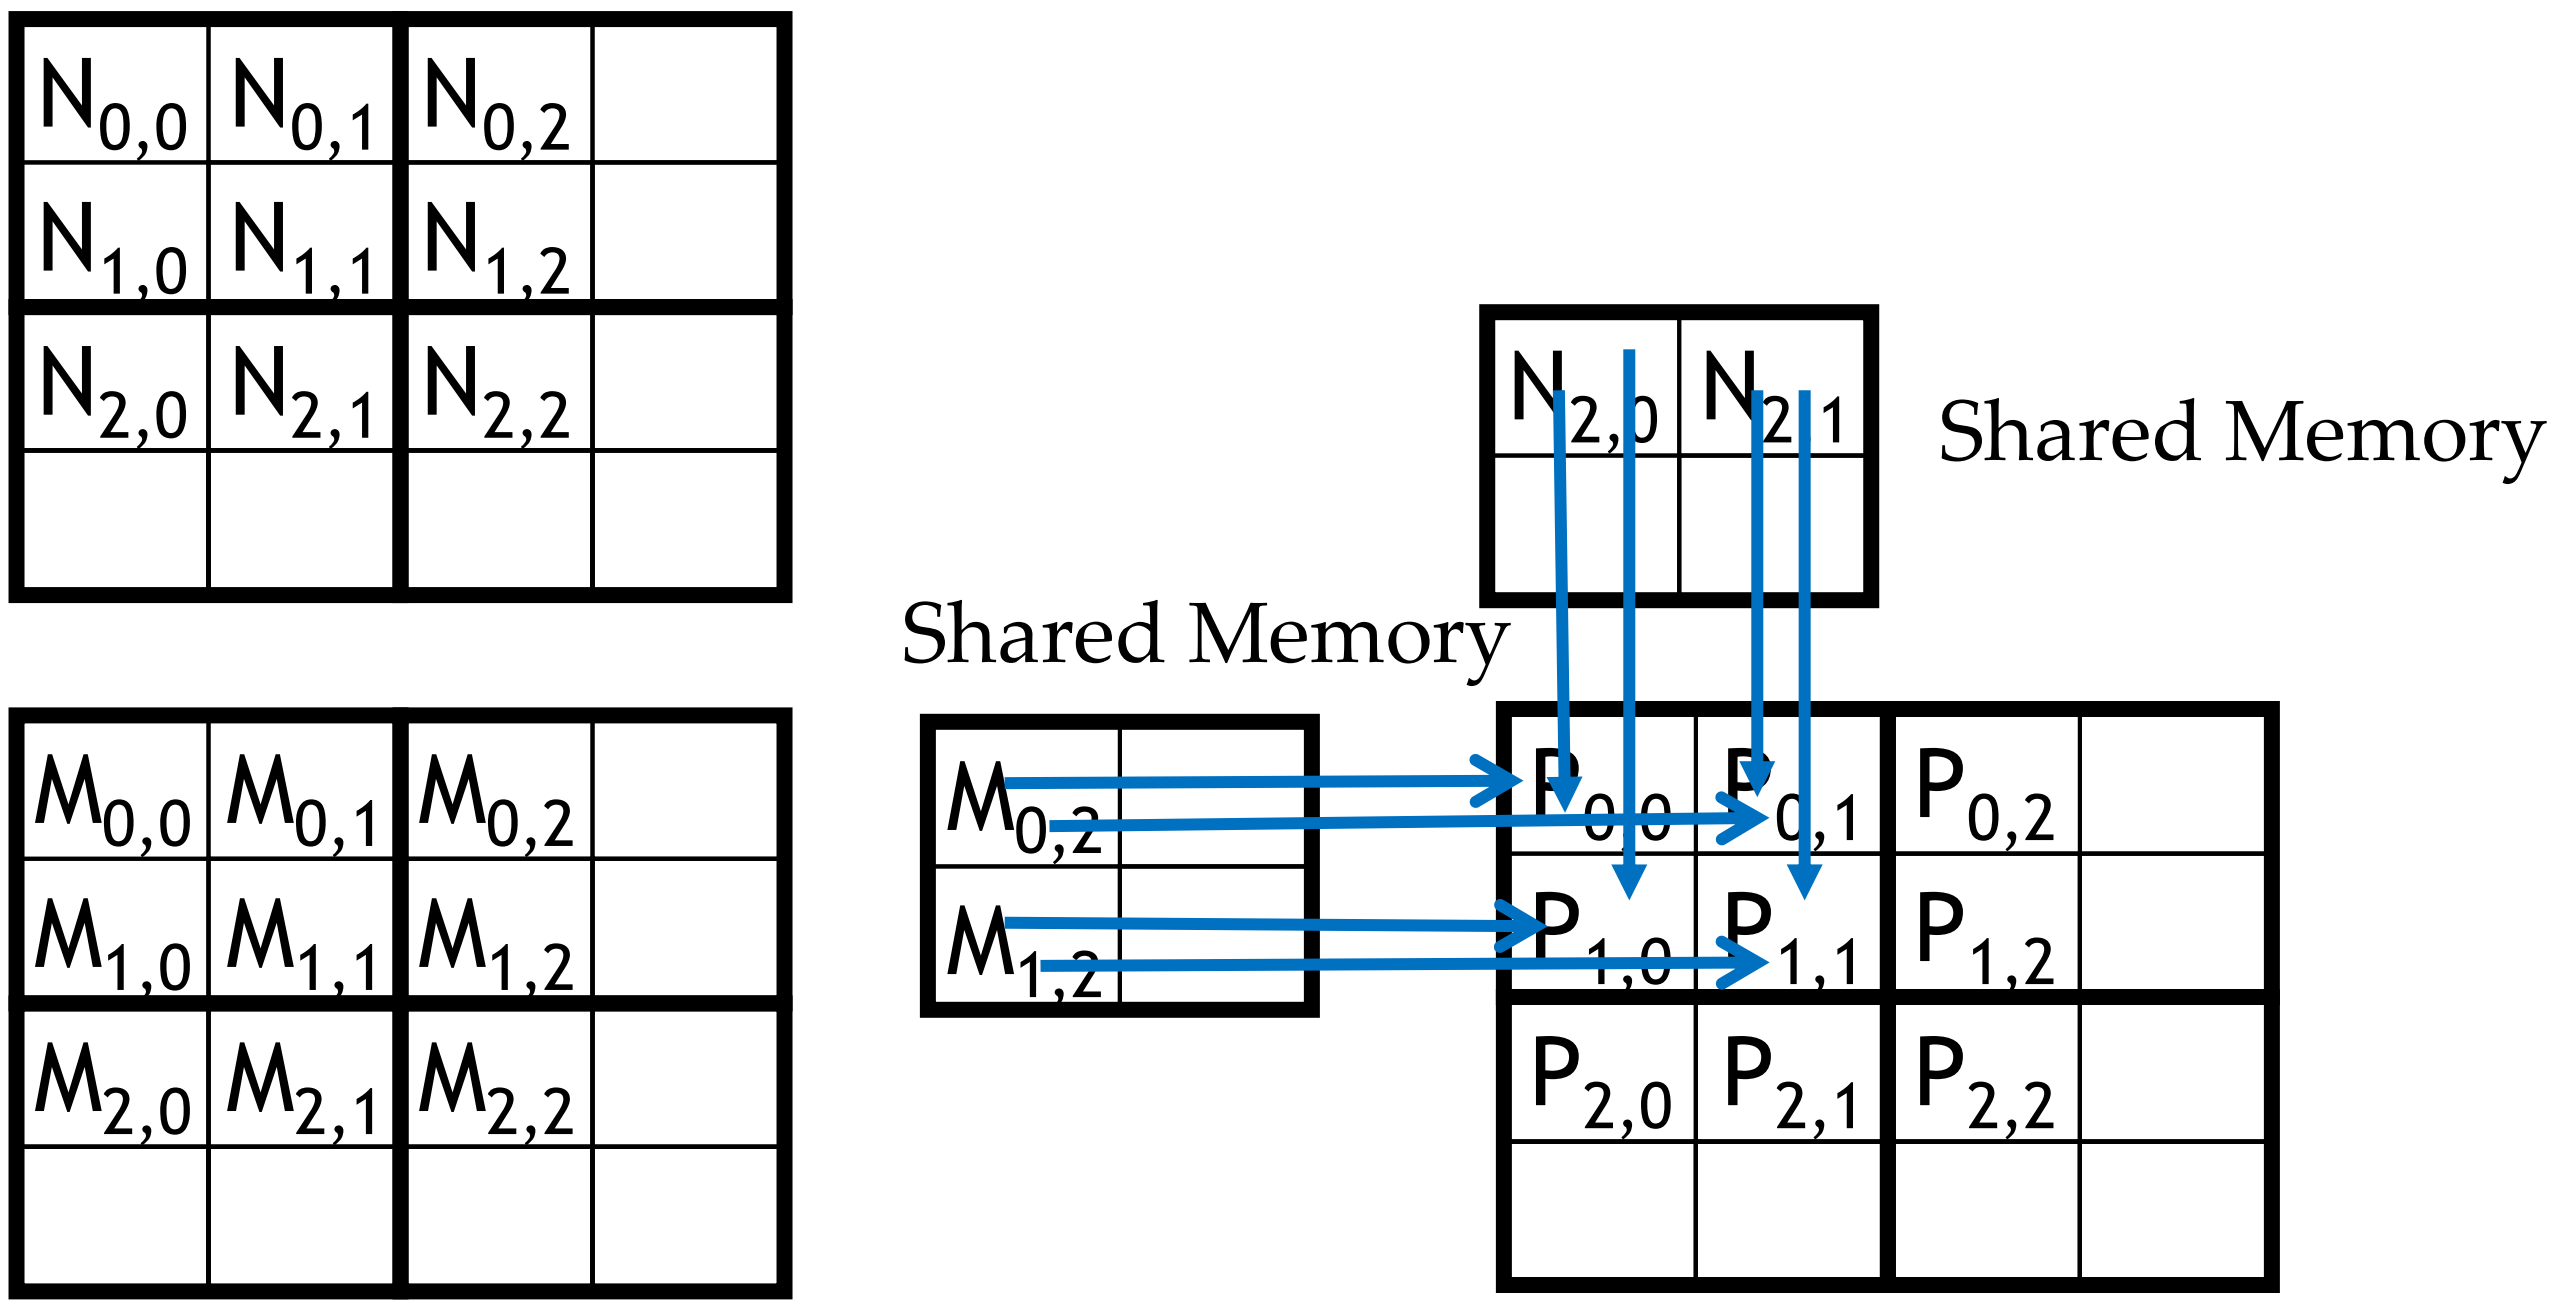

Phase 1 Use for Block (0,0) (iteration 1)

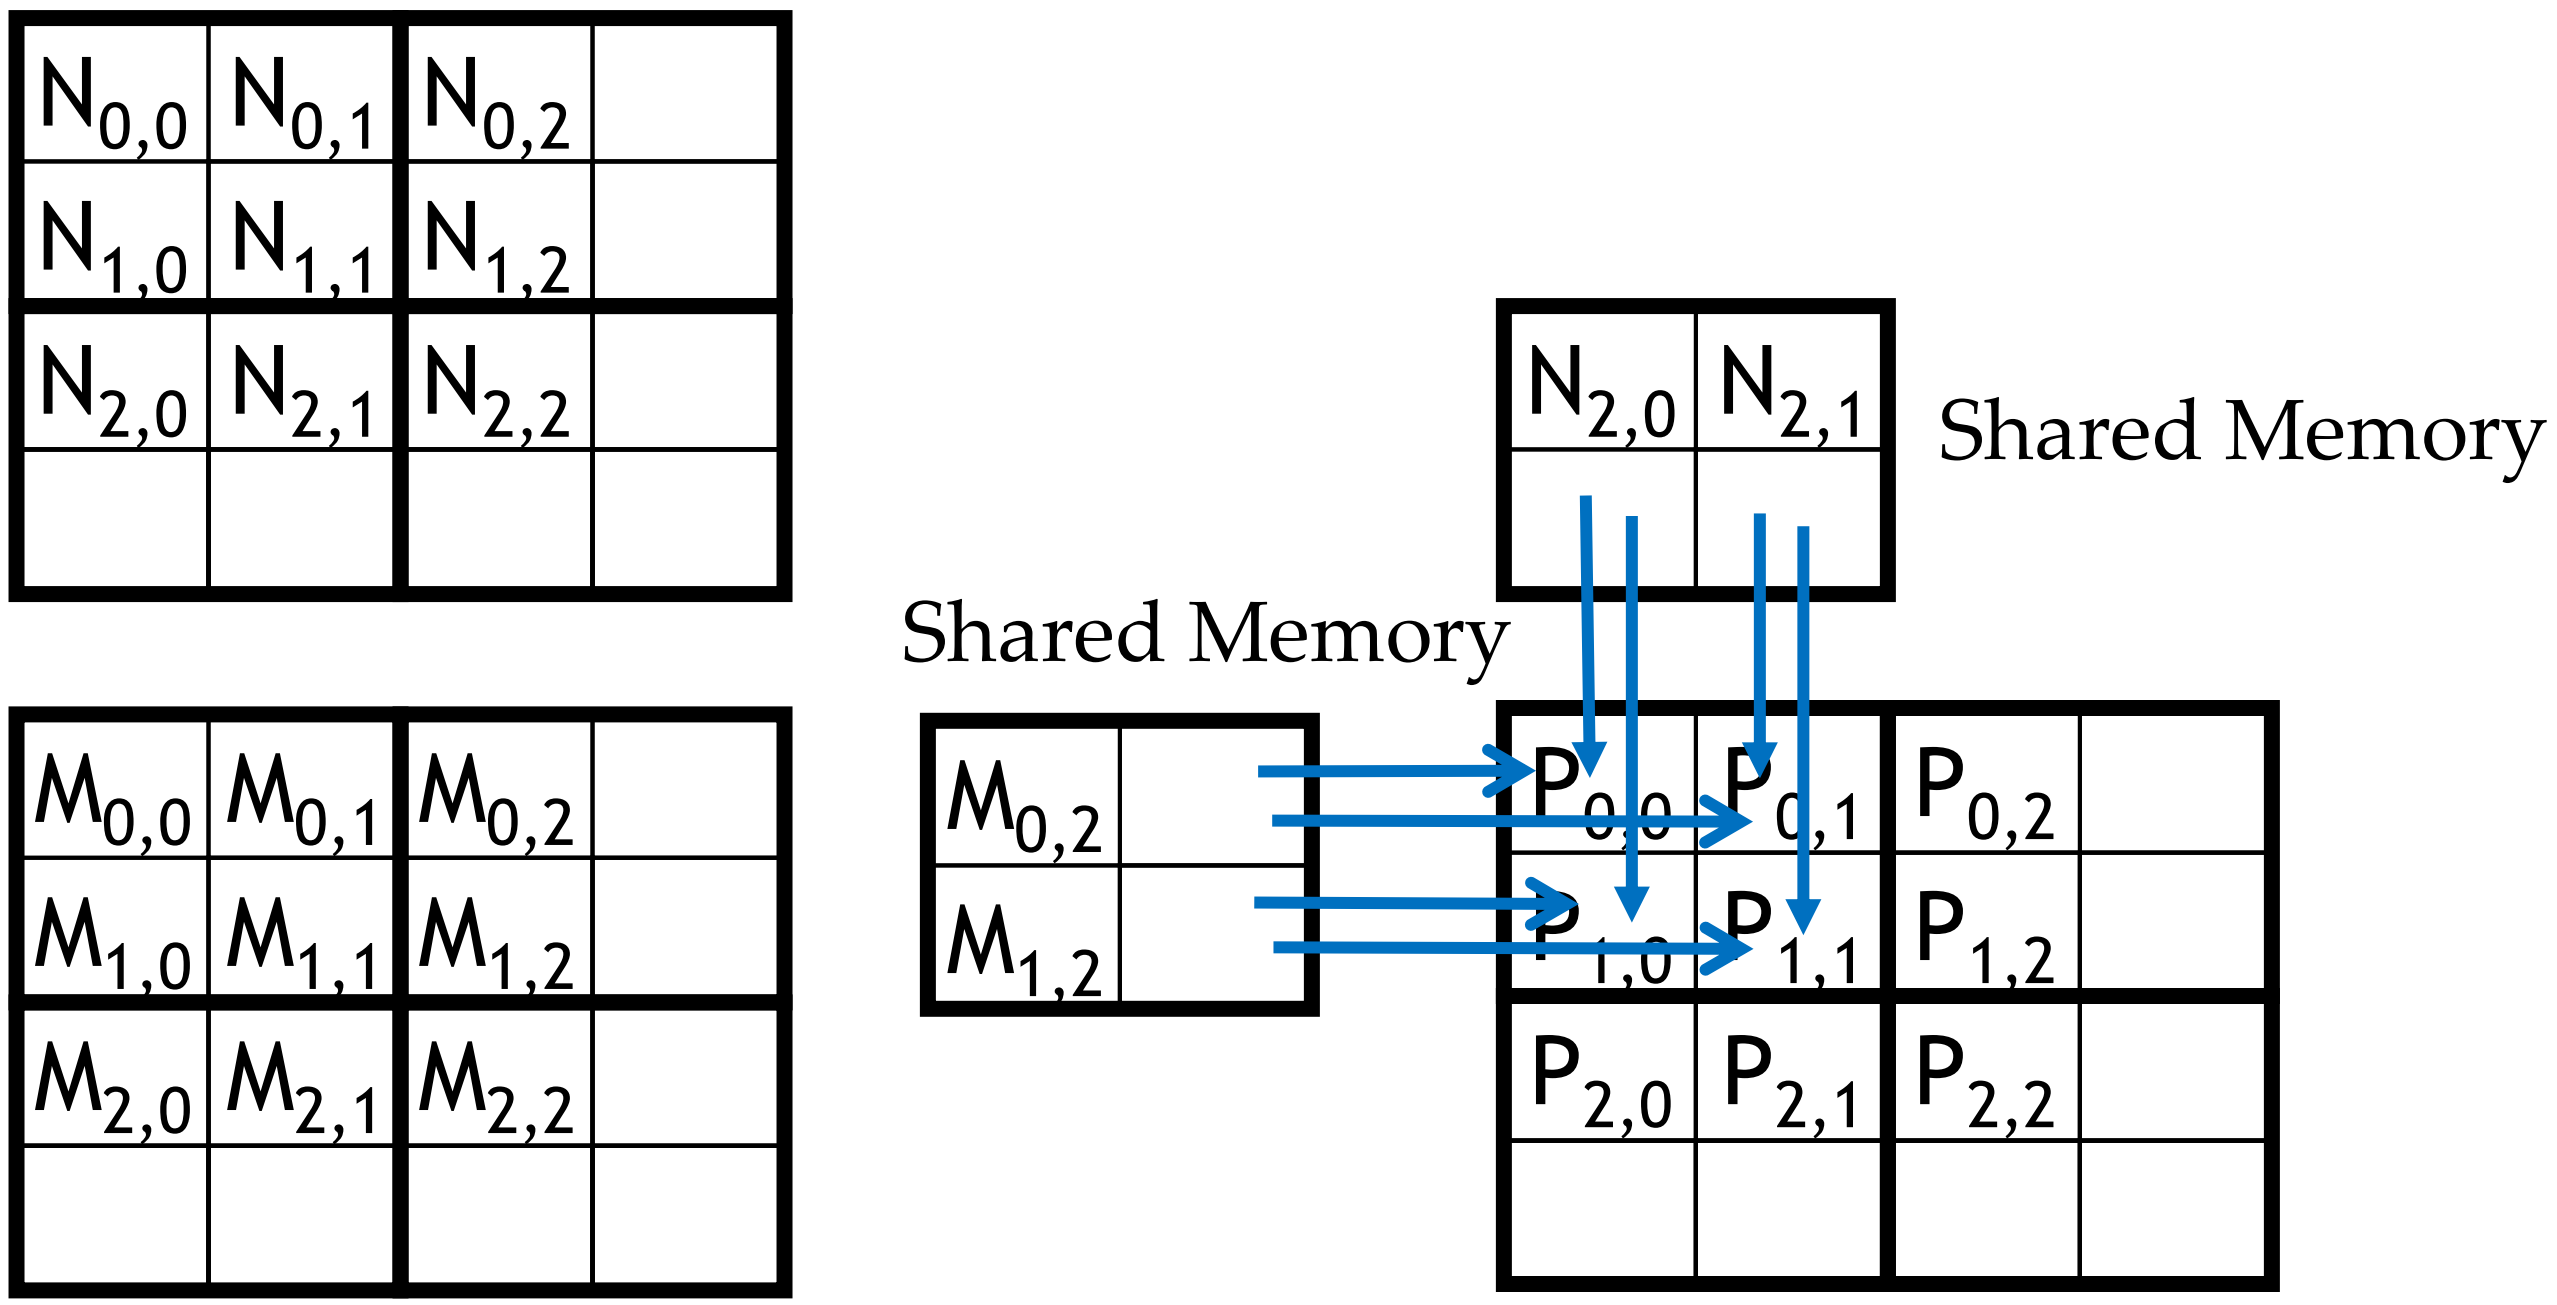

All Threads need special treatment. None of them should introduce invalidate contributions to their P elements.

Phase 0 Loads for Block (1,1) for a 3x3 Example

Threads (0,1) and (1,1) need special treatment in loading N tile

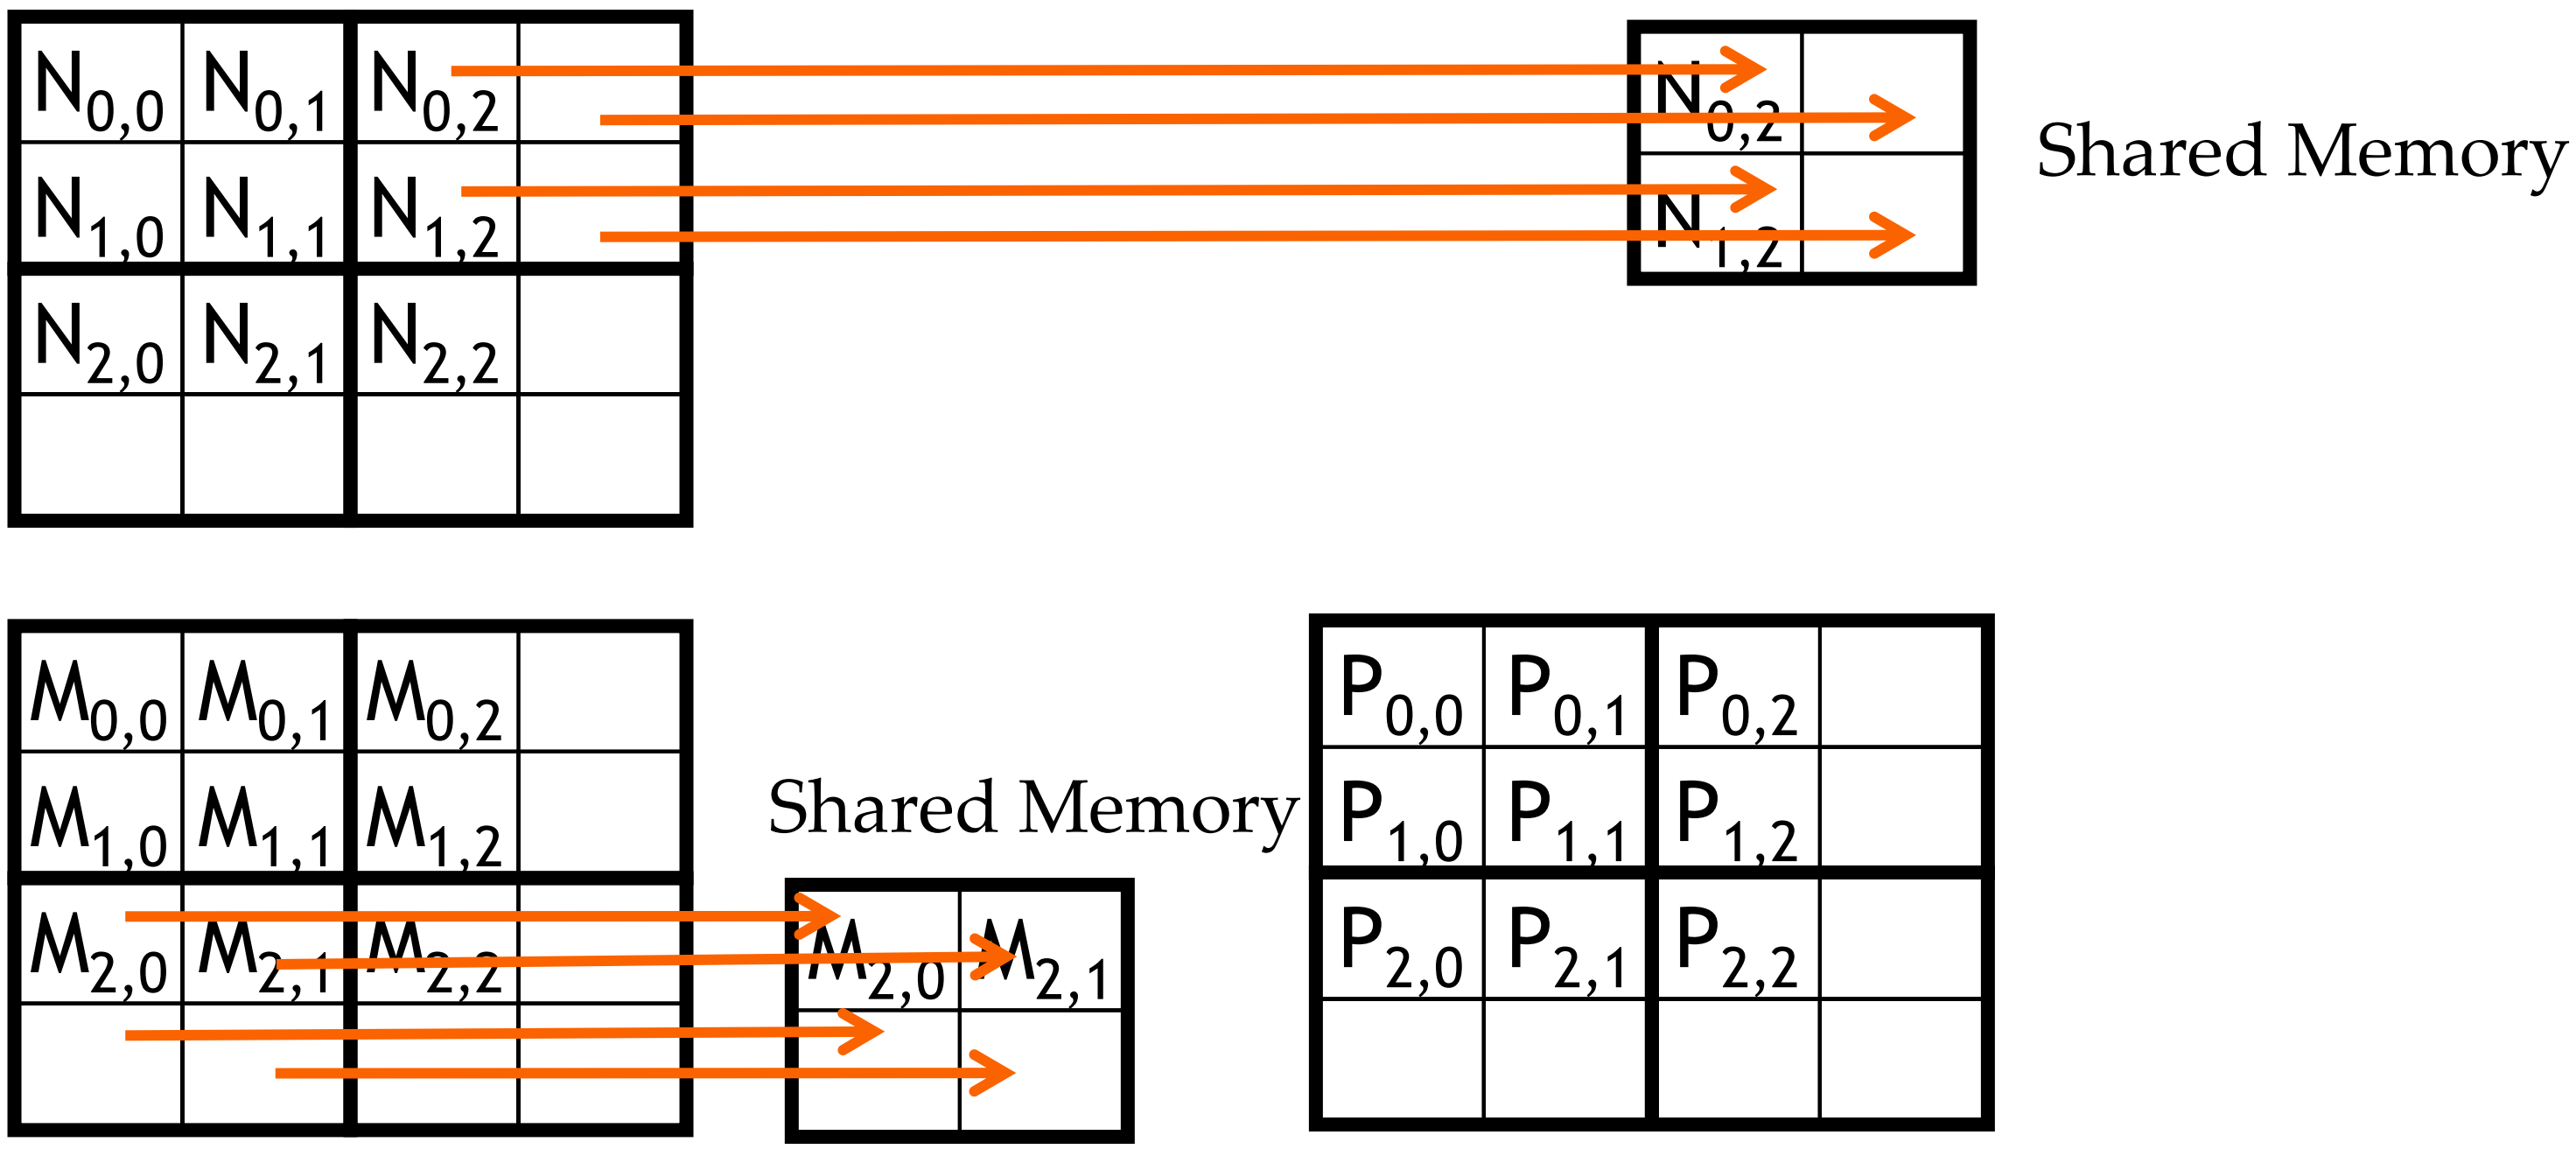

Threads (1,0) and (1,1) need special treatment in loading M tile

Major Cases in Toy Example

- Threads that do not calculate valid P elements but still need to participate in loading the input tiles
  - Phase 0 of Block(1,1), Thread(1,0), assigned to calculate non-existent P[3,2] but need to participate in loading tile element N[1,2]

- Threads that calculate valid P elements may attempt to load non-existing input elements when loading input tiles
  - Phase 0 of Block(0,0), Thread(1,0), assigned to calculate valid P[1,0] but attempts to load non-existing N[3,0]

A “Simple” Solution

- When a thread is to load any input element, test if it is in the valid index range
  - If valid, proceed to load
  - Else, do not load, just write a 0

- Rationale: a 0 value will ensure that that the multiply-add step does not affect the final value of the output element

- The condition tested for loading input elements is different from the test for calculating output P element
  - A thread that does not calculate valid P element can still participate in loading input tile elements

Phase 1 Use for Block (0,0) (iteration 1)

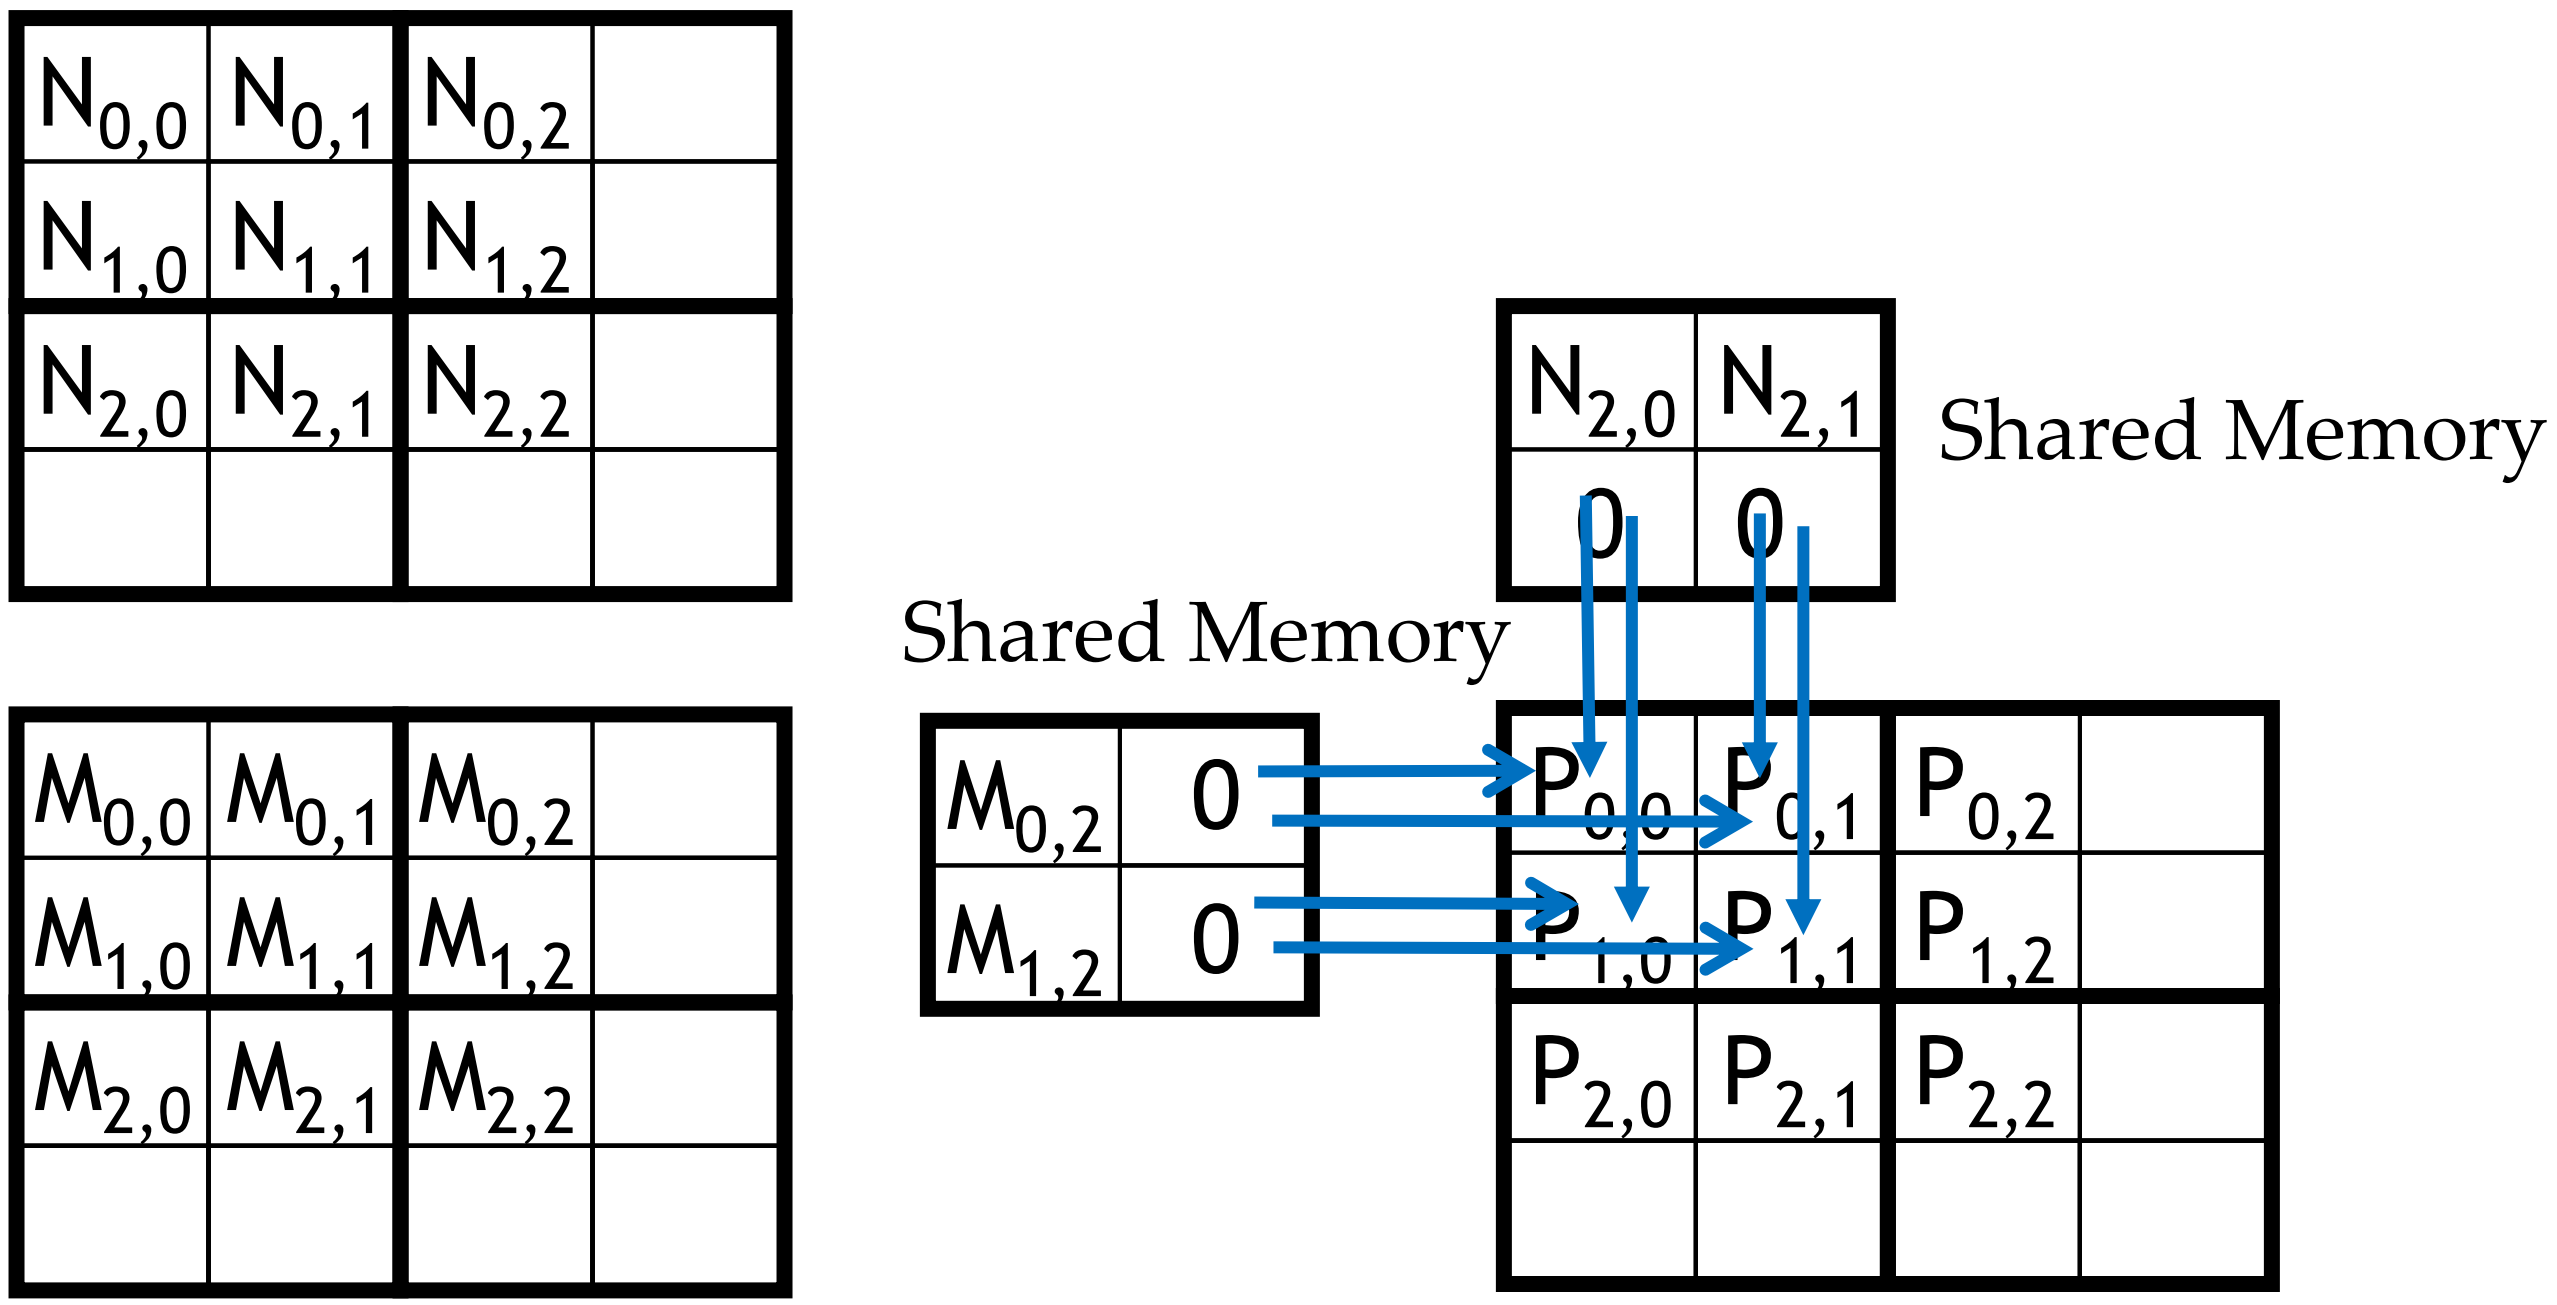

Boundary Condition for Input M Tile

- Each thread loads
  - M[Row][p*TILE_WIDTH+tx]
  - M[Row*Width + p*TILE_WIDTH+tx]
- Need to test
  - (Row < Width) && (p*TILE_WIDTH+tx < Width)
  - If true, load M element
  - Else , load 0

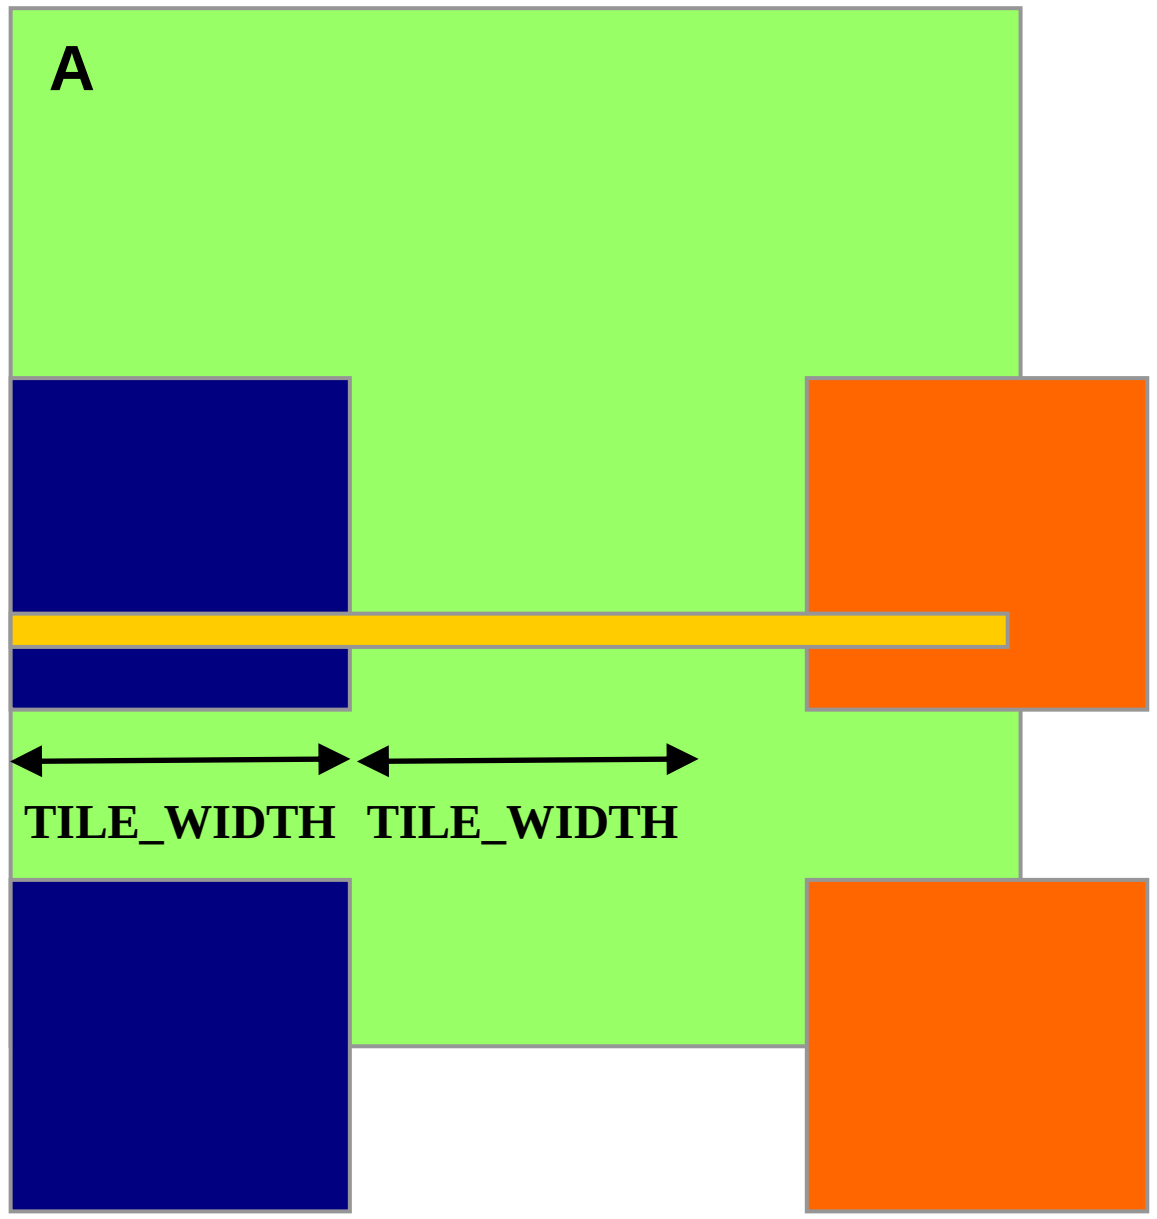

Boundary Condition for Input N Tile

– Each thread loads
  – N[p*TILE_WIDTH+ty][Col]
  – N[(p*TILE_WIDTH+ty)*Width+ Col]
– Need to test
  – (p*TILE_WIDTH+ty < Width) && (Col< Width)
  – If true, load N element
  – Else , load 0

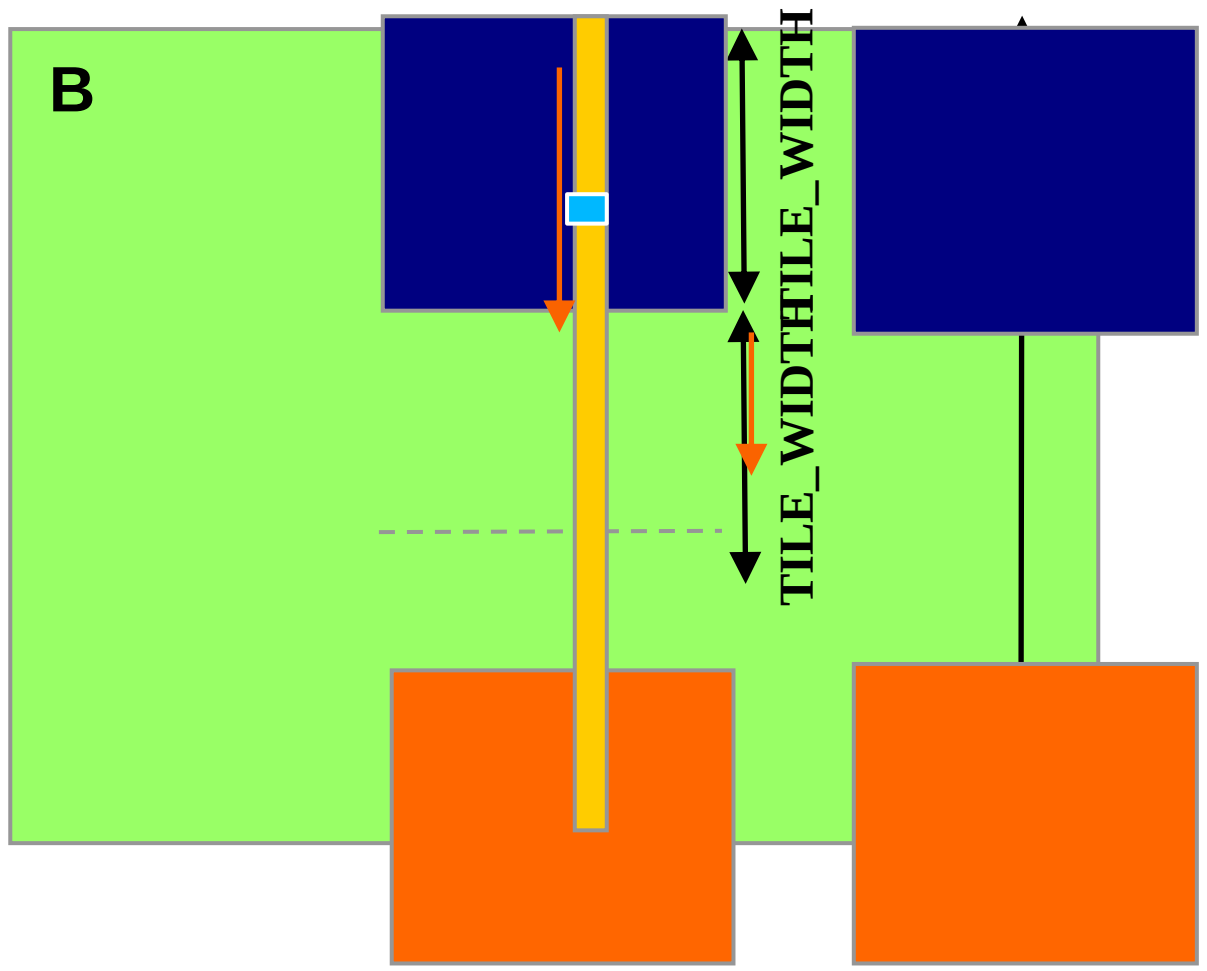

Loading Elements – with boundary check

```
    for (int p = 0; p < (Width-1) / TILE_WIDTH + 1; ++p) {

++      if(Row < Width && t * TILE_WIDTH+tx < Width) {
            ds_M[ty][tx] = M[Row * Width + p * TILE_WIDTH + tx];
++      } else {
++          ds_M[ty][tx] = 0.0;
++      }
++      if (p*TILE_WIDTH+ty < Width && Col < Width) {
            ds_N[ty][tx] = N[(p*TILE_WIDTH + ty) * Width + Col];
++      } else {
++          ds_N[ty][tx] = 0.0;
++      }
        __syncthreads();
```

Inner Product – Before and After

- ++ if(Row < Width && Col < Width) {
- 12 for (int i = 0; i < TILE_WIDTH; ++i) {
- 13 Pvalue += ds_M[ty][i] * ds_N[i][tx];
- }
- 14 __syncthreads();
- 15 } /* end of outer for loop */
- ++ if (Row < Width && Col < Width)
- 16 P[Row*Width + Col] = Pvalue;
- } /* end of kernel */

Some Important Points

- For each thread the conditions are different for
  - Loading M element
  - Loading N element
  - Calculating and storing output elements
- The effect of control divergence should be small for large matrices

Handling General Rectangular Matrices

- In general, the matrix multiplication is defined in terms of rectangular matrices
  - A j x k M matrix multiplied with a k x l N matrix results in a j x l P matrix

- We have presented square matrix multiplication, a special case

- The kernel function needs to be generalized to handle general rectangular matrices
  - The Width argument is replaced by three arguments: j, k, l
  - When Width is used to refer to the height of M or height of P, replace it with j
  - When Width is used to refer to the width of M or height of N, replace it with k
  - When Width is used to refer to the width of N or width of P, replace it with l