

# COULOMB EXCITATION OF $^{140}\text{Sm}$

by

Trond Wiggo Johansen

THESIS

for the degree of

MASTER OF SCIENCE



Faculty of Mathematics and Natural Sciences  
University of Oslo

September 2019



# **Abstract**



To my family, for all their support and encouragement!



# Acknowledgements

Supervisors Andreas Görzen and Katarzyna Hadyńska-Klęk  
Nuclear Physics Group  
Computational Physics Group, Morten Hjorth-Jensen  
CERN-ISOLDE, Liam Gaffney  
Lillefy, FFU, Fysikkforeningen  
My family  
Morten, Alex and Astrid.  
Ina, for pushing me towards excellence, I love you.

## Collaboration details

ENSAR2: European Nuclear Science and Applications Research - 2 <http://www.ensarfp7.eu>, UiO, ISOLDE, other contributors to the experiment?

*Trond Wiggo Johansen*

September, 2019



# Contents

<b>1</b>	<b>Introduction</b>	<b>11</b>
<b>2</b>	<b>Theory</b>	<b>13</b>
2.1	Oppgaveteksten (skal fjernes!)	15
2.2	Information sources	16
<b>3</b>	<b>Coulomb excitation experiment</b>	<b>19</b>
3.1	ISOLDE at CERN	19
3.1.1	Beam production	19
3.1.2	Target	23
3.2	Miniball	23
3.2.1	Particle detector, DSSSD (CD)	24
3.2.2	$\gamma$ detectors, HPGe	24
3.3	Experimental setup	26
<b>4</b>	<b>Data analysis</b>	<b>29</b>
4.1	Data and sorting	34
4.2	Helping scripts	36
4.3	Simulation	36
4.4	Calibration	38
4.4.1	Particle detector	43
4.4.2	Gamma detectors	44
4.5	Doppler correction	44
<b>5</b>	<b>Experimental results</b>	<b>51</b>
<b>6</b>	<b>Discussion</b>	<b>53</b>
<b>7</b>	<b>Summary and outlook</b>	<b>55</b>
<b>Appendices</b>		<b>57</b>
<b>Appendix A</b>	<b>Symbol list</b>	<b>59</b>
<b>Appendix B</b>	<b>Acronyms and abbreviations</b>	<b>61</b>
<b>Appendix C</b>	<b>Two-particle collision</b>	<b>63</b>
C.1	Laboratory (LAB) frame of reference	63
C.2	Center of mass (CM) frame of reference	66
C.3	Connection between the LAB frame and the CM frame	68

<b>Appendix D Source code</b>	<b>73</b>
<b>Appendix E Connecting MiniballCoulexSort with ROOT</b>	<b>75</b>
<b>Appendix F Running ROOT and MiniballCoulexSort from anywhere in the terminal</b>	<b>77</b>
<b>Appendix G Other appendices</b>	<b>79</b>
<b>Bibliography</b>	<b>81</b>

# Chapter 1

## Introduction

### + Motivation

kinsim [1]

The experiment has been done before, with lower energy (and another target), Malin Klintefjord. <http://urn.nb.no/URN:NBN:no-56121>

Experiment conducted 8th - 14th of August 2017.

Tilbakemelding:

old REX-ISOLDE post-accelerator limited to 2.8 MeV/u (low Coulomb excitation cross section, low probability for multi-step excitation). Mo target was chosen to maximize cross section at this energy, and to normalize  $B(E2; 0^+ \rightarrow 2^+)$  value in  $^{140}\text{Sm}$  to the well-known  $B(E2)$  value for the target.

New HIE-ISOLDE: energies up to 10 MeV/u  $\implies$  we can choose high-Z target (Pb)  $\implies$  high Coulex cross section, especially for multi-step. Also:  $B(E2)$  for  $^{140}\text{Sm}$  now known from previous experiment (and a lifetime measurement)  $\implies$  no need for normalization: we can use the known  $B(E2; 0^+ \rightarrow 2^+)$  to normalize the transition probabilities for the higher-lying transitions. Chosen 4.7 MeV/u as the highest possible energy that is safe for Pb (distance of closest approach large enough to exclude nuclear interaction.)



# Chapter 2

## Theory

Quadrupole deformation of nuclei.

Shape coexistence possible for certain regions of  $N$  and  $Z$ .

- triaxial shape / shape coexistence
- benchmark for theoretical models
- transition probabilities and quadrupole moments between several excited states are not known
- fundamental research

COULEX:

- nucleus excited by electromagnetic interaction.
- de-excitation  $\rightarrow$  gamma

Tilbakemelding:

shape coexistence often found near closed shells. Example: neutron deficient Hg nuclei ( $Z = 80$  just below 82 shell closure,  $N \sim 104$ : neutron mid-shell).

$^{140}\text{Sm}$ :  $N = 78$ , just below  $N = 82$  shell closure,  $Z = 62$ : mid-shell.

Typical indication for shape coexistence:  $0^+$  states (often at low energy).

$^{140}\text{Sm}$  was thought to have a low-lying  $0^+$  state [Firestone], but this state was shown to be  $2^+$  [Suoranczyk?]. Indication for  $0^+$  states around 1.5 MeV.

One of the objectives of this experiment: clarify the nature/structure of these  $0^+$  states.

Shape transition: Sm-144 ( $Z = 62$ ,  $N = 82$ ) spherical. Adding neutrons: transition of  $N = 90$  from spherical to prolate deformed  $\rightarrow$  shape-phase transition, so called X(5) critical-point symmetry.

Taking out neutrons: very neutron-deficient Sm nuclei are also prolate deformed (e.g. Sm-132), but for  $^{140}\text{Sm}$ : indication for triaxiality/ $\gamma$ -softness [Klintefjord]  $\rightarrow$  another form of shape-phase transition/critical point behavior  $\implies$  E(5) [Iachello?].  $^{140}\text{Sm}$  could be one of the best examples for E(5) symmetry  $\implies$

need transition probabilities from higher-lying states to confirm.

**Some suggestions:**

- general things about nuclei shapes
  - multipole expansion, shape parameters (5 parameters, 3 for space, 2 for deformation  $\beta, \gamma$ ), ...
  - quadrupole moments: intrinsic (body-fixed frame), spectroscopic (lab frame)
  - transition probabilities, el.magn. matrix elements
  - rotations and vibrations  $\rightarrow$  energy spectra,  $B(E2)$  values
  - Casten triangle (spherical vibrator, deformed rotor,  $\gamma$ -soft + X(5), E(5)), expected spectrum for E(5) nuclei
- the basics of Coulomb excitation

# NOTES TO BE REMOVED!!

## 2.1 Oppgaveteksten (skal fjernes!)

---

### Oppgavens mål:

The ISOLDE facility at CERN has been upgraded to provide higher energies and intensities for radioactive ion beams. A new experiment to study  $^{140}\text{Sm}$  was performed in the summer of 2017. The goal of the experiment was to measure electromagnetic transition probabilities and electric quadrupole moments for several excited states in  $^{140}\text{Sm}$  by measuring Coulomb excitation probabilities. A large data set was obtained using silicon detectors to determine the energies and angles of scattered particles, and germanium detectors to measure gamma rays from excited states in  $^{140}\text{Sm}$ .

The goal of the master thesis is to analyze the data from this experiment. The required tasks include development and improvement of data analysis software to determine Coulomb excitation yields. These yields will then, in a second step, be compared to theoretical calculations and transition probabilities and quadrupole moments will be extracted using chi-square minimization procedures.

### Prosjektbeskrivelse (omfang 60 studiepoeng):

The shape of an atomic nucleus is determined by a delicate interplay between macroscopic (liquid drop) properties and microscopic shell effects. Nuclei with filled proton or neutron shells (i.e. magic nuclei) are generally spherical in shape, whereas nuclei with open shells gain energy by assuming a deformed shape. Depending on the occupation of specific orbitals, the nuclear shape can change drastically by adding or removing protons or neutrons. Certain nuclei exhibit shape coexistence, i.e. the coexistence of quantum states that correspond to different shapes. Because the shape of a nucleus is so sensitive to the underlying nuclear structure and to changes of the proton and neutron numbers, the excitation energy, or the angular momentum, observables related to the nuclear shape are used as benchmarks for theoretical models.

Nuclei in the rare earth region, and in particular the chain of samarium isotopes, exhibit a variety of shape effects. The Sm isotope with closed neutron

shell at N=82,  $^{144}\text{Sm}$ , is spherical in shape. Adding neutrons to  $^{144}\text{Sm}$  changes the deformation to an elongated (prolate) quadrupole shape. The transition from spherical to prolate shape, which occurs for  $^{152}\text{Sm}$  at N=90, can be interpreted as a shape-phase transition. Flattened (oblate) quadrupole shapes are predicted by theory to occur below the N=82 shell closure. An earlier experiment studying  $^{140}\text{Sm}$  at CERN-ISOLDE found triaxial shape for this isotope, i.e. a shape where all three principal axes of the ellipsoid have different lengths.  $^{140}\text{Sm}$  can therefore be considered to lie at the critical point of a phase transition from spherical to deformed, and from prolate to oblate shape.

**Foreløpig tittel:**

Coulomb excitation of  $^{140}\text{Sm}$

**Metoder som tenkes benyttet:**

Multi-step Coulomb excitation with radioactive beam, isotope separation on-line technique, nuclear spectroscopy, particle-gamma and particle gamma-gamma coincidence analysis, advanced chi-square minimization procedures.

---

## 2.2 Information sources

- CD: <https://www.ikp.uni-koeln.de/~warr/doc/cd.pdf>
- Why CoulEx? [https://iks32.fys.kuleuven.be/wiki/brix/images/5/58/10\\_20151123\\_Illana\\_BriX15\\_web.pdf](https://iks32.fys.kuleuven.be/wiki/brix/images/5/58/10_20151123_Illana_BriX15_web.pdf)
- 2017: <https://iopscience.iop.org/article/10.1088/1361-6471/aa5c4e#jgaa5c4es2>
- 2017: <http://iopscience.iop.org/article/10.1088/1361-6471/aa990f/pdf>
- [http://publications.lib.chalmers.se/records/fulltext/175494/local\\_175494.pdf](http://publications.lib.chalmers.se/records/fulltext/175494/local_175494.pdf)
- [https://www.euroschoolonexoticbeams.be/site/files/nlp/LNP700\\_contrib2.pdf](https://www.euroschoolonexoticbeams.be/site/files/nlp/LNP700_contrib2.pdf)
- 2004: <http://accelconf.web.cern.ch/AccelConf/e04/PAPERS/TUXCH01.PDF>
- 2003: [https://ac.els-cdn.com/S0168583X02018864/1-s2.0-S0168583X02018864-main.pdf?\\_tid=64f42a8d-b37c-42a6-a3c5-f01dcee73366&acdnat=1545049646\\_8918b985af428e17](https://ac.els-cdn.com/S0168583X02018864/1-s2.0-S0168583X02018864-main.pdf?_tid=64f42a8d-b37c-42a6-a3c5-f01dcee73366&acdnat=1545049646_8918b985af428e17)
- 2002: [https://ac.els-cdn.com/S0168900201009548/1-s2.0-S0168900201009548-main.pdf?\\_tid=71a410a3-6554-4268-ac1a-1b43cae4039d&acdnat=1545056166\\_15ff5318affd89c7e](https://ac.els-cdn.com/S0168900201009548/1-s2.0-S0168900201009548-main.pdf?_tid=71a410a3-6554-4268-ac1a-1b43cae4039d&acdnat=1545056166_15ff5318affd89c7e)

Post-accelerated beams ISOLDE <http://iopscience.iop.org/article/10.1088/1361-6471/aa78ca>

PSB <https://home.cern/science/accelerators/proton-synchrotron-booster>

**Sjekk sensorveiledning!!**



# Chapter 3

## Coulomb excitation experiment


### 3.1 ISOLDE at CERN

The acronym ISOLDE stands for Isotope Separator On Line DEvice. ISOLDE is a Radioactive Ion Beam (RIB) facility at CERN in Meyrin, Switzerland. Fig. 3.1 shows the CERN accelerator complex [2], where ISOLDE is located beside the Proton Synchrotron Booster (PSB). The facility can produce over 1000 different radionuclides to be used in a wide variety of experiments in nuclear physics, atomic physics, solid state physics, life sciences and fundamental interactions. Experiments have been performed at ISOLDE since 1967 and since 2001 experiments with post-accelerated RIBs have been conducted. The high intensity and energy upgrade (HIE-ISOLDE) have made it possible to deliver energies up to 10 MeV/u in 2018 [3–5].

Most of the around 4000 known nuclides are radioactive. In many cases it is not possible to make radioactive nuclei targets and perform an experiment because of the short half-life of the nucleus of interest. To study these radioactive nuclei, RIBs are used on stable targets. One way of obtaining a RIB is to use the Isotope Separator On Line (ISOL) method. In the ISOL method, two accelerator systems is needed. The first accelerator is used to produce the radioactive atoms at rest, and the second accelerator is used to accelerate these atoms [6].

#### 3.1.1 Beam production

A continuous flow of accelerated proton beam bunches from the PSB comes into the ISOLDE facility and collide with a thick production target. The proton beam has an energy of 1.4 GeV and an intensity up to  $2 \mu\text{A}$ . Two proton beam bunches is separated by 1.2 s. ISOLDE typically takes 50% REF? of all proton bunches form the PSB, the rest goes to the LHC and other experiments shown in Fig. 3.1. In the reaction between the proton beam and the production target, radioactive nuclides are produced in spallation, fission or fragmentation reactions

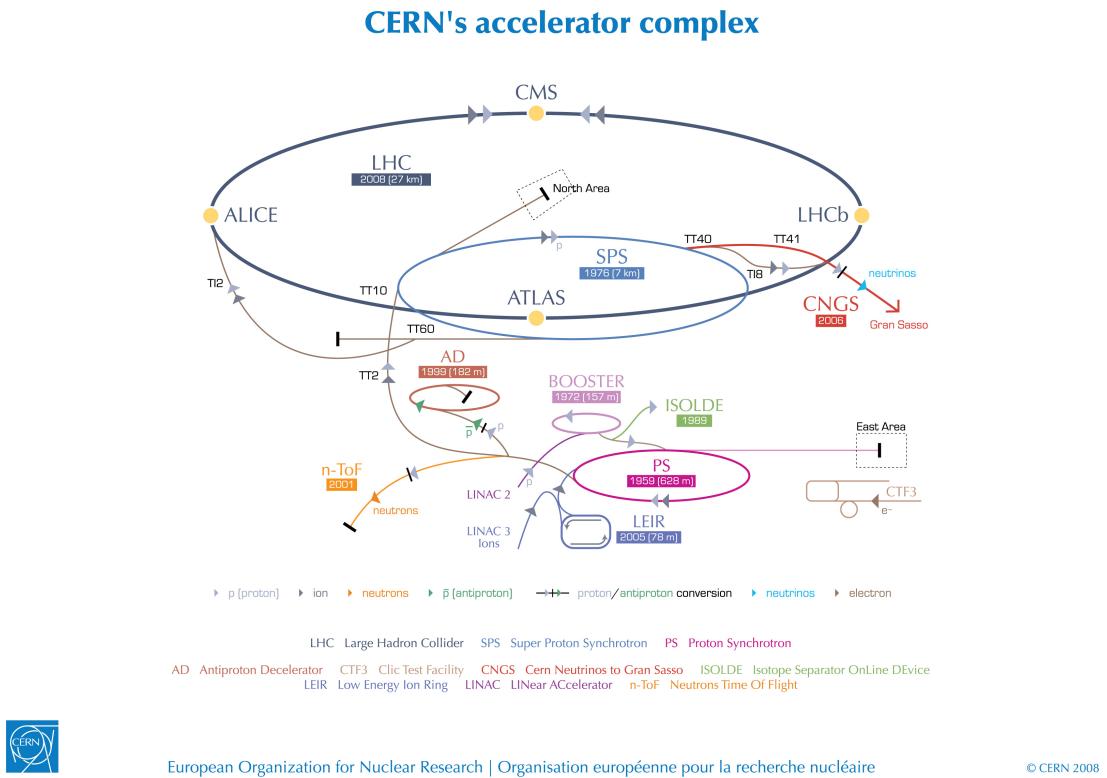

**Figure 3.1:** The CERN accelerator complex. ISOLDE gets accelerated protons from LINAC 2 and the PS BOOSTER.

(basically smashing the target into pieces) [4]. The production target is chosen from a stable region heavier than the nucleus of interest. In our experiment, a production target of tantalum (Ta) was used, producing the elements in the chart of nuclides up to tantalum. A large amount of different isotopes is produced in this way, and the challenge is to extract the nucleus of interest.

find other refs as well! forklare figuren mer?

### Tilbakemelding:

A large amount of different nuclei/isotopes is produced in this way. Challenge: extract the nuclei we are interested in. Idea: selective ionization → use HV (electrostatic field) to extract Sm ions electronic transitions are characteristic for each chemical element. use laserlight to excite an electron to a specific excited (electron) state in Sm, use another laser to excite electrons further to another excited state, 3. laser to to kick out the electron → only Sm atoms are ionized. There could be contaminants from surface ionization (atoms that collide with the walls of the ion source).

\*bruker laser on/off for å se hva annet som kommer ut av beamen

### RILIS:

The resonance ionization laser ion source (RILIS) is based on the method of

step-wise excitation and ionization of the atom. It is an element-selective process which is used to produce ion beams of the correct element [7]. In this experiment RILIS was used to select samarium with atomic number  $Z = 62$ .

\* 2-3 step ionization \* also other elements come through

Other refs: <http://rilis.web.cern.ch> and [https://www.research.manchester.ac.uk/portal/files/60831252/FULL\\_TEXT.PDF](https://www.research.manchester.ac.uk/portal/files/60831252/FULL_TEXT.PDF) and <https://www.sciencedirect.com/science/article/pii/S0168583X13008914?via%3Dihub>

**GPS:**

Tilbakemelding:

at this point we have a continuous beam of Sm ions of 60 keV energy (the target is on a 60 kV HV platform).

next step: we need to have mass separation, and we need to give this continuous beam a fine structure, because the post-accelerator cannot accept a continuous beam coming in, it also accelerates bunches.

The beam can collide in one of two target stations, either the general purpose separator (GPS) or the high resolution separator (HRS). The GPS has one bending magnet and can deliver beams of different masses simultaneously into three beam lines, while the HRS has two bending magnets with high mass resolving power which delivers the beam into the main beam line [8]. In this experiment the GPS was used to select the isotope of samarium with mass number  $A = 140$ .

Tilbakemelding:

now we have a continuous beam of  $^{140}\text{Sm}$ . The mass separator gets also rid of contaminants that come out of RILIS but have different mass. There could still be isobaric contaminants from surface ionization but luckily there is very little surface ionization for the neighboring elements of Sm. Laser ON/OFF.

Other refs: <http://isolde.web.cern.ch/targets-and-separators> and Klintefjord's PhD

**REXTRAP:**

REXTRAP is a penning trap which has the tasks of accumulation, bunching and cooling of the RIB. [3] The ions are released in bunches and transferred to the REXEBIS.

Tilbakemelding:

In REXTRAP we collect the  $^{140}\text{Sm}$  ions, so that we can release them in bunches that are matched to the fine structure of the LINAC.

Other refs: <https://www.sciencedirect.com/science/article/pii/S0168900204020169> and <https://www.sciencedirect.com/science/article/abs/pii/S0375947401016426>

**REXEgis:**

REXEgis is a charge breeder where the RIB is bred to a high charge state [9], with a mass-to-charge ( $A/q$ ) ratio typically between 2.5 and 4.5 [10]. REXEBIS

releases the beam with a certain energy through a mass separator and into the HIE-ISOLDE LINAC (LINear ACcelerator) [3].

**Tilbakemelding:**

go from  $^{140}\text{Sm}^{+1}$  to  $^{140}\text{Sm}^{+33}$  (I think, check log book), anyway we need a highly charged ion to accelerate to high energies. The electron beam of EBIS just blasts off more electrons from Sm. The longer the ions stay in EBIS, the higher the charge state → distribution of charge states → we loose those that have the wrong charge state. LINAC can only accept one.

excites the nucleus in three steps ionizing the atom, which leaves the nucleus in a high charge state. ?

Other refs: <http://cds.cern.ch/record/478399/files/> and <http://rex-isolde.web.cern.ch>

**HIE-ISOLDE LINAC:**

The HIE-ISOLDE LINAC accelerates the beam through the beam line and magnets bend the beam into MINIBALL.

\* one of the first Miniball experiments with the new accelerator

**Tilbakemelding:**

Accelerates  $^{140}\text{Sm}$  to 4.65 MeV/u

HIE-ISOLDE (Superconducting LINAC Upgrade): Linear accelerator, HIE-LINAC

HIE-ISOLDE <http://hie-isolde-project.web.cern.ch>, technical design <http://cds.cern.ch/record/2635892?ln=en>, direct to doc: [http://cds.cern.ch/record/2635892/files/HIE-ISOLDE\\_TDR.pdf](http://cds.cern.ch/record/2635892/files/HIE-ISOLDE_TDR.pdf)

**MINIBALL:**

Cite: [https://ac.els-cdn.com/0168583X92959079/1-s2.0-0168583X92959079-main.pdf?\\_tid=0ccb0647-5870-48f9-ac38-df8c0077981c&acdnat=1545216224\\_d359ddcc40ea1f94369c85](https://ac.els-cdn.com/0168583X92959079/1-s2.0-0168583X92959079-main.pdf?_tid=0ccb0647-5870-48f9-ac38-df8c0077981c&acdnat=1545216224_d359ddcc40ea1f94369c85) and [https://cds.cern.ch/record/2025701/files/epjconf\\_inpc2013\\_11005.pdf](https://cds.cern.ch/record/2025701/files/epjconf_inpc2013_11005.pdf) and <http://isolde.web.cern.ch/targets-and-separators>

Magnets....

ISOLDE actually uses the most protons at CERN [ref?].

ISOLDE <http://iopscience.iop.org/article/10.1088/1361-6471/aa5f03/pdf>

Very pure beam (did we have statistics of this?) - resultat til avhandling. sjekk etter doppler-korrigering. Nd-contaminasjon? i så fall veldig lite, 1-2 prosent?

**Tilbakemelding:**

we would have to look at the  $\gamma$ -spectra to identify any contaminants. There may

be a little bit of Nd-140 in the beam, but if so, it is very little (judging from on-line spectra).

MINIBALL <http://isolde.web.cern.ch/experiments/miniball> and [https://www.miniball.york.ac.uk/wiki/Main\\_Page](https://www.miniball.york.ac.uk/wiki/Main_Page)

ENSAR2 <http://www.ensarfp7.eu>

Beam production [http://tuprints.ulb.tu-darmstadt.de/4599/1/TUDthesis\\_Christoph%20Seiffert.pdf](http://tuprints.ulb.tu-darmstadt.de/4599/1/TUDthesis_Christoph%20Seiffert.pdf)

Test [2], copyright: <https://copyright.web.cern.ch>

CERN Document Server <https://cds.cern.ch>

### 3.1.2 Target

Kan skrive om dette i motivasjonen.

$^{208}\text{Pb}$  was chosen as a target. Want high  $Z$  so that the probability of excitation is high.

Tilbakemelding:

Thickness, etc.

It is very hard to excite  $^{208}\text{Pb}$  (doubly magic). We might see a little bit of the 2.6 MeV state (octupole vibration), but not sure.

Since we don't need normalization (because we have the  $B(E2, 0^+ \rightarrow 2^+)$  from the previous experiment and from lifetime measurement [Bello], we have chosen a target that is very hard to excite, so transitions from the target will not complicate the spectrum.

Doubly magic, very hard to excite. No quadrupole deformation/excitation.  
Need quadrupole for first state (see nndc)

ja og nei: Not enough beam energy to excite  $^{208}\text{Pb}$ .

Highest  $Z$  for maximum excitation probability.

Contamination... finger print [[picture](#)]

## 3.2 Miniball

Testcite (Nigel Warr) [11]

Pictures <https://cds.cern.ch/record/844871?ln=en>

### 3.2.1 Particle detector, DSSSD (CD)

DSSSD: Double sided silicon strip detector

16 rings, 12 strips effectively (24 strips, 12 pairs with two strips making a pair)

Rings = annular strips, strips = radial strips or sector strips

CD distance: 26.98 mm, Inner angle (min): 9 mm, Outer angle (max): 40.9 mm

Angle coverage: [18.4°, 56.6°]

See Fig. 3.2

See Tab. 3.1

**Table 3.1:** CD angles in laboratory frame. Adjacent (CD distance): 26.98 mm. The centroid energy is from simulation with kinsim3.

Ring number	Opposite (mid ring) [mm]	Angle [°]	$E_t$ [MeV]	$E_b$ [MeV]
0	40	56.0	139.62	273.80
1	38	54.6	151.51	286.78
2	36	53.1	164.55	299.11
3	34	51.6	182.41	312.31
4	32	49.9	198.95	326.87
5	30	48.0	219.53	342.40
6	28	46.1	240.36	358.75
7	26	43.9	262.77	376.35
8	24	41.7	287.31	395.31
9	22	39.2	313.65	414.84
10	20	36.5	340.64	435.42
11	18	33.7	369.54	456.71
12	16	30.7	398.95	478.33
13	14	27.4	428.87	499.72
14	12	24.0	457.53	520.55
15	10	20.3	484.86	539.89


Vis en figur/tegning av ”trekanten” i detektoroppsettet? Skjematiske figur?

$$\theta = \tan^{-1} \left( \frac{\text{opposite}}{\text{adjacent}} \right)$$


### 3.2.2 $\gamma$ detectors, HPGe

24 six-fold segmented. 8 clusters of 3 crystals each. Each crystal segmented in 6 parts (144 segments in total).

Cryo-modules

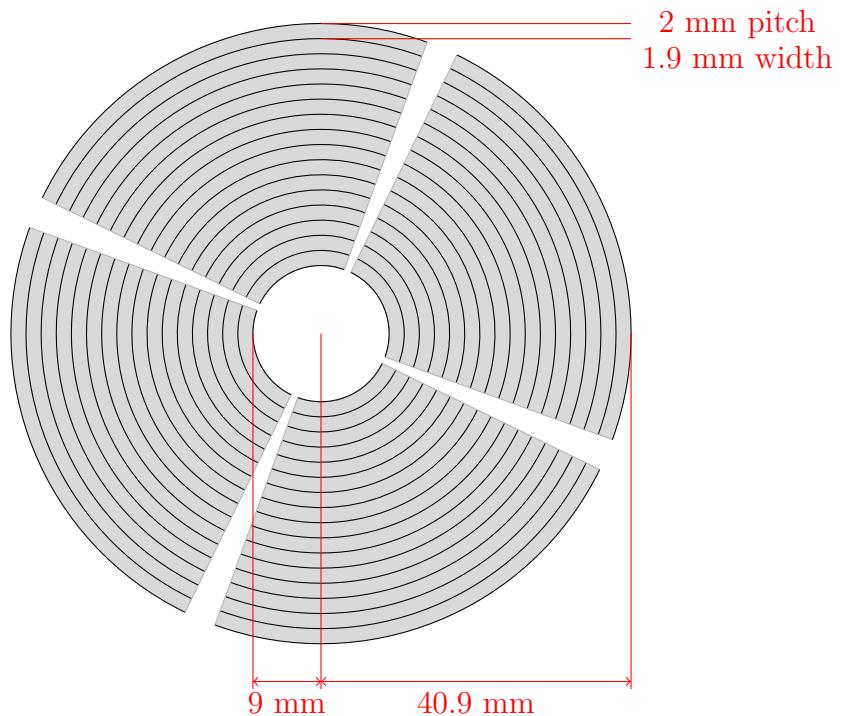

(a) CD front.

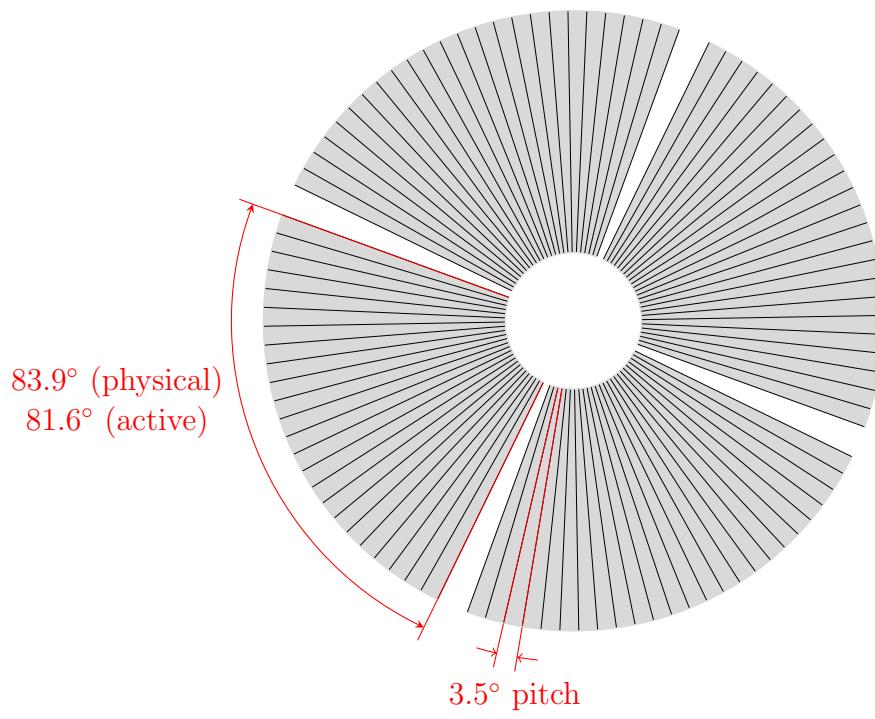


(b) CD back.

**Figure 3.2:** CD drawing, adapted from Nigel Warr.

### 3.3 Experimental setup

$^{140}\text{Sm}$  Coulomb excitation experiment.

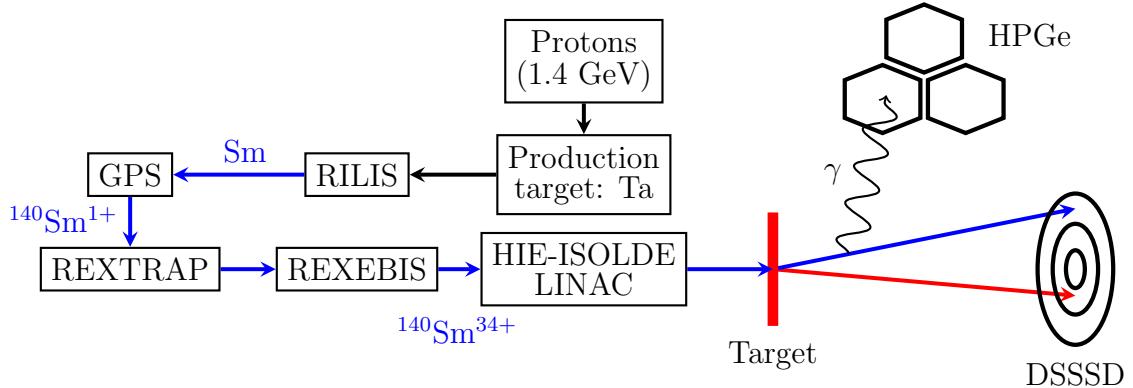

**Figure 3.3:** The Coulomb excitation setup at ISOLDE. Adapted from Malin Klintefjord's PhD thesis [12].

From operators logbook:  $^{140}\text{Sm}^{34+}$  at 4.65 MeV/u experiment.  $A/q = 4.0$ .

**Table 3.2:** Geometry

Cluster	R [mm]	$\alpha$ [ $^\circ$ ]	$\phi$ [ $^\circ$ ]	$\theta$ [ $^\circ$ ]
0	107.08	129.79	126.67	311.16
1	100.59	51.83	62.74	51.08
2	105.76	51.23	126.87	309.02
3	105.40	130.31	57.44	251.90
4	106.48	128.74	235.53	296.93
5	105.18	46.67	239.09	233.45
6	127.04	131.04	308.67	59.42
7	110.18	46.46	309.09	130.56

For geometry, see: <https://www.ikp.uni-koeln.de/~warr/doc/frame.pdf>

Experiment code: IS558

Ta: tantalum ( $Z = 73$ )

Sm: samarium ( $Z = 62$ )

Pb: lead ( $Z = 82$ )

Beam:  $^{140}\text{Sm}$  ( $T_{1/2} = 14.82$  min, 4.65 MeV/u, total 651 MeV), excellent purity

Target:  $^{208}\text{Pb}$  (Thickness: 1.4 mg/cm<sup>2</sup>)


**Table 3.3:** LAB vs CM. Based on LAB input angles from  $\theta_b$  and  $\theta_t$ . From LISE++ kinematics calculator (reaction from the middle of the target).

(a) $\theta_b \in [22.0^\circ, 56.7^\circ]$ .			(b) $\theta_t \in [22.0^\circ, 56.7^\circ]$ .		
LAB		CM	LAB		CM
$\theta_b$ [°]	$\theta_t$ [°]	$\theta'_b$ [°]	$\theta_b$ [°]	$\theta_t$ [°]	$\theta'_b$ [°]
22.0	71.7	36.6	40.6	56.7	66.6
26.0	68.4	43.2	42.3	55.3	69.4
29.1	65.9	48.2	44.2	53.9	72.2
32.2	63.4	53.3	46.1	52.4	75.2
35.2	60.9	58.1	48.3	50.7	78.6
37.9	58.8	62.4	50.6	49.0	82.0
40.4	56.8	66.3	53.1	47.1	85.8
42.8	54.9	70.1	56.0	45.0	90.0
45.0	53.2	73.5	59.1	42.8	94.4
47.1	51.6	76.7	62.5	40.4	99.2
49.0	50.2	79.6	66.1	37.9	104.2
50.7	48.9	82.1	70.2	35.2	109.6
52.4	47.6	84.7	75.0	32.2	115.6
53.9	46.5	86.9	80.2	29.1	121.8
55.3	45.5	88.9	85.8	26.0	128.0
56.7	44.5	91.0	93.8	22.0	136.0


Small angle: Forward scattering: Larger distance, weaker EM-field, less excitation probability.

Large angle: Backward scattering: Closer distance, stronger EM-field, higher excitation probability.

Expect to measure transition probabilities  $B(E2)$  and quadrupole moment (nuclear deformation).

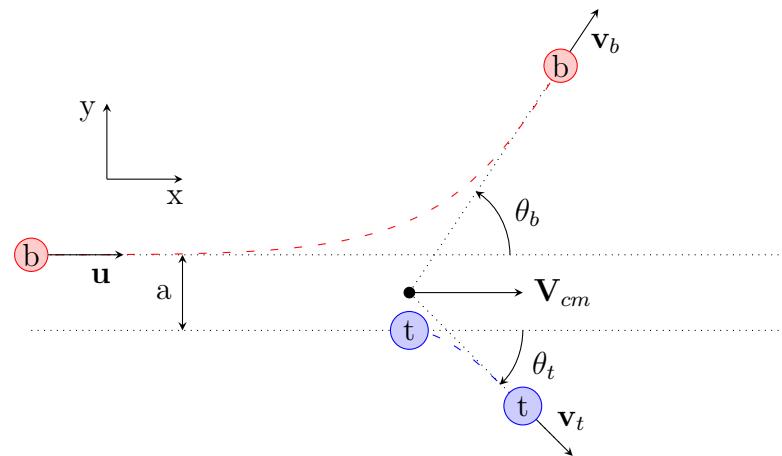

(a) Laboratory (LAB) frame

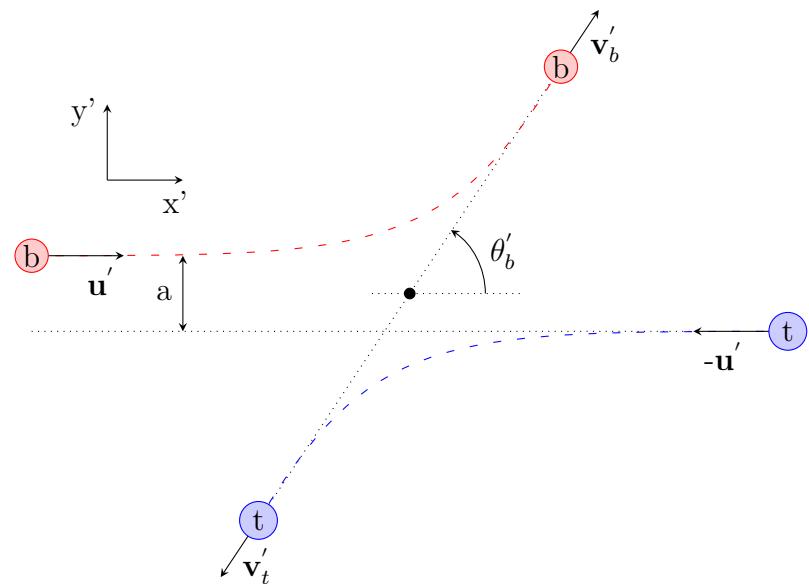

(b) Center of mass (CM) frame.

**Figure 3.4:** LAB vs CM frame.

# Chapter 4

## Data analysis

Tilbakemelding:

First: explain the tasks and give the bigger picture of what needs to be done:  
starting point: Raw data in list mode: ID, E, T, ID, E, T, ... (basically)  
what you want: Doppler-corrected  $\gamma$ -spectra with various conditions on particles, angles, etc.

procedure: 3 steps:

1. convert raw data to ROOT format
2. event-building:
  - calibrate detectors, apply thresholds, etc.
  - use correlations to build events: particle- $\gamma$  coincidences
  - store everything in a tree structure for easy access
3. apply gates on particles and perform Doppler correction

---

Could be nice to have a "cook book", i.e. step-by-step explanation of this procedure.

ROOT: analysere data

kinsim3 <https://github.com/lpgaff/kinsim> + SRIM <http://www.srim.org>

**Table 4.1:** Computer used for data analysis

Model	MacBook Air (13-inch, 2017)
Processor	1.8 GHz (Intel Core i5)
Memory	8 GB (1600 MHz DDR3)

Run time for sorting data:

TreeBuilder (online calibration):  $\sim$  40-45 min

AQ4Sort (online calibration):  $\sim$  120 min

**Table 4.2:** Run time for sorting data.

Executable	Run time [min]
TreeBuilder	~ 45
AQ4Sort	~ 120

The run time of the bash script was done with the built in script time

```
$ time ./AQ4S.sh Sm online TB
...
real 45m19.265s
user 42m49.653s
sys 0m39.665s
```

```
$ time ./AQ4S.sh Sm online Q4
...
real 121m40.830s
user 116m18.361s
sys 1m17.809s
```

```
$ time ./AQ4S.sh Sm user TB
...
real 41m11.282s
user 39m45.592s
sys 0m27.777s
```

```
$ time ./AQ4S.sh Sm user Q4
...
real 143m47.600s
user 128m6.174s
sys 1m50.921s
```

MedToRoot: file 9

```
$ ./M2R.sh Sm
opening file ../../Raw_data/Sm/140Sm_208Pb_pos6_009.med ...
EventBuffer::EventBuffer(GlobalSettings *)
Processing event number      0
Start trigger #14

Processing event number    40000
Stop trigger #15
```

```

Unpacked 47268 events:
wrong dgf hit pattern:          0 ( 0.0 %)
wrong adc headers:             0 ( 0.0 %)
# of overflows in adc channels: 147009 (311.0 %)
# of underflows in adc channels: 0 ( 0.0 %)
pattern unit mismatches:       0 ( 0.0 %)

Number of ebis pulses:           23584
Number of t1 pulses:              717
Number of supercycle pulses:      153
committed           351 320 654 bytes to tree tr, 'Tree for on
beam data of Coulex setup@Miniball'
and                 4 889 999 bytes to tree bg, 'Tree for on
beam background data of Coulex setup@Miniball'
and                 68 650 177 bytes to tree tr, 'Tree for off
beam data of Coulex setup@Miniball'
wrote                63 916 bytes to file ../../Raw_data/Sm
/140Sm_208Pb_pos6_009_OnBeam.root => compressed by a
factor of 5496.6
,                  9 451 bytes to file ../../Raw_data/Sm
/140Sm_208Pb_pos6_009_OnBeamBackground.root => compressed
by a factor of 517.4
,                  44 809 bytes to file ../../Raw_data/Sm
/140Sm_208Pb_pos6_009_OffBeam.root => compressed by a
factor of 1532.1
and                12 904 bytes to file ../../Raw_data/Sm
/140Sm_208Pb_pos6_009_Scaler.root => compressed by a
factor of 1690.2

```

MedToRoot: file 25

```

$ ./M2R.sh Sm
opening file ../../Raw_data/Sm/140Sm_208Pb_pos6_025.med ...
EventBuffer::EventBuffer(GlobalSettings *)
Processing event number      0
Start trigger #14

```

```

Processing event number 100000
Stop trigger #15

```

```

Unpacked 105352 events:
wrong dgf hit pattern:          0 ( 0.0 %)
wrong adc headers:             0 ( 0.0 %)
# of overflows in adc channels: 535143 (508.0 %)
# of underflows in adc channels: 0 ( 0.0 %)
pattern unit mismatches:       0 ( 0.0 %)

Number of ebis pulses:           52626
Number of t1 pulses:              1904
Number of supercycle pulses:      150

```

```

committed      1 68 292 586 bytes to tree tr, 'Tree for on
beam data of Coulex setup@Miniball'
and           12 475 16 bytes to tree bg, 'Tree for on
beam background data of Coulex setup@Miniball'
and           213 620 380 bytes to tree tr, 'Tree for off
beam data of Coulex setup@Miniball'
wrote         95 604 bytes to file ../../Raw_data/Sm
/140Sm_208Pb_pos6_025_OnBeam.root => compressed by a
factor of 11174.1
,           16 636 bytes to file ../../Raw_data/Sm
/140Sm_208Pb_pos6_025_OnBeamBackground.root => compressed
by a factor of 749.9
,           64 319 bytes to file ../../Raw_data/Sm
/140Sm_208Pb_pos6_025_OffBeam.root => compressed by a
factor of 3321.3
and           20 646 bytes to file ../../Raw_data/Sm
/140Sm_208Pb_pos6_025_Scaler.root => compressed by a
factor of 2080.6

```

## TreeBuilder

```

$ ./Q4S.sh Sm user TB
—— TreeBuilder ——
input file(s):
... <shows a list of all input files>
output file: Sm_user-TreeBuilder-2019-06-20.root
calibration file: ../../Miniball-config/IS558-user.cal
WeightPR: 0.75
Particle distribution:
Q0 fired: 12243817
Q1 fired: 12277727
Q2 fired: 11479362
Q3 fired: 10936096
Finished.

```

## AQ4Sort

```

$ ./Q4S.sh Sm user Q4
Info: No flag option for 'AQ4Sort'. Ignoring optional flag.
—— AQ4Sort ——
calibration file: ../../Miniball-config/IS558-user.cal
input file(s):
... <shows a list of all input files>
output file: Sm_user-AQ4Sort-2019-06-24.root

```

## CLXAna

```
$ CLXAna -i /Users/trondwj/GitHub/MasterThesis/Sorted_data/
  Sm_user-TreeBuilder-2019-06-20.root -o test_analysis_wcut.
  root -c /Users/trondwj/GitHub/MasterThesis/Miniball-config/
  config-IS558.dat -cut /Users/trondwj/GitHub/MasterThesis/
  Sorted_data/outputfile.root :Bcut:Tcut
Input parameters:
Zb = 62
Ab = 140
Zt = 82
At = 208
Eb = 4650 keV/u
Ex = 531 keV
thick = 1.4 mg/cm2
depth = 0.7 mg/cm2
cddist = 26.98 mm
cdoffset = 242.6 degrees
deadlayer = 0.0007 mm
contaminant = -1 mg/cm2
spededist = 23.6 mm
bg_frac = -0.75
srilm = /Users/trondwj/GitHub/MasterThesis/SRIM
cutfile = /Users/trondwj/GitHub/MasterThesis/Sorted_data/
  outputfile.root :Bcut:Tcut
Begin g_clx loop.
Info in <TCanvas::Print>: pdf file /Users/trondwj/GitHub/
  MasterThesis/SRIM/140Sm_208Pb.pdf has been created
Info in <TCanvas::Print>: pdf file /Users/trondwj/GitHub/
  MasterThesis/SRIM/208Pb_208Pb.pdf has been created
Info in <TCanvas::Print>: pdf file /Users/trondwj/GitHub/
  MasterThesis/SRIM/140Sm_Si.pdf has been created
Info in <TCanvas::Print>: pdf file /Users/trondwj/GitHub/
  MasterThesis/SRIM/208Pb_Si.pdf has been created
Initialising histograms...
Looping over events...
Warning in <TClass::Init>: no dictionary for class trevts is
  available
1-particle events = 89020258%
Finished.
```

## hadd

After saving "part" from CLXAna-file:

```
$ cd GitHub(ROOT-framework/build/bin
$ hadd /Users/trondwj/GitHub/MasterThesis/Sorted_data/
  outputfile.root /Users/trondwj/GitHub/MasterThesis/
```

```
Sorted_data/part.root /Users/trondwj/GitHub/MasterThesis/
Sorted_data/Bcut.root /Users/trondwj/GitHub/MasterThesis/
Sorted_data/Tcut.root
```

- 

particle-gamma and particle-gamma-gamma coincidence  
 sjekk opp om energi fra online kalibrering passer med simuleringen.

## 4.1 Data and sorting

Gamma:

core ID from 0 to 23

segment ID from 0 to 6 (zero is the core)

cluster ID from 0 to 7

ADC:

annular (front) strip ID of particle (0 = outer; 15 inner)

secular (back) strip ID of particle (0 to 12; clockwise wrt beam)

[From offl.root.med.pdf](#)

”Direction of the central axis of the detector ( $r, \theta, \phi$ ) and the notation about the axis of the cluster ( $\alpha$ ), [is this correct??](#). Needed to calculate the positions of the segments or the position of a point determined by the pulse-shape analysis.

In order to perform the Doppler shift, we need to know the angle in the Miniball frame of reference of the interaction point. We determine the interaction point either from the segment with the largest energy or using pulse-shape analysis. In the former case, we need to know the position of the centre of each segment. In the latter, we need geometrical information to relate the time-to-steepest slope and ratio of the mirror charge amplitudes to the angle between the interaction point, the target and the emitted particle.”

The analysis code for Miniball data is named MiniballCoulexSort and is available on GitHub at <https://github.com/Miniball/MiniballCoulexSort>. The main steps of how to download, install and use it is outlined in the README.md file in the GitHub repository.

Data from Miniball comes in the form of .med-files (Miniball Event Data). In order to analyze this data in ROOT<sup>1</sup> the first part of the sorting is just to convert the .med-files into .root-files with the script MedToRoot.

---

<sup>1</sup>ROOT is a data analysis framework made at CERN.

To get useful information out of the converted .root-files, the Treebuilder script is used. The .root-file(s) and a calibration file is given to the Treebuilder so it can make event trees that can be used for analyzing the Coulomb excitation events.

One script that is mentioned in the Miniball GitHub repository, but not showed how to use, is the AQ4Sort. It is used in the same way as the TreeBuilder script, but it sorts the histograms in another way. This script is used before and during the calibration of the detectors, because it gives information about every single ring and every single back strip. The one thing to note here, is that the numbering of the detector rings and strips are different from the ones used in Treebuilder.

The histograms sorted by Treebuilder starts counting from 0 and the AQ4Sort starts counting from 1.

The ADC spectras from the file sorted by Treebuilder have a naming convention of  $\text{adc}_q_s$ , where  $q$  corresponds to the quadrant and  $s$  corresponds to the channel. The front energy is saved in  $\text{adc}_{[0-3]}_{[0-15]}$  and the back energy from strips 1-12 from all 16 rings (the whole quadrant) is saved in  $\text{adc}_{[0-3]}_{[16-27]}$ .

**Tilbakemelding:**

useful with a table that explains all the different channels and assigns the various detector segments/rings? (naming conventions) (appendix?)

$\text{adc}_{0\_0}$  in the file sorted by Treebuilder is the same as  $\text{fE\_Q1\_f1}$  sorted by AQ4Sort. All the front detectors can be found in the Treebuilder-sorted file, but when it comes to the back detector, the single pixels from the strips are not shown. These are available through the AQ4Sort sorted file. For the front detectors the histograms  $\text{adc}_{[0-3]}_{[0-15]}$  and  $\text{fE\_Q}[1-4]_f[1-16]$  are the same. For the back detectors, we have that  $\text{adc}_{[0-3]}_{[16-27]}$  and  $\text{bE\_Q}[1-4]_b[1-12]$  are the same. In addition in AQ4Sort we can see the different pixels. The histograms  $\text{fE\_Q}[1-4]_f[1-16]_b[1-12]$  shows the front energy of quadrant 1-4 gated on ring 1-16 and back strip 1-12, while the  $\text{bE\_Q}[1-4]_f[1-16]_b[1-12]$  shows the same, only for the back energy.

**Tilbakemelding:**

a little confusing: is it correct that the treebuilder sort individual spectra for the front and back strips, but if you want coincidences between front and back ( $\rightarrow$  pixels) you use AQ4Sort?

In the naming convention of  $\text{adc}_q_s$  or  $\text{fE\_Qu\_fv}$ , where  $q \in [0, 1, 2, 3]$ ,  $s \in [0, 1, \dots, 27]$  and  $u \in [1, 2, 3, 4]$ ,  $v \in [1, 2, \dots, 16]$ , the  $s = 0$  and  $v = 1$  is the outermost ring, while  $s = 15$  and  $v = 16$  is the innermost ring. In our case, the innermost ring was so destroyed that we have to remove it from the data analysis.

$\text{adc}_q_s$ , where  $q \in [0, 1, 2, 3]$ ,  $s \in [0, 1, \dots, 27]$ .

$\text{pE\_Q}_q_{fr\_bs}$ , where  $q \in [b, f]$ ,  $b, f \in [1, 2, 3, 4]$ ,  $r \in [1, 2, \dots, 16]$  and  $s \in [1, 2, \dots, 12]$ .

The  $\text{adc}_{[0-3]}_{[16-27]}$  or  $\text{bE\_Q}[1-4]_b[1-12]$  are a combination of all the 16 rings of  $\text{bE\_Q}[1-4]_f[1, 2, \dots, 16]_b[1-12]$ .

Don't blame me for the naming convention, I did not write the code. I just tried to make sense of it.

## 4.2 Helping scripts

All of my scripts are available in the GitHub repository <https://github.com/wiggoen/MasterThesis>.

In order to not copy and paste the sorting command in the terminal for every data file, I made two bash scripts to do this. The script **M2R.sh** is using MedToRoot to take in as many files as you want, and sort it in one go. The other script is **AQ4S.sh**, which is using either AQ4Sort or Treebuilder to sort a lot of files in one go.

**Tilbakemelding:**

you should have a list of all the files with comments: in-beam data, calibration, laser on-off, problems, which ones can be used and which can not.

I also made other helping scripts to get histograms, do fitting, comparison and calibration.

My scripts: MultiFit.cpp, MultiPlot.cpp, ++ (python, bash,...)

**Tilbakemelding:**

if you try to write this step-by-step cook book, you could introduce your scripts wherever is the right place to use them.

## 4.3 Simulation

To calibrate the data, we need to know the expected energy of the centroids of the peaks. This was done by simulating the experiment in a program called kinsim3. The program is written by Liam Gaffney<sup>2</sup> and the purpose of the program is to simulate the kinematics of the experiment. It takes into account the Silicon dead layer.

kinsim3 generates pdf-files of the stopping powers automatically. The rest of the plots are available inside the root-file. To get the energy simulation for each ring, the function `cd_sim_plots()` from the script `MultiPlot.cpp` was used.

**Tilbakemelding:**

what are the ingredients for this simulation?

simple 2-body kinematics: energy of projectile, scattering angle of projectile  $\Rightarrow$  energy of scattered projectile, {angle, energy} of binary partner (target recoil)  
Stopping powers (which models?)  $\rightarrow$  SRIM


Slowing of the particles in the target and in the dead layer of Si

CD to target distance: 26.98 mm.

---

<sup>2</sup>Liam Gaffney is a fellow at ISOLDE, affiliated with MINIBALL.

Simulation done by kinsim3

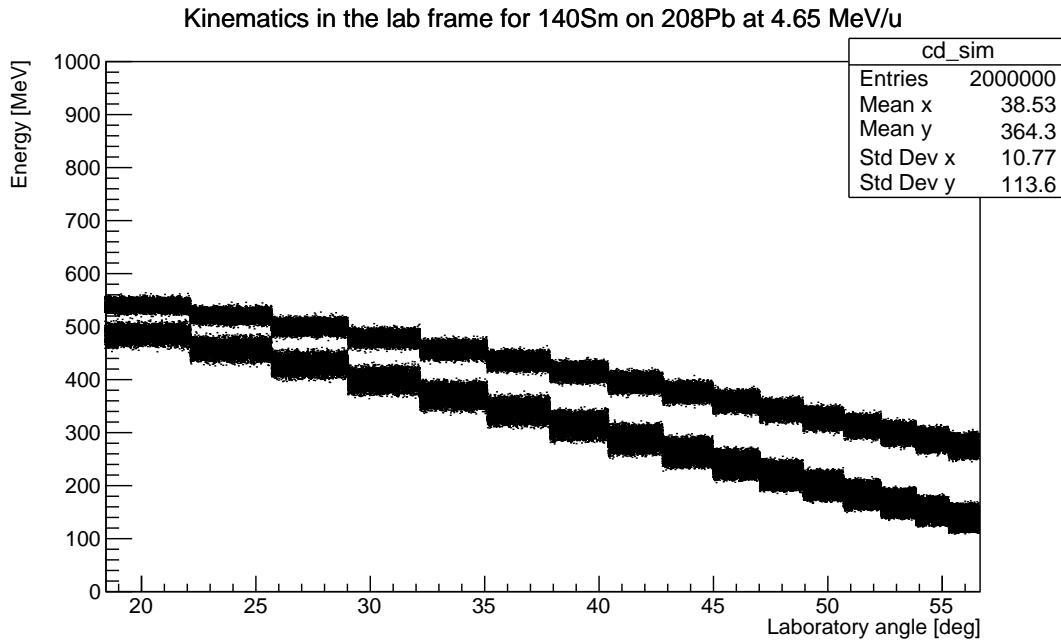

Tilbakemelding:

explain figure: Sm/Pb inner ring, Sm/Pb outer ring

simulation does not consider cross sections: in simulation all angles are equally probable. The corresponding figure from your data looks therefore quite different.

— Mail from Liam started —

”the source has a thickness of 1.23 mm, which needs to be factored in so that the CD to target distance is the CD to source distance PLUS the source thickness, i.e.  $25.78 \text{ mm} + 1.23 \text{ mm} = 27.01 \text{ mm}$ . This is very close to the 26.98 mm you got from us in August. I think that the source data was reanalysed since the original blog entry, giving the 0.03 mm difference!”

— Mail from Liam ended —

Terminal: Simulation: 140Sm on 208Pb:

```
$ cd GitHub/Miniball/kinsim
$ root
root [0] .L kinsim3.cc+
root [1] kinsim3(62, 82, 140, 208, 1.4, 4.65, 0.02, 1.0, 0.6,
26.98, false, 1e6, "../SRIM")
```

kinsim3 function:

```

void kinsim3( int Zb, int Zt, double Ab, double At, double
    thick /* mg/cm^2 */, double Eb /* MeV/u */,
    double dEb = 0.1 /* MeV/u */, double Ex = 1.0 /* MeV */,
    double res = 0.6 /* % */,
    double cd_dist = 28.0 /* mm */, bool flat = false /* angular
        distribution? */,
    long Nevts = 1E6, string srim_dir = "../srin" )

```

Say something about SRIM files.

## 4.4 Calibration

Tilbakemelding:

start with explaining the general idea for the calibration:

determine centroids of peaks in spectra, compare with simulations (kinematics, energy loss) to get linear coefficients (gain + offset). You could show spectra for 2 rings: one where it is ok to get the 2 centroids for Sm and Pb, and one where it is difficult → use additional data (Ni?)

Sectors: cover wide angular range → no sharp peaks

Solution: gate on rings to see peaks in sectors and calibrate.

Idea:

1. produce spectra
2. set thresholds: example, explain criteria
3. find calibration coefficients → see above  
explain strategy, show examples...
4. time calibration

My goal of the calibration was to make a program that could automatically fit the plots I needed, but it became more and more manual labor. Because of the shape of the data peaks, it demands very much individual care. This I could not do with a automatic program. The downfall of the automatic centroid collector came when trying it on the back detectors.

The total amount particle front detectors to calibrate is 4 quadrants \* 16 rings = 64 front detectors

back detectors: 4 quadrants \* 12 strips = 48 back detectors

but to do this, one need all the centroids of the peaks from both sides:

front: 64 detectors \* 2 peaks/ring = 128 centroids

back: 48 detectors \* 2 peaks/ring \* 16 rings = 1536 centroids

total centroids to collect: 1664 centroids (this I did not want to do manually)

Full calibration with 16 rings and 12 back strips. We had to remove the innermost ring.

**MOVE THE BELOW TO APPENDIX?**

Tilbakemelding:  
 up to you. I would do like this:  
 very technical things about scripts etc. I would move to an appendix. If it helps  
 understanding what you did, I would leave it in the text.

For each file converted with MedToRoot, the program makes four files; OffBeam, OnBeam, OnBeamBackground and Scaler. The file we are interested in for analysis is the OnBeam file.

First all of the interesting files are converted with the M2R.sh script.

```
$ cd /Users/trondwj/GitHub/MasterThesis/Scripts/sorting
$ ./M2R.sh Sm
```

Then the OnBeam files from M2R.sh is run through using Treebuilder in the AQ4S.sh script.

```
$ cd /Users/trondwj/GitHub/MasterThesis/Scripts/sorting
$ ./AQ4S.sh Sm user TB
$ mv Sm_user-TreeBuilder-2019-04-10.root ../../Sorted_data/
```

After the sorting, I moved the file to a folder of sorted data, and gave the relative path in the setup\_Sm.txt file in Scripts/plotting/ used as input in the MultiPlot.cpp script. Using the MultiPlot.cpp script, the ADC time offsets can be extracted by the following commands

```
$ cd /Users/trondwj/GitHub/MasterThesis/Scripts/plotting
$ root
root [0] .L MultiPlot.cpp++
root [1] check_ADC_time_offsets("setup_Sm.txt")
```


or they can be manually reached by

```
$ cd /Users/trondwj/GitHub/MasterThesis/Sorted_data
$ root Sm_user-TreeBuilder-2019-04-10.root
root [1] new TBrowser()
```

and in the browser, the histograms named tdiff\_gp\_*i* (where *i* is a number between 0 and 3) will lie under all the folders. The peaks of these plots have the interesting x-value. Zooming into the peaks, it is very clear what value it is. These values are provided in the calibration file under ADC time offsets (ticks). These values can change depending on the amount of data sorted, so it is wise to double check them.

After the peak values have been collected, they should be written into the calibration file

```
# ADC time offsets (ticks)
adc_0.TimeOffset: 0
adc_1.TimeOffset: -2
adc_2.TimeOffset: -3
adc_3.TimeOffset: 5
```

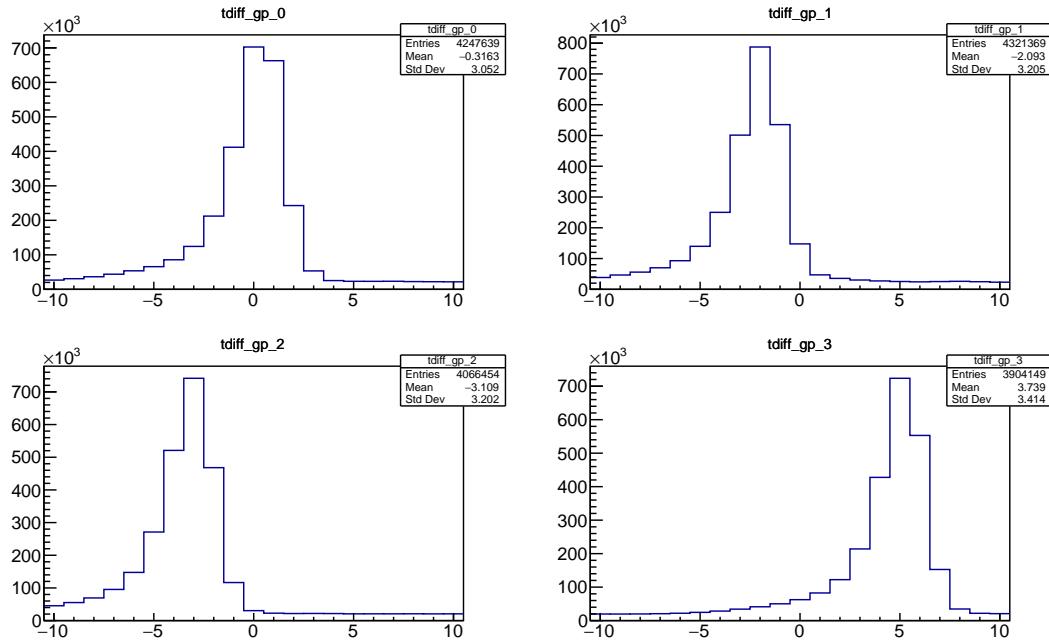

**Figure 4.1:** ADC time offsets.

Tilbakemelding:  
one time spectrum per quadrant?

**HUSK:** Si noe om ADC time offsets + Threshold. Og at man må se på det tidlig, så resortere.

M2R.sh → AQ4S.sh → check time offset → threshold → AQ4.fit() → particle-calibration.py → ADC-generator.py → copy the calibration from the terminal and paste into calibration file

Tilbakemelding:  
need to explain the time spectra: start - stop  
purpose: align time spectra so that you can set a prompt time gate.  
→ correlate  $\gamma$ -rays with particles.

Simulation fit → AQ4.fit() → particle-calibration.py → ADC-generator.py  
→ copy the calibration from the terminal and paste into calibration file

Visualize plots using ROOT and the scripts.

Skriv om scriptene som er lagd, og at det var litt vanskelig å automatisere kalibreringen. Hvis det skulle vært gjort måtte vi funnet en funksjon med ”nega-

tively skewed distribution” or ”negative skewness” (right modal), en ”left skewed function” (most data is more than the mean).

I log-skala ser dette mer Gaussisk ut, men det er ikke det i non-log skala.

Back detector calibration: There are just too much individual differences to calibrate the back detectors with a simple script given a range for all 12 back strips. I found out this way to late. There isn’t any range to rule them all, at least since the fitting function can behave very strange given a too small or too big range.

— **Mail from Liam begins —**

”You might have to investigate the threshold a little bit. The continuum of events at low energy comes from charge sharing between the strips. For these very heavy ions, the total amount of charge deposited gets split between neighbouring strips of the CD. The code does performs some tricks to try and recover the correct energy and position, but that depends on counting the number of strips that fire. Therefore, if the threshold is too low you will include ”pedestal” events and it will get things wrong. If the threshold is too high, you will miss some events that have charge sharing and get the wrong energy for your particle.

The key spectra to look at are ”part” and ”cd\_debug”. The latter counts how many particles have X strips fired on the front side and Y strips fired on the back side.

If you have too many cd\_debug events = 3, then your thresholds are too low. If you have a large continuum/background in the ”part” spectrum, your thresholds are too high. Best thing to do is play about with different values.

Bin 20 is when no particle can be found, because there is no energy registered in either the front or the back strips. This can only happen when the front energy is below the software threshold that you set and the back energy is either in a broken strip or is also below the software threshold. Likely it is some noise events or charge sharing that comes below the threshold.

The major problem with the online calibration is that a number of the back strips have the wrong gains, but it otherwise looks quite good. Have you identified which strips these are, by comparing the gains between the ’online’ and ’user’ calibrations? You could maybe correct those strips as an intermediate step and see how things look.

the source has a thickness of 1.23 mm, which needs to be factored in so that the CD to target distance is the CD to source distance PLUS the source thickness, i.e.  $25.78 \text{ mm} + 1.23 \text{ mm} = 27.01 \text{ mm}$ . This is very close to the 26.98 mm you got from us in August. I think that the source data was reanalyzed since the original blog entry, giving the 0.03 mm difference!”

For the centroids, it is very hard to tell in log scale how precise you are with the automatic fitting. I zoomed in on one example (attached) and you can see that the black lines do not really represent the centroid in this instance (black lines too low in energy). Because of the complex peak shapes, it is very hard to

do this with automatic fitting it seems.

It honestly might be better to simply hover your mouse over the correct "feature" of the peak, be it the centroid or the maximum, and compare that. The fitting just doesn't seem reliable.

If you do not have the cdpad option selected, then there will be no particle events, because they come in the CD. The -s flag is for adding particles which come without a gamma-ray and the add back flag is for adding Compton scattered events together in the Miniball clusters.

What you observe around channel number 20 in the ADC events is the so-called pedestal. There is a single common gate for each ADC (containing channels from one CD quadrant). Therefore, when there is an event in one strip of the CD all channels are readout, but the channels without a real event read a "zero" energy. These are the events in the pedestal. You should define your threshold for each ADC channel to be above this peak. You are simply zoomed in to the wrong range. Maybe try with log scale on the y-axis and you will see that there should be a cut off at low-energy. After a correct calibration is applied (as you can see for adc\_1\_19 in your example), this pedestal will be calibrated out of the physical energy range.

The nominal calibration will be quite good for most detectors in a certain energy range, because it is designed to be that way. The gains of each DGF are matched during the setup of the experiment so that the online analysis is more straightforward. However, there are some non-linearities and drifting offsets and gains over time that have to be corrected for with a proper calibration using the  $^{133}\text{Ba}/^{152}\text{Eu}$  source data.

#### — Mail from Liam ended —

##### Tilbakemelding:

I presume that charge sharing is only considered if 2 firing strips are neighbors?

##### Pedestal

The pedestal is like a massive statue in front of the interesting data.

We use a threshold to cut away the pedestal.

##### Threshold

\* Threshold (forskjellig i log/ikke-log skala)

Using a logarithmic y-axis, the threshold value will decrease very much. So don't use that.


##### Tilbakemelding:

easier to set thresholds on lin. scale.

Threshold: The code has a default threshold of 100, but in some cases this is too much and some cases this is not enough. So for each adc channel, the threshold can be set. We don't want to include the "pedestal". Charge sharing. Won't cut too much or too little..

##### CD debug:

```
$ cd /Users/trondwj/GitHub/MasterThesis/Scripts/plotting
```

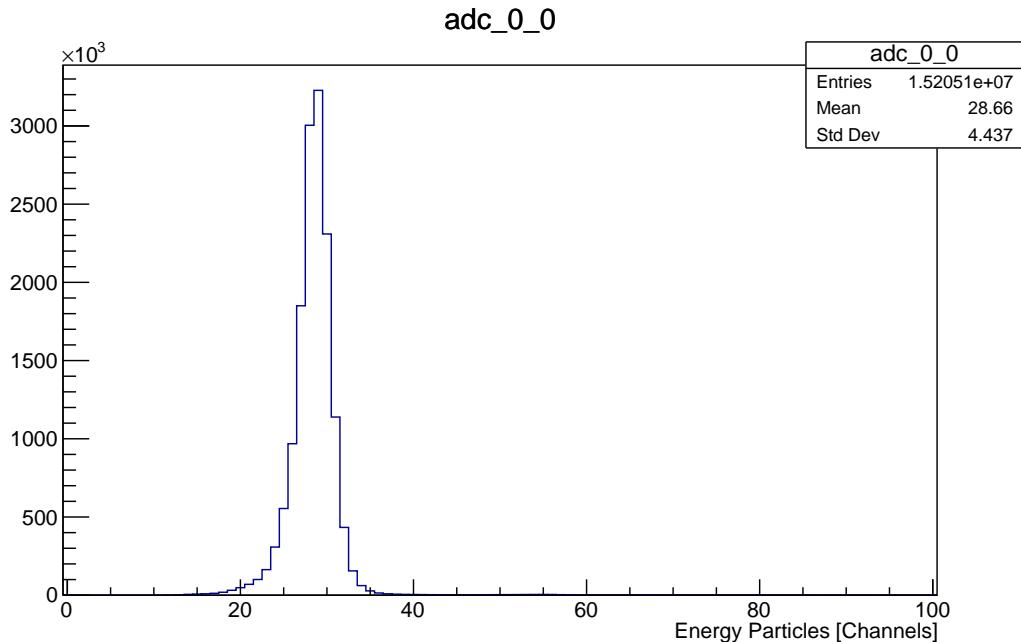

**Figure 4.2:** Pedestal Q1, f1.

```
$ root
root [0] .L MultiPlot.cpp++
root [1] check_cd_debug("setup_Sm.txt")
```

#### 4.4.1 Particle detector

##### User calibration

ADC: Analog to digital converter (Mesytec)

TDC: Time to digital converter

DSSSD: Double-Sided Silicon Strip Detector  $\Rightarrow$  CD


must remove the inner ring from data analysis because of damage

$$\text{gain} = \frac{E_{\text{Sm}} - E_{\text{Pb}}}{Ch_{\text{Sm}} - Ch_{\text{Pb}}}$$

$$\text{offset} = E_{\text{Sm}} - \text{gain} \cdot Ch_{\text{Sm}}$$

in keV.

Hvis man har flere sentroider bruker man bare lineær regresjon. Gjelder

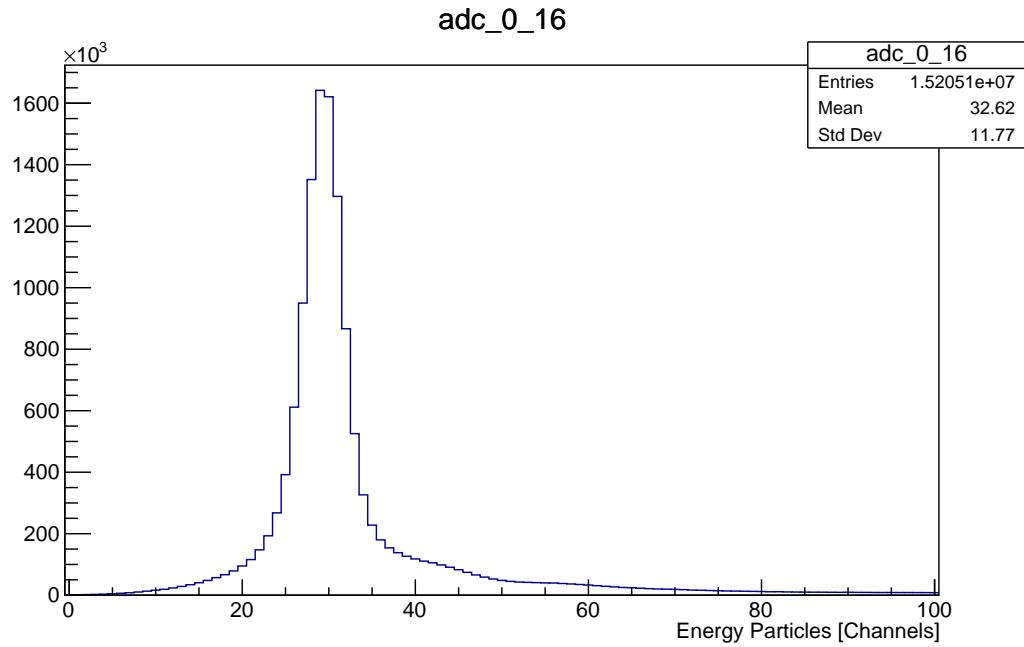

**Figure 4.3:** Pedestal Q1, b1.


spesielt for baksiden!

Online calibration


#### 4.4.2 Gamma detectors

DGF: Digital  $\gamma$  finder  
addback, singles, ...

### 4.5 Doppler correction

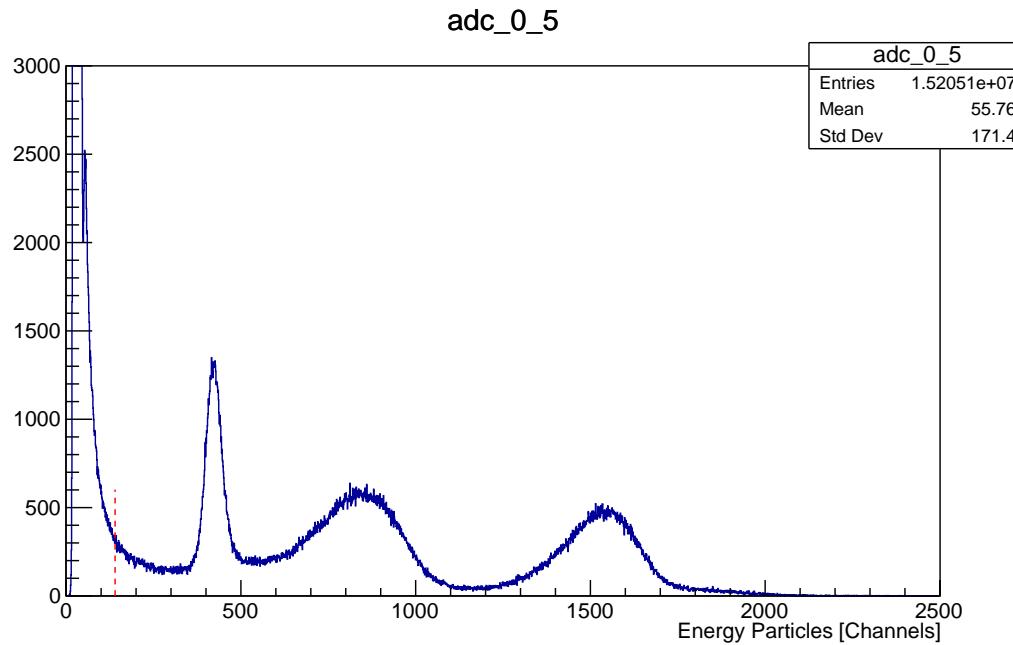

**Figure 4.4:** Threshold Q1, f6.

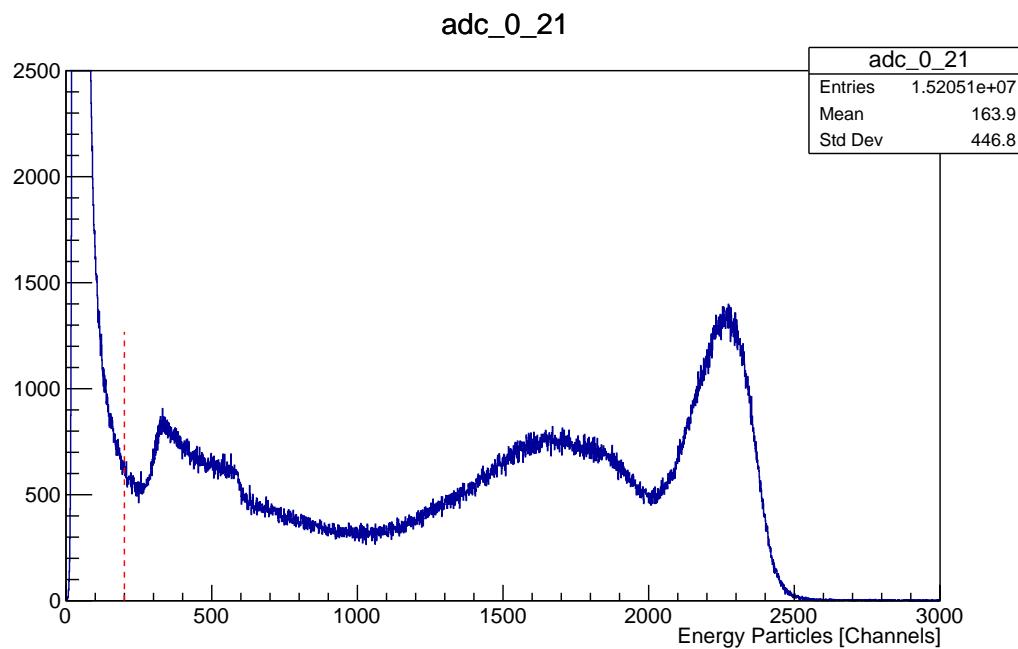



**Figure 4.5:** Threshold Q1, b6.


**Table 4.3:** TreeBuilder vs AQ4Sort.

Quadrant	Front ring [F] or back strip [B]	TreeBuilder	AQ4Sort
1	F 15	adc_0_0	fE_Q1_f1
1	F 14	adc_0_1	fE_Q1_f2
1	F 13	adc_0_2	fE_Q1_f3
:	:	:	:
1	F 1	adc_0_14	fE_Q1_f15
1	F 0	adc_0_15	fE_Q1_f16
1	B 0	adc_0_16	bE_Q1_f1
1	B 1	adc_0_17	bE_Q1_f2
1	B 2	adc_0_18	bE_Q1_f3
:	:	:	:
1	B 11	adc_0_26	bE_Q1_f11
1	B 12	adc_0_27	bE_Q1_f12
2	F 15	adc_1_0	fE_Q2_f1
:	:	:	:
2	F 0	adc_1_15	fE_Q2_f16
2	B 0	adc_1_16	bE_Q2_f1
:	:	:	:
2	B 12	adc_1_27	bE_Q2_f12
3	F 15	adc_2_0	fE_Q3_f1
:	:	:	:
3	F 0	adc_2_15	fE_Q3_f16
3	B 0	adc_2_16	bE_Q3_f1
:	:	:	:
3	B 12	adc_2_27	bE_Q3_f12
4	F 15	adc_3_0	fE_Q4_f1
:	:	:	:
4	F 0	adc_3_15	fE_Q4_f16
4	B 0	adc_3_16	bE_Q4_f1
:	:	:	:
4	B 12	adc_3_27	bE_Q4_f12

**Table 4.4:** ADC

ADC	Quadrant	Channel	Front ring [F] or back strip [B]
0 - 3	1 - 4	0	F
0 - 3	1 - 4	1	F
0 - 3	1 - 4	2	F
0 - 3	1 - 4	3	F
0 - 3	1 - 4	4	F
0 - 3	1 - 4	5	F
0 - 3	1 - 4	6	F
0 - 3	1 - 4	7	F
0 - 3	1 - 4	8	F
0 - 3	1 - 4	9	F
0 - 3	1 - 4	10	F
0 - 3	1 - 4	11	F
0 - 3	1 - 4	12	F
0 - 3	1 - 4	13	F
0 - 3	1 - 4	14	F
0 - 3	1 - 4	15	F
0 - 3	1 - 4	16	B
0 - 3	1 - 4	17	B
0 - 3	1 - 4	18	B
0 - 3	1 - 4	19	B
0 - 3	1 - 4	20	B
0 - 3	1 - 4	21	B
0 - 3	1 - 4	22	B
0 - 3	1 - 4	23	B
0 - 3	1 - 4	24	B
0 - 3	1 - 4	25	B
0 - 3	1 - 4	26	B
0 - 3	1 - 4	27	B
0 - 3		28	Empty
0 - 3		29	Empty
0 - 3		30	Empty
0 - 3	1 - 4	31	PAD
4		0	Ionization Chamber
4		1	Ionization Chamber

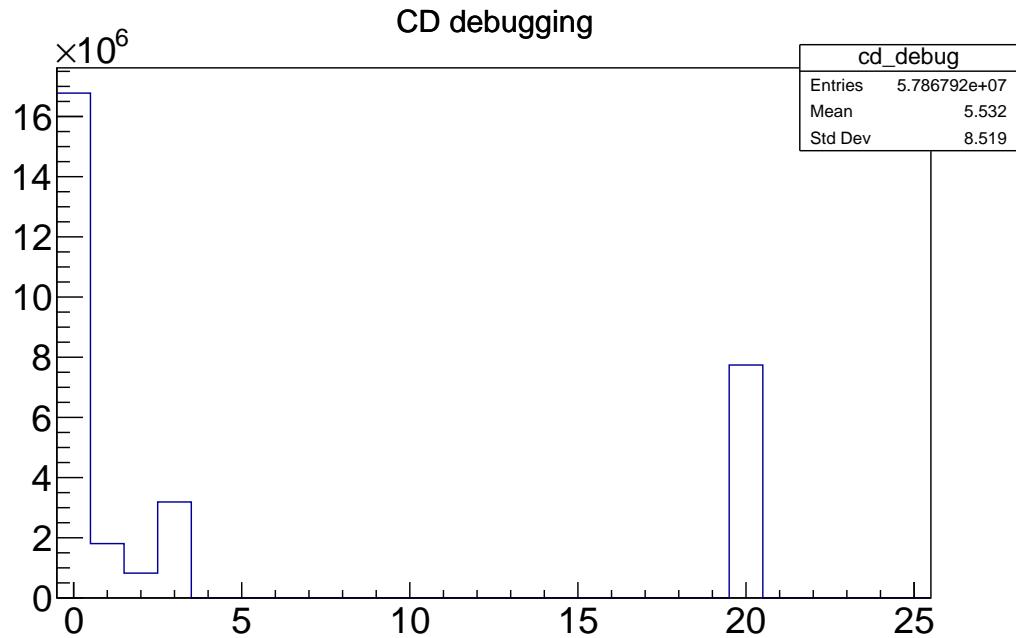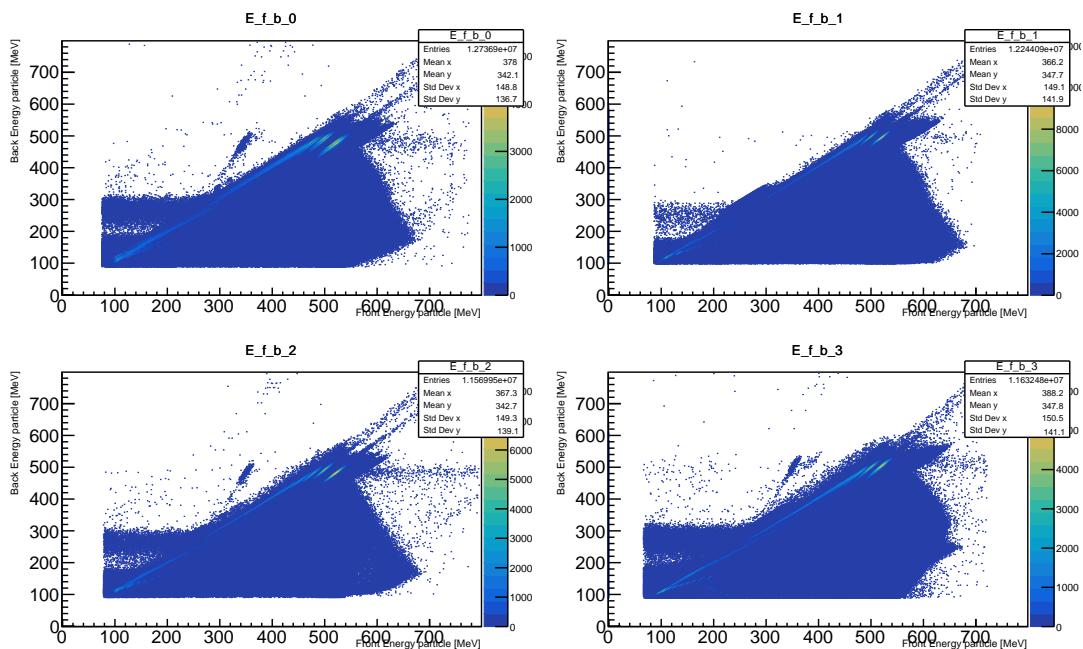**Figure 4.6:** CD debugging.**Figure 4.7:** User calibration.

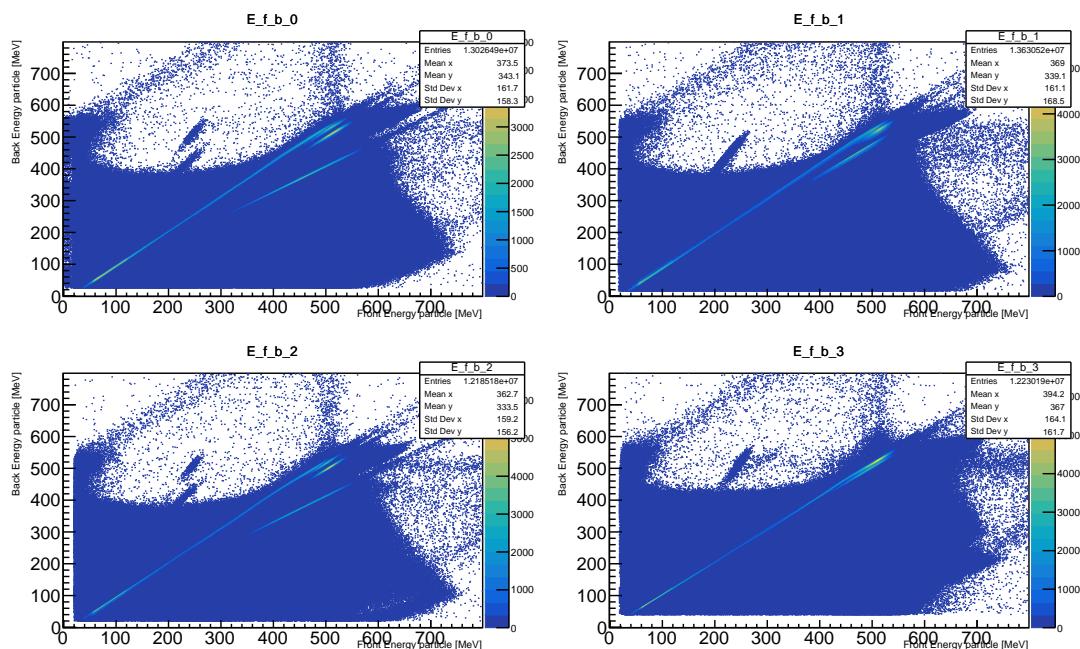**Figure 4.8:** Online calibration.



# **Chapter 5**

## **Experimental results**



# Chapter 6

## Discussion

Level scheme (from Klintefjord?)


Tilbakemelding:

at some point you should show the level scheme.

- motivation: to explain what is known, and which transition probabilities you want to measure.

Perhaps also to explain what theory predicts.

- discussion: if you get  $\gamma$ -spectrum for  $^{140}\text{Sm} \rightarrow$  to explain what you see.

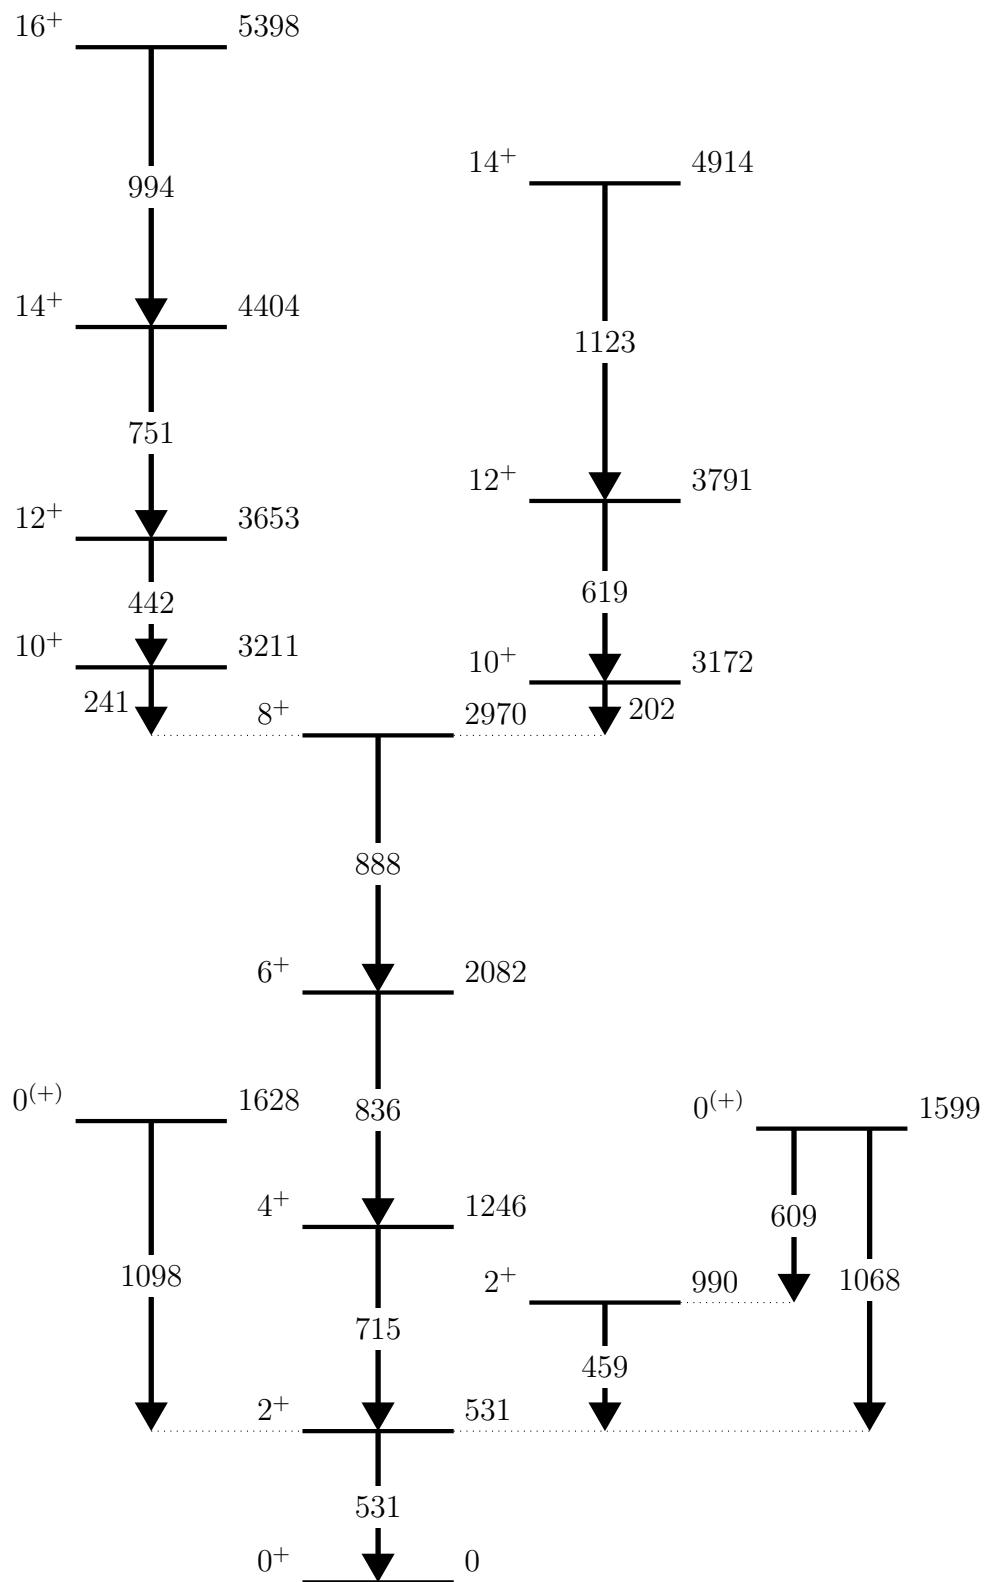

**Figure 6.1:** Level scheme for  $^{140}\text{Sm}$ . Adapted from Klintefjord.

# Chapter 7

## Summary and outlook

Future work: Better calibration of particle detectors (online not perfect). Take into account the shape of the peaks  $\Rightarrow$  calibrate the particle detectors manually.. Takes a lot of time! But maybe less than trying to fit all in a script? Had I just known...

Fra oppgaveteksten:

determine Coulomb excitation yields. These yields will then, in a second step, be compared to theoretical calculations and transition probabilities and quadrupole moments will be extracted using chi-square minimization procedures.

GOSIA and GOSIA2 analysis?

[https://www.pas.rochester.edu/~cline/Gosia/Gosia\\_Manual\\_20110609.pdf](https://www.pas.rochester.edu/~cline/Gosia/Gosia_Manual_20110609.pdf)



# Appendices



# Appendix A

## Symbol list

**Table A.1:** Table of symbols with explanations.

T <sub>1/2</sub>	Half-life
------------------	-----------



# Appendix B

## Acronyms and abbreviations

**Table B.1:** Table of acronyms and abbreviations.

---

ADC	Analog to Digital Converter
CERN	European Council for Nuclear Research (in French: Conseil Européen pour la Recherche Nucléaire)
COULEX	Coulomb excitation
DGF	Digital Gamma Finder
DSSSD	Double-Sided Silicon Strip Detector
GPS	General Purpose Separator
HRS	High Resolution Separator
HIE-ISOLDE	High Intensity and Energy upgrade of ISOLDE
ISOL	Isotope Separator On Line
ISOLDE	ISOL DEvice
LINAC	LINear ACcelerator
MBS	Multi Branch System
MED	MBS Event Data (also known as Miniball Event Data)
MAR <sub>a</sub> BQU	MBS And ROOT Based Online/Offline Utility
PSB	Proton Synchrotron Booster
EBIS	Electron Beam Ion Source
REXEgis	Radioactive beam EXperiment EBIS
REX-ISOLDE	Radioactive beam EXperiment at ISOLDE
RIB	Radioactive Ion Beam
RILIS	Resonance Ionization Laser Ion Source
TDC	Time to Digital Converter

---



# Appendix C

## Two-particle collision

### C.1 Laboratory (LAB) frame of reference

The angles of the two-particle collision in the laboratory frame from Fig. 3.4a is calculated in this section. A general approach is used to make it easier to hold track of the parameters. From the figure we can express the velocities as

$$\begin{aligned}\mathbf{u} &= \mathbf{u}_1 = u\hat{\mathbf{x}} \\ \mathbf{u}_2 &= 0 \\ \mathbf{v}_b &= \mathbf{v}_1 = v_1(\cos \theta\hat{\mathbf{x}} + \sin \theta\hat{\mathbf{y}}) \\ \mathbf{v}_t &= \mathbf{v}_2 = v_2(\cos \varphi\hat{\mathbf{x}} - \sin \varphi\hat{\mathbf{y}})\end{aligned}\tag{C.1}$$

where  $\mathbf{u}_1$  and  $\mathbf{v}_1$  is the initial and final velocity of the projectile  $m_b = m_1$  respectively, and  $\mathbf{u}_2$  and  $\mathbf{v}_2$  is the initial and final velocity of the target  $m_t = m_2$  respectively. The angles  $\theta_b = \theta$  and  $\theta_t = \varphi$  are the projectile and target angle respectively. We also introduce a ratio of the projectile mass to the target mass,  $\alpha = m_1/m_2$ .

Conservation of momentum gives

$$m_1\mathbf{u}_1 = m_1\mathbf{v}_1 + m_2\mathbf{v}_2$$

which in x-direction can be expressed as

$$\begin{aligned}m_1u &= m_1v_1 \cos \theta + m_2v_2 \cos \varphi \\ m_1(u - v_1 \cos \theta) &= m_2v_2 \cos \varphi \\ \frac{m_1}{m_2}(u - v_1 \cos \theta) &= v_2 \cos \varphi \\ \alpha(u - v_1 \cos \theta) &= v_2 \cos \varphi\end{aligned}\tag{C.2}$$

and in y-direction can be expressed as

$$\begin{aligned} 0 &= m_1 v_1 \sin \theta - m_2 v_2 \sin \varphi \\ m_1 v_1 \sin \theta &= m_2 v_2 \sin \varphi \\ \frac{m_1}{m_2} v_1 \sin \theta &= v_2 \sin \varphi \\ \alpha v_1 \sin \theta &= v_2 \sin \varphi \end{aligned} \quad (\text{C.3})$$

Conservation of energy gives

$$\begin{aligned} \frac{1}{2} m_1 \mathbf{u}_1^2 &= \frac{1}{2} m_1 \mathbf{v}_1^2 + \frac{1}{2} m_2 \mathbf{v}_2^2 \\ \frac{1}{2} m_1 (u^2 - v_1^2) &= \frac{1}{2} m_2 v_2^2 \\ \frac{m_1}{m_2} (u^2 - v_1^2) &= v_2^2 \\ \alpha (u^2 - v_1^2) &= v_2^2 \end{aligned} \quad (\text{C.4})$$

We now have three equations (Eq. (C.2) - Eq. (C.4)) with four unknown quantities ( $v_1, \theta, v_2, \varphi$ ). Using the target angle  $\varphi$  as an independent variable, we can find expressions for the other three variables.

Squaring Eq. (C.2)

$$\begin{aligned} \alpha^2 (u - v_1 \cos \theta)^2 &= v_2^2 \cos^2 \varphi \\ \alpha^2 (u^2 - 2uv_1 \cos \theta + v_1^2 \cos^2 \theta) &= v_2^2 \cos^2 \varphi \end{aligned}$$

and Eq. (C.3)

$$\alpha^2 v_1^2 \sin^2 \theta = v_2^2 \sin^2 \varphi$$

and adding them together gives

$$\begin{aligned} \alpha^2 (u^2 - 2uv_1 \cos \theta + v_1^2 \cos^2 \theta + v_1^2 \sin^2 \theta) &= v_2^2 (\cos^2 \varphi + \sin^2 \varphi) \\ \alpha^2 (u^2 - 2uv_1 \cos \theta + v_1^2) &= v_2^2 \\ \alpha^2 u^2 - 2\alpha^2 uv_1 \cos \theta + \alpha^2 v_1^2 &= v_2^2 \\ \alpha^2 v_1^2 &= -\alpha^2 u^2 + 2\alpha^2 uv_1 \cos \theta + v_2^2 \\ \alpha^2 v_1^2 &= -\alpha^2 u^2 + 2\alpha u (\alpha v_1 \cos \theta) + v_2^2 \end{aligned} \quad (\text{C.5})$$

From Eq. (C.2) we have

$$\begin{aligned} \alpha(u - v_1 \cos \theta) &= v_2 \cos \varphi \\ \alpha u - \alpha v_1 \cos \theta &= v_2 \cos \varphi \\ \alpha v_1 \cos \theta &= \alpha u - v_2 \cos \varphi \end{aligned} \quad (\text{C.6})$$

Substituting for Eq. (C.6) into Eq. (C.5) we get

$$\begin{aligned}\alpha^2 v_1^2 &= -\alpha^2 u^2 + 2\alpha u(\alpha u - v_2 \cos \varphi) + v_2^2 \\ \alpha^2 v_1^2 &= -\alpha^2 u^2 + 2\alpha^2 u^2 - 2\alpha u v_2 \cos \varphi + v_2^2 \\ \alpha^2 v_1^2 &= \alpha^2 u^2 - 2\alpha u v_2 \cos \varphi + v_2^2\end{aligned}\quad (\text{C.7})$$

Using Eq. (C.4) we get

$$\begin{aligned}\left(\frac{\alpha}{\alpha}\right) \alpha(u^2 - v_1^2) &= v_2^2 \\ \alpha^2(u^2 - v_1^2) &= \alpha v_2^2 \\ \alpha^2 u^2 - \alpha^2 v_1^2 &= \alpha v_2^2 \\ \alpha^2 v_1^2 &= \alpha^2 u^2 - \alpha v_2^2\end{aligned}\quad (\text{C.8})$$

Combining Eq. (C.7) and Eq. (C.8) gives

$$\begin{aligned}\alpha^2 u^2 - 2\alpha u v_2 \cos \varphi + v_2^2 &= \alpha^2 u^2 - \alpha v_2^2 \\ v_2^2 + \alpha v_2^2 &= 2\alpha u v_2 \cos \varphi \\ v_2^2(1 + \alpha) &= 2\alpha u v_2 \cos \varphi \\ v_2 &= 2 \left( \frac{\alpha}{1 + \alpha} \right) u \cos \varphi\end{aligned}\quad (\text{C.9})$$

Substituting Eq. (C.9) into Eq. (C.8) we get

$$\begin{aligned}\alpha^2 v_1^2 &= \alpha^2 u^2 - \alpha \left( 2 \left( \frac{\alpha}{1 + \alpha} \right) u \cos \varphi \right)^2 \\ v_1^2 &= u^2 - \frac{1}{\alpha} \left( 4 \left( \frac{\alpha^2}{(1 + \alpha)^2} \right) u^2 \cos^2 \varphi \right) \\ v_1^2 &= u^2 \left( 1 - 4 \left( \frac{\alpha}{(1 + \alpha)^2} \right) \cos^2 \varphi \right) \\ v_1 &= u \sqrt{1 - 4 \frac{\alpha}{M} \cos^2 \varphi}\end{aligned}\quad (\text{C.10})$$

where  $\alpha/M = \alpha/(1 + \alpha)^2$ . The ratio of Eq. (C.3) and Eq. (C.6) gives

$$\begin{aligned}\frac{\alpha v_1 \sin \theta}{\alpha v_1 \cos \theta} &= \frac{v_2 \sin \varphi}{\alpha u - v_2 \cos \varphi} \\ \tan \theta &= \frac{v_2 \sin \varphi}{\alpha u - v_2 \cos \varphi}\end{aligned}\quad (\text{C.11})$$

Inserting Eq. (C.9) into Eq. (C.11) gives

$$\begin{aligned}
 \tan \theta &= \frac{\left(2\left(\frac{\alpha}{1+\alpha}\right) u \cos \varphi\right) \sin \varphi}{\alpha u - \left(2\left(\frac{\alpha}{1+\alpha}\right) u \cos \varphi\right) \cos \varphi} \\
 \tan \theta &= \frac{\alpha u \left(\frac{1}{1+\alpha}\right) 2 \sin \varphi \cos \varphi}{\alpha u \left(1 - 2\left(\frac{1}{1+\alpha}\right) \cos^2 \varphi\right)} \\
 \tan \theta &= \frac{\sin 2\varphi}{\left(1 + \alpha\right) \left(1 - 2\left(\frac{1}{1+\alpha}\right) \cos^2 \varphi\right)} \\
 \tan \theta &= \frac{\sin 2\varphi}{1 + \alpha - 2 \cos^2 \varphi} \\
 \tan \theta &= \frac{\sin 2\varphi}{\alpha - (2 \cos^2 \varphi - 1)} \\
 \tan \theta &= \frac{\sin 2\varphi}{\alpha - \cos 2\varphi} \\
 \theta &= \arctan \left( \frac{\sin 2\varphi}{\alpha - \cos 2\varphi} \right)
 \end{aligned} \tag{C.12}$$

Substituting back the variable names from Fig. 3.4a into Eq. (C.12) gives

$$\theta_b = \arctan \left( \frac{\sin 2\theta_t}{\alpha - \cos 2\theta_t} \right) \tag{C.13}$$

## C.2 Center of mass (CM) frame of reference

Using the same approach as Sec. C.1. From figure Fig. 3.4b we can express the velocities as

$$\begin{aligned}
 \mathbf{u}'_1 &= u'_1 \hat{\mathbf{x}} \\
 \mathbf{u}'_2 &= u'_2 \hat{\mathbf{x}} \\
 \mathbf{v}'_b &= \mathbf{v}'_1 = v'_1 (\cos \theta' \hat{\mathbf{x}} + \sin \theta' \hat{\mathbf{y}}) \\
 \mathbf{v}'_t &= \mathbf{v}'_2 = v'_2 (-\cos \theta' \hat{\mathbf{x}} - \sin \theta' \hat{\mathbf{y}}) = -v'_2 (\cos \theta' \hat{\mathbf{x}} + \sin \theta' \hat{\mathbf{y}})
 \end{aligned} \tag{C.14}$$

where  $\mathbf{u}'_1$  and  $\mathbf{v}'_1$  is the initial and final velocity of the projectile  $m_b = m_1$  respectively, and  $\mathbf{u}'_2$  and  $\mathbf{v}'_2$  is the initial and final velocity of the target  $m_t = m_2$  respectively. The angle  $\theta'_b = \theta'$  is the projectile angle.

In the center of mass (CM) frame of reference, the position of the center of mass is given by

$$\mathbf{R} = \frac{m_1 \mathbf{r}_1 + m_2 \mathbf{r}_2}{m_1 + m_2} \tag{C.15}$$

and the velocity is

$$\mathbf{V} = \frac{d\mathbf{R}}{dt} = \frac{d}{dt} \left( \frac{m_1 \mathbf{r}_1 + m_2 \mathbf{r}_2}{m_1 + m_2} \right) = \frac{m_1 \mathbf{u}'_1 + m_2 \mathbf{u}'_2}{m_1 + m_2} \quad (\text{C.16})$$

At the origin of the CM frame,  $\mathbf{R} = 0$ , which implies  $\mathbf{V} = 0$ . The total momentum before the collision is

$$\begin{aligned} m_1 \mathbf{u}'_1 + m_2 \mathbf{u}'_2 &= 0 \\ m_2 \mathbf{u}'_2 &= -m_1 \mathbf{u}'_1 \\ \mathbf{u}'_2 &= -\frac{m_1}{m_2} \mathbf{u}'_1 \\ \mathbf{u}'_2 &= -\alpha \mathbf{u}'_1 \end{aligned} \quad (\text{C.17})$$

and after the collision it is

$$\begin{aligned} m_1 \mathbf{v}'_1 + m_2 \mathbf{v}'_2 &= 0 \\ m_2 \mathbf{v}'_2 &= -m_1 \mathbf{v}'_1 \\ \mathbf{v}'_2 &= -\frac{m_1}{m_2} \mathbf{v}'_1 \\ \mathbf{v}'_2 &= -\alpha \mathbf{v}'_1 \\ -v'_2 (\cos \theta' \hat{\mathbf{x}} + \sin \theta' \hat{\mathbf{y}}) &= -\alpha v'_1 (\cos \theta' \hat{\mathbf{x}} + \sin \theta' \hat{\mathbf{y}}) \\ v'_2 &= \alpha v'_1 \end{aligned} \quad (\text{C.18})$$

Conservation of energy gives

$$\begin{aligned} \frac{1}{2} m_1 u'^2_1 + \frac{1}{2} m_2 u'^2_2 &= \frac{1}{2} m_1 v'^2_1 + \frac{1}{2} m_2 v'^2_2 \\ m_1 u'^2_1 + m_2 u'^2_2 &= m_1 v'^2_1 + m_2 v'^2_2 \end{aligned} \quad (\text{C.19})$$

Substituting Eq. (C.17) and Eq. (C.18) into Eq. (C.19) gives

$$\begin{aligned} m_1 u'^2_1 + m_2 (-\alpha u'_1)^2 &= m_1 v'^2_1 + m_2 (\alpha v'_1)^2 \\ m_1 u'^2_1 + \alpha^2 m_2 u'^2_1 &= m_1 v'^2_1 + \alpha^2 m_2 v'^2_1 \\ (m_1 + \alpha^2 m_2) u'^2_1 &= (m_1 + \alpha^2 m_2) v'^2_1 \\ u'^2_1 &= v'^2_1 \\ u'_1 &= v'_1 \end{aligned} \quad (\text{C.20})$$

Substituting Eq. (C.20) into Eq. (C.17) gives

$$u'_2 = -\alpha v'_1 \quad (\text{C.21})$$

### C.3 Connection between the LAB frame and the CM frame

Galilean transformations describes the relationship between the LAB frame and the CM frame

$$\begin{aligned} x' &= x - vt & v'_x &= v_x - V_{cm} \\ y' &= y & v'_y &= v_y \\ z' &= z & v'_z &= v_z \\ t' &= t \end{aligned}$$

Using the same approach as Sec. C.1. In the LAB frame Fig. 3.4a, conservation of momentum is given by

$$m_1 \mathbf{u}_1 + m_2 \mathbf{u}_2 = m_1 \mathbf{v}_1 + m_2 \mathbf{v}_2 = (m_1 + m_2) \mathbf{V} \quad (\text{C.22})$$

which can be written as

$$\begin{aligned} m_1 \mathbf{u}_1 + m_2 \mathbf{u}_2 &= (m_1 + m_2) \mathbf{V} \\ \mathbf{V} &= \frac{m_1 \mathbf{u}_1 + m_2 \mathbf{u}_2}{m_1 + m_2} & \mathbf{u}_2 &= 0 \\ \mathbf{V} &= \frac{m_1}{m_1 + m_2} \mathbf{u}_1 \\ \mathbf{V} &= \frac{\alpha}{1 + \alpha} u \hat{\mathbf{x}} \\ V &= \frac{\alpha}{1 + \alpha} u \end{aligned} \quad (\text{C.23})$$

Using Galilean transformations, the connection between  $\mathbf{v}'_1$  and  $\mathbf{v}_1$  is expressed as

$$\begin{aligned} \mathbf{v}'_1 &= \mathbf{v}_1 - \mathbf{V} \\ \mathbf{v}_1 &= \mathbf{v}'_1 + \mathbf{V} \end{aligned} \quad (\text{C.24})$$

which in x-direction gives

$$v_1 \cos \theta = v'_1 \cos \theta' + V \quad (\text{C.25})$$

and in y-direction gives

$$v_1 \sin \theta = v'_1 \sin \theta' \quad (\text{C.26})$$

The ratio of Eq. (C.26) and Eq. (C.25) gives

$$\begin{aligned}\frac{v_1 \sin \theta}{v_1 \cos \theta} &= \frac{v'_1 \sin \theta'}{v'_1 \cos \theta' + V} \\ \tan \theta &= \frac{\sin \theta'}{\cos \theta' + \frac{V}{v'_1}} \\ \tan \theta &= \frac{\sin \theta'}{\frac{V}{v'_1} + \cos \theta'}\end{aligned}\quad (\text{C.27})$$

We need to reformulate the velocity ratio. Substitution from Eq. (C.20) gives

$$\frac{V}{v'_1} = \frac{V}{u'_1} \quad (\text{C.28})$$

Using Galilean transformation and Eq. (C.23) we have that

$$\begin{aligned}u'_1 &= u_1 - \mathbf{V} \\ u'_1 &= u_1 - V \\ u'_1 &= u - \frac{\alpha}{1+\alpha}u \\ u'_1 &= u \left(1 - \frac{\alpha}{1+\alpha}\right) \\ u'_1 &= u \left(\frac{1+\alpha-\alpha}{1+\alpha}\right) \\ u'_1 &= \frac{1}{1+\alpha}u\end{aligned}\quad (\text{C.29})$$

Substituting Eq. (C.23) and Eq. (C.29) into Eq. (C.28) gives

$$\frac{V}{u'_1} = \frac{\frac{\alpha}{1+\alpha}u}{\frac{1}{1+\alpha}u} = \alpha \quad (\text{C.30})$$

Substituting Eq. (C.30) into Eq. (C.27) gives

$$\begin{aligned}\tan \theta &= \frac{\sin \theta'}{\alpha + \cos \theta'} \\ \theta &= \arctan \left( \frac{\sin \theta'}{\alpha + \cos \theta'} \right)\end{aligned}\quad (\text{C.31})$$

Substituting back the variable names from Fig. 3.4b into Eq. (C.31) gives

$$\theta_b = \arctan \left( \frac{\sin \theta'_b}{\alpha + \cos \theta'_b} \right) \quad (\text{C.32})$$

Using Galilean transformations, the connection between  $\mathbf{v}'_2$  and  $\mathbf{v}_2$  is expressed as

$$\begin{aligned} \mathbf{v}'_2 &= \mathbf{v}_2 - \mathbf{V} \\ \mathbf{v}_2 &= \mathbf{v}'_2 + \mathbf{V} \end{aligned} \quad (\text{C.33})$$

which in x-direction gives

$$\begin{aligned} v_2 \cos \varphi &= -v'_2 \cos \theta' + V \\ v_2 \cos \varphi &= V - v'_2 \cos \theta' \end{aligned} \quad (\text{C.34})$$

and in y-direction gives

$$v_2 \sin \varphi = v'_2 \sin \theta' \quad (\text{C.35})$$

The ratio of Eq. (C.35) and Eq. (C.34) gives

$$\begin{aligned} \frac{v_2 \sin \varphi}{v_2 \cos \varphi} &= \frac{v'_2 \sin \theta'}{V - v'_2 \cos \theta'} \\ \tan \varphi &= \frac{\sin \theta'}{\frac{V}{v'_2} - \cos \theta'} \end{aligned} \quad (\text{C.36})$$

We need to reformulate the velocity ratio. Substitution from Eq. (C.18) and Eq. (C.20) gives

$$\frac{V}{v'_2} = \frac{V}{\alpha v'_1} = \frac{V}{\alpha u'_1} \quad (\text{C.37})$$

Substituting Eq. (C.30) into Eq. (C.37) gives

$$\frac{V}{v'_2} = \frac{V}{\alpha \frac{V}{\alpha}} = 1 \quad (\text{C.38})$$

Substituting Eq. (C.38) into Eq. (C.36) gives

$$\begin{aligned}\tan \varphi &= \frac{\sin \theta'}{1 - \cos \theta'} = \frac{1}{\frac{1-\cos \theta'}{\sin \theta'}} = \frac{1}{\tan \frac{\theta'}{2}} = \cot \frac{\theta'}{2} \\ \varphi &= \frac{1}{2}(\pi - \theta') \text{ [radians]} = \frac{1}{2}(180^\circ - \theta') \text{ [degrees]}\end{aligned}\quad (\text{C.39})$$

Substituting back the variable names from Fig. 3.4 into Eq. (C.39) gives

$$\theta_t = \frac{1}{2}(\pi - \theta'_b) \text{ [radians]} = \frac{1}{2}(180^\circ - \theta'_b) \text{ [degrees]} \quad (\text{C.40})$$



# Appendix D

## Source code

The sorting and analysis code used in this thesis has been developed at CERN-ISOLDE and can be found at <https://github.com/Miniball/MiniballCoulexSort>

The code for theoretical predictions of energy used in the calibration was developed by Liam Gaffney who is working at ISOLDE and has to do with analysis of data from Miniball and ISS. kinsim can be found here <https://github.com/lpgaff/kinsim>

Some calibration code is based on the codes of Ville Virtanen and Liam Gaffney.

Other code/scripts have been written by the author. C++ / Python.

**Table D.1:** Table of source code.

Name/Link	Description
<a href="https://github.com/Miniball/MiniballCoulexSort">MiniballCoulexSort</a>	Sorting and analysis code
	Kinematic simulation



## Appendix E

# Connecting MiniballCoulexSort with ROOT

To connect MiniballCoulexSort with ROOT you need them to share their libraries with each other. This is done with a dynamic loader. You can find out more here: <https://root.cern.ch/root/html/doc/guides/users-guide/ROOTUsersGuide.html#file-system.rootrc>.

You have to make a `.rootrc` file in your home folder on your computer. In the `.rootrc` file you want to write something like this

```
Unix .*. Root .DynamicPath:    .:/Users/trondwj/GitHub(ROOT-
framework/build/lib >:/Users/trondwj/GitHub/Miniball/
MiniballCoulexSort/lib :
```

This should all be in one line. The first part is to tell the system to use the dynamic loader of ROOT to connect the given paths that follow. In my case the lib folder of the ROOT install was at

```
/Users/trondwj/GitHub(ROOT-framework/build/lib
```

and the lib folder of the MiniballCoulexSort was at

```
/Users/trondwj/GitHub/Miniball/MiniballCoulexSort/lib
```

These paths is totally individual, and you will probably not have it in the same place. Therefore these paths must be changed to fit your system.

After making the file you either have restart the terminal or you can source the file by writing this in the terminal

```
$ source ~/.rootrc
```



## Appendix F

# Running ROOT and MiniballCoulexSort from anywhere in the terminal

To run ROOT or the different scripts of MiniballCoulexSort anywhere in the terminal, you have to edit your `.bash_profile` file [.bash\_profile on MacOS, .bashrc on Linux]. In my `.bash_profile` I used this

```
# Run ROOT from anywhere
export ROOTSYS=$HOME/GitHub(ROOT-framework/build
export PATH=$ROOTSYS/lib:$PATH
export PATH=$ROOTSYS/bin:$PATH
export DYLD_LIBRARY_PATH=$ROOTSYS/lib:$DYLD_LIBRARY_PATH

# Run MiniballCoulexSort from anywhere
export DYLD_LIBRARY_PATH=$HOME/GitHub/Miniball/
    MiniballCoulexSort/lib:$DYLD_LIBRARY_PATH
export PATH=$HOME/GitHub/Miniball/MiniballCoulexSort/lib:$PATH
export PATH=$HOME/GitHub/Miniball/MiniballCoulexSort/bin:$PATH
```

The DYLD\_LIBRARY\_PATH is used on Mac only. On other systems, use LD\_LIBRARY\_PATH. You need to locate the lib and bin folders for both ROOT and MiniballCoulexSort and change them to fit your system, and in addition you need the build folder of your ROOT install.



# **Appendix G**

## **Other appendices**

Kinematics in the lab frame for  $^{140}\text{Sm}$  on  $^{208}\text{Pb}$  at 4.65 MeV/u







Kinematics in the lab frame for  $^{140}\text{Sm}$  on  $^{208}\text{Pb}$  at 4.65 MeV/u



Kinematics in the lab frame for  $^{140}\text{Sm}$  on  $^{208}\text{Pb}$  at 4.65 MeV/u



Kinematics in the lab frame for  $^{140}\text{Sm}$  on  $^{208}\text{Pb}$  at 4.65 MeV/u

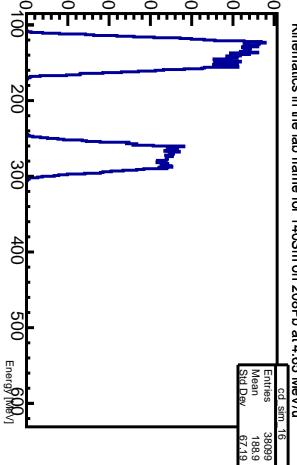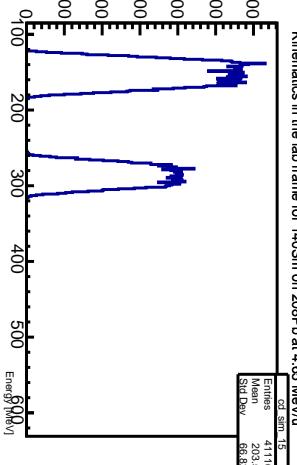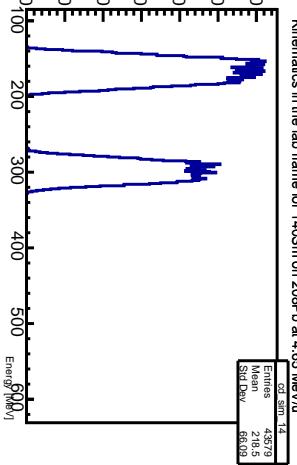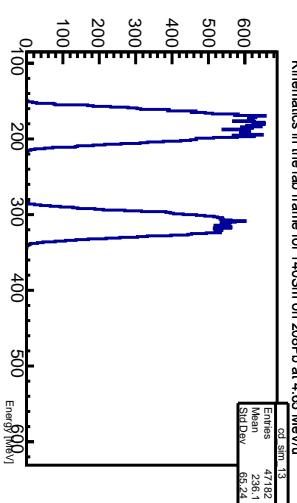

# Bibliography

- [1] L. Gaffney. Kinematics simulations for Coulomb-excitation experiments at Miniball, May 2018. URL <https://github.com/lpgaff/kinsim>.
- [2] C. Lefèvre. The CERN accelerator complex. Complexe des accélérateurs du CERN. Dec 2008. URL <https://cds.cern.ch/record/1260465>.
- [3] M. J. Borge and K. Riisager. HIE-ISOLDE, the project and the physics opportunities. *European Physical Journal A*, 52(11), 2016. ISSN 1434601X. doi: 10.1140/epja/i2016-16334-4.
- [4] The ISOLDE web page. URL <http://isolde.web.cern.ch>. Accessed: April 2019.
- [5] B. Jonson and K. Riisager. The ISOLDE facility. *Scholarpedia*, 5(7):9742, 2010. doi: 10.4249/scholarpedia.9742. Revision #90796.
- [6] D. Olsen. First generation ISOL radioactive ion beam facilities. pages 312–316, 2002. doi: 10.1109/pac.1995.504646.
- [7] T. D. Goodacre, V. Fedosseev, S. Rothe, et al. Ion beam production and study of radioactive isotopes with the laser ion source at ISOLDE. *Journal of Physics G: Nuclear and Particle Physics*, 44(8):084006, 2017. ISSN 0954-3899. doi: 10.1088/1361-6471/aa78e0.
- [8] E. Kugler, D. Fiander, B. Johnson, et al. The new CERN-ISOLDE on-line mass-separator facility at the PS-Booster. *Nuclear Inst. and Methods in Physics Research, B*, 70(1-4):41–49, 1992. ISSN 0168583X. doi: 10.1016/0168-583X(92)95907-9.
- [9] B. H. Wolf, J. Cederkäll, O. Forstner, et al. First radioactive ions charge bred in REXEBIS at the REX-ISOLDE accelerator. *Nuclear Instruments and Methods in Physics Research, Section B: Beam Interactions with Materials and Atoms*, 204:428–432, 2003. ISSN 0168583X. doi: 10.1016/S0168-583X(02)02108-0.

- [10] Y. Kadi, Y. Blumenfeld, W. V. Delsolaro, et al. Post-accelerated beams at ISOLDE. *Journal of Physics G: Nuclear and Particle Physics*, 44(8), 2017. ISSN 13616471. doi: 10.1088/1361-6471/aa78ca.
- [11] N. Warr. *The Miniball double-sided silicon strip detector (CD)*, October 2015. URL <https://www.ikp.uni-koeln.de/~warr/doc/cd.pdf>. Accessed: April 2019.
- [12] M. Klintefjord. *Evolution of deformation and collectivity away from magic numbers*. PhD thesis, University of Oslo, May 2016. URL <http://urn.nb.no/URN:NBN:no-56121>.