



**DATA DICTIONARY
FOR
3D PEDESTRIAN NETWORK**

Version: 2.2

December 2025

© The Government of the Hong Kong Special Administrative Region

The contents of this document remain the property of and may not be reproduced in whole or in part without the express permission of the Government of the HKSAR

Endorsed By:	Original Signed
	Mr. CHAN Yue Chun
	CLS/T
Date:	29 December 2025

Amendment History					
Change Number	Revision Description	Pages Affected	Revision Number	Date	Approved Reference
1	1 st Version (Revision 1)		1.1	19/11/2020	
2	2 nd Version (3DPN Phase 2)		2.0	19/08/2022	
3	Added details for other output formats	Section 5			
4	Added footnote for the relevant feature inside MTR Station	Section 4.4	2.1	11/12/2023	
5	1) Revised Covered Area and Data Source	Section 1.1, 1.2	2.2	29/12/2025	
	2) Added coded value for dPedLocation	2.1, 3.1, 4.5			
	3) Increase field length for FloorPolyID from 27 to 28	2.1, 3.1			
	4) Disclaimer	1.7			

Table of Contents

1. Introduction	1-1
1.1. Covered Area.....	1-1
1.2. Data Source	1-1
1.3. Grid System and Vertical Datum	1-3
1.4. Map Accuracy	1-3
1.5. Availability.....	1-3
1.6. Update Frequency	1-3
1.7. Disclaimer	1-3
2. Schema Overview	2-1
2.1. Schema Diagram	2-1
3. Entity Description	3-1
3.1. PedestrianRoute.....	3-2
3.2. PedRouteRelFloorPoly.....	3-5
3.3. PedRouteRelBldgPoly.....	3-6
3.4. PedRouteRelSitePoly	3-7
3.5. PedRouteRelTerminalPoly.....	3-7
3.6. PedRouteRelDistancePost.....	3-8
3.7. AccessTime	3-9
3.8. AccessTimeDetails.....	3-9
4. Domain Value Description.....	4-1
4.1. dPedCover	4-2
4.2. dPedCrossingFeature.....	4-2
4.3. dPedEnabled.....	4-2
4.4. dPedFeatureType.....	4-2
4.5. dPedLocation.....	4-3
4.6. dPedWheelchairAccess	4-4
4.7. dPedWheelchairBarrier	4-4
4.8. dPedPositionCertainty.....	4-4
4.9. dPedDataSource	4-4
4.10. dPedLevelSource.....	4-5
4.11. dDirection.....	4-5
4.12. dObstacleType.....	4-6
4.13. dFloorUnitDataSource	4-6
4.14. dFloorUnitLevelSource	4-7
4.15. dSiteType	4-7
4.16. dTerminalType	4-8
4.17. dAccessTimeType.....	4-8
4.18. dAccessTimeDayCode	4-8

5. Output Formats 5-1

5.1. ESRI File Geodatabase..... 5-1

5.2. ESRI Shapefile 5-1

5.2.1. Core Entities 5-1

5.2.1.1. PedestrianRoute 5-1

5.2.1.2. PedRouteRelFloorPoly 5-2

5.2.1.3. PedRouteRelBldgPoly 5-3

5.2.1.4. PedRouteRelSitePoly..... 5-3

5.2.1.5. PedRouteRelTerminalPoly 5-4

5.2.1.6. PedRouteRelDistancePost 5-4

5.2.1.7. AccessTime 5-4

5.2.1.8. AccessTimeDetails 5-5

5.2.2. Domains 5-5

5.3. GeoJSON..... 5-5

5.4. GML 5-5

1. Introduction

3D Pedestrian Network (3DPN) provides pedestrian-oriented information to support navigation and pedestrian analysis. It is designed to be both easy to understand for human users and machine-readable for applications.

The database schema provides a comprehensive framework to describe pedestrian routes and crossings, record positional accuracy in rural and country park areas, and manage access times for facilities. It supports universal accessibility by including information relevant to mobility-aided navigation. It also ensures direct association with building, site, and terminal identifiers, while maintaining consistency through standardized naming conventions.

The 3DPN is built to integrate seamlessly with the 3D Indoor Network, which represents the interiors of selected buildings where detailed indoor maps have been created. This dataset connects directly to the outdoor pedestrian network, ensuring continuity of navigation across indoor and outdoor environments. (<https://data.gov.hk/en-data/dataset/hk-landsd-openmap-3d-indoor-network>)

Together, the 3D Pedestrian Network and 3D Indoor Network form a unified framework. Their fully aligned database schemas guarantee consistency, interoperability, and robust support for pedestrian analysis and navigation applications.

1.1. Covered Area

3DPN covers routes in the following areas:

- Walkways within built-up areas, derived from the latest Land Utilisation in Hong Kong (Planning Department, 2017), covering 24.4% of land in Hong Kong;
- Long distance trails and country trails maintained by AFCD;
- Major footpaths within villages;
- Direct and shortest paths inside buildings that provided outdoor-indoor, elevated or sub-grade passages to the connected buildings or public transport facilities.

1.2. Data Source

The following are the approved source data to facilitate 3DPN updates. It shall be noted that source data are updated periodically, thus the pedestrian route shall also be reviewed and updated continuously.

- Digital Topographic Map
Digital map data at 1:1,000, 1:5,000, 1:10,000 and 1:20,000 scales, of the Lands Department
- DSM Orthophoto
Orthophotos with height values from DSM of the Lands Department
- DTM & DSM
Digital Terrain Model (DTM) and Digital Surface Model (DSM) of the Lands Department
- 3D Mesh Model
3D Mesh Model in Wavefront (.obj), OpenSceneGraph (.osgb) or Cesium 3D Tiles format of the Lands Department
- Geo-referenced point cloud
Geo-referenced point cloud (3D) in LAS (.las) format collected from airborne LiDAR or mobile mapping system of the Lands Department
- Public Transport Facilities
Bus stop and ferry pier locations of the Transport Department
- Pavement Polygon
Pavement polygon of the Highways Department.
- Distance Post
Distance posts, long distance trails and country trails of the Agriculture, Fisheries and Conservation Department.
- Digitized Traffic Aids Drawings
The Digitized Traffic Aids Drawings dataset contains traffic signs, traffic signals, road markings of the Transport Department.
- Road Network
The Road Network dataset includes traffic directions, turning restrictions at road junctions, stopping restrictions, on-street parking spaces and other road traffic data of the Transport Department.

1.3. Grid System and Vertical Datum

3DPN are stored using Hong Kong 1980 Grid (HK 1980 Grid), which is a local rectangular grid system based on the HK80 Datum and Transverse Mercator projection.

Heights are shown in metres above the Hong Kong Principal Datum (HKPD). For general reference, the Mean Sea Level is about 1.3 metres above the HKPD.

1.4. Map Accuracy

The map accuracy for 3DPN are:

- Horizontal accuracy within ± 1 metre
- Vertical accuracy within ± 2 metres

1.5. Availability

The dataset is uploaded to CSDI Portal (<https://portal.csdi.gov.hk/>) and data.gov.hk as open data for public.

1.6. Update Frequency

Quarterly

1.7. Disclaimer


3DPN integrates the opening hours of footways within buildings and parks, along with the maintenance schedules of lifts, to facilitate navigation that reflects real-world accessibility conditions. While every effort is made to keep access time information current, the dataset is maintained on an “as-available” basis to support ease of use. It should be understood that 3DPN is not an authoritative source for official opening or operating hours, but rather a practical reference designed to enhance pedestrian accessibility and convenience.

2. Schema Overview

The 3DPN database is edited and maintained as a Geodatabase, where a spatial entity is known as a *Feature Class*, while a textual entity is known as a *Table*.

2.1. Schema Diagram

The following schema diagram illustrate the relationships between the entities

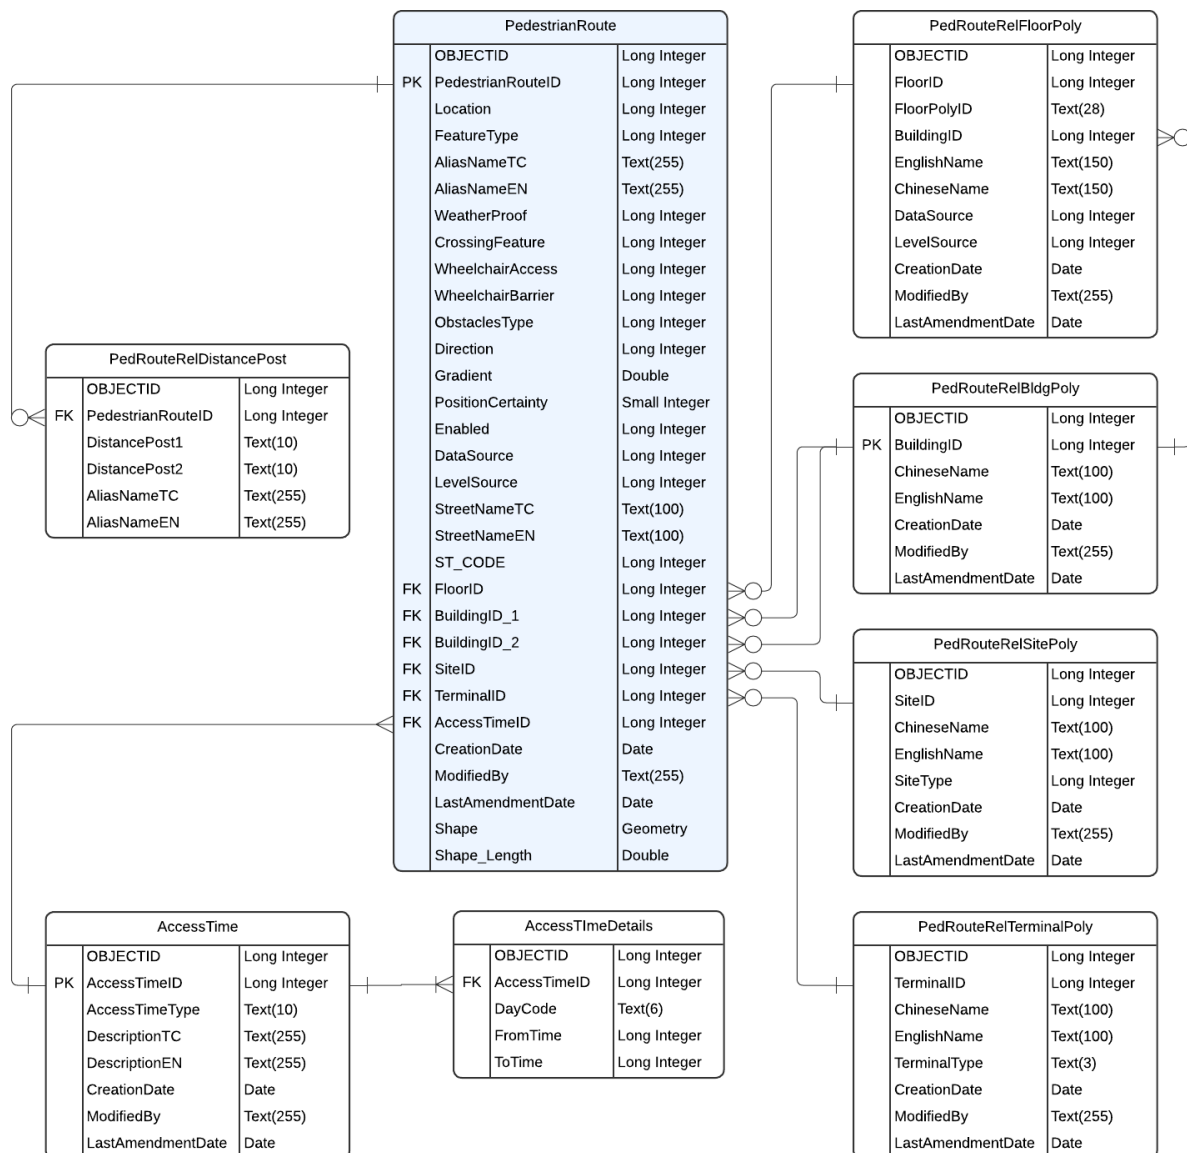

3. Entity Description

Entity Name	Type	Description
PedestrianRoute	Feature Class	Spatial layer containing all route segments.
PedRouteRelFloorPoly	Table	To provide related floor information for indoor pedestrian route segments.
PedRouteRelBldgPoly	Table	To provide related iB1000 building polygon information for indoor pedestrian or service lanes route segments.
PedRouteRelSitePoly	Table	To provide related iB1000 site polygon information for pedestrian route segments located within a site.
PedRouteRelTerminalPoly	Table	To provide related iB1000 terminal polygon information for pedestrian route segments located within a public transport terminal area.
PedRouteRelDistancePost	Table	To provide related distance post information for major footpaths inside country park.
AccessTime	Table	To provide accessible time information grouped by its purpose and type.
AccessTimeDetails	Table	To provide detailed accessible opening hours information.

3.1. PedestrianRoute

The *PedestrianRoute* feature class is the parent entity for the 3D Pedestrian Network.

Field Name	Description	Type	Nullable	Default	Domain
ObjectID	Non persistent unique ID generated by ESRI Geodatabase	Long	No	-	-
PedestrianRouteID	Persistent unique ID generated and maintained by 3DPN.	Long	No	-	-
Location	Indicates whether a pedestrian segment is outdoor or indoor, and whether access is paid. Outdoor refers to open spaces without roofs, while indoor refers to areas with ceilings or roofs and at least 50% enclosure. Paid options refers to areas that require tickets for entry.	Long	No	1 - Outdoor	dPedLocation
FeatureType	Type of pedestrian segment	Long	No	-	dPedFeatureType
AliasNameTC	Generic name of the segment in Traditional Chinese.	Text (255)	Yes	-	-
AliasNameEN	Generic name of the segment in English.	Text (255)	Yes	-	-
CrossingFeature	To indicate the type of feature across the road crossing	Long	Yes	-	dPedCrossingFeature
WeatherProof	To indicate whether the segment is covered or non-covered	Long	No	1 - Covered	dPedCover

**3D PEDESTRIAN NETWORK
DATA DICTIONARY**

ENTITY DESCRIPTION

Field Name	Description	Type	Nullable	Default	Domain
WheelchairBarrier	To indicate the network segment is assessed to be unsuitable for mobility access, particularly for wheelchair users. Segment not fit for mobility access is set to True.	Long	No	2 – False	dPedWheelchairBarrier
WheelchairAccess	To indicate the network segment is a mobility accessible entrance/exit (e.g. ramps) connected to a public building/site. Segment that is an accessible entrance/exit for mobility aided users is set to True, otherwise set as False	Long	No	1 – True	dPedWheelchairAccess
ObstaclesType	To indicate the presence and the type of obstacles (immovable / permanent) on the pedestrian walkway, which might hinder access for mobility aided users.	Long	Yes	-	dObstacleType
Gradient	The gradient of the segment in radian	Double	No	-	-
Direction	Primarily applicable for: Escalator, Travelator. For all other features, it is set to 0 – Bothway To indicate the permissible travel direction of the segment in relation to its drawn direction.	Long	No	0 - Bothway	dDirection
PositionCertainty	To indicate the position certainty of the segment in Country Park and Rural Village Area. Segment that cannot be double confirmed via LandsD's	Short	Yes	1 - Certain	dPedPositionCertainty

**3D PEDESTRIAN NETWORK
DATA DICTIONARY**

ENTITY DESCRIPTION

Field Name	Description	Type	Nullable	Default	Domain
	iB1000 and reference dataset from AFCD, and is also unidentifiable via DSM Orthophotos will be labelled as ‘uncertain’				
Enabled	To indicate whether the segment is ready and opened for public access	Long	No	1 - Enabled	dPedEnabled
DataSource	Data source for the feature	Long	No	1 – iB1000	dPedDataSource
LevelSource	Data source for the vertical height information of the feature	Long	No	2 – 3DSpatialData	dPedLevelSource
StreetNameEN	English name of the street in which the pedestrian route is spatially related to	Text (100)	Yes	-	-
StreetNameTC	Traditional Chinese name of the street in which the pedestrian route is spatially related to	Text (100)	Yes	-	-
ST_CODE	Street_code of gazetted street on which the pedestrian walkway is running parallel along	Long	Yes	-	-
FloorID	Foreign Key to link with PedRouteRelFloorPoly.	Long	Yes	-	-
BuildingID_1	Foreign Key to link with iB1000 Building Polygon	Long	Yes	-	-
BuildingID_2	Foreign Key to link with iB1000 Building Polygon	Long	Yes	-	-
SiteID	Foreign Key to link with iB1000 Site Polygon	Long	Yes	-	-
TerminalID	Foreign Key to link with iB1000 Terminal Polygon	Long	Yes	-	-
AccessTimeID	Foreign Key to link with AccessTime	Long	Yes	-	-

Field Name	Description	Type	Nullable	Default	Domain
CreationDate	Creation date	Date	No	Now ()	
ModifiedBy	Name of user who last edited	Text (255)	No	-	-
LastAmendmentDate	Last edited date	Date	No	-	-
SHAPE	Polyline with height value	Geometry	No	-	-
SHAPE_Length	Horizontal length of the feature in meter	Double	Yes	-	-

3.2. PedRouteRelFloorPoly

Field Name	Description	Type	Nullable	Default	Domain
ObjectID	Non persistent unique ID generated by ESRI Geodatabase	Long	No	-	-
FloorID	Persistent unique ID generated and maintained by 3DPN Primary Key to link with PedestrianRoute	Long	No	-	-
FloorPolyID	Foreign Key to link with FloorPoly of 3D Indoor Map	Text (28)	Yes	-	-
BuildingID	Foreign Key to link with iB1000 Building Polygon	Long	No	-	-
EnglishName	The annotation of the floor level as stated on the building plans in English (e.g., G/F, 1/F, B/2...)	Text (150)	Yes	-	-

Field Name	Description	Type	Nullable	Default	Domain
ChineseName	The annotation of the floor level as stated on the building plans in Traditional Chinese	Text (150)	Yes	-	-
DataSource	Data source of the feature	Long	No	1 – iB1000	dFloorUnitDataSource
LevelSource	Source of the level information	Long	No	1 – iB1000	dFloorUnitLevelSource
CreationDate	Creation date	Date	No	-	-
ModifiedBy	Name of user who last edited	Text (255)	No	-	-
LastAmendmentDate	Last edited date	Date	No	-	-

3.3. PedRouteRelBldgPoly

Field Name	Description	Type	Nullable	Default	Domain
ObjectID	Non persistent unique ID generated by ESRI Geodatabase	Long	No	-	-
BuildingID	Foreign Key to link with iB1000 Building Polygon	Long	No	-	-
ChineseName	Traditional Chinese name of the building which relates to pedestrian route spatially	Text (100)	Yes	-	-
EnglishName	English name of the building which relates to pedestrian route spatially	Text (100)	Yes	-	-
CreationDate	Creation date	Date	No	-	-
ModifiedBy	Name of user who last edited	Text (255)	No	-	-
LastAmendmentDate	Last edited date	Date	No	-	-

3.4. PedRouteRelSitePoly

Field Name	Description	Type	Nullable	Default	Domain
ObjectID	Non persistent unique ID generated by ESRI Geodatabase	Long	No	-	-
SiteID	Foreign Key to link with iB1000 Site Polygon	Long	No	-	-
ChineseName	Traditional Chinese name of site which relates to pedestrian route spatially	Text (100)	Yes	-	-
EnglishName	English name of site which relates to pedestrian route spatially	Text (100)	Yes	-	-
SiteType	Type of Site	Long	No	-	dSiteType
CreationDate	Creation date	Date	No	-	-
ModifiedBy	Name of user who last edited	Text (255)	No	-	-
LastAmendmentDate	Last edited date	Date	No	-	-

3.5. PedRouteRelTerminalPoly

Field Name	Description	Type	Nullable	Default	Domain
ObjectID	Non persistent unique ID generated by ESRI Geodatabase	Long	No	-	-
TerminalID	Foreign Key to link with iB1000 Terminal Polygon	Long	No	-	-
ChineseName	Traditional Chinese name of terminal which relates to pedestrian route spatially	Text (100)	Yes	-	-

Field Name	Description	Type	Nullable	Default	Domain
EnglishName	English name of terminal which relates to pedestrian route spatially	Text (100)	Yes	-	-
TerminalType	Type of terminal	Text (3)	No	-	dTerminalType
CreationDate	Creation date	Date	No	-	-
ModifiedBy	Name of user who last edited	Text (255)	No	-	-
LastAmendmentDate	Last edited date	Date	No	-	-

3.6. PedRouteRelDistancePost

Field Name	Description	Type	Nullable	Default	Domain
ObjectID	Non persistent unique ID generated by ESRI Geodatabase	Long	No	-	-
PedestrianRouteID	Foreign Key to link with PedestrianRoute	Long	No	-	-
DistancePost1	Distance post maintained by AFCD in which the line segment lies within	Text (10)	No	-	-
DistancePost2	Distance post maintained by AFCD in which the line segment lies within	Text (10)	No	-	-
AliasNameTC	Traditional Chinese description of the segment	Text (255)	No	-	-
AliasNameEN	English description of the segment	Text (255)	No	-	-

3.7. AccessTime

Field Name	Description	Type	Nullable	Default	Domain
ObjectID	Non persistent unique ID generated by ESRI Geodatabase	Long	No	-	-
AccessTimeID	Persistent unique ID generated and maintained by 3DPN Primary Key to link with PedestrianRoute	Long	No	-	-
AccessTimeType	Access Type Code (e.g., OPEN, CLOSE)	Text (10)	No	-	dAccessTimeType
DescriptionTC	Traditional Chinese description of the time group (e.g., 中環港鐵站開放時間)	Text (255)	No	-	-
DescriptionEN	English description of the time group (e.g., Opening time of Central MTR station)	Text (255)	No	-	-
CreationDate	Creation date	Date	No	-	-
ModifiedBy	Name of user who last edited	Text (255)	No	-	-
LastAmendmentDate	Last edited date	Date	No	-	-

3.8. AccessTimeDetails

Field Name	Description	Type	Nullable	Default	Domain
ObjectID	Non persistent unique ID generated by ESRI Geodatabase	Long	No	-	-
AccessTimeID	Foreign Key to AccessTimeID in <i>AccessTime</i> table	Long	No	-	-
DayCode	Day Code (e.g., MON, TUE, WED, etc.)	Text (6)	No	-	dAccessTimeDayCode

**3D PEDESTRIAN NETWORK
DATA DICTIONARY**

ENTITY DESCRIPTION

Field Name	Description	Type	Nullable	Default	Domain
FromTime	From Time in HHMM (i.e., 0 – 2359)	Long	No	-	
ToTime	To Time in HHMM (i.e., 0 – 2359)	Long	No	-	

4. Domain Value Description

For ESRI geodatabase, attribute domains are a list of lookup values that describe the legal values of a field type, providing a method for enforcing data integrity.

Domain Name	Field Type	Description
dPedCover	Long Integer	Indicator to define whether the network segment is under cover or not
dPedCrossingFeature	Long Integer	List of different type of crossing feature(s) across a road crossing
dPedEnabled	Long Integer	Boolean indicator to define whether the network segment is ready and enabled for pedestrian access
dPedFeatureType	Long Integer	List of different type of the network segment (i.e., footway, ramp, staircase, etc.)
dPedLocation	Long Integer	Indicator to define the location of the network segment (i.e., outdoor or indoor)
dPedWheelchairAccess	Long Integer	Indicator to define whether a network segment which is connected to public facilities / buildings / sites is also an accessible entrance or not
dPedWheelchairBarrier	Long Integer	Indicator to define whether the network segment is suitable for mobility aided users.
dPedPositionCertainty	Short Integer	Boolean indicator to define the position certainty of the segment within Country Park and Rural Village Area.
dPedDataSource	Long Integer	Data source of the feature
dPedLevelSource	Long Integer	Source of the level information for the network segment
dDirection	Short Integer	Indicator to define the direction for Escalator, Travelator
dObstacleType	Long Integer	Type of obstacle on a network segment that might hinder passage for mobility aided user
dFloorUnitDataSource	Long Integer	Type of source data for floor information
dFloorUnitLevelSource	Long Integer	Type of source data for floor level information
dSiteType	Long Integer	Type of Site
dTerminalType	Text (3)	Type of Terminal
dAccessTimeType	Text (10)	Type of Access Times (e.g., Opening Hours, Closing Hours, etc.)

Domain Name	Field Type	Description
dAccessTimeDayCode	Text (6)	The applicable day

4.1. dPedCover

Code	Description
1	Covered
2	NonCovered
3	Unclassified

4.2. dPedCrossingFeature

Code	Description
1	Road
2	Tramway
3	LightRail
4	BicycleTrack
5	PublicTransportInterchange

4.3. dPedEnabled

Code	Description
1	True
2	False

4.4. dPedFeatureType

Code	Description
1	Footway
2	Footbridge
4	Subway
5	Service Lane

Code	Description
6	Traffic Island
7	RunIn
8	Escalator
9	Travelator
10	Lift
11	Ramp
12	Staircase
13	Stairlift
14	Other
15	M_Footway ^{#1}
16	M_Escalator ^{#1}
17	M_Travelator ^{#1}
18	M_Lift ^{#1}
19	M_Ramp ^{#1}
20	M_Staircase ^{#1}
21	M_Stairlift ^{#1}
22	M_Others ^{#1}
23	Generalized Walkway Inside Park
24	Footpath
25	Village
26	Track
30	Crossing - Signalized
31	Crossing - Zebra
32	Crossing - Cautionary
33	Crossing - Others

Note:

#1 Obsoleted

4.5. dPedLocation

Code	Description
1	Outdoor

Code	Description
2	Indoor
3	Paid

4.6. dPedWheelchairAccess

Code	Description
1	True
2	False

4.7. dPedWheelchairBarrier

Code	Description
1	True
2	False

4.8. dPedPositionCertainty

Code	Description
0	Uncertain
1	Certain

4.9. dPedDataSource

Code	Description
1	iB1000
2	3DSpatialData
3	DAP
4	MMS
5	TD
6	AFCD
7	HyD

Code	Description
8	AsBuilt
9	Proposal
10	FieldChecking
11	Estimation
12	Other

4.10. dPedLevelSource

Code	Description
1	iB1000
2	3DSpatialData
3	Photo
4	MMS
5	LiDAR
6	TD
7	AsBuilt
8	Proposal
9	FieldChecking
10	Estimation
11	Other
12	CEDD

4.11. dDirection

Code	Description
1	One Way Forward (follow the digitized direction)
-1	One Way Backward (opposite the digitized direction)
0	Both Ways

4.12. dObstacleType

Code	Description
1	Accessible #2
2	BridgePier
3	BusStop
4	FireHydrant
5	LightPole
6	RoadSign
7	TrafficLight
8	TrafficSign
9	SignPole
10	Bollard
11	Tree
12	ElectricBox
13	ParkingMeter

Note:

#2 Obsoleted

4.13. dFloorUnitDataSource

Code	Description
1	iB1000
2	3DSpatialData
3	DAP
4	MMS
5	TD
6	AFCD
7	HyD
8	AsBuilt
9	Proposal
10	FieldChecking

Code	Description
11	Estimation
12	Other

4.14. dFloorUnitLevelSource

Code	Description
1	iB1000
2	3DSpatialData
3	Photo
4	MMS
5	LiDAR
6	TD
7	AsBuilt
8	Proposal
9	FieldChecking
10	Estimation
11	Other

4.15. dSiteType

Code	Description
1	Farm
2	Accommodation
3	Commerce
4	EducationAndTraining
5	HealthAndMedicalService
6	LeisureCultureAndSports
7	Organization
8	PublicAndSocialService
9	Religion
10	TouristAttraction

Code	Description
11	Military
12	Industry
13	WorksArea
14	Transportation
15	Utilities

4.16. dTerminalType

Code	Description
ATE	Airport Terminal
BTE	Bus Terminal
MBT	Mini Bus Terminal
TTE	Taxi Terminal
FTE	Ferry Terminal
MST	MTR Station
LRS	Light Rail Station
TST	Tram Station
PTS	Peak Tram Station
CCS	Cable Car Station

4.17. dAccessTimeType

Code	Description
OPEN	Opening Hours
CLOSE	Closing Hours

4.18. dAccessTimeDayCode

Code	Description
MON	Every Monday
TUE	Every Tuesday
WED	Every Wednesday

Code	Description
THU	Every Thursday
FRI	Every Friday
SAT	Every Saturday
SUN	Every Sunday
ED	Every day (Mon – Sun)
WD	All Weekday (Mon – Fri)
WE	All Weekend (Sat – Sun)
PH	All Public Holiday
EPH	Eve of all Public Holiday

5. Output Formats

This section lists out the output formats available for 3DPN.

5.1. ESRI File Geodatabase

File geodatabase is a proprietary data storage model for ESRI ArcGIS software products and services. Data stored in a file geodatabase requires ESRI GIS software such as ArcMap or ArcGIS Pro to open.

5.2. ESRI Shapefile

Shapefile is a geospatial vector data format. It is developed and regulated by ESRI as an open specification for data interoperability among ESRI and other GIS software products.

A single ‘shapefile’ consists of a collection of files with a common filename prefix, stored in the same directory. For *feature class*, there are three mandatory files with the following filename extensions: .shp, .shx, and .dbf. For *tables*, only the .dbf file is mandatory. Users requiring additional information should refer to official ESRI documentation <https://desktop.arcgis.com/en/arcmap/latest/manage-data/shapefiles/what-is-a-shapefile.htm> for technical details.

The field length of Shapefile is limited to 10 characters; the attribute mapping listed in the following sub-section are applied to the output shapefile.

5.2.1. Core Entities

5.2.1.1. PedestrianRoute

Key	Geodatabase	Shapefile
	OBJECTID	FID
	Shape	Shape
PK	PedestrianRouteID	PedRouteID
	Location	Location
	FeatureType	FeatType
	AliasNameEN	AliasNamEN

Key	Geodatabase	Shapefile
	AliasNameTC	AliasNamTC
	CrossingFeature	CrossFeat
	WeatherProof	WX_Proof
	WheelchairBarrier	WC_Barrier
	WheelchairAccess	WC_Access
	ObstaclesType	ObsType
	Gradient	Gradient
	Direction	Direction
	PositionCertainty	PosCertain
	Enabled	Enabled
	DataSource	DataSrc
	LevelSource	LevelSrc
	StreetNameEN	ST_NameEN
	StreetNameTC	ST_NameTC
	ST_CODE	ST_CODE
FK	FloorID	FloorID
FK	BuildingID_1	BldgID_1
FK	BuildingID_2	BldgID_2
FK	SiteID	SiteID
FK	TerminalID	TerminalID
FK	AccessTimeID	AcsTimeID
	CreationDate	CrtDt
	ModifiedBy	ModifiedBy
	LastAmendmentDate	LstAmdDt
	Shape_Length	Shape_Len

5.2.1.2. PedRouteRelFloorPoly

Key	Geodatabase	Shapefile
	ObjectID	OID
PK	FloorID	FloorID

Key	Geodatabase	Shapefile
	FloorPolyID	FlPolyID
	BuildingID	BuildingID
	EnglishName	NameEN
	ChineseName	NameTC
	DataSource	DataSrc
	LevelSource	LevelSrc
	CreationDate	CrtDt
	ModifiedBy	ModifiedBy
	LastAmendmentDate	LstAmdDt

5.2.1.3. PedRouteRelBldgPoly

Key	Geodatabase	Shapefile
	ObjectID	OID
PK	BuildingID	BuildingID
	ChineseName	NameTC
	EnglishName	NameEN
	CreationDate	CrtDt
	ModifiedBy	ModifiedBy
	LastAmendmentDate	LstAmdDt

5.2.1.4. PedRouteRelSitePoly

Key	Geodatabase	Shapefile
	ObjectID	OID
PK	SiteID	SiteID
	ChineseName	NameTC
	EnglishName	NameEN
	SiteType	Type
	CreationDate	CrtDt
	ModifiedBy	ModifiedBy

Key	Geodatabase	Shapefile
	LastAmendmentDate	LstAmdDt

5.2.1.5. PedRouteRelTerminalPoly

Key	Geodatabase	Shapefile
	ObjectID	OID
PK	TerminalID	TerminalID
	ChineseName	NameTC
	EnglishName	NameEN
	TerminalType	Type
	CreationDate	CrtDt
	ModifiedBy	ModifiedBy
	LastAmendmentDate	LstAmdDt

5.2.1.6. PedRouteRelDistancePost

Key	Geodatabase	Shapefile
	OBJECTID	OID
FK	PedestrianRouteID	PedRouteID
	DistancePost1	DistPost1
	DistancePost2	DistPost2
	AliasNameTC	AliasNamTC
	AliasNameEN	AliasNamEN

5.2.1.7. AccessTime

Key	Geodatabase	Shapefile
	OBJECTID	OID
PK	AccessTimeID	AcsTimeID
	AccessTimeType	AcsTimeTyp
	DescriptionTC	DescTC
	DescriptionEN	DescEN

Key	Geodatabase	Shapefile
	CreationDate	CrtDt
	ModifiedBy	ModifiedBy
	LastAmendmentDate	LstAmdDt

5.2.1.8. AccessTimeDetails

Key	Geodatabase	Shapefile
	OBJECTID	OID
FK	AccessTimeID	AcsTimeID
	DayCode	DayCode
	FromTime	FromTime
	ToTime	ToTime

5.2.2. Domains

Attribute domains are an in-built lookup table function for ESRI Geodatabase. It is not available for Shapefile. For reference purposes, all domains are output individually as tables under the output *domains* sub-folder.

5.3. GeoJSON

GeoJSON is an open standard format designed for representing simple geographical features, along with their non-spatial attributes. It is based on the JSON format. 3DPN is output according to the GeoJSON RFC 7946 specification (<https://geojson.org/>)

For reference purpose, all domains are output individually as separated JSON files under the output *domains* sub-folder.

5.4. GML

The Geography Markup Language (GML) is an open standard format defined by the Open Geospatial Consortium (OGC) in XML grammar for representing geographical features. 3DPN is output according the GML 3.2 specification (<https://www.ogc.org/standards/gml>)

For reference purpose, all domains are output individually as separated GML files under the output *domains* sub-folder.