



Type: **IR Narrow Band Pass Filter**

CWL: $18.500 \mu\text{m} \pm 0.074 \mu\text{m}$ ($18.426 - 18.574 \mu\text{m}$) ($\pm 0.40\%$)

FWHM: $0.370 \mu\text{m} \pm 0.074 \mu\text{m}$ ($\sim 1.60\% - 2.40\%$) ($\pm 20.00\%$)

T(pk): $\geq 60\%$



Blocking range: Fully blocked out of band from $0.300 \mu\text{m}$ to $\geq 27.000 \mu\text{m}$ (aim for $\geq 30.000 \mu\text{m}$)

Blocking level: T(avg) $< 0.10\%$, T(pk) $\leq 0.30\%$

Size: $\varnothing 25.40 \text{ mm} +0.00/-0.10 \text{ mm}$

Thickness: $1.00 \text{ mm} \pm 0.10 \text{ mm}$ (before coating)

Substrate: Optical grade Germanium

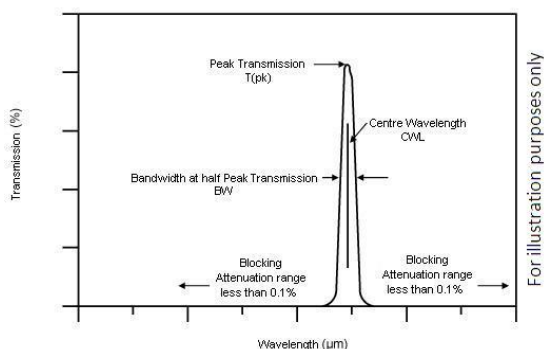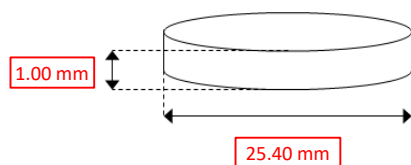

Specification Temperature: 25°C

Angle of incidence: Normal

Clear Aperture: $\geq 23.8 \text{ mm}$

Mounting: Unmounted

Surface Quality: Scratch/Dig - F/F (80/50) to MIL-F-48616 (section 4.6.7.2)

Adhesion Testing: MIL-M-13508C: ☐ MIL-F-48616: ☒

Notes:

- Transmission curve to be provided between 400nm and $45.000\mu\text{m}$
- Cryogenic testing required

Notes:

Drawn By: E.Beauchamp	Date: 22/04/2022	Checked by: N. Gilland	Date: 22/04/2022	Template Revision: 11
This Document is the property of Northumbria Optical Coatings Ltd and may not be copied or communicated to a third party or used for any purpose other than that for which it is supplied without express written permission from NOC Ltd. Northumbria Optical Coatings Ltd is Registered in England and Wales, Company number: 03005203				
Customer Part No:	Customer: NWO-I /SRON		Customer Drawing No:	
			NOC Drawing No: NC-2444-1	Sheet: 1 of 1