



Type: **IR Narrow Band Pass Filter**

CWL: $8.500 \mu\text{m} \pm 0.043 \mu\text{m}$ ($8.457 - 8.543 \mu\text{m}$) ($\pm 0.51\%$)

FWHM: $0.170 \mu\text{m} \pm 0.034 \mu\text{m}$ ($\sim 1.60 - 2.40\%$) ($\pm 20.00\%$)

T(pk): $\geq 65\%$

Blocking range: Fully blocked out of band from $0.20 \mu\text{m}$ to $\geq 15.00 \mu\text{m}$


Blocking level: T(avg) $< 0.10\%$, T(pk) $\leq 0.30\%$

Size: $\varnothing 25.40 \text{ mm} +0.00/-0.10 \text{ mm}$


Thickness: $1.00 \text{ mm} \pm 0.10 \text{ mm}$ (before coating)

Substrate: Optical grade Germanium

1.00 mm



25.40 mm

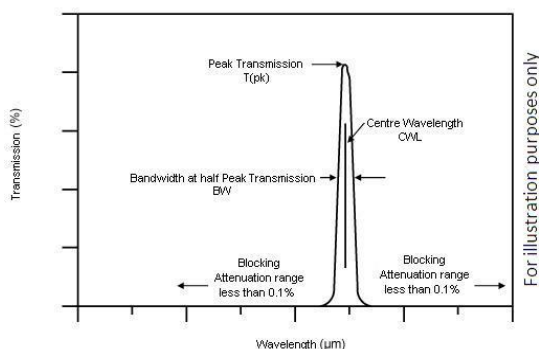

Specification Temperature: 4K (-269 °C)

Angle of incidence: Normal

Clear Aperture: $\geq 23.8 \text{ mm}$

Mounting: Unmounted

Surface Quality: Scratch/Dig - F/F (80/50) to MIL-F-48616 (section 4.6.7.2)

Adhesion Testing: MIL-M-13508C: ☐ MIL-F-48616: ☒

Notes:

- Provide T Curve & csv data over range 1 to $50 \mu\text{m}$
- Provide T data over passband at RT & 77K
-
-

Notes:

-
-
-
-
-

Drawn By: N. Gilland	Date: 14/04/2020	Checked by: A. Huntley	Date: 22/04/2020	Template Revision: 11
This Document is the property of Northumbria Optical Coatings Ltd and may not be copied or communicated to a third party or used for any purpose other than that for which it is supplied without express written permission from NOC Ltd. Northumbria Optical Coatings Ltd is Registered in England and Wales, Company number: 03005203				
Customer Part No:	Customer: SRON Utrecht	Customer Drawing No:		
		NOC Drawing No: NC-2118	Sheet: 1 of 1	