


Note about 5V Power:
– When USB is connected this will be 5V from VBUS
– When running from a battery this will be Vbatt–V_protection_diode
– Battery can only charge when USB is connected and power switch is 'ON'



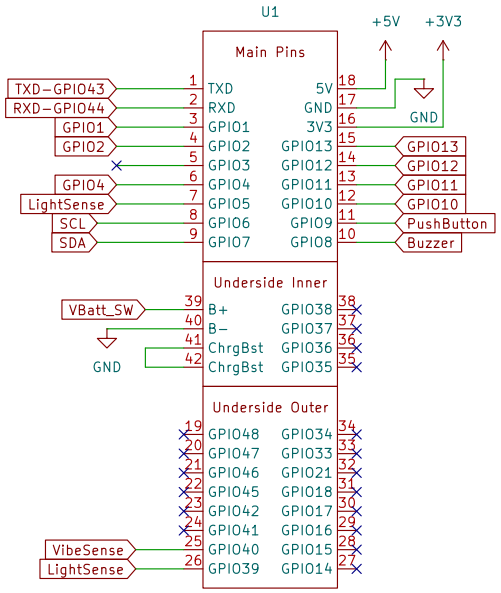




Mounting Holes




Power Switch – Battery Connector




Note: This battery connector pinout seems to match standard adafruit batteries

Vibration Sensor




Note: Use GPIO as input with pull up to read the vibe sensor. Sensor will pull pin low during vibration event.

Speaker

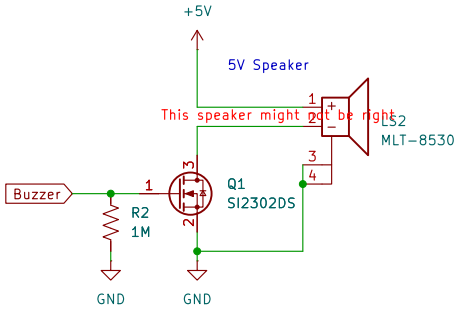


Push Button



Note: Use GPIO as input with pull up to read the PushButton. PushButton will pull pin low when button is pressed.

Light Sensor

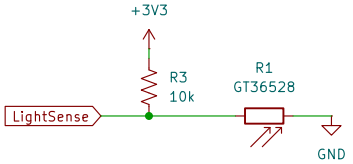

LDR is a CDS that measures:
– 500 ohms when I shine my flashlight on it
– 90k in a dim (hard to read) room

WildCircuits | Tinkerfarm | Brockport Original Builds

Sheet: /
File: Cobble–board–test.kicad_sch

Title: Cobble – ESP32S3–supermini dev board

Size: A4	Date: 2026–09–21	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: 1/1