## FT-991


HF/VHF/UHF ALL MODE TRANSCEIVER



New generation all-band transceiver FT-991 offers full-fledged support for all modes including HF/50/144/430 MHz in a single compact unit


## (New Feature) High Quality Digital C4FM voice over the WIRES-X internet VoIP network

- Triple conversion with 1st IF frequency of 69.450MHz for all bands
- Narrow band 3 kHz roofing filter provided in standard configuration realizes excellent adjacent multi signal characteristics
- Features the highly acclaimed FTDX series quad mixer, along with a dedicated VHF/UHF mixer
- Highly effective interference removal functions are great for stress-free OSOs on the DX and Contest scene
- Final Stage with Ample Power Reserves: 100 W for HF/50 MHz Bands and 50 W for VHF/UHF Bands
- Advanced technologies fully utilize the potential of C4FM Digital including high-quality transmit audio, AMS, and Group Monitor functions
- The FT-991 does not support the Kews Station function or direct HRI-200 connectivity as Digital Node station.
  bata FR mode (high speed data communication mode) is not supported therefore image send/receive by C4FM digital is not possible.

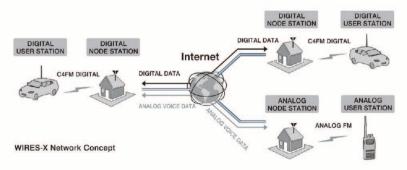







IDR (IMD Dynamic range) / IP3 (3rd-Order Intercept Point) characteristics

HF/VHF/UHF 100 W All Mode Transceiver

(144 MHz/ 430 MHz 50 W)

