ELECTRADROP-E
ELECTRADROP-E-P

LOCINOX®
Let's make it better together

LOCINOX

LIVE CHAT
www.locinox.com

HQ: +32 56 77 27 66
CEE: +48 71 758 21 00

help@locinox.com

www.locinox.com/
electradrop-e

LOCINOX USA

LIVE CHAT
www.locinoxusa.com

877- LOCINOX

helpusa@locinox.com


www.locinoxusa.com/
electradrop-e

ELECTRADROP-E

5 m (4x 0,5 mm²)
16' 4" (4x 24 ga)


ELECTRADROP-E-P

5 m (7x 0,5 mm²)
16' 4" (7x 24 ga)

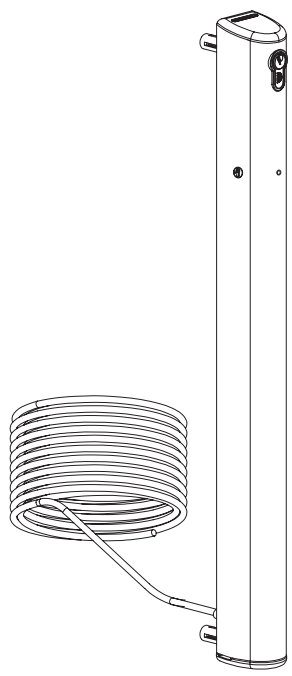


CE FC


QUICK-FIX





OPEN





CLOSED

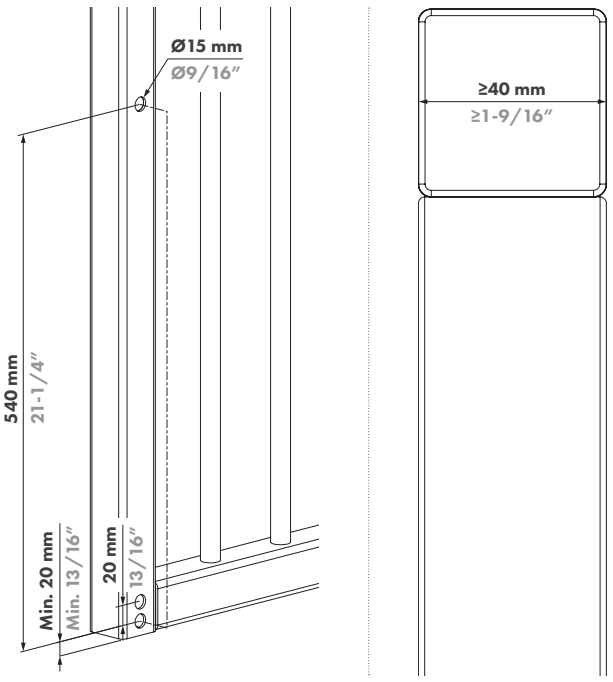

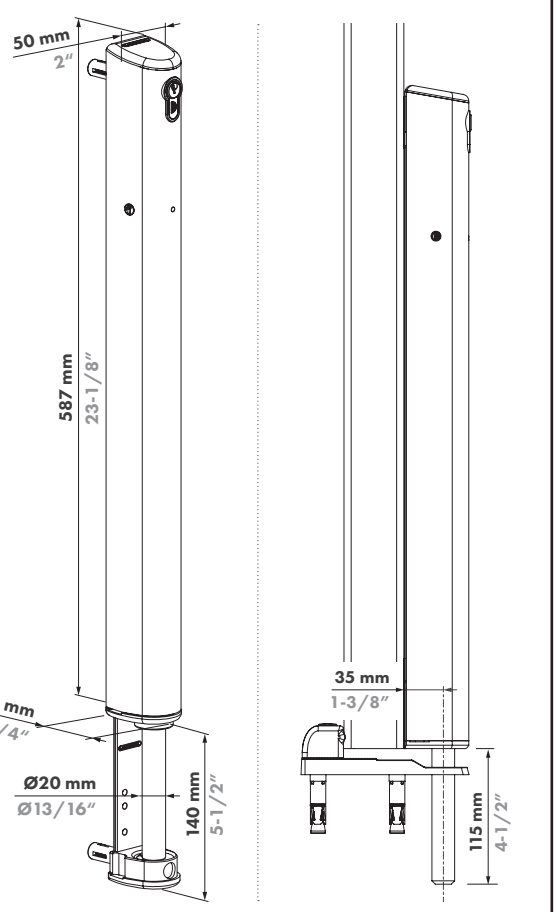

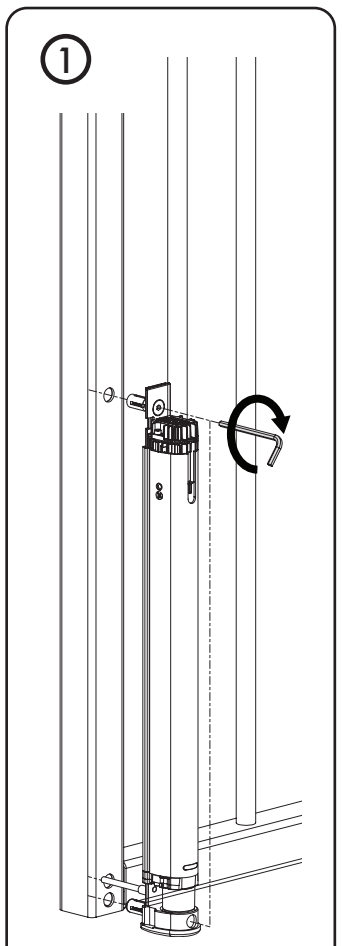

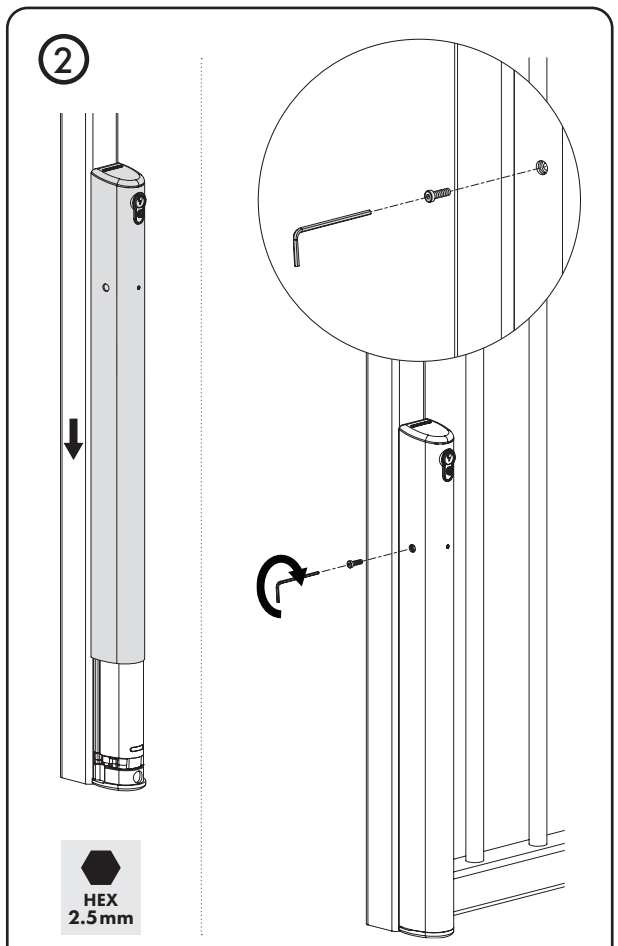

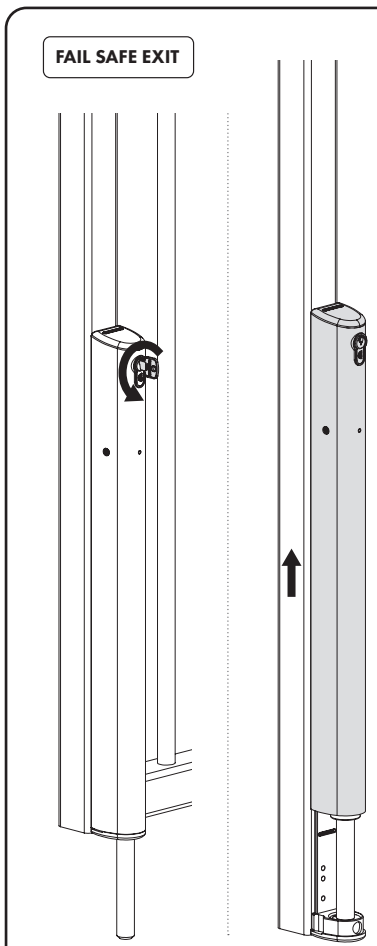

pictures@locinox.com

SUCCESSFUL INSTALLATION?	SUCCESVOLLE INSTALLATIE?	INSTALLATION RÉUSSIE?	ERFOLGREICHE INSTALLATION?	INSTALACION EXITOSA?	UDANA INSTALACJA?	УСПЕШНАЯ УСТАНОВКА?
Please send us your pictures & videos	Stuur gerust uw foto's & video's door	Veuillez nous envoyer vos photos & vidéos	Bitte senden Sie uns Ihre Bilder & Videos	Por favor envíenos sus fotos y videos	Prześlij nam swoje zdjęcia i filmy	Пожалуйста, отправьте нам свой фотографии и видео

LOCINOX®
Let's make it better together


Doc. Nr.: P0004000

Locinox NV • Brabantstraat 107 • 8790 Waregem • Belgium
Locinox CEE • Irysowa 9 • 55-040 Bielany Wrocławskie • Poland
Locinox LLC • 460 Windy Point Drive • Glendale Heights - IL 60139 • USA


P00004000

2024-10-22 - rev 1

ELECTRADROP-E

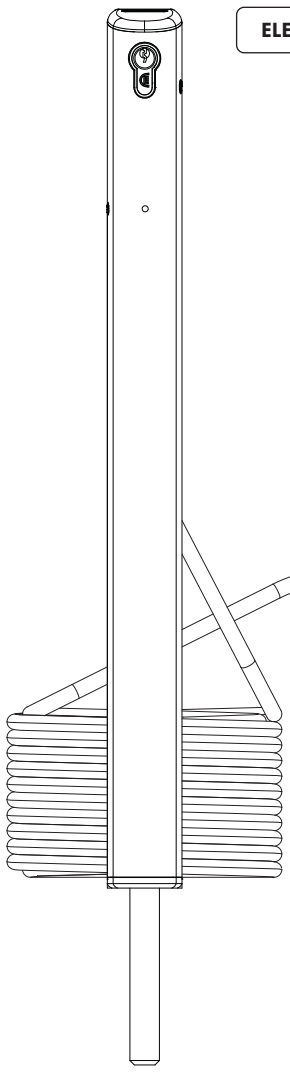


A ⚠ **PRE-FLASHING TIME ≥3S** | **12-24V AC/DC**

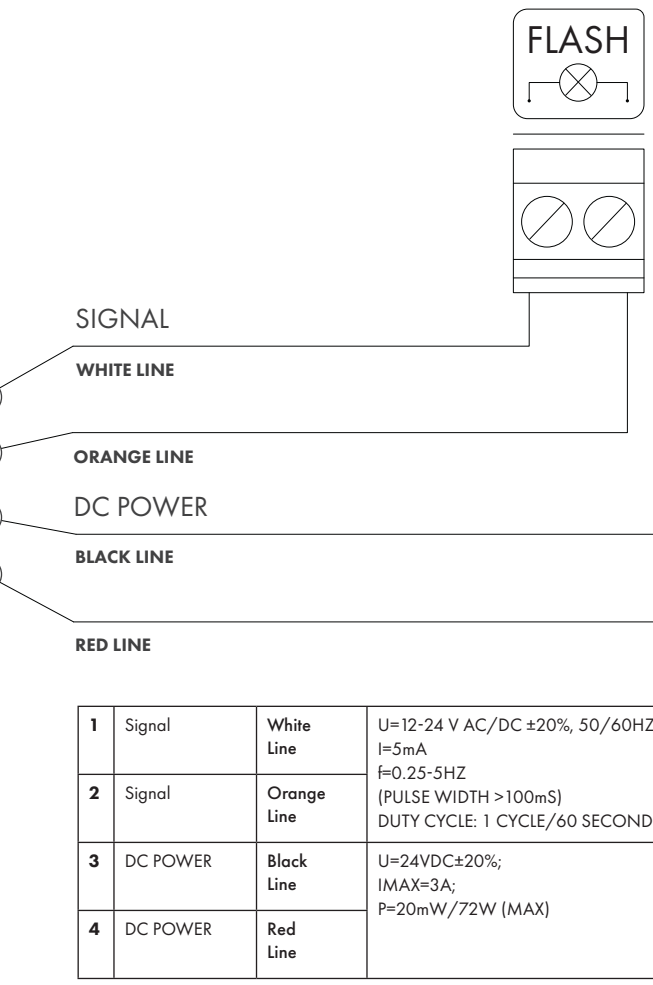


1	Signal	White Line	U=12-24 V AC/DC ±20%, 50/60HZ I=5mA f=0.25-5HZ (PULSE WIDTH >100mS) DUTY CYCLE: 1 CYCLE/60 SECONDS
2	Signal	Orange Line	
3	DC POWER	Black Line	U=24VDC±20%; IMAX=3A; P=20mW/72W (MAX)
4	DC POWER	Red Line	

B **OTHER (110/230V AC)**

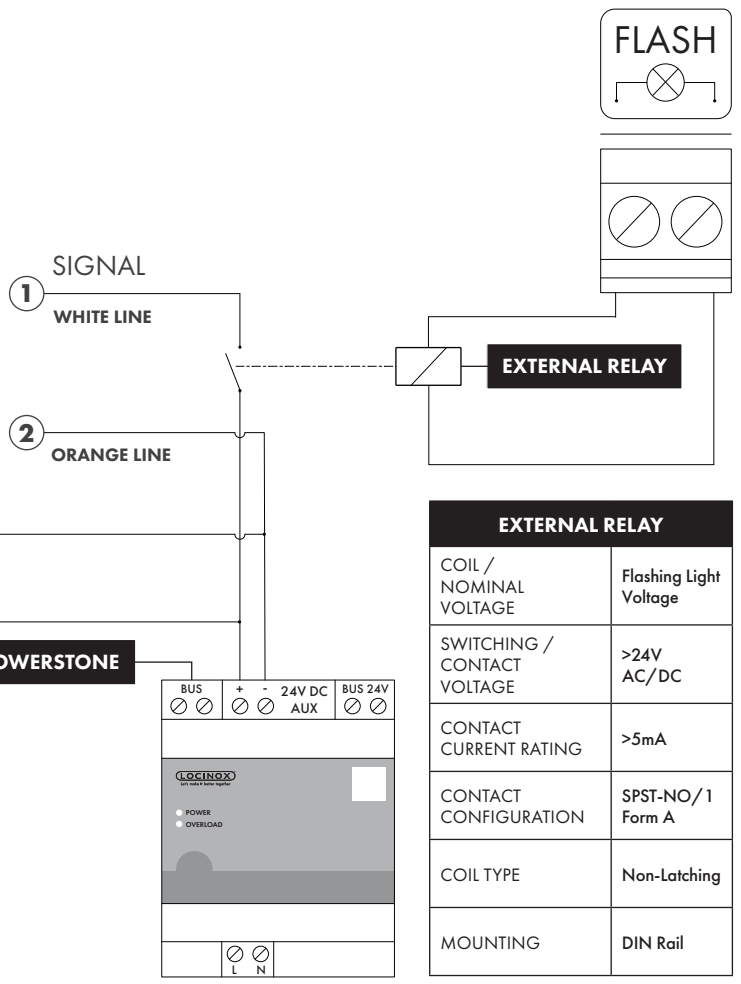


EXTERNAL RELAY	
COIL / NOMINAL VOLTAGE	Flashing Light Voltage
SWITCHING / CONTACT VOLTAGE	>24V AC/DC
CONTACT CURRENT RATING	>5mA
CONTACT CONFIGURATION	SPST-NO/1 Form A
COIL TYPE	Non-Latching
MOUNTING	DIN Rail

ELECTRADROP-E-P

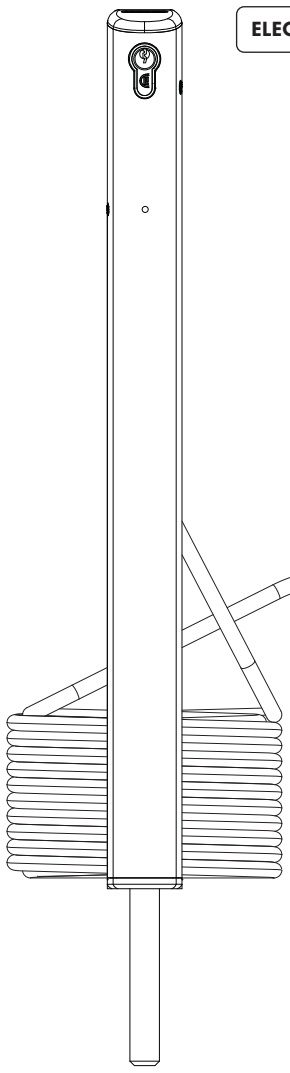


A ⚠ **PRE-FLASHING TIME ≥3S** | **12-24V AC/DC**

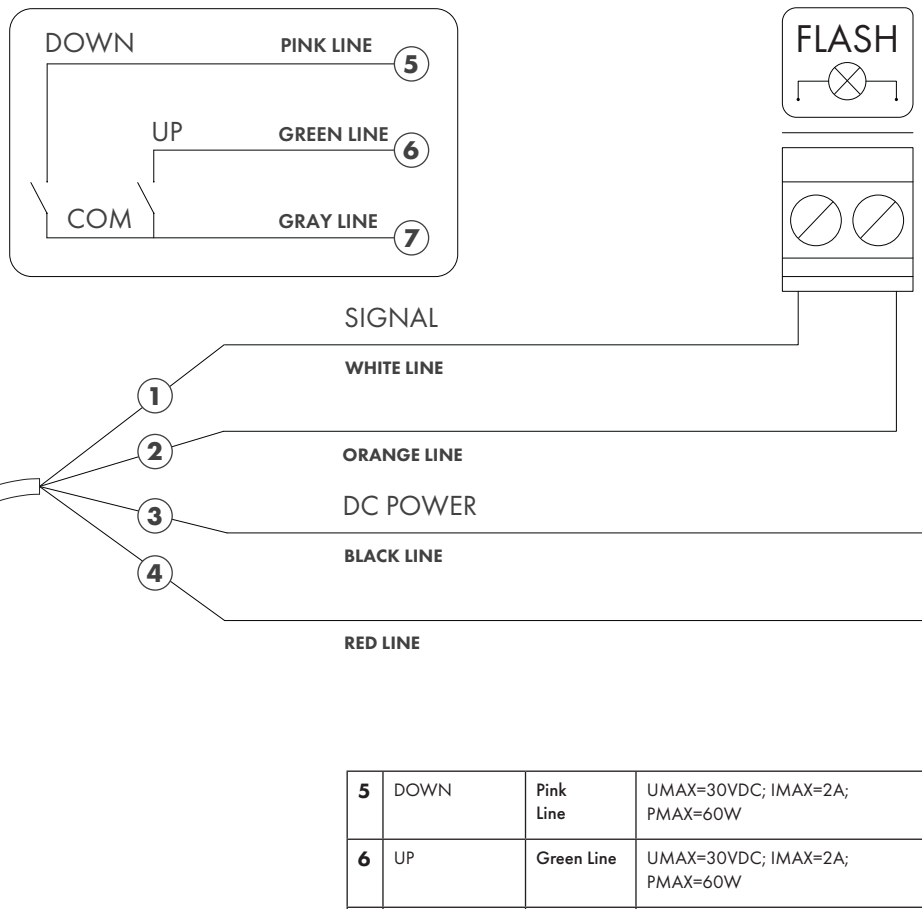


5	DOWN	Pink Line	UMAX=30VDC; IMAX=2A; PMAX=60W
6	UP	Green Line	UMAX=30VDC; IMAX=2A; PMAX=60W
7	COM	Gray Line	

B **OTHER (110/230V AC)**

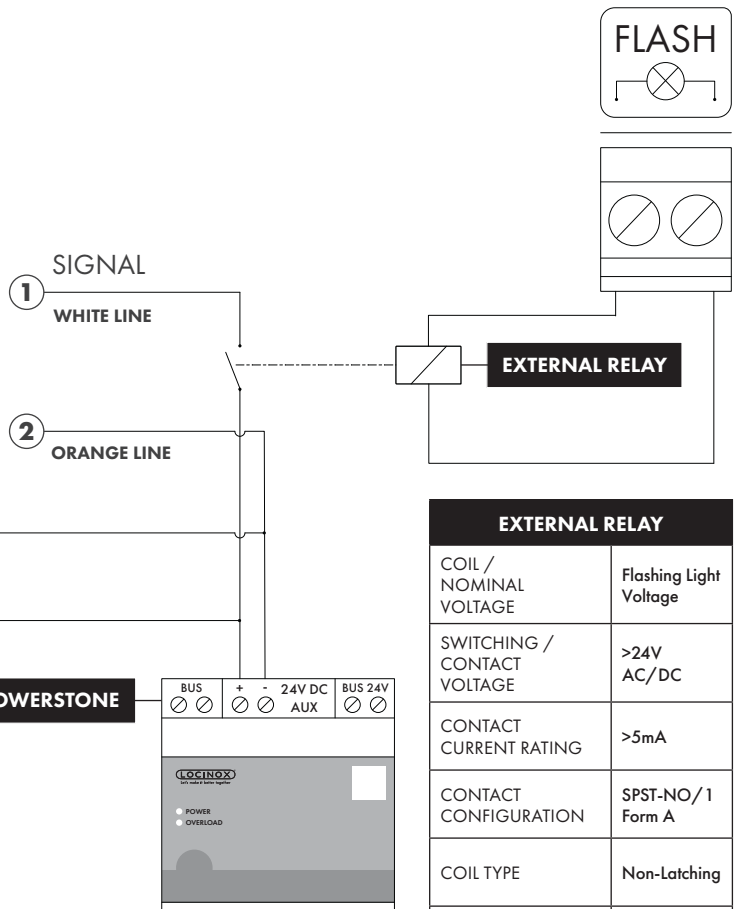


EXTERNAL RELAY	
COIL / NOMINAL VOLTAGE	Flashing Light Voltage
SWITCHING / CONTACT VOLTAGE	>24V AC/DC
CONTACT CURRENT RATING	>5mA
CONTACT CONFIGURATION	SPST-NO/1 Form A
COIL TYPE	Non-Latching
MOUNTING	DIN Rail

POSITION OUTPUT

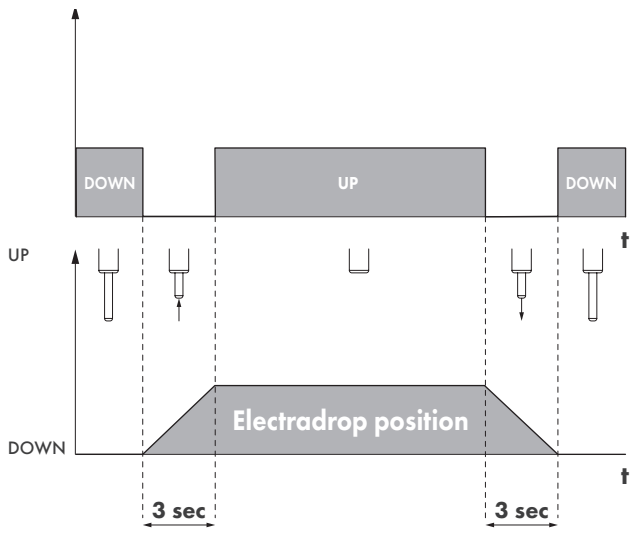


ELECTRADROP-E CONTINUOUS SIGNAL

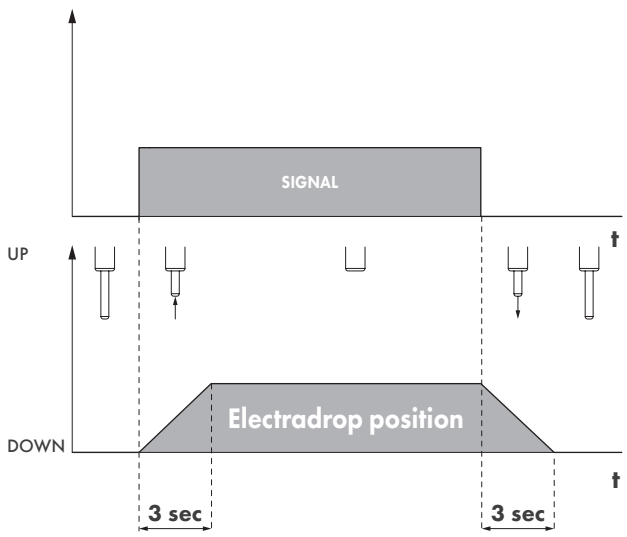

ELECTRADROP-E PULSE SIGNAL

FREQUENCY=0.25-5HZ
(PULS WIDTH >100mS)

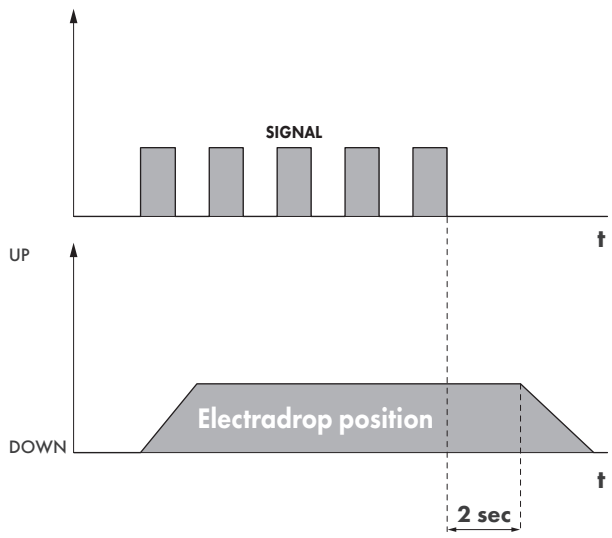

2024-10-22 - rev 1

ELECTRADROP-R
ELECTRADROP-R-P


LOCINOX®
Let's make it better together

ELECTRADROP-R

5 m (4x 0,5 mm²)
16' 4" (4x 24 ga)


ELECTRADROP-R-P

5 m (7x 0,5 mm²)
16' 4" (7x 24 ga)

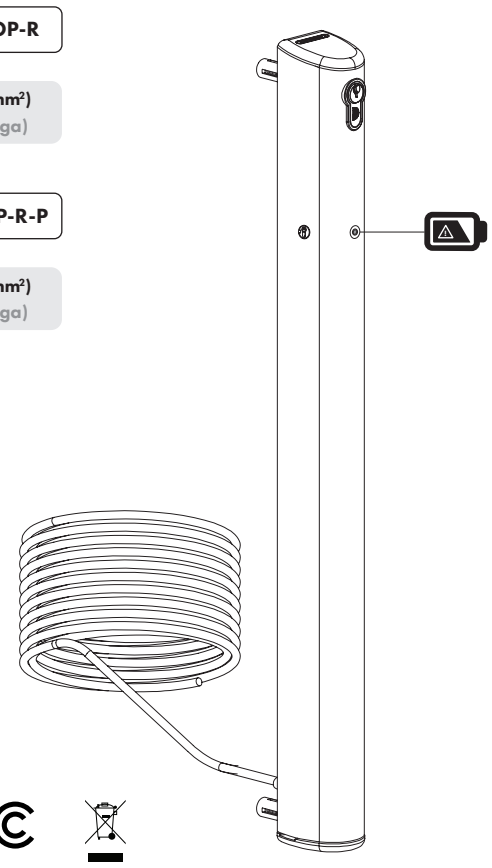

CE FC

QUICK-FIX

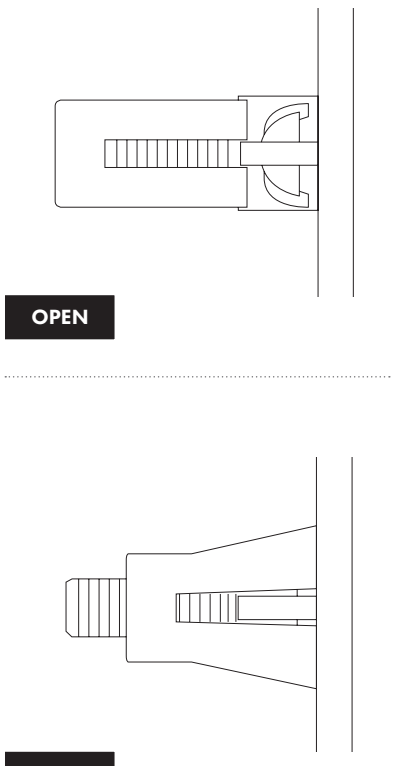

LOCINOX

LIVE CHAT

www.locinox.com

HQ: +32 56 77 27 66
CEE: +48 71 758 21 00

help@locinox.com

www.locinox.com/electradrop-r

LOCINOX USA


LIVE CHAT


www.locinoxusa.com


877- LOCINOX

helpusa@locinox.com


www.locinoxusa.com/electradrop-r

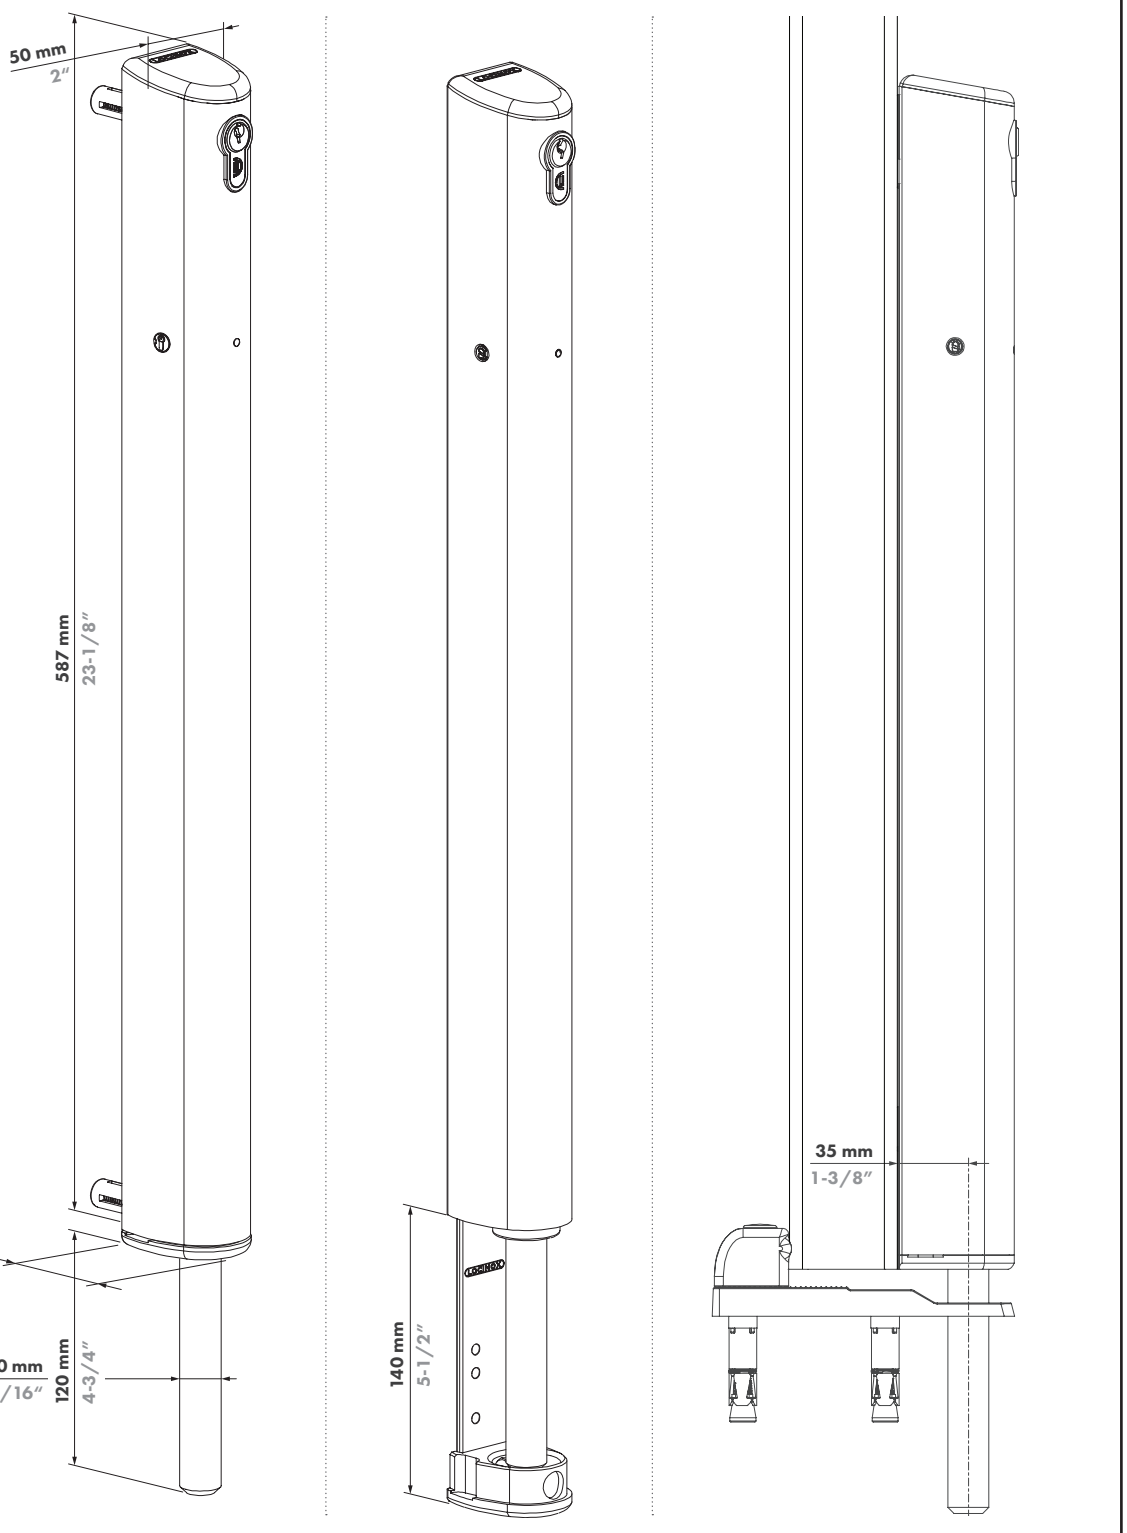

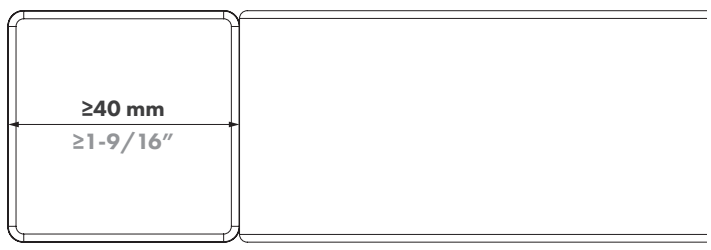

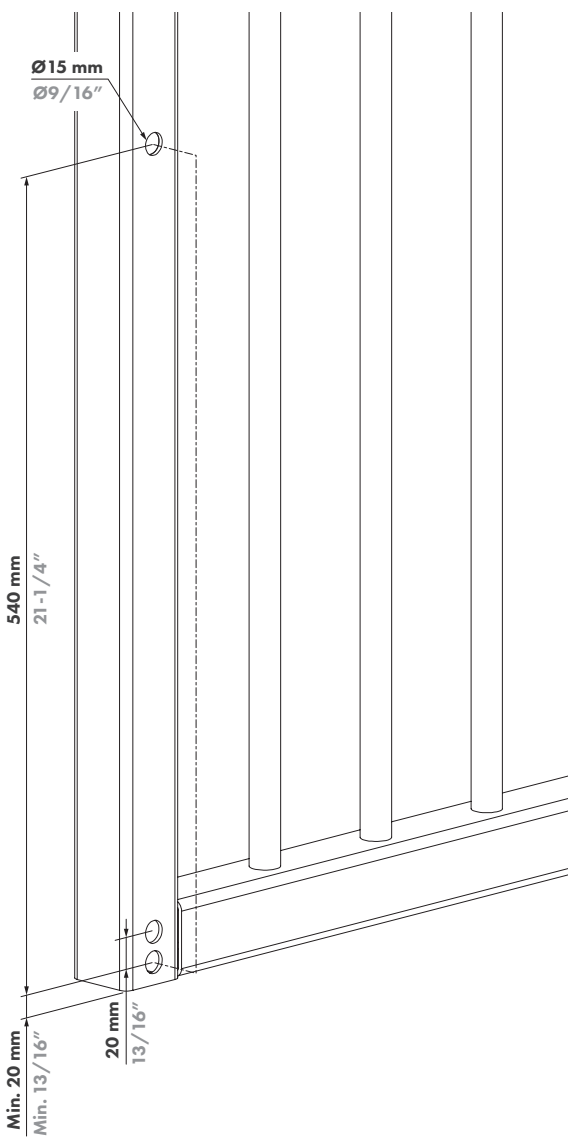


①

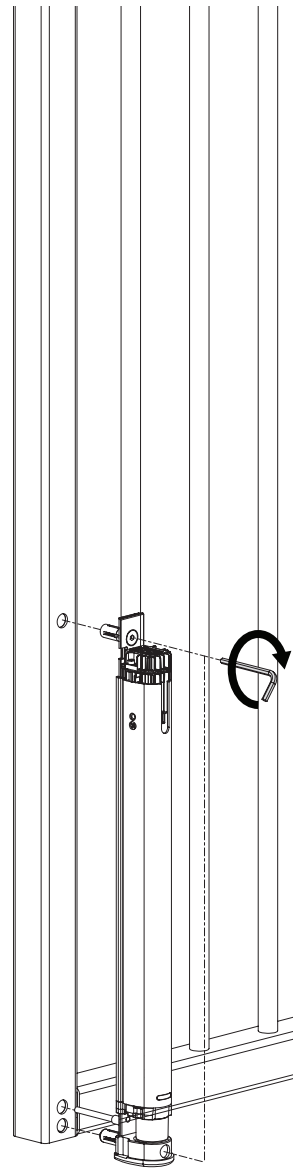


HEX
5mm

②

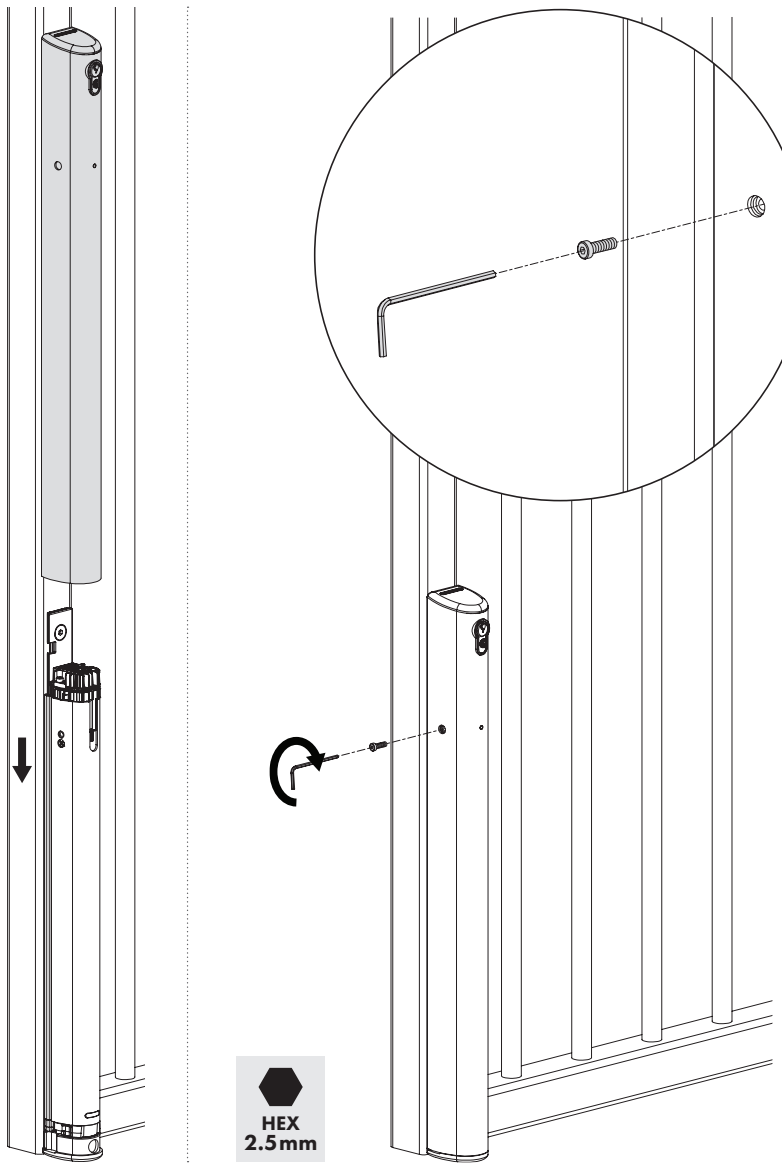



HEX
2.5mm


FAIL SAFE EXIT

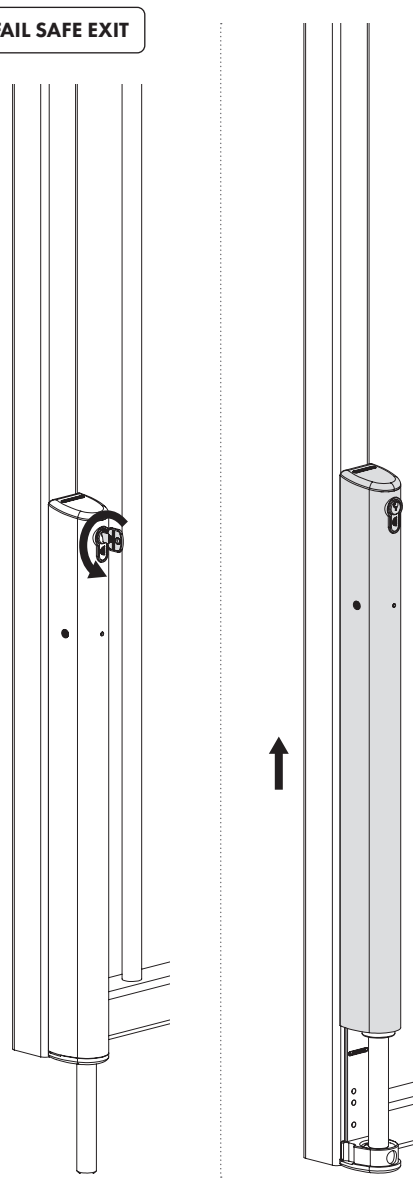


CHANGING THE BATTERY

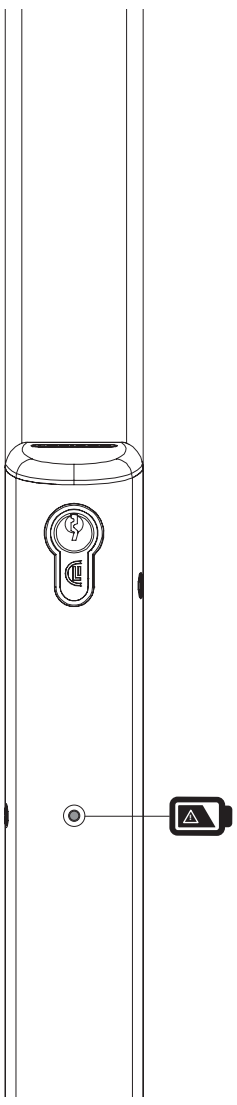

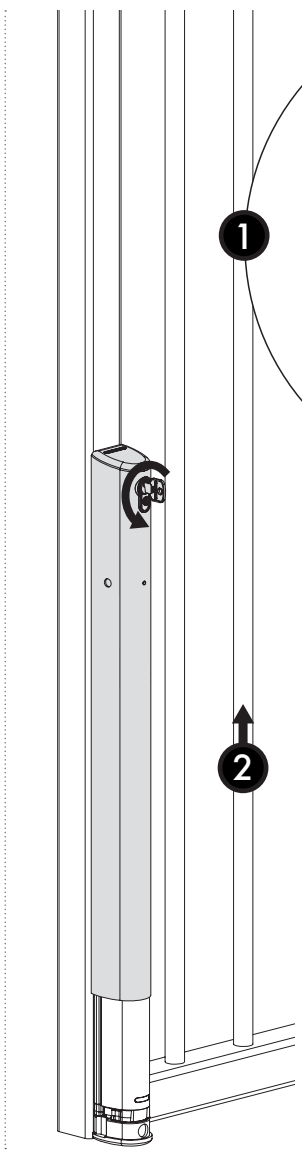

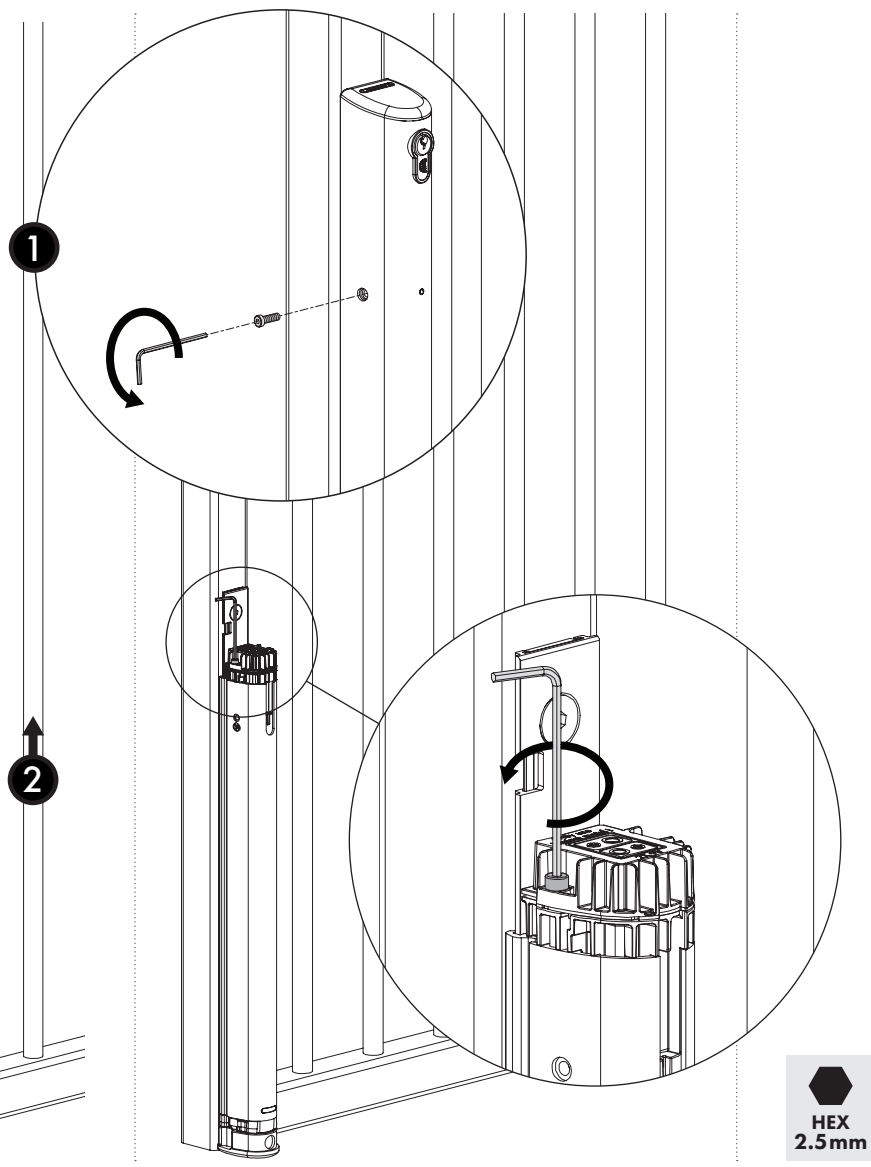

HEX
2.5mm

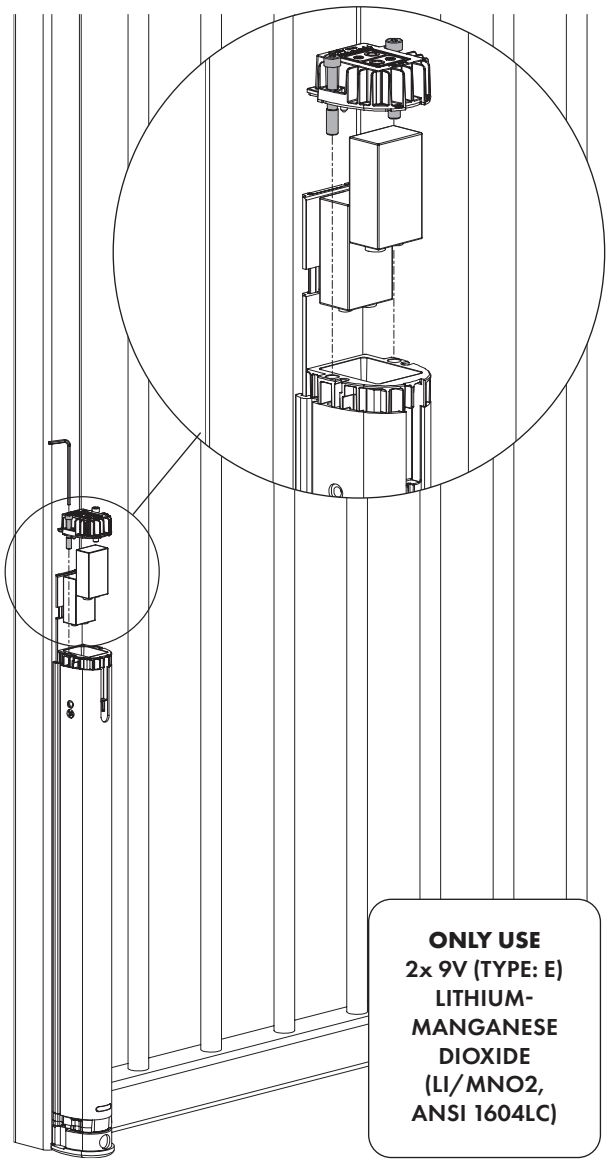

ONLY USE
2x 9V (TYPE: E) LITHIUM-MANGANESE DIOXIDE (LI/MNO2, ANSI 1604LC)

pictures@locinox.com

SUCCESSFUL INSTALLATION?	SUCCESVOLLE INSTALLATIE?	INSTALLATION RÉUSSIE?	ERFOLGREICHE INSTALLATION?	INSTALACION EXITOSA?	UDANA INSTALACJA?	УСПЕШНАЯ УСТАНОВКА?
Please send us your pictures & videos	Stuur gerust uw foto's & video's door	Veuillez nous envoyer vos photos & vidéos	Bitte senden Sie uns Ihre Bilder & Videos	Por favor envíenos sus fotos y videos	Prześlij nam swoje zdjęcia i filmy	Пожалуйста, отправьте нам свой фотографии и видео

LOCINOX®
Let's make it better together


Doc. Nr.: MANU-000464

Locinox NV • Brabantstraat 107 • 8790 Waregem • Belgium
Locinox CEE • Irysowa 9 • 55-040 Bielany Wrocławskie • Poland
Locinox LLC • 460 Windy Point Drive • Glendale Heights - IL 60139 • USA


MANU-000464

2023-07-07 - rev 0

ELECTRADROP-R

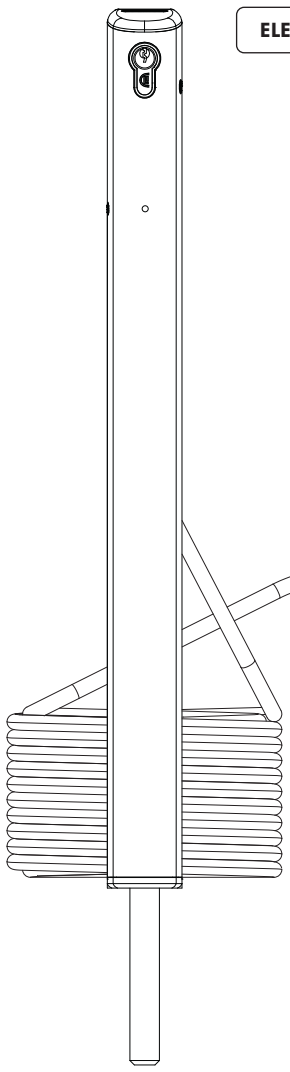


A ⚠ **PRE-FLASHING TIME ≥3S** | **12-24V AC/DC**

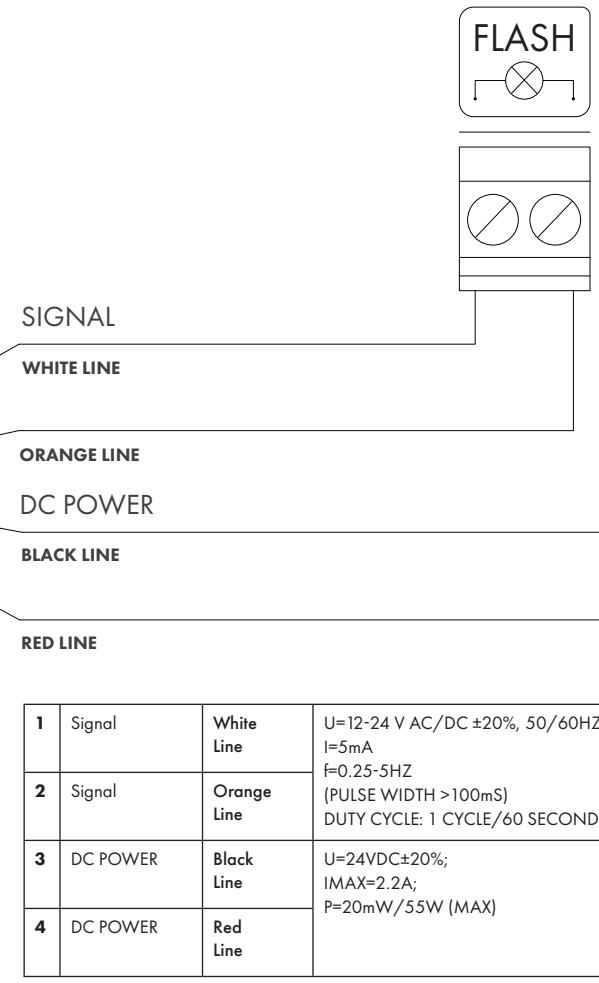


1	Signal	White Line	U=12-24 V AC/DC ±20%, 50/60HZ I=5mA f=0.25-5HZ (PULSE WIDTH >100mS) DUTY CYCLE: 1 CYCLE/60 SECONDS
2	Signal	Orange Line	
3	DC POWER	Black Line	U=24VDC±20%; IMAX=2.2A; P=20mW/55W (MAX)
4	DC POWER	Red Line	

B **OTHER (110/230V AC)**

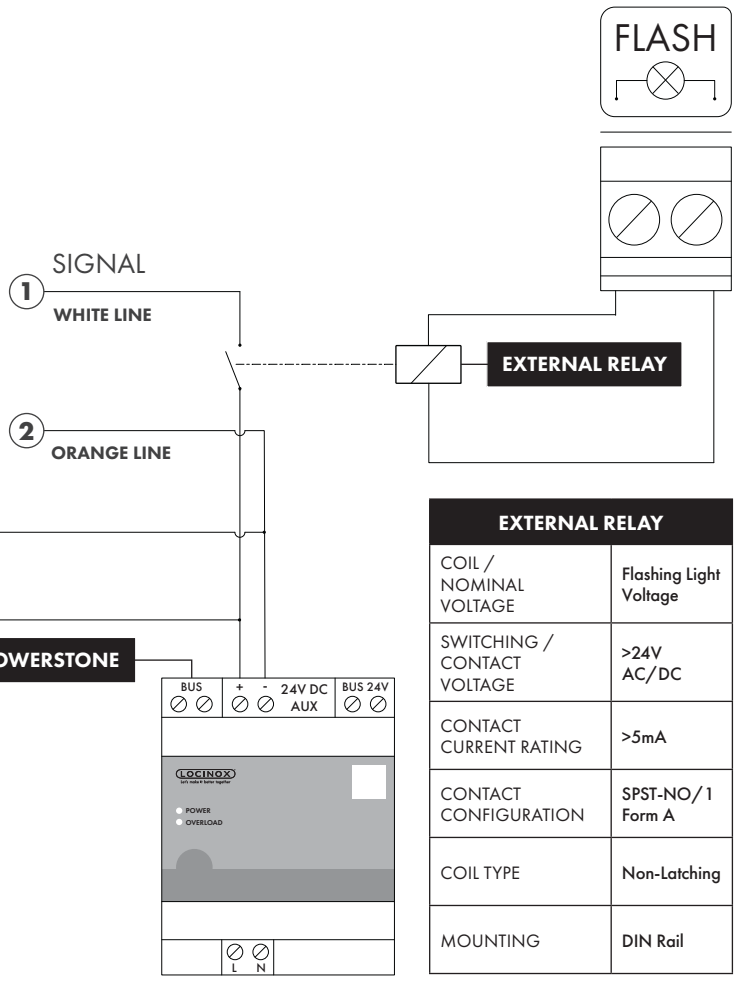


EXTERNAL RELAY	
COIL / NOMINAL VOLTAGE	Flashing Light Voltage
SWITCHING / CONTACT VOLTAGE	>24V AC/DC
CONTACT CURRENT RATING	>5mA
CONTACT CONFIGURATION	SPST-NO/1 Form A
COIL TYPE	Non-Latching
MOUNTING	DIN Rail

ELECTRADROP-R-P

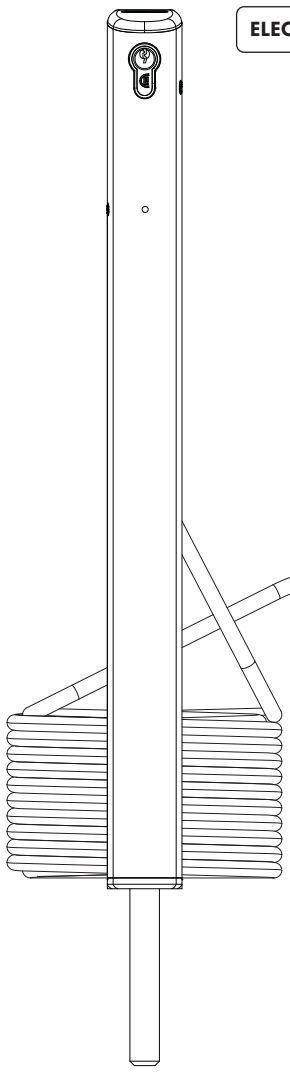


A ⚠ **PRE-FLASHING TIME ≥3S** | **12-24V AC/DC**

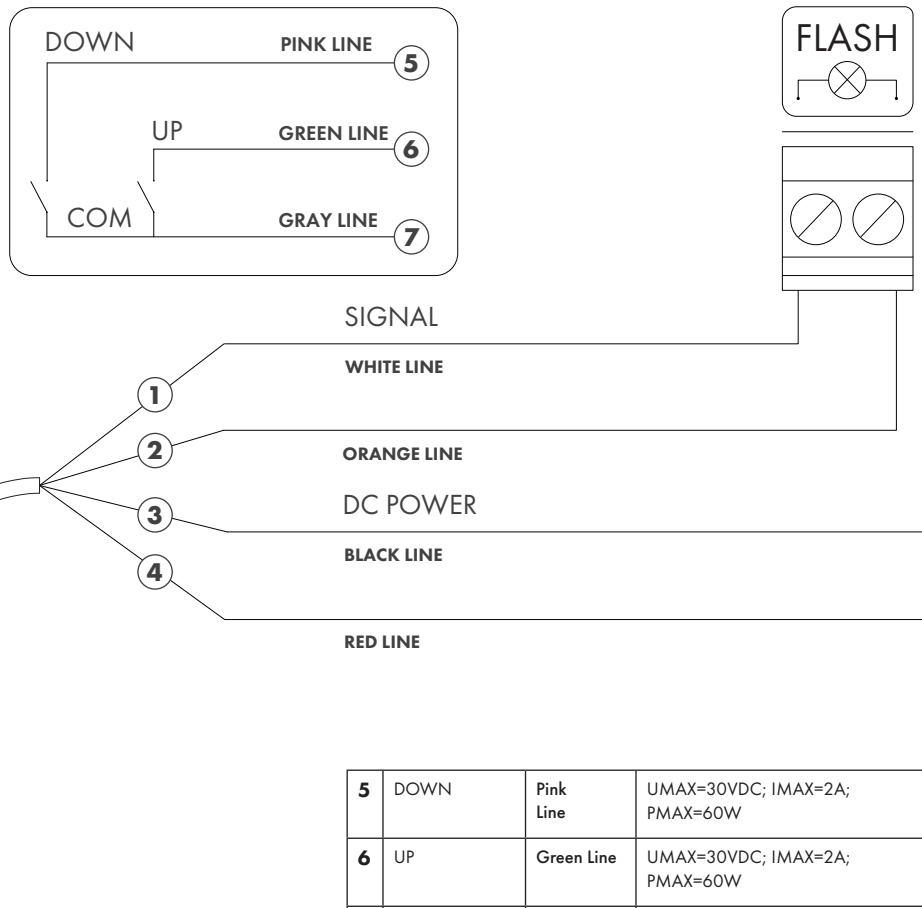


5	DOWN	Pink Line	UMAX=30VDC; IMAX=2A; PMAX=60W
6	UP	Green Line	UMAX=30VDC; IMAX=2A; PMAX=60W
7	COM	Gray Line	

B **OTHER (110/230V AC)**

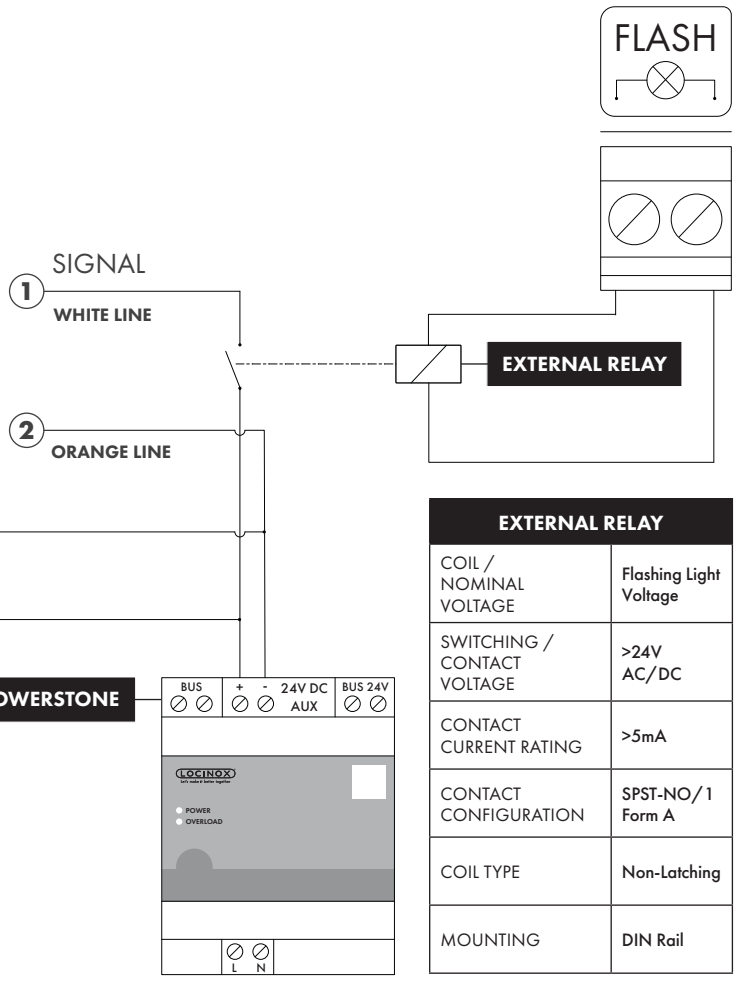


EXTERNAL RELAY	
COIL / NOMINAL VOLTAGE	Flashing Light Voltage
SWITCHING / CONTACT VOLTAGE	>24V AC/DC
CONTACT CURRENT RATING	>5mA
CONTACT CONFIGURATION	SPST-NO/1 Form A
COIL TYPE	Non-Latching
MOUNTING	DIN Rail

POSITION OUTPUT

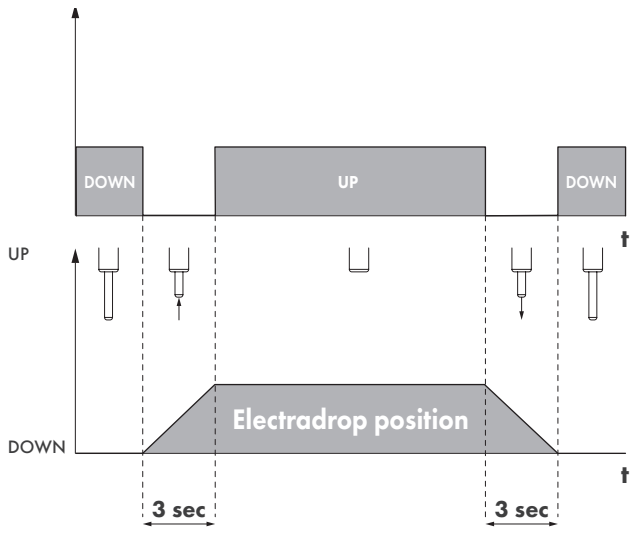


ELECTRADROP-R CONTINUOUS SIGNAL

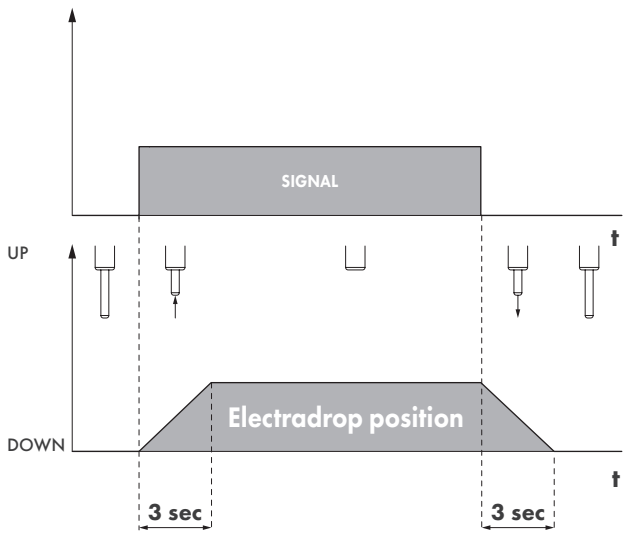

ELECTRADROP-R PULSE SIGNAL

FREQUENCY=0.25-5HZ
(PULS WIDTH >100mS)

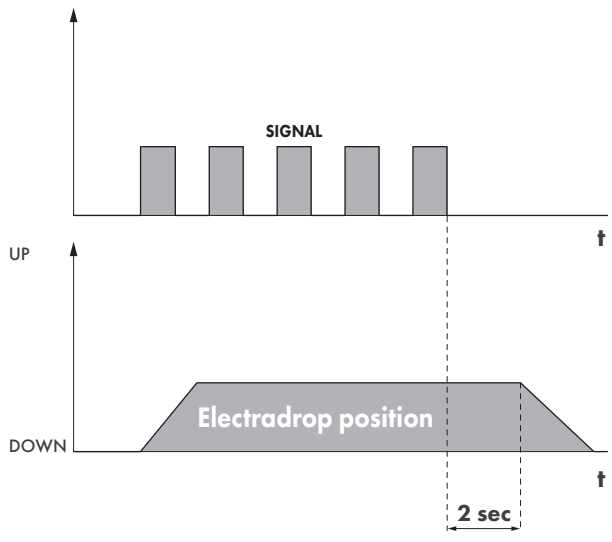

2023-07-07 - rev 0